

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332196-935

Luminaire Tested: **S123DIW-S1000D1030U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332196-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S1000D1030U935-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1030 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7099.2 lumens  
Efficiency: N/A  
Efficacy: 116.0 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 61.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332196-935

CATALOG NUMBER: S123DIW-S1000D1030U935-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

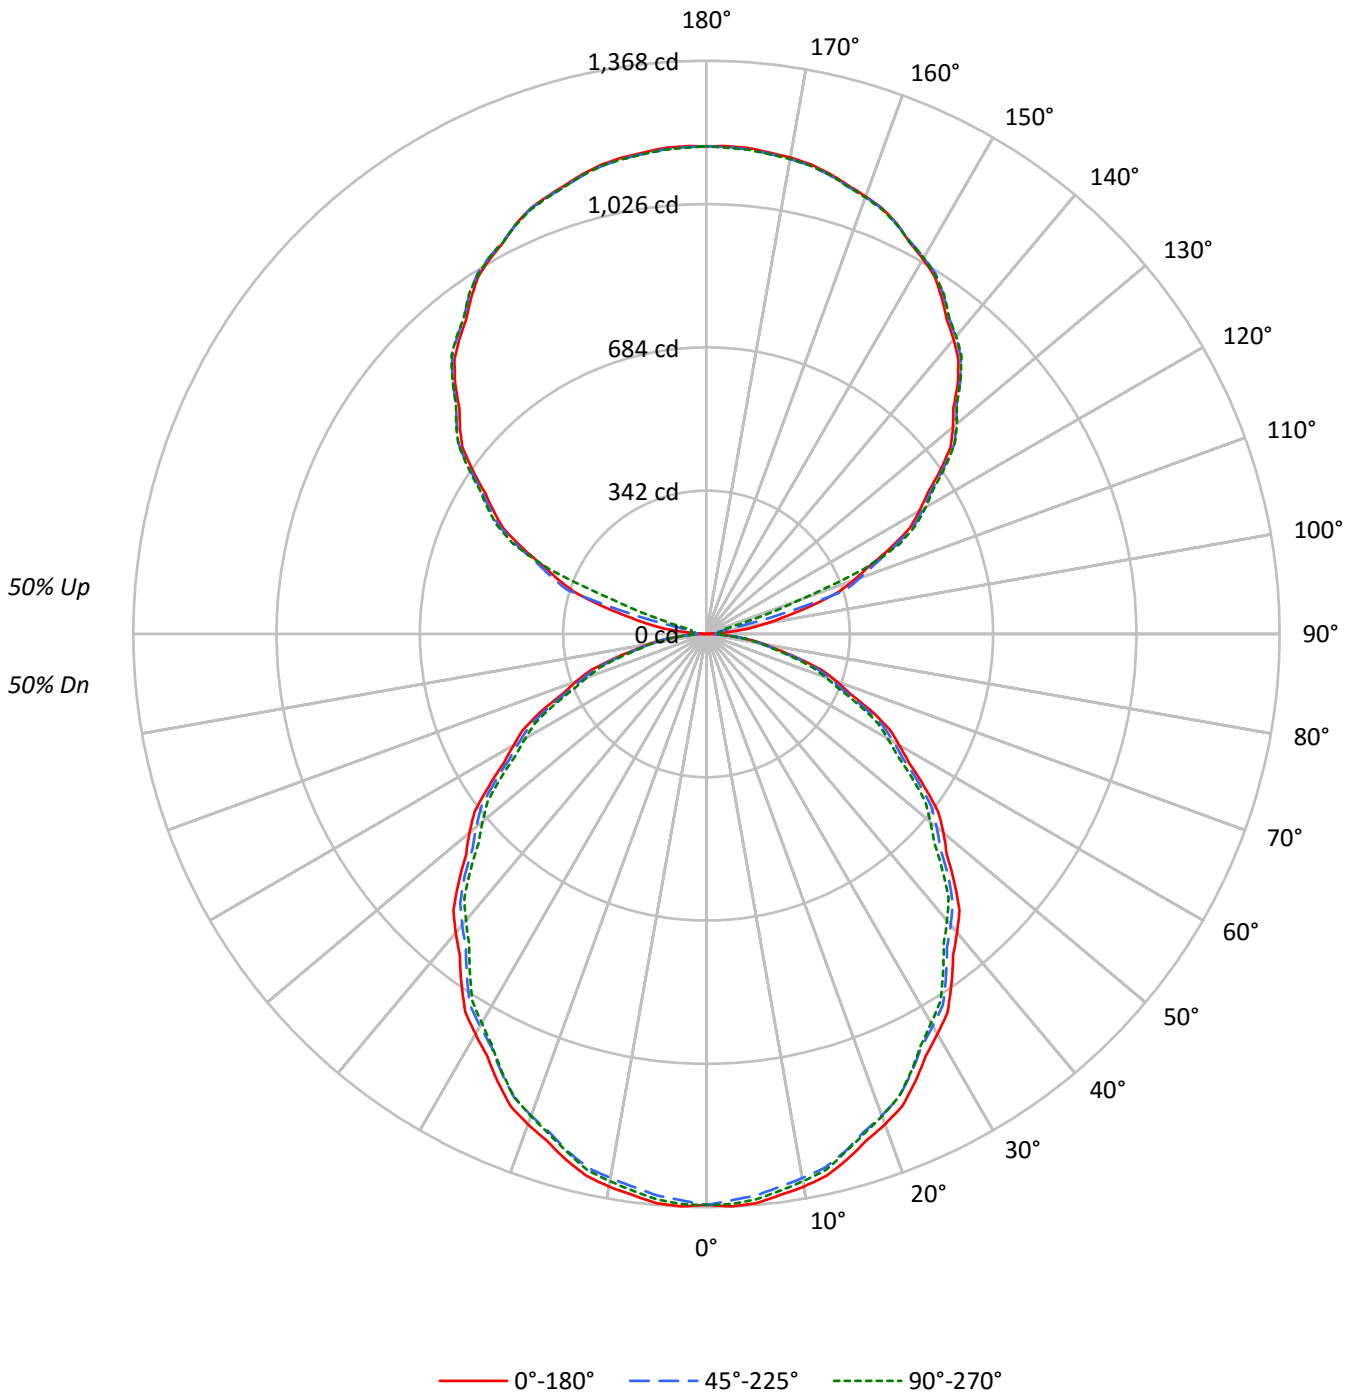



TEST NUMBER: P332196-935

CATALOG NUMBER: S123DIW-S1000D1030U935-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	93	89	86	90	86	83	80	73	71	68	61	59	57	49	48	47	42
2	89	81	75	70	82	75	70	65	64	60	56	53	50	48	44	42	40	35
3	81	72	64	58	75	66	60	55	56	51	47	47	44	41	39	36	34	30
4	74	63	55	49	68	59	52	46	50	45	40	42	38	35	34	32	29	25
5	68	56	48	42	63	52	45	40	45	39	35	38	33	30	31	28	25	22
6	63	51	42	37	58	47	40	35	40	35	30	34	30	26	28	25	22	19
7	58	46	38	32	53	43	35	30	37	31	27	31	27	23	26	22	20	17
8	54	41	34	28	50	39	32	27	33	28	24	28	24	21	24	20	18	15
9	50	38	30	25	46	35	29	24	31	25	21	26	22	19	22	18	16	14
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	14670	14670	14670
5°	14738	14536	14638
10°	14641	14410	14499
15°	14469	14247	14273
20°	14269	14014	14027
25°	14001	13737	13709
30°	13706	13430	13326
35°	13397	13104	12935
40°	13075	12745	12546
45°	12718	12415	12113
50°	12363	12010	11675
55°	11898	11590	11237
60°	11427	11102	10747
65°	11013	10565	10236
70°	10401	9958	9514
75°	9503	9162	8771
80°	8573	8207	8133
85°	7534	7237	6941



TEST NUMBER: P332196-935

CATALOG NUMBER: S123DIW-S1000D1030U935-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	128.4	1.8
10°-20°	362.5	5.1
20°-30°	535.5	7.5
30°-40°	625.5	8.8
40°-50°	628.8	8.9
50°-60°	552.4	7.8
60°-70°	411.5	5.8
70°-80°	234.5	3.3
80°-90°	70.5	1.0
90°-100°	42.3	0.6
100°-110°	201.7	2.8
110°-120°	484.5	6.8
120°-130°	616.9	8.7
130°-140°	659.2	9.3
140°-150°	616.4	8.7
150°-160°	497.2	7.0
160°-170°	320.9	4.5
170°-180°	110.6	1.6
0°-30°	1026.3	14.5
0°-40°	1651.8	23.3
0°-60°	2833.0	39.9
0°-90°	3549.5	50.0
90°-120°	728.5	10.3
90°-150°	2621.0	36.9
90°-180°	3550.0	50.0
0°-180°	7099.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1363	1363	1363	1363	1363	
5°	1364	1358	1345	1356	1355	129
15°	1298	1293	1278	1287	1281	366
25°	1179	1171	1157	1158	1154	543
35°	1020	1012	997	990	984	638
45°	836	830	816	802	796	645
55°	634	632	618	605	599	568
65°	432	426	415	406	402	427
75°	228	224	220	215	211	244
85°	61	59	59	56	56	67
90°	1	10	21	24	26	6
95°	53	20	27	33	33	65
105°	258	262	189	45	38	273
115°	484	489	496	505	508	477
125°	682	688	692	694	695	608
135°	848	853	857	859	857	653
145°	979	985	987	988	988	613
155°	1078	1077	1078	1081	1077	497
165°	1137	1135	1134	1140	1135	321
175°	1164	1160	1160	1166	1160	111
180°	1164	1164	1164	1164	1164	



TEST NUMBER: P332196-935

CATALOG NUMBER: S123DIW-S1000D1030U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9
2.5°	1367.5	1366.8	1365.9	1365.0	1364.3	1362.6	1360.4	1358.1	1355.8	1353.5	1355.6
5°	1364.0	1362.7	1361.4	1360.1	1358.8	1356.8	1353.9	1351.0	1348.2	1345.3	1347.9
7.5°	1350.7	1349.4	1348.1	1346.8	1345.5	1343.3	1340.4	1337.4	1334.5	1331.5	1333.8
10°	1339.5	1338.2	1336.8	1335.5	1334.2	1331.9	1328.5	1325.1	1321.7	1318.4	1320.7
12.5°	1324.4	1323.4	1322.2	1321.1	1320.1	1317.9	1314.7	1311.6	1308.4	1305.2	1306.9
15°	1298.4	1297.4	1296.3	1295.3	1294.3	1292.0	1288.7	1285.3	1281.9	1278.5	1280.6
17.5°	1268.2	1266.8	1265.5	1264.1	1262.7	1260.4	1257.0	1253.6	1250.3	1246.8	1248.3
20°	1245.7	1244.1	1242.6	1241.0	1239.4	1236.9	1233.6	1230.2	1226.8	1223.4	1224.4
22.5°	1220.4	1218.8	1217.3	1215.6	1214.1	1211.7	1208.2	1204.9	1201.5	1198.1	1198.9
25°	1178.9	1177.3	1175.8	1174.2	1172.6	1170.2	1166.7	1163.4	1160.0	1156.6	1156.8
27.5°	1134.6	1133.1	1131.5	1130.1	1128.5	1125.9	1122.3	1118.7	1115.0	1111.4	1111.6
30°	1102.7	1101.4	1100.1	1098.8	1097.5	1095.0	1091.4	1087.7	1084.1	1080.5	1080.5
32.5°	1070.8	1069.1	1067.4	1065.7	1063.9	1061.7	1058.9	1056.1	1053.3	1050.4	1049.0
35°	1019.5	1018.0	1016.4	1014.9	1013.2	1010.8	1007.4	1004.0	1000.7	997.2	995.7
37.5°	967.0	965.0	963.0	961.0	959.1	956.4	953.0	949.5	946.1	942.6	940.7
40°	930.5	928.8	927.3	925.7	924.2	921.6	917.9	914.3	910.7	907.0	904.9
42.5°	893.9	892.1	890.4	888.6	886.8	884.1	880.5	876.8	873.1	869.5	867.5
45°	835.5	834.5	833.4	832.4	831.4	829.1	825.8	822.3	819.0	815.6	812.5
47.5°	777.7	776.1	774.6	773.1	771.6	769.2	766.1	762.9	759.7	756.6	753.5
50°	738.3	736.9	735.6	734.3	733.1	730.7	727.3	723.9	720.6	717.2	714.3
52.5°	697.0	696.1	695.3	694.4	693.4	691.2	687.7	684.1	680.4	676.8	674.4
55°	634.0	633.7	633.4	633.2	632.9	631.1	627.8	624.3	621.0	617.6	614.7
57.5°	573.9	573.1	572.2	571.4	570.4	568.6	565.9	563.2	560.5	557.8	555.3
60°	530.8	530.5	530.3	530.0	529.8	528.1	525.0	521.9	518.8	515.7	513.2
62.5°	492.4	491.7	491.0	490.3	489.7	487.8	484.7	481.6	478.5	475.3	472.9
65°	432.4	431.1	429.8	428.5	427.2	425.2	422.7	420.1	417.4	414.8	412.8
67.5°	368.9	367.7	366.6	365.5	364.3	362.7	360.8	358.8	356.8	354.8	353.0
70°	330.5	328.9	327.4	325.8	324.3	322.6	321.1	319.5	318.0	316.4	314.6
72.5°	290.2	289.0	287.8	286.7	285.6	284.1	282.3	280.6	278.8	277.0	275.4
75°	228.5	227.5	226.4	225.4	224.4	223.4	222.7	221.9	221.1	220.3	219.0
77.5°	173.9	173.3	172.7	172.2	171.6	170.8	170.0	169.0	168.1	167.1	166.3
80°	138.3	137.5	136.7	136.0	135.2	134.5	134.0	133.5	132.9	132.4	132.2
82.5°	103.6	103.4	103.3	103.1	103.0	102.8	102.7	102.6	102.5	102.5	101.9
85°	61.0	60.4	59.9	59.4	58.9	58.6	58.6	58.6	58.6	58.6	58.0
87.5°	24.5	24.3	24.1	23.8	23.6	23.6	23.9	24.2	24.5	24.8	24.7
90°	0.9	2.8	4.7	6.6	8.5	10.8	13.3	15.8	18.3	20.8	21.5
92.5°	16.1	15.6	15.0	14.5	13.9	14.6	16.5	18.3	20.2	22.1	23.3
95°	52.8	44.9	37.0	29.1	21.3	18.3	20.5	22.6	24.7	26.8	28.2
97.5°	106.0	102.5	98.9	95.4	91.9	83.2	69.4	55.5	41.7	27.8	29.4
100°	146.1	150.0	153.9	157.6	161.5	148.4	118.5	88.5	58.5	28.5	30.0
102.5°	191.8	194.6	197.3	200.1	202.9	187.9	155.2	122.4	89.6	56.9	52.2
105°	257.7	259.8	261.9	264.1	266.1	258.6	241.3	223.9	206.7	189.4	155.4
107.5°	327.3	328.9	330.6	332.3	334.0	336.2	339.0	341.6	344.4	347.2	322.2
110°	373.6	375.1	376.7	378.2	379.7	381.6	383.7	385.8	387.9	390.0	383.7



TEST NUMBER: P332196-935

CATALOG NUMBER: S123DIW-S1000D1030U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	417.8	419.2	420.6	422.1	423.4	425.2	427.2	429.4	431.5	433.6	433.7
115°	483.5	484.6	485.7	486.9	488.0	489.5	491.2	492.9	494.6	496.4	498.3
117.5°	546.9	548.3	549.7	551.1	552.6	553.7	554.7	555.5	556.4	557.2	558.8
120°	586.3	588.1	589.8	591.5	593.2	594.4	595.0	595.6	596.2	596.7	598.2
122.5°	626.5	627.8	629.3	630.7	632.1	633.2	634.0	634.6	635.4	636.1	637.2
125°	681.5	683.0	684.5	686.0	687.6	688.8	689.5	690.3	691.0	691.8	692.2
127.5°	734.7	736.2	737.8	739.3	740.9	742.1	743.0	744.0	744.9	745.8	746.4
130°	767.9	769.5	771.0	772.6	774.1	775.2	776.0	776.8	777.6	778.3	779.1
132.5°	799.8	801.3	802.8	804.3	805.9	807.0	807.6	808.2	808.8	809.4	810.2
135°	848.3	849.5	850.7	851.8	853.0	853.9	854.7	855.5	856.3	857.0	857.6
137.5°	889.8	891.3	892.8	894.2	895.7	896.6	897.1	897.5	897.9	898.4	899.2
140°	917.6	918.7	919.9	921.0	922.1	923.0	923.6	924.2	924.7	925.3	926.1
142.5°	943.1	944.3	945.5	946.6	947.8	948.6	949.2	949.8	950.4	950.9	951.6
145°	979.0	980.2	981.6	983.0	984.3	985.2	985.6	985.9	986.4	986.7	987.1
147.5°	1012.7	1013.6	1014.4	1015.3	1016.2	1016.8	1017.2	1017.6	1018.0	1018.4	1018.7
150°	1033.5	1034.0	1034.6	1035.2	1035.7	1036.2	1036.6	1037.0	1037.3	1037.8	1038.1
152.5°	1052.1	1052.4	1052.7	1052.9	1053.2	1053.4	1053.7	1053.9	1054.1	1054.4	1055.1
155°	1078.4	1078.0	1077.6	1077.3	1076.9	1076.8	1076.9	1077.1	1077.4	1077.5	1078.5
157.5°	1098.8	1098.8	1098.7	1098.7	1098.6	1098.5	1098.4	1098.1	1097.9	1097.8	1098.9
160°	1111.3	1111.0	1110.9	1110.7	1110.5	1110.3	1110.1	1109.9	1109.7	1109.6	1110.7
162.5°	1123.0	1122.5	1122.1	1121.5	1121.0	1120.7	1120.5	1120.3	1120.1	1119.9	1121.2
165°	1137.2	1136.6	1136.1	1135.5	1134.9	1134.5	1134.3	1134.1	1133.9	1133.8	1135.3
167.5°	1148.2	1147.5	1146.8	1146.0	1145.2	1144.8	1144.8	1144.8	1144.8	1144.8	1146.3
170°	1154.5	1153.7	1153.0	1152.2	1151.4	1151.1	1151.1	1151.1	1151.1	1151.1	1152.5
172.5°	1158.6	1157.7	1156.8	1155.9	1154.9	1154.6	1154.7	1154.9	1155.0	1155.2	1156.8
175°	1164.0	1163.0	1162.1	1161.1	1160.2	1159.8	1159.9	1160.2	1160.4	1160.5	1161.9
177.5°	1165.4	1164.6	1163.9	1163.1	1162.4	1162.0	1162.2	1162.4	1162.4	1162.6	1163.9
180°	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0



TEST NUMBER: P332196-935

CATALOG NUMBER: S123DIW-S1000D1030U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9
2.5°	1357.6	1359.8	1361.8	1362.8	1362.5	1362.4	1362.1	1361.9
5°	1350.5	1353.1	1355.7	1356.8	1356.2	1355.7	1355.2	1354.7
7.5°	1336.2	1338.5	1340.8	1341.9	1341.5	1341.3	1340.9	1340.6
10°	1323.0	1325.3	1327.7	1328.6	1328.1	1327.6	1327.1	1326.5
12.5°	1308.6	1310.4	1312.1	1312.8	1312.5	1312.2	1311.8	1311.6
15°	1282.6	1284.7	1286.9	1287.1	1285.6	1283.9	1282.4	1280.8
17.5°	1249.7	1251.2	1252.7	1253.1	1252.6	1252.0	1251.4	1250.9
20°	1225.5	1226.6	1227.6	1227.7	1226.9	1226.2	1225.4	1224.6
22.5°	1199.8	1200.6	1201.4	1201.4	1200.4	1199.4	1198.4	1197.4
25°	1157.1	1157.4	1157.7	1157.4	1156.6	1155.8	1155.0	1154.3
27.5°	1111.8	1112.0	1112.2	1111.8	1110.9	1109.8	1108.9	1107.8
30°	1080.5	1080.5	1080.5	1079.5	1077.7	1075.9	1074.1	1072.2
32.5°	1047.5	1046.1	1044.7	1043.4	1042.4	1041.4	1040.4	1039.4
35°	994.1	992.6	991.0	989.5	988.3	987.0	985.7	984.4
37.5°	938.9	937.0	935.1	933.8	933.0	932.1	931.3	930.5
40°	902.8	900.8	898.7	897.1	896.0	895.0	894.0	892.9
42.5°	865.3	863.2	861.2	859.6	858.6	857.6	856.5	855.5
45°	809.3	806.2	803.1	800.9	799.6	798.3	797.0	795.7
47.5°	750.4	747.3	744.2	742.2	741.0	739.9	738.7	737.5
50°	711.4	708.6	705.7	703.5	702.0	700.3	698.8	697.2
52.5°	671.9	669.5	667.1	665.0	663.5	661.9	660.4	658.8
55°	611.8	609.0	606.1	604.0	602.7	601.4	600.1	598.8
57.5°	552.7	550.2	547.6	545.5	544.1	542.5	541.1	539.5
60°	510.9	508.6	506.3	504.5	503.1	501.8	500.5	499.2
62.5°	470.6	468.3	465.9	464.3	463.4	462.5	461.7	460.8
65°	410.7	408.5	406.5	405.1	404.3	403.6	402.7	401.9
67.5°	351.2	349.4	347.6	346.1	345.0	343.9	342.8	341.7
70°	312.7	310.9	309.1	307.5	306.3	305.0	303.7	302.3
72.5°	273.8	272.2	270.5	269.4	268.7	268.0	267.4	266.7
75°	217.7	216.4	215.1	214.0	213.3	212.5	211.7	210.9
77.5°	165.3	164.5	163.6	163.2	163.2	163.2	163.2	163.2
80°	131.9	131.6	131.4	131.2	131.2	131.2	131.2	131.2
82.5°	101.5	101.0	100.6	100.2	100.0	99.8	99.6	99.4
85°	57.5	57.0	56.5	56.2	56.2	56.2	56.2	56.2
87.5°	24.6	24.6	24.5	24.5	24.6	24.7	24.8	24.9
90°	22.3	23.1	23.8	24.4	24.8	25.1	25.6	25.9
92.5°	24.6	25.8	27.0	27.8	28.0	28.2	28.5	28.7
95°	29.5	30.8	32.2	32.9	32.9	32.9	32.9	32.9
97.5°	30.9	32.5	34.0	34.9	35.0	35.2	35.5	35.6
100°	31.6	33.1	34.7	35.6	35.7	35.9	36.2	36.3
102.5°	47.4	42.6	37.8	35.6	36.0	36.3	36.7	37.0
105°	121.4	87.3	53.3	36.5	36.9	37.3	37.6	38.1
107.5°	297.2	272.3	247.4	222.1	196.4	170.8	145.2	119.5
110°	377.4	371.0	364.6	347.8	320.3	292.7	265.3	237.8





TEST NUMBER: P332196-935

CATALOG NUMBER: S123DIW-S1000D1030U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	433.9	433.9	434.0	431.2	425.4	419.7	413.8	408.0
115°	500.2	502.1	504.1	505.4	506.2	507.0	507.7	508.5
117.5°	560.3	561.9	563.4	564.3	564.4	564.6	564.7	564.9
120°	599.8	601.3	602.9	603.6	603.6	603.6	603.6	603.6
122.5°	638.3	639.4	640.4	641.1	641.2	641.4	641.5	641.7
125°	692.6	693.0	693.4	693.8	694.1	694.5	694.9	695.3
127.5°	747.0	747.6	748.3	748.4	748.0	747.6	747.3	746.8
130°	779.9	780.6	781.4	781.6	781.2	780.8	780.4	780.1
132.5°	811.0	811.8	812.5	812.6	812.1	811.6	811.1	810.5
135°	858.2	858.8	859.3	859.3	858.8	858.2	857.6	857.0
137.5°	900.2	901.1	902.1	902.3	901.9	901.6	901.1	900.8
140°	926.9	927.6	928.4	928.6	928.2	927.8	927.5	927.0
142.5°	952.2	952.8	953.4	953.4	952.9	952.4	951.8	951.2
145°	987.5	987.9	988.3	988.4	988.4	988.4	988.4	988.4
147.5°	1019.2	1019.5	1019.9	1019.7	1018.8	1017.9	1017.0	1016.2
150°	1038.5	1038.9	1039.3	1039.2	1038.6	1038.0	1037.5	1036.9
152.5°	1055.8	1056.4	1057.1	1057.0	1056.1	1055.2	1054.4	1053.5
155°	1079.4	1080.4	1081.4	1081.2	1080.1	1079.0	1077.8	1076.7
157.5°	1100.1	1101.2	1102.3	1102.2	1100.7	1099.2	1097.7	1096.2
160°	1111.8	1113.0	1114.1	1114.0	1112.7	1111.4	1110.0	1108.6
162.5°	1122.5	1123.9	1125.2	1125.2	1124.0	1122.8	1121.6	1120.4
165°	1136.8	1138.3	1139.9	1140.0	1138.7	1137.3	1135.9	1134.6
167.5°	1147.9	1149.4	1151.0	1151.0	1149.4	1147.9	1146.3	1144.8
170°	1154.1	1155.6	1157.2	1157.2	1155.6	1154.1	1152.5	1151.1
172.5°	1158.3	1159.8	1161.3	1161.2	1159.6	1157.9	1156.2	1154.5
175°	1163.2	1164.6	1166.0	1165.9	1164.3	1162.8	1161.2	1159.7
177.5°	1165.1	1166.3	1167.5	1167.4	1165.9	1164.3	1162.8	1161.2
180°	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0

(END OF REPORT)