

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332186-935

Luminaire Tested: **S123DIW-S1000D755U935-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332186-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S1000D755U935-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 755 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6252.9 lumens
Efficiency: N/A
Efficacy: 116.7 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 53.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

Luminous Intensity Polar Plot

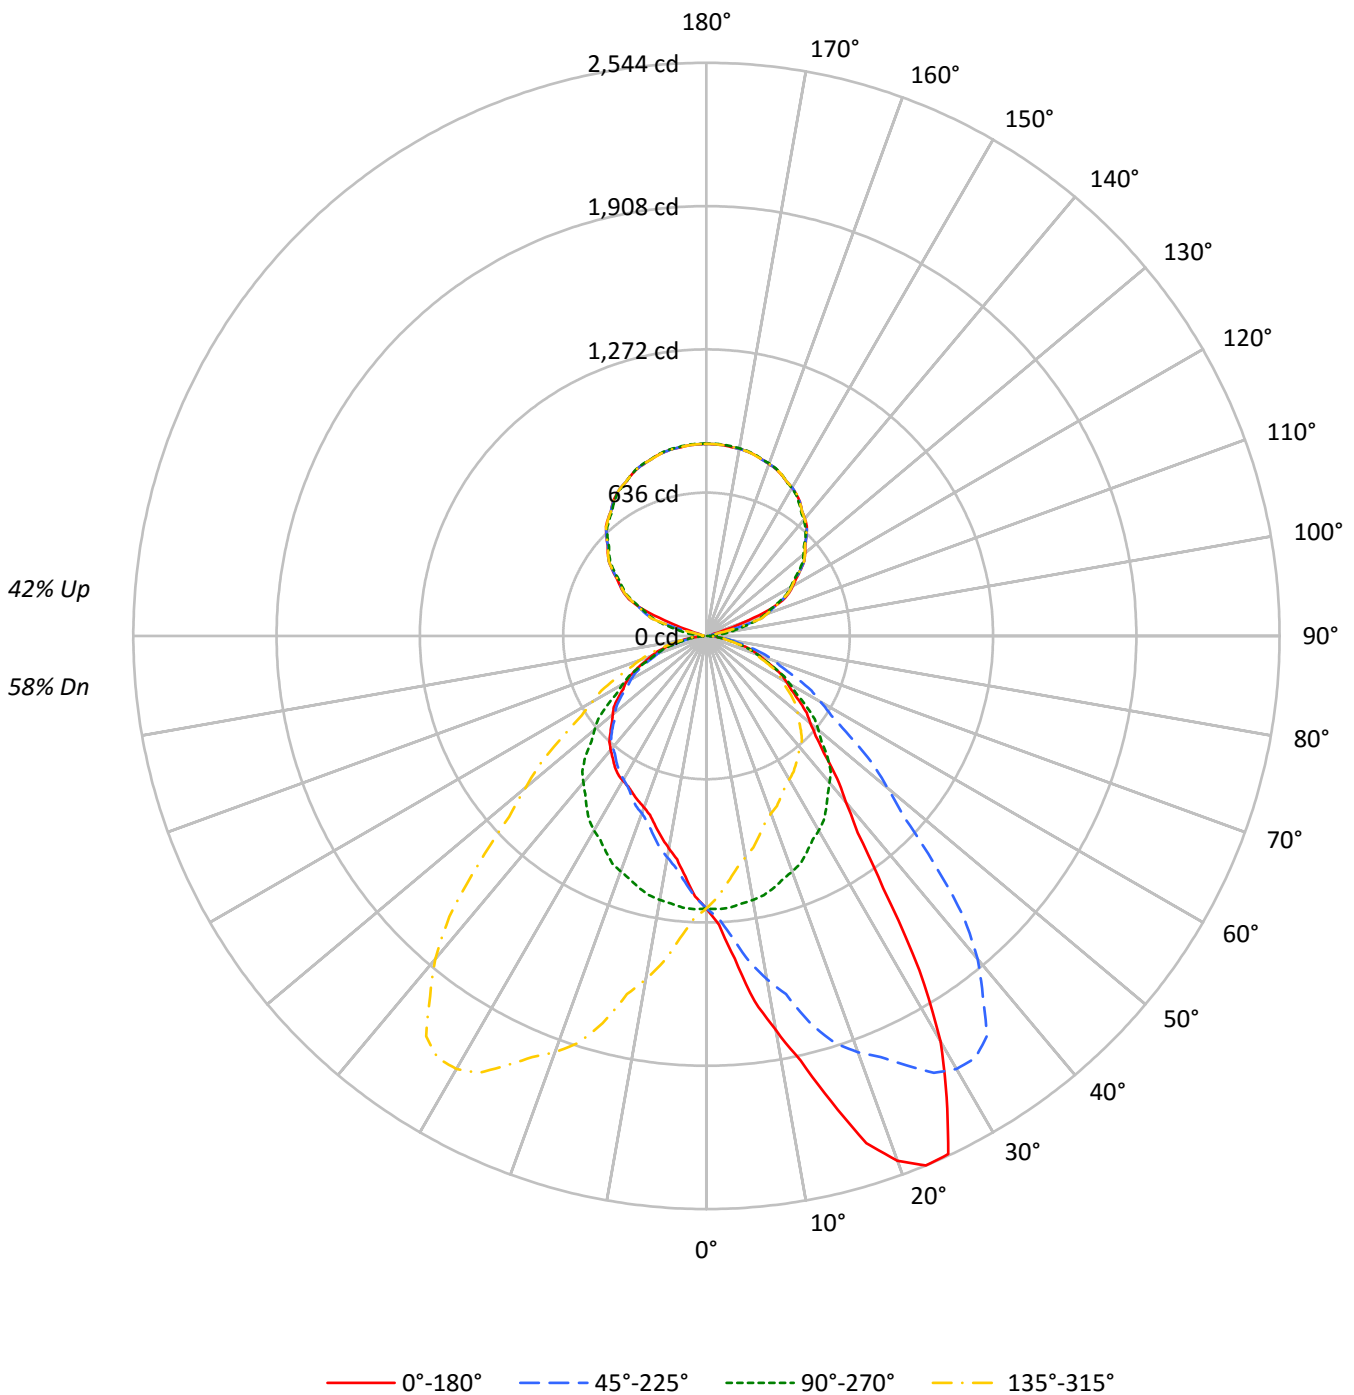



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	64	64	64	58
1	100	96	92	88	93	89	86	83	78	75	73	67	65	64	57	56	55	50
2	91	84	78	73	85	79	73	69	68	64	61	59	56	54	50	48	46	42
3	83	74	67	61	78	69	63	58	61	56	52	53	49	46	45	42	40	36
4	77	66	58	52	71	62	55	49	54	49	44	47	43	39	40	37	35	31
5	70	59	51	45	65	55	48	42	48	43	38	42	38	34	36	33	30	27
6	65	53	45	39	60	50	42	37	44	38	34	38	34	30	33	30	27	24
7	60	48	40	34	56	45	38	33	40	34	30	35	30	27	30	27	24	21
8	56	43	36	30	52	41	34	29	36	31	26	32	27	24	28	24	21	19
9	52	40	32	27	48	37	31	26	33	28	24	29	25	21	26	22	19	17
10	49	36	29	24	45	34	28	23	31	25	21	27	23	19	24	20	17	16

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13017	13017	13017	13017
5°	15524	13073	11585	13073
10°	19429	13007	10463	13007
15°	23832	12902	9742	12902
20°	28389	12739	9275	12739
25°	30144	12539	9171	12539
30°	25838	12394	9220	12394
35°	17969	12188	9315	12188
40°	13534	11946	9286	11946
45°	11237	11586	9168	11586
50°	10068	10851	9085	10851
55°	9411	10061	8972	10061
60°	8829	9233	8880	9233
65°	8298	8418	8596	8418
70°	7783	7487	8186	7487
75°	6970	6554	7507	6554
80°	6100	5374	6465	5374
85°	4780	3903	4335	3903



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.1	1.9
10°-20°	382.0	6.1
20°-30°	641.1	10.3
30°-40°	725.9	11.6
40°-50°	651.0	10.4
50°-60°	525.3	8.4
60°-70°	366.1	5.9
70°-80°	192.4	3.1
80°-90°	49.4	0.8
90°-100°	31.0	0.5
100°-110°	147.8	2.4
110°-120°	355.0	5.7
120°-130°	452.0	7.2
130°-140°	482.9	7.7
140°-150°	451.6	7.2
150°-160°	364.3	5.8
160°-170°	235.1	3.8
170°-180°	81.0	1.3
0°-30°	1142.2	18.3
0°-40°	1868.1	29.9
0°-60°	3044.4	48.7
0°-90°	3652.3	58.4
90°-120°	533.7	8.5
90°-150°	1920.2	30.7
90°-180°	2601.0	41.6
0°-180°	6252.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1209	1209	1209	1209	1209	
5°	1437	1210	1072	1210	1437	149
15°	2139	1158	874	1158	2139	617
25°	2538	1056	772	1056	2538	1113
35°	1368	928	709	928	1368	888
45°	738	761	602	761	738	584
55°	502	536	478	536	502	450
65°	326	330	338	330	326	324
75°	168	158	180	158	168	179
85°	39	32	35	32	39	46
90°	19	1	19	1	19	11
95°	24	39	24	39	24	20
105°	28	189	28	189	28	64
115°	373	354	373	354	373	344
125°	509	499	509	499	509	455
135°	628	622	628	622	628	484
145°	724	717	724	717	724	452
155°	789	790	789	790	789	364
165°	831	833	831	833	831	235
175°	850	853	850	853	850	81
180°	853	853	853	853	853	



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3
2.5°	1283.3	1282.5	1280.0	1281.9	1278.2	1273.1	1272.6	1267.9	1254.3	1253.4	1249.7
5°	1436.7	1431.9	1431.3	1430.8	1422.5	1411.4	1390.3	1388.6	1360.5	1346.4	1329.4
7.5°	1635.1	1637.6	1629.0	1621.5	1596.5	1579.9	1557.3	1528.4	1493.8	1458.8	1435.5
10°	1777.6	1797.0	1773.0	1756.5	1741.3	1712.6	1679.2	1637.6	1596.0	1547.4	1510.5
12.5°	1930.4	1939.9	1935.1	1919.7	1896.0	1852.3	1793.1	1747.3	1709.0	1628.0	1595.3
15°	2138.6	2174.3	2151.5	2098.7	2099.9	2058.3	1980.9	1896.0	1850.9	1779.9	1683.3
17.5°	2360.3	2364.7	2355.0	2311.0	2281.7	2224.6	2153.2	2071.7	1980.4	1894.5	1792.1
20°	2478.4	2474.9	2454.4	2431.5	2381.1	2336.6	2258.7	2167.8	2050.6	1966.3	1854.4
22.5°	2544.0	2538.1	2528.4	2509.3	2467.4	2419.6	2349.6	2250.3	2138.8	2022.6	1893.3
25°	2538.1	2545.7	2546.9	2541.7	2527.0	2498.3	2443.2	2364.1	2252.8	2103.4	1968.7
27.5°	2308.4	2319.3	2350.5	2378.3	2409.3	2441.0	2436.8	2397.5	2315.1	2186.1	2021.4
30°	2078.8	2055.4	2113.3	2186.6	2236.4	2324.3	2373.5	2376.4	2330.1	2219.4	2058.8
32.5°	1760.1	1785.8	1811.5	1901.6	2010.4	2109.1	2207.1	2286.0	2295.0	2221.3	2080.9
35°	1367.5	1399.7	1446.6	1493.5	1610.7	1711.4	1883.7	2033.7	2153.2	2169.0	2082.8
37.5°	1102.0	1117.9	1147.5	1194.6	1271.2	1390.7	1524.0	1713.6	1886.7	2015.5	2021.1
40°	963.2	967.9	1001.3	1037.1	1099.2	1197.6	1317.7	1485.2	1692.6	1872.6	1947.6
42.5°	859.2	869.4	883.6	918.0	967.4	1041.5	1153.1	1291.7	1481.8	1688.8	1835.5
45°	738.2	749.9	758.7	781.6	816.7	866.5	944.5	1071.0	1215.7	1429.6	1627.0
47.5°	658.3	659.3	665.8	683.0	707.0	744.3	799.4	880.7	1013.6	1187.1	1389.7
50°	601.2	610.5	612.9	626.3	645.1	672.6	718.3	787.5	896.5	1048.8	1235.1
52.5°	560.9	563.6	570.2	580.0	596.3	617.8	657.4	711.5	797.0	926.9	1098.2
55°	501.5	501.5	508.0	515.6	525.0	544.3	570.7	610.5	675.5	776.4	918.1
57.5°	446.7	449.6	454.2	456.5	464.5	477.3	499.3	529.5	578.1	655.7	768.4
60°	410.1	415.4	414.8	419.5	426.5	436.5	455.2	479.8	523.2	585.3	680.3
62.5°	378.2	377.9	377.8	383.4	390.5	399.9	412.2	433.4	470.3	525.3	606.1
65°	325.8	324.6	328.7	332.2	334.6	341.6	350.9	369.7	394.3	435.3	498.0
67.5°	279.1	275.7	277.9	279.1	283.1	288.6	297.4	309.0	328.6	361.5	408.7
70°	247.3	244.4	243.7	244.9	248.4	252.5	259.0	270.1	288.3	314.6	349.2
72.5°	214.5	212.4	212.3	214.9	216.5	219.2	223.8	234.0	248.4	268.2	300.5
75°	167.6	167.6	167.6	168.2	169.9	172.3	175.7	181.1	192.2	206.2	227.9
77.5°	125.6	125.5	124.8	124.7	127.3	128.3	129.2	134.1	140.3	149.7	165.6
80°	98.4	95.5	96.7	98.4	99.6	100.2	101.9	103.1	108.4	113.7	124.8
82.5°	73.1	70.7	70.9	73.6	73.8	74.4	76.2	77.8	79.8	84.6	90.6
85°	38.7	38.7	39.3	39.3	39.9	39.3	41.0	41.6	41.6	44.5	48.0
87.5°	17.8	16.9	17.3	17.7	17.1	17.6	17.9	18.3	18.6	18.9	19.1
90°	19.0	18.7	18.4	18.2	17.9	17.5	16.9	16.4	15.8	15.2	13.3
92.5°	21.0	20.8	20.7	20.5	20.3	19.8	18.9	18.0	17.1	16.2	14.8
95°	24.1	24.1	24.1	24.1	24.1	23.6	22.6	21.6	20.7	19.6	18.1
97.5°	26.1	26.0	25.8	25.7	25.6	24.9	23.8	22.6	21.5	20.4	30.6
100°	26.6	26.4	26.3	26.2	26.1	25.4	24.3	23.2	22.0	20.9	42.9
102.5°	27.1	26.9	26.6	26.3	26.1	27.7	31.3	34.7	38.2	41.7	65.7
105°	27.9	27.6	27.3	27.0	26.8	39.1	64.0	88.9	113.8	138.8	151.4
107.5°	87.6	106.3	125.1	143.9	162.7	181.2	199.5	217.7	236.0	254.3	252.4
110°	174.3	194.3	214.5	234.6	254.8	267.2	271.8	276.5	281.1	285.8	284.2



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	298.9	303.2	307.5	311.7	315.9	318.1	318.0	317.9	317.8	317.7	316.2
115°	372.6	372.0	371.4	370.8	370.3	369.3	367.9	366.5	365.1	363.7	362.4
117.5°	413.9	413.7	413.6	413.5	413.4	412.8	411.6	410.5	409.4	408.3	407.6
120°	442.2	442.2	442.2	442.2	442.2	441.7	440.6	439.5	438.3	437.1	436.8
122.5°	470.1	470.0	469.8	469.8	469.7	469.2	468.4	467.6	466.8	466.1	465.5
125°	509.4	509.1	508.9	508.6	508.2	508.0	507.7	507.4	507.1	506.9	506.3
127.5°	547.2	547.4	547.7	548.0	548.3	548.2	547.8	547.3	546.8	546.4	545.7
130°	571.4	571.8	572.0	572.3	572.7	572.5	571.9	571.4	570.8	570.2	569.6
132.5°	593.7	594.2	594.6	595.0	595.4	595.3	594.7	594.2	593.6	593.1	592.5
135°	627.8	628.3	628.7	629.1	629.6	629.6	629.1	628.7	628.3	627.8	627.3
137.5°	660.0	660.2	660.5	660.8	661.1	660.9	660.2	659.5	658.8	658.1	657.9
140°	679.2	679.5	679.8	680.0	680.4	680.2	679.6	679.1	678.5	678.0	677.5
142.5°	696.9	697.3	697.8	698.1	698.5	698.4	698.0	697.6	697.2	696.7	696.3
145°	724.2	724.2	724.2	724.2	724.2	724.0	723.8	723.5	723.2	722.9	722.6
147.5°	744.4	745.1	745.7	746.4	747.0	747.3	746.9	746.7	746.4	746.1	745.8
150°	759.7	760.1	760.5	761.0	761.4	761.4	761.1	760.9	760.6	760.3	760.0
152.5°	771.8	772.5	773.1	773.8	774.4	774.5	774.0	773.4	772.9	772.5	772.3
155°	788.8	789.6	790.5	791.3	792.2	792.3	791.5	790.8	790.1	789.5	789.3
157.5°	803.1	804.3	805.3	806.4	807.5	807.6	806.8	806.0	805.1	804.3	804.4
160°	812.3	813.2	814.2	815.2	816.2	816.2	815.5	814.6	813.7	812.9	813.0
162.5°	820.9	821.7	822.6	823.5	824.3	824.3	823.4	822.4	821.5	820.4	820.6
165°	831.2	832.2	833.2	834.2	835.2	835.1	834.0	832.8	831.7	830.6	830.8
167.5°	838.7	839.8	840.9	842.1	843.3	843.3	842.1	840.9	839.8	838.7	838.7
170°	843.3	844.4	845.5	846.7	847.8	847.8	846.7	845.5	844.4	843.3	843.3
172.5°	845.8	847.1	848.3	849.5	850.8	850.8	849.7	848.6	847.5	846.4	846.2
175°	849.6	850.8	851.9	853.0	854.1	854.2	853.3	852.2	851.3	850.2	850.2
177.5°	850.8	851.9	853.0	854.1	855.2	855.4	854.5	853.6	852.6	851.8	851.7
180°	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3
2.5°	1246.8	1243.0	1239.3	1232.8	1227.1	1219.2	1216.8	1214.0	1205.6	1198.1	1192.4
5°	1322.9	1308.9	1288.4	1269.6	1254.4	1233.9	1222.2	1209.9	1192.3	1176.5	1163.6
7.5°	1402.7	1375.0	1343.2	1308.6	1276.6	1245.6	1220.6	1198.4	1173.8	1150.5	1132.3
10°	1465.9	1426.1	1381.6	1333.5	1292.5	1252.7	1219.3	1190.0	1158.3	1130.8	1107.9
12.5°	1538.1	1479.0	1417.6	1359.3	1310.8	1255.5	1215.0	1177.8	1141.9	1108.8	1083.1
15°	1623.5	1548.5	1475.9	1395.6	1321.8	1252.7	1204.6	1157.8	1116.1	1082.2	1049.4
17.5°	1701.3	1616.4	1520.6	1423.1	1333.9	1252.0	1184.7	1131.7	1079.7	1038.1	1005.4
20°	1745.4	1648.7	1540.3	1439.0	1340.6	1249.1	1175.4	1112.1	1055.8	1011.8	974.9
22.5°	1783.4	1670.3	1558.2	1449.8	1340.1	1241.6	1158.0	1092.9	1031.9	988.9	949.6
25°	1822.7	1687.4	1574.9	1447.8	1325.3	1223.4	1129.6	1055.8	994.9	944.5	904.0
27.5°	1856.5	1686.3	1552.7	1416.0	1302.1	1199.9	1099.8	1020.6	956.0	901.2	860.2
30°	1879.0	1688.6	1529.8	1394.5	1279.6	1174.1	1076.9	997.2	929.3	873.6	834.9
32.5°	1893.1	1687.1	1508.7	1364.4	1244.0	1150.7	1052.1	969.6	899.7	845.0	807.7
35°	1901.3	1676.9	1472.4	1302.4	1186.5	1095.6	1013.1	927.5	854.3	803.3	761.1
37.5°	1884.8	1655.2	1430.2	1242.7	1115.7	1026.2	956.7	883.9	813.8	757.7	721.3
40°	1859.1	1641.2	1397.4	1200.5	1067.0	980.8	921.6	850.2	781.0	727.7	693.7
42.5°	1809.8	1612.5	1361.3	1153.7	1016.3	930.1	875.7	816.0	750.5	700.5	666.5
45°	1689.7	1550.3	1307.2	1083.3	941.5	852.5	804.4	761.1	701.9	653.2	624.0
47.5°	1523.1	1456.6	1228.9	1009.2	863.5	777.8	727.9	693.0	649.8	610.5	582.4
50°	1407.3	1379.8	1175.9	958.6	811.5	727.7	679.7	648.0	617.0	577.7	551.9
52.5°	1273.8	1290.7	1114.0	906.0	758.5	676.1	630.9	605.8	577.6	545.4	522.9
55°	1085.7	1147.2	1007.2	817.9	679.7	601.2	558.4	536.1	519.7	495.7	476.3
57.5°	909.6	987.8	891.7	727.1	602.2	534.4	493.4	469.2	458.7	446.1	430.8
60°	805.0	882.4	809.2	666.2	550.2	485.7	449.4	428.9	418.4	409.6	396.7
62.5°	711.8	790.1	728.5	604.3	499.0	439.3	407.7	387.6	379.4	374.9	363.9
65°	583.6	650.9	609.9	508.0	425.9	373.2	344.5	330.5	322.9	321.1	314.0
67.5°	474.9	526.2	496.4	421.4	356.8	311.3	286.9	274.9	269.1	268.5	263.2
70°	403.7	451.8	428.9	360.9	305.2	269.5	248.4	237.9	234.4	233.8	230.8
72.5°	348.4	381.9	363.7	307.0	264.0	231.5	216.1	205.1	201.0	201.9	199.9
75°	257.8	283.0	272.4	233.2	198.6	177.5	164.6	157.6	154.1	155.8	153.5
77.5°	185.5	201.5	191.9	164.8	143.4	128.2	118.7	114.3	111.2	111.1	110.0
80°	140.0	149.4	144.1	127.7	110.1	97.3	89.6	86.7	85.0	84.4	83.8
82.5°	99.7	107.7	101.5	90.2	78.3	70.5	66.2	62.3	61.0	61.4	60.8
85°	50.4	53.3	51.0	43.9	39.3	35.7	33.4	31.6	30.5	31.1	29.9
87.5°	19.6	19.7	18.0	15.8	14.6	12.9	12.6	11.4	10.8	11.0	10.8
90°	11.5	9.7	7.9	6.3	4.8	3.4	2.1	0.6	2.1	3.4	4.8
92.5°	13.4	12.1	10.7	10.2	10.6	11.0	11.4	11.8	11.4	11.0	10.6
95°	16.5	15.0	13.4	15.6	21.4	27.1	32.9	38.7	32.9	27.1	21.4
97.5°	40.6	50.8	61.0	67.3	69.9	72.5	75.1	77.7	75.1	72.5	69.9
100°	64.8	86.8	108.7	118.3	115.5	112.7	109.9	107.1	109.9	112.7	115.5
102.5°	89.6	113.7	137.7	148.6	146.6	144.6	142.6	140.5	142.6	144.6	146.6
105°	164.1	176.8	189.4	195.0	193.5	191.9	190.4	188.8	190.4	191.9	193.5
107.5°	250.3	248.3	246.3	244.7	243.5	242.2	241.0	239.7	241.0	242.2	243.5
110°	282.7	281.1	279.6	278.2	277.1	276.0	274.8	273.7	274.8	276.0	277.1



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	314.6	313.1	311.5	310.2	309.2	308.2	307.1	306.2	307.1	308.2	309.2
115°	361.1	359.9	358.6	357.6	356.7	355.9	355.0	354.1	355.0	355.9	356.7
117.5°	407.0	406.3	405.7	404.8	403.8	402.8	401.7	400.7	401.7	402.8	403.8
120°	436.4	435.9	435.5	434.6	433.3	432.1	430.8	429.6	430.8	432.1	433.3
122.5°	465.0	464.4	463.9	463.1	462.1	461.1	460.0	459.0	460.0	461.1	462.1
125°	505.8	505.1	504.6	503.8	502.7	501.5	500.4	499.3	500.4	501.5	502.7
127.5°	545.0	544.4	543.7	542.8	541.7	540.5	539.4	538.3	539.4	540.5	541.7
130°	569.1	568.5	568.0	567.1	566.0	564.9	563.8	562.6	563.8	564.9	566.0
132.5°	592.1	591.7	591.2	590.5	589.3	588.1	587.0	585.9	587.0	588.1	589.3
135°	626.7	626.2	625.6	624.9	624.1	623.2	622.4	621.6	622.4	623.2	624.1
137.5°	657.5	657.2	656.9	656.3	655.1	654.1	653.0	651.9	653.0	654.1	655.1
140°	677.1	676.7	676.2	675.6	674.8	673.9	673.0	672.2	673.0	673.9	674.8
142.5°	695.9	695.4	695.0	694.4	693.5	692.7	691.8	691.0	691.8	692.7	693.5
145°	722.4	722.0	721.8	721.2	720.1	719.2	718.2	717.2	718.2	719.2	720.1
147.5°	745.5	745.3	744.9	744.5	743.8	743.2	742.5	741.9	742.5	743.2	743.8
150°	759.7	759.5	759.1	758.8	758.4	757.9	757.5	757.2	757.5	757.9	758.4
152.5°	772.1	772.0	771.8	771.6	771.4	771.2	771.0	770.8	771.0	771.2	771.4
155°	789.2	789.0	788.8	788.9	789.2	789.5	789.8	790.1	789.8	789.5	789.2
157.5°	804.5	804.7	804.9	804.9	804.9	804.9	805.0	805.0	805.0	804.9	804.9
160°	813.1	813.3	813.5	813.6	813.7	813.9	814.0	814.2	814.0	813.9	813.7
162.5°	820.8	820.9	821.0	821.3	821.7	822.0	822.4	822.8	822.4	822.0	821.7
165°	830.9	831.0	831.2	831.5	831.9	832.3	832.8	833.2	832.8	832.3	831.9
167.5°	838.7	838.7	838.7	839.0	839.6	840.2	840.7	841.3	840.7	840.2	839.6
170°	843.3	843.3	843.3	843.6	844.1	844.7	845.2	845.8	845.2	844.7	844.1
172.5°	846.1	846.0	845.8	846.2	846.9	847.5	848.2	848.9	848.2	847.5	846.9
175°	850.0	849.8	849.7	850.0	850.7	851.4	852.0	852.8	852.0	851.4	850.7
177.5°	851.5	851.4	851.4	851.5	852.1	852.6	853.3	853.8	853.3	852.6	852.1
180°	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3
2.5°	1189.1	1185.9	1181.2	1174.1	1168.5	1159.6	1159.6	1161.1	1161.1	1160.5	1159.6
5°	1153.1	1144.3	1133.8	1121.5	1108.5	1095.6	1093.3	1088.6	1085.1	1082.7	1079.8
7.5°	1115.0	1099.4	1084.0	1066.8	1051.1	1038.1	1029.1	1021.6	1016.8	1011.6	1007.9
10°	1089.2	1069.9	1051.7	1033.5	1013.6	997.8	987.8	980.8	975.5	970.9	968.5
12.5°	1058.7	1036.6	1016.6	999.3	977.5	961.2	951.7	948.5	942.3	932.4	927.2
15°	1014.2	993.7	969.7	943.3	932.7	912.8	901.7	896.5	892.9	885.3	883.0
17.5°	976.1	949.3	922.3	902.7	883.0	866.9	860.7	854.1	849.5	843.3	841.4
20°	945.6	921.6	897.0	875.9	855.4	837.8	832.6	827.9	823.2	820.3	817.9
22.5°	914.7	890.7	870.3	850.6	828.7	817.2	811.5	806.3	803.1	801.1	798.7
25°	871.2	850.2	827.3	809.7	792.1	784.5	781.0	778.1	775.8	772.8	772.2
27.5°	832.3	809.3	790.8	774.5	761.8	755.4	752.1	750.6	751.1	752.2	752.9
30°	803.3	782.2	767.0	752.9	741.1	735.3	734.7	734.7	737.1	737.6	738.8
32.5°	776.5	759.2	744.0	730.4	721.5	717.5	719.7	719.7	721.6	723.2	725.2
35°	737.6	722.4	710.7	699.0	691.4	693.1	694.3	695.4	698.4	701.9	704.3
37.5°	700.5	687.3	675.1	665.9	662.5	665.6	668.4	670.9	674.2	676.9	679.3
40°	673.8	663.8	652.1	643.9	645.1	646.9	649.2	652.1	655.0	656.8	659.2
42.5°	648.9	638.5	629.6	622.8	624.5	626.7	628.1	629.6	633.0	636.2	637.6
45°	611.1	602.9	594.7	590.6	591.8	593.0	594.1	595.9	598.8	601.2	601.8
47.5°	568.5	562.8	557.3	553.4	555.2	554.7	556.3	560.0	560.9	562.3	565.6
50°	541.4	536.1	529.7	528.5	528.5	528.5	529.1	533.7	533.7	536.1	538.5
52.5°	511.3	508.0	503.9	501.8	500.8	500.8	503.3	505.7	506.6	509.9	512.2
55°	467.0	463.5	459.9	458.1	457.0	458.1	462.9	464.0	467.0	468.7	470.5
57.5°	420.7	418.0	415.2	414.2	414.0	415.5	418.1	421.6	422.3	427.7	430.4
60°	390.2	386.1	383.7	383.7	382.6	387.9	386.7	392.5	393.7	397.3	401.3
62.5°	358.8	353.3	352.3	352.3	354.0	355.5	357.1	359.7	362.8	367.2	370.4
65°	308.2	305.2	309.4	308.8	307.6	311.1	311.1	314.0	317.5	321.7	328.1
67.5°	260.3	258.7	259.1	259.1	260.9	262.9	264.5	267.1	271.3	275.6	279.8
70°	227.9	229.7	226.8	229.1	230.8	231.4	232.6	236.1	240.8	243.7	248.4
72.5°	196.5	196.4	196.7	197.7	199.4	200.5	201.6	205.7	210.8	213.3	217.1
75°	151.2	150.6	152.3	152.3	155.2	156.4	157.6	159.4	164.0	167.6	170.5
77.5°	110.4	111.1	110.7	112.7	111.9	112.1	115.8	117.5	118.0	124.9	126.5
80°	83.2	84.4	85.0	85.6	86.1	85.0	89.0	90.8	90.8	94.9	97.8
82.5°	59.8	60.4	62.0	62.6	62.7	63.9	64.2	65.5	66.9	68.7	72.5
85°	29.9	31.6	32.2	31.6	32.2	31.1	32.8	33.4	34.0	34.0	34.0
87.5°	10.6	11.5	11.3	12.1	12.1	12.9	13.0	12.1	12.3	13.8	12.1
90°	6.3	7.9	9.7	11.5	13.3	15.2	15.8	16.4	16.9	17.5	17.9
92.5°	10.2	10.7	12.1	13.4	14.8	16.2	17.1	18.0	18.9	19.8	20.3
95°	15.6	13.4	15.0	16.5	18.1	19.6	20.7	21.6	22.6	23.6	24.1
97.5°	67.3	61.0	50.8	40.6	30.6	20.4	21.5	22.6	23.8	24.9	25.6
100°	118.3	108.7	86.8	64.8	42.9	20.9	22.0	23.2	24.3	25.4	26.1
102.5°	148.6	137.7	113.7	89.6	65.7	41.7	38.2	34.7	31.3	27.7	26.1
105°	195.0	189.4	176.8	164.1	151.4	138.8	113.8	88.9	64.0	39.1	26.8
107.5°	244.7	246.3	248.3	250.3	252.4	254.3	236.0	217.7	199.5	181.2	162.7
110°	278.2	279.6	281.1	282.7	284.2	285.8	281.1	276.5	271.8	267.2	254.8



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	310.2	311.5	313.1	314.6	316.2	317.7	317.8	317.9	318.0	318.1	315.9
115°	357.6	358.6	359.9	361.1	362.4	363.7	365.1	366.5	367.9	369.3	370.3
117.5°	404.8	405.7	406.3	407.0	407.6	408.3	409.4	410.5	411.6	412.8	413.4
120°	434.6	435.5	435.9	436.4	436.8	437.1	438.3	439.5	440.6	441.7	442.2
122.5°	463.1	463.9	464.4	465.0	465.5	466.1	466.8	467.6	468.4	469.2	469.7
125°	503.8	504.6	505.1	505.8	506.3	506.9	507.1	507.4	507.7	508.0	508.2
127.5°	542.8	543.7	544.4	545.0	545.7	546.4	546.8	547.3	547.8	548.2	548.3
130°	567.1	568.0	568.5	569.1	569.6	570.2	570.8	571.4	571.9	572.5	572.7
132.5°	590.5	591.2	591.7	592.1	592.5	593.1	593.6	594.2	594.7	595.3	595.4
135°	624.9	625.6	626.2	626.7	627.3	627.8	628.3	628.7	629.1	629.6	629.6
137.5°	656.3	656.9	657.2	657.5	657.9	658.1	658.8	659.5	660.2	660.9	661.1
140°	675.6	676.2	676.7	677.1	677.5	678.0	678.5	679.1	679.6	680.2	680.4
142.5°	694.4	695.0	695.4	695.9	696.3	696.7	697.2	697.6	698.0	698.4	698.5
145°	721.2	721.8	722.0	722.4	722.6	722.9	723.2	723.5	723.8	724.0	724.2
147.5°	744.5	744.9	745.3	745.5	745.8	746.1	746.4	746.7	746.9	747.3	747.0
150°	758.8	759.1	759.5	759.7	760.0	760.3	760.6	760.9	761.1	761.4	761.4
152.5°	771.6	771.8	772.0	772.1	772.3	772.5	772.9	773.4	774.0	774.5	774.4
155°	788.9	788.8	789.0	789.2	789.3	789.5	790.1	790.8	791.5	792.3	792.2
157.5°	804.9	804.9	804.7	804.5	804.4	804.3	805.1	806.0	806.8	807.6	807.5
160°	813.6	813.5	813.3	813.1	813.0	812.9	813.7	814.6	815.5	816.2	816.2
162.5°	821.3	821.0	820.9	820.8	820.6	820.4	821.5	822.4	823.4	824.3	824.3
165°	831.5	831.2	831.0	830.9	830.8	830.6	831.7	832.8	834.0	835.1	835.2
167.5°	839.0	838.7	838.7	838.7	838.7	838.7	839.8	840.9	842.1	843.3	843.3
170°	843.6	843.3	843.3	843.3	843.3	843.3	844.4	845.5	846.7	847.8	847.8
172.5°	846.2	845.8	846.0	846.1	846.2	846.4	847.5	848.6	849.7	850.8	850.8
175°	850.0	849.7	849.8	850.0	850.2	850.2	851.3	852.2	853.3	854.2	854.1
177.5°	851.5	851.4	851.4	851.5	851.7	851.8	852.6	853.6	854.5	855.4	855.2
180°	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3
2.5°	1156.3	1155.9	1159.2	1156.8	1159.2	1155.9	1156.3	1159.6	1160.5	1161.1	1161.1
5°	1076.3	1078.1	1072.2	1072.2	1072.2	1078.1	1076.3	1079.8	1082.7	1085.1	1088.6
7.5°	1005.0	1002.5	1002.7	999.5	1002.7	1002.5	1005.0	1007.9	1011.6	1016.8	1021.6
10°	961.5	957.9	956.7	957.3	956.7	957.9	961.5	968.5	970.9	975.5	980.8
12.5°	925.4	924.7	917.0	917.1	917.0	924.7	925.4	927.2	932.4	942.3	948.5
15°	883.0	871.8	870.6	874.2	870.6	871.8	883.0	883.0	885.3	892.9	896.5
17.5°	840.4	834.6	834.9	833.2	834.9	834.6	840.4	841.4	843.3	849.5	854.1
20°	817.9	814.4	813.8	809.7	813.8	814.4	817.9	817.9	820.3	823.2	827.9
22.5°	797.3	796.2	796.5	791.9	796.5	796.2	797.3	798.7	801.1	803.1	806.3
25°	771.6	774.6	772.2	772.2	772.2	774.6	771.6	772.2	772.8	775.8	778.1
27.5°	754.3	754.1	753.0	753.0	753.0	754.1	754.3	752.9	752.2	751.1	750.6
30°	741.1	740.5	741.8	741.8	741.8	740.5	741.1	738.8	737.6	737.1	734.7
32.5°	728.1	728.8	729.1	729.5	729.1	728.8	728.1	725.2	723.2	721.6	719.7
35°	707.7	708.3	710.2	708.9	710.2	708.3	707.7	704.3	701.9	698.4	695.4
37.5°	680.4	683.0	682.4	683.4	682.4	683.0	680.4	679.3	676.9	674.2	670.9
40°	659.7	661.5	660.9	660.9	660.9	661.5	659.7	659.2	656.8	655.0	652.1
42.5°	638.6	639.9	638.4	637.5	638.4	639.9	638.6	637.6	636.2	633.0	629.6
45°	604.1	602.9	604.7	602.3	604.7	602.9	604.1	601.8	601.2	598.8	595.9
47.5°	565.4	566.5	567.1	568.8	567.1	566.5	565.4	565.6	562.3	560.9	560.0
50°	539.6	543.1	543.1	542.5	543.1	543.1	539.6	538.5	536.1	533.7	533.7
52.5°	514.3	515.9	518.3	518.1	518.3	515.9	514.3	512.2	509.9	506.6	505.7
55°	475.2	476.3	477.5	478.1	477.5	476.3	475.2	470.5	468.7	467.0	464.0
57.5°	434.6	434.1	437.0	437.8	437.0	434.1	434.6	430.4	427.7	422.3	421.6
60°	406.0	406.0	410.7	412.5	410.7	406.0	406.0	401.3	397.3	393.7	392.5
62.5°	375.6	377.5	382.1	379.7	382.1	377.5	375.6	370.4	367.2	362.8	359.7
65°	331.1	335.7	335.1	337.5	335.1	335.7	331.1	328.1	321.7	317.5	314.0
67.5°	284.5	287.4	291.6	292.1	291.6	287.4	284.5	279.8	275.6	271.3	267.1
70°	253.1	256.1	258.4	260.1	258.4	256.1	253.1	248.4	243.7	240.8	236.1
72.5°	222.7	224.2	229.8	227.3	229.8	224.2	222.7	217.1	213.3	210.8	205.7
75°	174.6	178.7	182.2	180.5	182.2	178.7	174.6	170.5	167.6	164.0	159.4
77.5°	129.2	133.2	134.8	133.4	134.8	133.2	129.2	126.5	124.9	118.0	117.5
80°	101.9	101.3	104.9	104.3	104.9	101.3	101.9	97.8	94.9	90.8	90.8
82.5°	74.7	74.2	75.9	76.2	75.9	74.2	74.7	72.5	68.7	66.9	65.5
85°	36.3	38.1	35.7	35.1	35.7	38.1	36.3	34.0	34.0	34.0	33.4
87.5°	12.1	12.1	11.7	11.3	11.7	12.1	12.1	12.1	13.8	12.3	12.1
90°	18.2	18.4	18.7	19.0	18.7	18.4	18.2	17.9	17.5	16.9	16.4
92.5°	20.5	20.7	20.8	21.0	20.8	20.7	20.5	20.3	19.8	18.9	18.0
95°	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	23.6	22.6	21.6
97.5°	25.7	25.8	26.0	26.1	26.0	25.8	25.7	25.6	24.9	23.8	22.6
100°	26.2	26.3	26.4	26.6	26.4	26.3	26.2	26.1	25.4	24.3	23.2
102.5°	26.3	26.6	26.9	27.1	26.9	26.6	26.3	26.1	27.7	31.3	34.7
105°	27.0	27.3	27.6	27.9	27.6	27.3	27.0	26.8	39.1	64.0	88.9
107.5°	143.9	125.1	106.3	87.6	106.3	125.1	143.9	162.7	181.2	199.5	217.7
110°	234.6	214.5	194.3	174.3	194.3	214.5	234.6	254.8	267.2	271.8	276.5



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	311.7	307.5	303.2	298.9	303.2	307.5	311.7	315.9	318.1	318.0	317.9
115°	370.8	371.4	372.0	372.6	372.0	371.4	370.8	370.3	369.3	367.9	366.5
117.5°	413.5	413.6	413.7	413.9	413.7	413.6	413.5	413.4	412.8	411.6	410.5
120°	442.2	442.2	442.2	442.2	442.2	442.2	442.2	442.2	441.7	440.6	439.5
122.5°	469.8	469.8	470.0	470.1	470.0	469.8	469.8	469.7	469.2	468.4	467.6
125°	508.6	508.9	509.1	509.4	509.1	508.9	508.6	508.2	508.0	507.7	507.4
127.5°	548.0	547.7	547.4	547.2	547.4	547.7	548.0	548.3	548.2	547.8	547.3
130°	572.3	572.0	571.8	571.4	571.8	572.0	572.3	572.7	572.5	571.9	571.4
132.5°	595.0	594.6	594.2	593.7	594.2	594.6	595.0	595.4	595.3	594.7	594.2
135°	629.1	628.7	628.3	627.8	628.3	628.7	629.1	629.6	629.6	629.1	628.7
137.5°	660.8	660.5	660.2	660.0	660.2	660.5	660.8	661.1	660.9	660.2	659.5
140°	680.0	679.8	679.5	679.2	679.5	679.8	680.0	680.4	680.2	679.6	679.1
142.5°	698.1	697.8	697.3	696.9	697.3	697.8	698.1	698.5	698.4	698.0	697.6
145°	724.2	724.2	724.2	724.2	724.2	724.2	724.2	724.2	724.0	723.8	723.5
147.5°	746.4	745.7	745.1	744.4	745.1	745.7	746.4	747.0	747.3	746.9	746.7
150°	761.0	760.5	760.1	759.7	760.1	760.5	761.0	761.4	761.4	761.1	760.9
152.5°	773.8	773.1	772.5	771.8	772.5	773.1	773.8	774.4	774.5	774.0	773.4
155°	791.3	790.5	789.6	788.8	789.6	790.5	791.3	792.2	792.3	791.5	790.8
157.5°	806.4	805.3	804.3	803.1	804.3	805.3	806.4	807.5	807.6	806.8	806.0
160°	815.2	814.2	813.2	812.3	813.2	814.2	815.2	816.2	816.2	815.5	814.6
162.5°	823.5	822.6	821.7	820.9	821.7	822.6	823.5	824.3	824.3	823.4	822.4
165°	834.2	833.2	832.2	831.2	832.2	833.2	834.2	835.2	835.1	834.0	832.8
167.5°	842.1	840.9	839.8	838.7	839.8	840.9	842.1	843.3	843.3	842.1	840.9
170°	846.7	845.5	844.4	843.3	844.4	845.5	846.7	847.8	847.8	846.7	845.5
172.5°	849.5	848.3	847.1	845.8	847.1	848.3	849.5	850.8	850.8	849.7	848.6
175°	853.0	851.9	850.8	849.6	850.8	851.9	853.0	854.1	854.2	853.3	852.2
177.5°	854.1	853.0	851.9	850.8	851.9	853.0	854.1	855.2	855.4	854.5	853.6
180°	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3
2.5°	1159.6	1159.6	1168.5	1174.1	1181.2	1185.9	1189.1	1192.4	1198.1	1205.6	1214.0
5°	1093.3	1095.6	1108.5	1121.5	1133.8	1144.3	1153.1	1163.6	1176.5	1192.3	1209.9
7.5°	1029.1	1038.1	1051.1	1066.8	1084.0	1099.4	1115.0	1132.3	1150.5	1173.8	1198.4
10°	987.8	997.8	1013.6	1033.5	1051.7	1069.9	1089.2	1107.9	1130.8	1158.3	1190.0
12.5°	951.7	961.2	977.5	999.3	1016.6	1036.6	1058.7	1083.1	1108.8	1141.9	1177.8
15°	901.7	912.8	932.7	943.3	969.7	993.7	1014.2	1049.4	1082.2	1116.1	1157.8
17.5°	860.7	866.9	883.0	902.7	922.3	949.3	976.1	1005.4	1038.1	1079.7	1131.7
20°	832.6	837.8	855.4	875.9	897.0	921.6	945.6	974.9	1011.8	1055.8	1112.1
22.5°	811.5	817.2	828.7	850.6	870.3	890.7	914.7	949.6	988.9	1031.9	1092.9
25°	781.0	784.5	792.1	809.7	827.3	850.2	871.2	904.0	944.5	994.9	1055.8
27.5°	752.1	755.4	761.8	774.5	790.8	809.3	832.3	860.2	901.2	956.0	1020.6
30°	734.7	735.3	741.1	752.9	767.0	782.2	803.3	834.9	873.6	929.3	997.2
32.5°	719.7	717.5	721.5	730.4	744.0	759.2	776.5	807.7	845.0	899.7	969.6
35°	694.3	693.1	691.4	699.0	710.7	722.4	737.6	761.1	803.3	854.3	927.5
37.5°	668.4	665.6	662.5	665.9	675.1	687.3	700.5	721.3	757.7	813.8	883.9
40°	649.2	646.9	645.1	643.9	652.1	663.8	673.8	693.7	727.7	781.0	850.2
42.5°	628.1	626.7	624.5	622.8	629.6	638.5	648.9	666.5	700.5	750.5	816.0
45°	594.1	593.0	591.8	590.6	594.7	602.9	611.1	624.0	653.2	701.9	761.1
47.5°	556.3	554.7	555.2	553.4	557.3	562.8	568.5	582.4	610.5	649.8	693.0
50°	529.1	528.5	528.5	528.5	529.7	536.1	541.4	551.9	577.7	617.0	648.0
52.5°	503.3	500.8	500.8	501.8	503.9	508.0	511.3	522.9	545.4	577.6	605.8
55°	462.9	458.1	457.0	458.1	459.9	463.5	467.0	476.3	495.7	519.7	536.1
57.5°	418.1	415.5	414.0	414.2	415.2	418.0	420.7	430.8	446.1	458.7	469.2
60°	386.7	387.9	382.6	383.7	383.7	386.1	390.2	396.7	409.6	418.4	428.9
62.5°	357.1	355.5	354.0	352.3	352.3	353.3	358.8	363.9	374.9	379.4	387.6
65°	311.1	311.1	307.6	308.8	309.4	305.2	308.2	314.0	321.1	322.9	330.5
67.5°	264.5	262.9	260.9	259.1	259.1	258.7	260.3	263.2	268.5	269.1	274.9
70°	232.6	231.4	230.8	229.1	226.8	229.7	227.9	230.8	233.8	234.4	237.9
72.5°	201.6	200.5	199.4	197.7	196.7	196.4	196.5	199.9	201.9	201.0	205.1
75°	157.6	156.4	155.2	152.3	152.3	150.6	151.2	153.5	155.8	154.1	157.6
77.5°	115.8	112.1	111.9	112.7	110.7	111.1	110.4	110.0	111.1	111.2	114.3
80°	89.0	85.0	86.1	85.6	85.0	84.4	83.2	83.8	84.4	85.0	86.7
82.5°	64.2	63.9	62.7	62.6	62.0	60.4	59.8	60.8	61.4	61.0	62.3
85°	32.8	31.1	32.2	31.6	32.2	31.6	29.9	29.9	31.1	30.5	31.6
87.5°	13.0	12.9	12.1	12.1	11.3	11.5	10.6	10.8	11.0	10.8	11.4
90°	15.8	15.2	13.3	11.5	9.7	7.9	6.3	4.8	3.4	2.1	0.6
92.5°	17.1	16.2	14.8	13.4	12.1	10.7	10.2	10.6	11.0	11.4	11.8
95°	20.7	19.6	18.1	16.5	15.0	13.4	15.6	21.4	27.1	32.9	38.7
97.5°	21.5	20.4	30.6	40.6	50.8	61.0	67.3	69.9	72.5	75.1	77.7
100°	22.0	20.9	42.9	64.8	86.8	108.7	118.3	115.5	112.7	109.9	107.1
102.5°	38.2	41.7	65.7	89.6	113.7	137.7	148.6	146.6	144.6	142.6	140.5
105°	113.8	138.8	151.4	164.1	176.8	189.4	195.0	193.5	191.9	190.4	188.8
107.5°	236.0	254.3	252.4	250.3	248.3	246.3	244.7	243.5	242.2	241.0	239.7
110°	281.1	285.8	284.2	282.7	281.1	279.6	278.2	277.1	276.0	274.8	273.7



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	317.8	317.7	316.2	314.6	313.1	311.5	310.2	309.2	308.2	307.1	306.2
115°	365.1	363.7	362.4	361.1	359.9	358.6	357.6	356.7	355.9	355.0	354.1
117.5°	409.4	408.3	407.6	407.0	406.3	405.7	404.8	403.8	402.8	401.7	400.7
120°	438.3	437.1	436.8	436.4	435.9	435.5	434.6	433.3	432.1	430.8	429.6
122.5°	466.8	466.1	465.5	465.0	464.4	463.9	463.1	462.1	461.1	460.0	459.0
125°	507.1	506.9	506.3	505.8	505.1	504.6	503.8	502.7	501.5	500.4	499.3
127.5°	546.8	546.4	545.7	545.0	544.4	543.7	542.8	541.7	540.5	539.4	538.3
130°	570.8	570.2	569.6	569.1	568.5	568.0	567.1	566.0	564.9	563.8	562.6
132.5°	593.6	593.1	592.5	592.1	591.7	591.2	590.5	589.3	588.1	587.0	585.9
135°	628.3	627.8	627.3	626.7	626.2	625.6	624.9	624.1	623.2	622.4	621.6
137.5°	658.8	658.1	657.9	657.5	657.2	656.9	656.3	655.1	654.1	653.0	651.9
140°	678.5	678.0	677.5	677.1	676.7	676.2	675.6	674.8	673.9	673.0	672.2
142.5°	697.2	696.7	696.3	695.9	695.4	695.0	694.4	693.5	692.7	691.8	691.0
145°	723.2	722.9	722.6	722.4	722.0	721.8	721.2	720.1	719.2	718.2	717.2
147.5°	746.4	746.1	745.8	745.5	745.3	744.9	744.5	743.8	743.2	742.5	741.9
150°	760.6	760.3	760.0	759.7	759.5	759.1	758.8	758.4	757.9	757.5	757.2
152.5°	772.9	772.5	772.3	772.1	772.0	771.8	771.6	771.4	771.2	771.0	770.8
155°	790.1	789.5	789.3	789.2	789.0	788.8	788.9	789.2	789.5	789.8	790.1
157.5°	805.1	804.3	804.4	804.5	804.7	804.9	804.9	804.9	804.9	805.0	805.0
160°	813.7	812.9	813.0	813.1	813.3	813.5	813.6	813.7	813.9	814.0	814.2
162.5°	821.5	820.4	820.6	820.8	820.9	821.0	821.3	821.7	822.0	822.4	822.8
165°	831.7	830.6	830.8	830.9	831.0	831.2	831.5	831.9	832.3	832.8	833.2
167.5°	839.8	838.7	838.7	838.7	838.7	838.7	839.0	839.6	840.2	840.7	841.3
170°	844.4	843.3	843.3	843.3	843.3	843.3	843.6	844.1	844.7	845.2	845.8
172.5°	847.5	846.4	846.2	846.1	846.0	845.8	846.2	846.9	847.5	848.2	848.9
175°	851.3	850.2	850.2	850.0	849.8	849.7	850.0	850.7	851.4	852.0	852.8
177.5°	852.6	851.8	851.7	851.5	851.4	851.4	851.5	852.1	852.6	853.3	853.8
180°	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3
2.5°	1216.8	1219.2	1227.1	1232.8	1239.3	1243.0	1246.8	1249.7	1253.4	1254.3	1267.9
5°	1222.2	1233.9	1254.4	1269.6	1288.4	1308.9	1322.9	1329.4	1346.4	1360.5	1388.6
7.5°	1220.6	1245.6	1276.6	1308.6	1343.2	1375.0	1402.7	1435.5	1458.8	1493.8	1528.4
10°	1219.3	1252.7	1292.5	1333.5	1381.6	1426.1	1465.9	1510.5	1547.4	1596.0	1637.6
12.5°	1215.0	1255.5	1310.8	1359.3	1417.6	1479.0	1538.1	1595.3	1628.0	1709.0	1747.3
15°	1204.6	1252.7	1321.8	1395.6	1475.9	1548.5	1623.5	1683.3	1779.9	1850.9	1896.0
17.5°	1184.7	1252.0	1333.9	1423.1	1520.6	1616.4	1701.3	1792.1	1894.5	1980.4	2071.7
20°	1175.4	1249.1	1340.6	1439.0	1540.3	1648.7	1745.4	1854.4	1966.3	2050.6	2167.8
22.5°	1158.0	1241.6	1340.1	1449.8	1558.2	1670.3	1783.4	1893.3	2022.6	2138.8	2250.3
25°	1129.6	1223.4	1325.3	1447.8	1574.9	1687.4	1822.7	1968.7	2103.4	2252.8	2364.1
27.5°	1099.8	1199.9	1302.1	1416.0	1552.7	1686.3	1856.5	2021.4	2186.1	2315.1	2397.5
30°	1076.9	1174.1	1279.6	1394.5	1529.8	1688.6	1879.0	2058.8	2219.4	2330.1	2376.4
32.5°	1052.1	1150.7	1244.0	1364.4	1508.7	1687.1	1893.1	2080.9	2221.3	2295.0	2286.0
35°	1013.1	1095.6	1186.5	1302.4	1472.4	1676.9	1901.3	2082.8	2169.0	2153.2	2033.7
37.5°	956.7	1026.2	1115.7	1242.7	1430.2	1655.2	1884.8	2021.1	2015.5	1886.7	1713.6
40°	921.6	980.8	1067.0	1200.5	1397.4	1641.2	1859.1	1947.6	1872.6	1692.6	1485.2
42.5°	875.7	930.1	1016.3	1153.7	1361.3	1612.5	1809.8	1835.5	1688.8	1481.8	1291.7
45°	804.4	852.5	941.5	1083.3	1307.2	1550.3	1689.7	1627.0	1429.6	1215.7	1071.0
47.5°	727.9	777.8	863.5	1009.2	1228.9	1456.6	1523.1	1389.7	1187.1	1013.6	880.7
50°	679.7	727.7	811.5	958.6	1175.9	1379.8	1407.3	1235.1	1048.8	896.5	787.5
52.5°	630.9	676.1	758.5	906.0	1114.0	1290.7	1273.8	1098.2	926.9	797.0	711.5
55°	558.4	601.2	679.7	817.9	1007.2	1147.2	1085.7	918.1	776.4	675.5	610.5
57.5°	493.4	534.4	602.2	727.1	891.7	987.8	909.6	768.4	655.7	578.1	529.5
60°	449.4	485.7	550.2	666.2	809.2	882.4	805.0	680.3	585.3	523.2	479.8
62.5°	407.7	439.3	499.0	604.3	728.5	790.1	711.8	606.1	525.3	470.3	433.4
65°	344.5	373.2	425.9	508.0	609.9	650.9	583.6	498.0	435.3	394.3	369.7
67.5°	286.9	311.3	356.8	421.4	496.4	526.2	474.9	408.7	361.5	328.6	309.0
70°	248.4	269.5	305.2	360.9	428.9	451.8	403.7	349.2	314.6	288.3	270.1
72.5°	216.1	231.5	264.0	307.0	363.7	381.9	348.4	300.5	268.2	248.4	234.0
75°	164.6	177.5	198.6	233.2	272.4	283.0	257.8	227.9	206.2	192.2	181.1
77.5°	118.7	128.2	143.4	164.8	191.9	201.5	185.5	165.6	149.7	140.3	134.1
80°	89.6	97.3	110.1	127.7	144.1	149.4	140.0	124.8	113.7	108.4	103.1
82.5°	66.2	70.5	78.3	90.2	101.5	107.7	99.7	90.6	84.6	79.8	77.8
85°	33.4	35.7	39.3	43.9	51.0	53.3	50.4	48.0	44.5	41.6	41.6
87.5°	12.6	12.9	14.6	15.8	18.0	19.7	19.6	19.1	18.9	18.6	18.3
90°	2.1	3.4	4.8	6.3	7.9	9.7	11.5	13.3	15.2	15.8	16.4
92.5°	11.4	11.0	10.6	10.2	10.7	12.1	13.4	14.8	16.2	17.1	18.0
95°	32.9	27.1	21.4	15.6	13.4	15.0	16.5	18.1	19.6	20.7	21.6
97.5°	75.1	72.5	69.9	67.3	61.0	50.8	40.6	30.6	20.4	21.5	22.6
100°	109.9	112.7	115.5	118.3	108.7	86.8	64.8	42.9	20.9	22.0	23.2
102.5°	142.6	144.6	146.6	148.6	137.7	113.7	89.6	65.7	41.7	38.2	34.7
105°	190.4	191.9	193.5	195.0	189.4	176.8	164.1	151.4	138.8	113.8	88.9
107.5°	241.0	242.2	243.5	244.7	246.3	248.3	250.3	252.4	254.3	236.0	217.7
110°	274.8	276.0	277.1	278.2	279.6	281.1	282.7	284.2	285.8	281.1	276.5



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	307.1	308.2	309.2	310.2	311.5	313.1	314.6	316.2	317.7	317.8	317.9
115°	355.0	355.9	356.7	357.6	358.6	359.9	361.1	362.4	363.7	365.1	366.5
117.5°	401.7	402.8	403.8	404.8	405.7	406.3	407.0	407.6	408.3	409.4	410.5
120°	430.8	432.1	433.3	434.6	435.5	435.9	436.4	436.8	437.1	438.3	439.5
122.5°	460.0	461.1	462.1	463.1	463.9	464.4	465.0	465.5	466.1	466.8	467.6
125°	500.4	501.5	502.7	503.8	504.6	505.1	505.8	506.3	506.9	507.1	507.4
127.5°	539.4	540.5	541.7	542.8	543.7	544.4	545.0	545.7	546.4	546.8	547.3
130°	563.8	564.9	566.0	567.1	568.0	568.5	569.1	569.6	570.2	570.8	571.4
132.5°	587.0	588.1	589.3	590.5	591.2	591.7	592.1	592.5	593.1	593.6	594.2
135°	622.4	623.2	624.1	624.9	625.6	626.2	626.7	627.3	627.8	628.3	628.7
137.5°	653.0	654.1	655.1	656.3	656.9	657.2	657.5	657.9	658.1	658.8	659.5
140°	673.0	673.9	674.8	675.6	676.2	676.7	677.1	677.5	678.0	678.5	679.1
142.5°	691.8	692.7	693.5	694.4	695.0	695.4	695.9	696.3	696.7	697.2	697.6
145°	718.2	719.2	720.1	721.2	721.8	722.0	722.4	722.6	722.9	723.2	723.5
147.5°	742.5	743.2	743.8	744.5	744.9	745.3	745.5	745.8	746.1	746.4	746.7
150°	757.5	757.9	758.4	758.8	759.1	759.5	759.7	760.0	760.3	760.6	760.9
152.5°	771.0	771.2	771.4	771.6	771.8	772.0	772.1	772.3	772.5	772.9	773.4
155°	789.8	789.5	789.2	788.9	788.8	789.0	789.2	789.3	789.5	790.1	790.8
157.5°	805.0	804.9	804.9	804.9	804.9	804.7	804.5	804.4	804.3	805.1	806.0
160°	814.0	813.9	813.7	813.6	813.5	813.3	813.1	813.0	812.9	813.7	814.6
162.5°	822.4	822.0	821.7	821.3	821.0	820.9	820.8	820.6	820.4	821.5	822.4
165°	832.8	832.3	831.9	831.5	831.2	831.0	830.9	830.8	830.6	831.7	832.8
167.5°	840.7	840.2	839.6	839.0	838.7	838.7	838.7	838.7	838.7	839.8	840.9
170°	845.2	844.7	844.1	843.6	843.3	843.3	843.3	843.3	843.3	844.4	845.5
172.5°	848.2	847.5	846.9	846.2	845.8	846.0	846.1	846.2	846.4	847.5	848.6
175°	852.0	851.4	850.7	850.0	849.7	849.8	850.0	850.2	850.2	851.3	852.2
177.5°	853.3	852.6	852.1	851.5	851.4	851.4	851.5	851.7	851.8	852.6	853.6
180°	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8	852.8



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3	1209.3
2.5°	1272.6	1273.1	1278.2	1281.9	1280.0	1282.5	1283.3
5°	1390.3	1411.4	1422.5	1430.8	1431.3	1431.9	1436.7
7.5°	1557.3	1579.9	1596.5	1621.5	1629.0	1637.6	1635.1
10°	1679.2	1712.6	1741.3	1756.5	1773.0	1797.0	1777.6
12.5°	1793.1	1852.3	1896.0	1919.7	1935.1	1939.9	1930.4
15°	1980.9	2058.3	2099.9	2098.7	2151.5	2174.3	2138.6
17.5°	2153.2	2224.6	2281.7	2311.0	2355.0	2364.7	2360.3
20°	2258.7	2336.6	2381.1	2431.5	2454.4	2474.9	2478.4
22.5°	2349.6	2419.6	2467.4	2509.3	2528.4	2538.1	2544.0
25°	2443.2	2498.3	2527.0	2541.7	2546.9	2545.7	2538.1
27.5°	2436.8	2441.0	2409.3	2378.3	2350.5	2319.3	2308.4
30°	2373.5	2324.3	2236.4	2186.6	2113.3	2055.4	2078.8
32.5°	2207.1	2109.1	2010.4	1901.6	1811.5	1785.8	1760.1
35°	1883.7	1711.4	1610.7	1493.5	1446.6	1399.7	1367.5
37.5°	1524.0	1390.7	1271.2	1194.6	1147.5	1117.9	1102.0
40°	1317.7	1197.6	1099.2	1037.1	1001.3	967.9	963.2
42.5°	1153.1	1041.5	967.4	918.0	883.6	869.4	859.2
45°	944.5	866.5	816.7	781.6	758.7	749.9	738.2
47.5°	799.4	744.3	707.0	683.0	665.8	659.3	658.3
50°	718.3	672.6	645.1	626.3	612.9	610.5	601.2
52.5°	657.4	617.8	596.3	580.0	570.2	563.6	560.9
55°	570.7	544.3	525.0	515.6	508.0	501.5	501.5
57.5°	499.3	477.3	464.5	456.5	454.2	449.6	446.7
60°	455.2	436.5	426.5	419.5	414.8	415.4	410.1
62.5°	412.2	399.9	390.5	383.4	377.8	377.9	378.2
65°	350.9	341.6	334.6	332.2	328.7	324.6	325.8
67.5°	297.4	288.6	283.1	279.1	277.9	275.7	279.1
70°	259.0	252.5	248.4	244.9	243.7	244.4	247.3
72.5°	223.8	219.2	216.5	214.9	212.3	212.4	214.5
75°	175.7	172.3	169.9	168.2	167.6	167.6	167.6
77.5°	129.2	128.3	127.3	124.7	124.8	125.5	125.6
80°	101.9	100.2	99.6	98.4	96.7	95.5	98.4
82.5°	76.2	74.4	73.8	73.6	70.9	70.7	73.1
85°	41.0	39.3	39.9	39.3	39.3	38.7	38.7
87.5°	17.9	17.6	17.1	17.7	17.3	16.9	17.8
90°	16.9	17.5	17.9	18.2	18.4	18.7	19.0
92.5°	18.9	19.8	20.3	20.5	20.7	20.8	21.0
95°	22.6	23.6	24.1	24.1	24.1	24.1	24.1
97.5°	23.8	24.9	25.6	25.7	25.8	26.0	26.1
100°	24.3	25.4	26.1	26.2	26.3	26.4	26.6
102.5°	31.3	27.7	26.1	26.3	26.6	26.9	27.1
105°	64.0	39.1	26.8	27.0	27.3	27.6	27.9
107.5°	199.5	181.2	162.7	143.9	125.1	106.3	87.6
110°	271.8	267.2	254.8	234.6	214.5	194.3	174.3



TEST NUMBER: P332186-935

CATALOG NUMBER: S123DIW-S1000D755U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	318.0	318.1	315.9	311.7	307.5	303.2	298.9
115°	367.9	369.3	370.3	370.8	371.4	372.0	372.6
117.5°	411.6	412.8	413.4	413.5	413.6	413.7	413.9
120°	440.6	441.7	442.2	442.2	442.2	442.2	442.2
122.5°	468.4	469.2	469.7	469.8	469.8	470.0	470.1
125°	507.7	508.0	508.2	508.6	508.9	509.1	509.4
127.5°	547.8	548.2	548.3	548.0	547.7	547.4	547.2
130°	571.9	572.5	572.7	572.3	572.0	571.8	571.4
132.5°	594.7	595.3	595.4	595.0	594.6	594.2	593.7
135°	629.1	629.6	629.6	629.1	628.7	628.3	627.8
137.5°	660.2	660.9	661.1	660.8	660.5	660.2	660.0
140°	679.6	680.2	680.4	680.0	679.8	679.5	679.2
142.5°	698.0	698.4	698.5	698.1	697.8	697.3	696.9
145°	723.8	724.0	724.2	724.2	724.2	724.2	724.2
147.5°	746.9	747.3	747.0	746.4	745.7	745.1	744.4
150°	761.1	761.4	761.4	761.0	760.5	760.1	759.7
152.5°	774.0	774.5	774.4	773.8	773.1	772.5	771.8
155°	791.5	792.3	792.2	791.3	790.5	789.6	788.8
157.5°	806.8	807.6	807.5	806.4	805.3	804.3	803.1
160°	815.5	816.2	816.2	815.2	814.2	813.2	812.3
162.5°	823.4	824.3	824.3	823.5	822.6	821.7	820.9
165°	834.0	835.1	835.2	834.2	833.2	832.2	831.2
167.5°	842.1	843.3	843.3	842.1	840.9	839.8	838.7
170°	846.7	847.8	847.8	846.7	845.5	844.4	843.3
172.5°	849.7	850.8	850.8	849.5	848.3	847.1	845.8
175°	853.3	854.2	854.1	853.0	851.9	850.8	849.6
177.5°	854.5	855.4	855.2	854.1	853.0	851.9	850.8
180°	852.8	852.8	852.8	852.8	852.8	852.8	852.8

(END OF REPORT)