

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332232-935

Luminaire Tested: **S123DIW-S1165D1320U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332232-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S1165D1320U935-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1320 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8644.2 lumens
Efficiency: N/A
Efficacy: 113.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332232-935

CATALOG NUMBER: S123DIW-S1165D1320U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

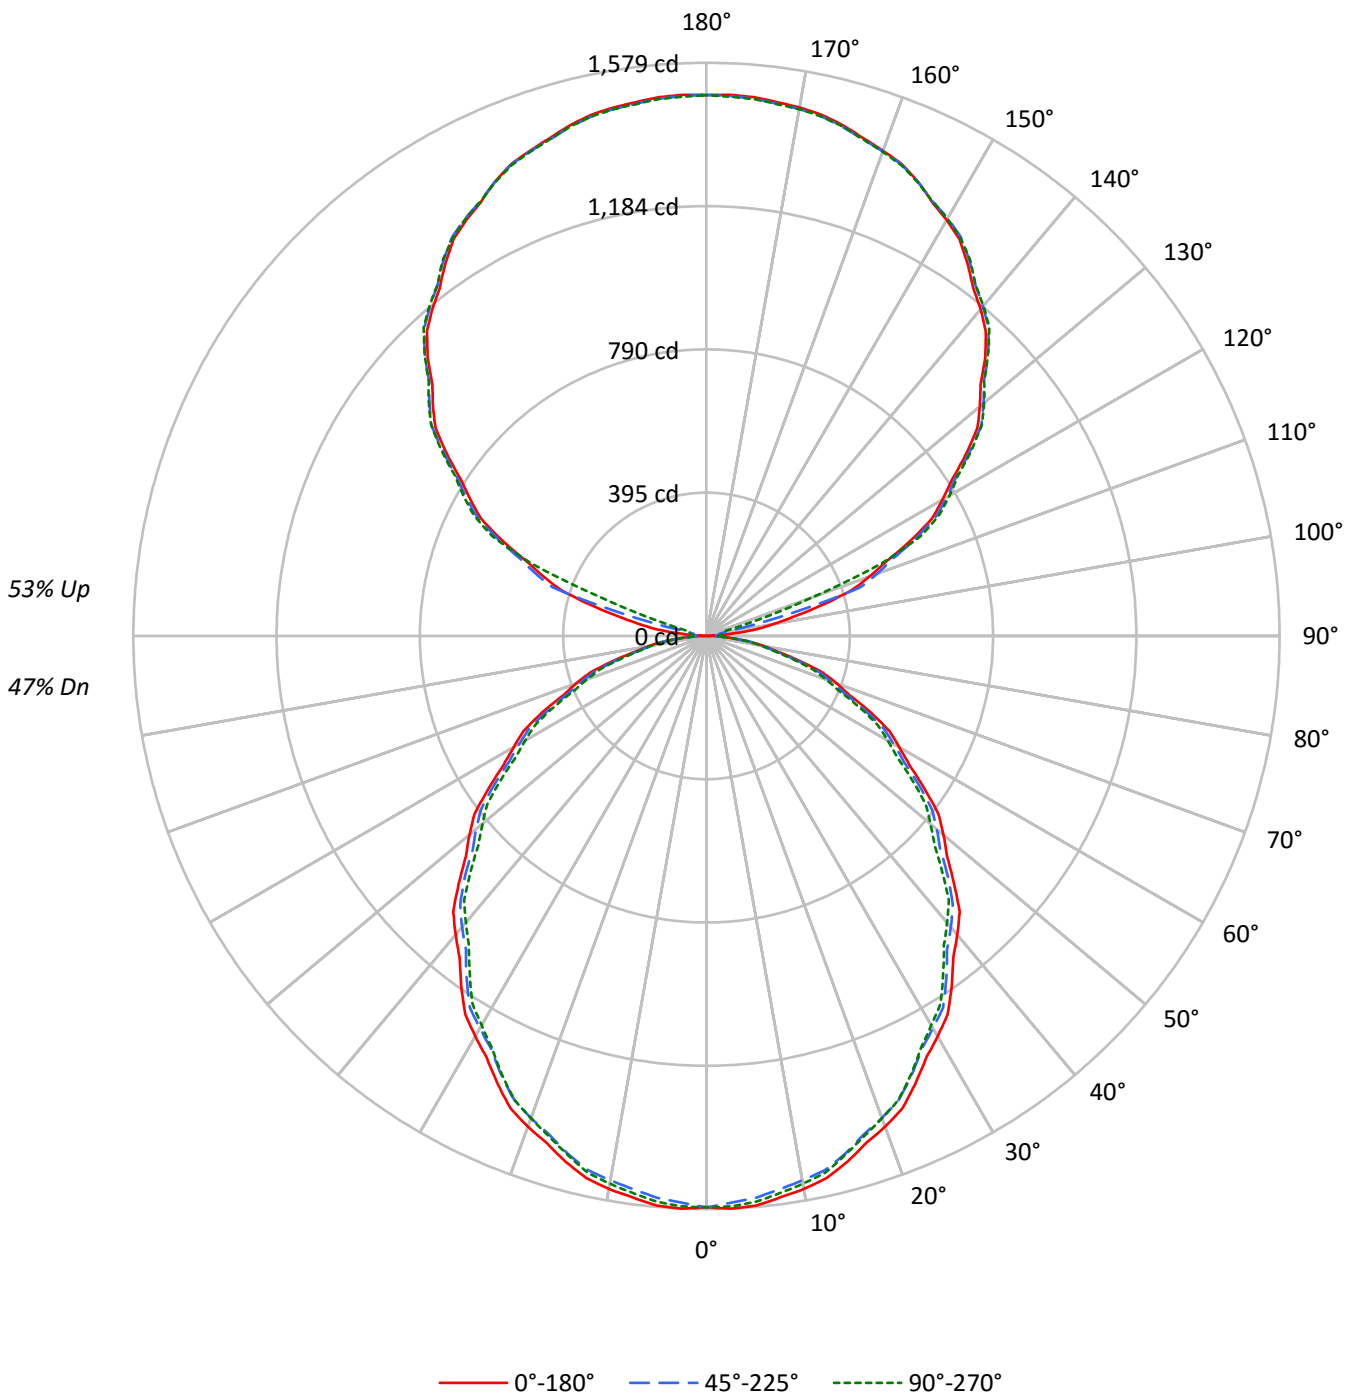



TEST NUMBER: P332232-935

CATALOG NUMBER: S123DIW-S1165D1320U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54	47
1	97	93	89	85	89	85	82	79	72	69	67	59	57	56	47	46	45	40
2	88	81	75	70	81	75	69	65	63	59	55	52	49	47	42	40	38	33
3	81	71	64	58	74	66	59	54	55	51	47	46	42	39	37	34	32	28
4	74	63	55	49	67	58	51	46	49	44	40	41	37	34	33	30	28	24
5	68	56	48	42	62	52	45	39	44	38	34	37	32	29	30	27	24	21
6	62	50	42	36	57	47	39	34	40	34	30	33	29	26	27	24	21	18
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	25	21	19	16
8	53	41	33	28	49	38	31	26	33	27	23	27	23	20	23	19	17	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13
10	46	34	27	22	43	32	26	21	28	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16942	16942	16942
5°	17022	16788	16904
10°	16909	16642	16746
15°	16711	16454	16485
20°	16479	16186	16200
25°	16170	15865	15833
30°	15830	15509	15392
35°	15473	15135	14939
40°	15100	14720	14491
45°	14690	14338	13988
50°	14277	13870	13485
55°	13741	13386	12979
60°	13199	12820	12411
65°	12720	12202	11826
70°	12013	11500	10990
75°	10975	10580	10131
80°	9899	9478	9397
85°	8682	8361	8028



TEST NUMBER: P332232-935

CATALOG NUMBER: S123DIW-S1165D1320U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.3	1.7
10°-20°	418.7	4.8
20°-30°	618.4	7.2
30°-40°	722.4	8.4
40°-50°	726.3	8.4
50°-60°	638.0	7.4
60°-70°	475.3	5.5
70°-80°	270.8	3.1
80°-90°	81.9	0.9
90°-100°	54.2	0.6
100°-110°	258.2	3.0
110°-120°	620.2	7.2
120°-130°	789.8	9.1
130°-140°	843.9	9.8
140°-150°	789.1	9.1
150°-160°	636.5	7.4
160°-170°	410.8	4.8
170°-180°	141.6	1.6
0°-30°	1185.3	13.7
0°-40°	1907.7	22.1
0°-60°	3272.0	37.9
0°-90°	4099.9	47.4
90°-120°	932.6	10.8
90°-150°	3355.4	38.8
90°-180°	4544.0	52.6
0°-180°	8644.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1574	1574	1574	1574	1574	
5°	1575	1568	1554	1566	1564	149
15°	1500	1494	1476	1486	1479	423
25°	1362	1353	1336	1337	1333	627
35°	1178	1169	1152	1144	1137	736
45°	965	959	942	926	919	745
55°	732	730	713	699	692	656
65°	499	492	479	469	464	493
75°	264	259	254	248	244	282
85°	70	68	68	65	65	77
90°	1	12	27	31	33	7
95°	68	25	34	42	42	83
105°	330	336	242	58	49	350
115°	619	626	636	646	651	611
125°	872	881	886	888	890	779
135°	1086	1093	1097	1100	1097	836
145°	1253	1261	1263	1265	1265	784
155°	1380	1378	1379	1384	1378	636
165°	1456	1453	1451	1459	1452	411
175°	1490	1485	1486	1493	1485	142
180°	1490	1490	1490	1490	1490	



TEST NUMBER: P332232-935

CATALOG NUMBER: S123DIW-S1165D1320U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1574.0	1574.0	1574.0	1574.0	1574.0	1574.0	1574.0	1574.0	1574.0	1574.0	1574.0
2.5°	1579.4	1578.5	1577.5	1576.6	1575.5	1573.7	1571.2	1568.5	1565.8	1563.1	1565.6
5°	1575.4	1573.9	1572.4	1570.9	1569.3	1566.9	1563.7	1560.3	1557.0	1553.7	1556.7
7.5°	1560.0	1558.4	1556.9	1555.4	1553.9	1551.4	1548.0	1544.6	1541.2	1537.7	1540.4
10°	1547.0	1545.4	1543.9	1542.4	1540.9	1538.3	1534.3	1530.4	1526.5	1522.6	1525.3
12.5°	1529.7	1528.4	1527.1	1525.9	1524.6	1522.1	1518.5	1514.8	1511.1	1507.4	1509.4
15°	1499.6	1498.4	1497.2	1496.0	1494.8	1492.2	1488.3	1484.4	1480.5	1476.5	1478.9
17.5°	1464.6	1463.1	1461.5	1460.0	1458.4	1455.7	1451.7	1447.9	1443.9	1440.0	1441.7
20°	1438.6	1436.8	1435.0	1433.2	1431.5	1428.6	1424.7	1420.8	1416.9	1413.0	1414.2
22.5°	1409.5	1407.6	1405.8	1404.0	1402.2	1399.4	1395.4	1391.5	1387.7	1383.7	1384.7
25°	1361.5	1359.7	1357.9	1356.1	1354.4	1351.4	1347.6	1343.7	1339.7	1335.8	1336.1
27.5°	1310.4	1308.6	1306.9	1305.1	1303.4	1300.5	1296.2	1292.0	1287.8	1283.6	1283.8
30°	1273.6	1272.0	1270.6	1269.0	1267.6	1264.7	1260.5	1256.3	1252.1	1247.8	1247.8
32.5°	1236.7	1234.8	1232.8	1230.8	1228.8	1226.2	1223.0	1219.7	1216.4	1213.2	1211.5
35°	1177.5	1175.7	1173.9	1172.1	1170.3	1167.4	1163.5	1159.6	1155.6	1151.8	1150.0
37.5°	1116.8	1114.6	1112.2	1110.0	1107.7	1104.6	1100.6	1096.7	1092.7	1088.6	1086.5
40°	1074.6	1072.8	1071.0	1069.2	1067.4	1064.4	1060.1	1055.9	1051.7	1047.6	1045.2
42.5°	1032.3	1030.4	1028.3	1026.2	1024.2	1021.1	1016.8	1012.6	1008.4	1004.3	1001.9
45°	965.0	963.8	962.6	961.4	960.2	957.6	953.7	949.8	945.9	941.9	938.4
47.5°	898.1	896.4	894.7	892.9	891.1	888.5	884.8	881.1	877.4	873.7	870.2
50°	852.6	851.2	849.6	848.2	846.6	844.0	840.0	836.1	832.2	828.3	825.0
52.5°	805.0	804.0	803.0	801.9	800.9	798.3	794.2	790.1	785.9	781.7	778.9
55°	732.2	731.9	731.6	731.3	731.0	728.9	725.0	721.1	717.1	713.3	710.0
57.5°	662.9	661.9	660.8	659.9	658.8	656.8	653.6	650.5	647.4	644.2	641.3
60°	613.1	612.8	612.5	612.2	611.9	609.9	606.3	602.7	599.1	595.5	592.8
62.5°	568.7	567.9	567.1	566.4	565.6	563.4	559.7	556.1	552.6	549.0	546.2
65°	499.4	497.9	496.4	494.9	493.4	491.1	488.1	485.1	482.1	479.1	476.7
67.5°	426.0	424.7	423.4	422.1	420.8	419.0	416.6	414.4	412.1	409.8	407.7
70°	381.7	379.9	378.1	376.3	374.4	372.6	370.8	369.0	367.2	365.4	363.3
72.5°	335.1	333.8	332.4	331.1	329.8	328.1	326.1	324.0	322.0	319.9	318.1
75°	263.9	262.7	261.5	260.3	259.1	258.0	257.2	256.2	255.4	254.4	253.0
77.5°	200.9	200.2	199.5	198.9	198.2	197.3	196.2	195.2	194.1	193.0	192.0
80°	159.7	158.8	157.9	157.0	156.1	155.3	154.7	154.1	153.5	152.9	152.7
82.5°	119.7	119.4	119.2	119.1	118.9	118.7	118.6	118.6	118.4	118.3	117.8
85°	70.3	69.7	69.1	68.5	67.9	67.7	67.7	67.7	67.7	67.7	67.1
87.5°	28.4	28.2	27.9	27.7	27.5	27.6	27.9	28.3	28.8	29.1	29.1
90°	1.1	3.5	6.0	8.5	10.9	13.8	17.0	20.1	23.3	26.6	27.6
92.5°	20.6	19.9	19.2	18.5	17.8	18.7	21.1	23.5	25.9	28.3	29.9
95°	67.5	57.4	47.4	37.3	27.2	23.5	26.2	28.9	31.6	34.4	36.1
97.5°	135.7	131.2	126.7	122.2	117.6	106.5	88.8	71.1	53.4	35.6	37.6
100°	187.1	192.0	196.9	201.8	206.8	190.0	151.7	113.3	74.9	36.5	38.5
102.5°	245.6	249.1	252.6	256.1	259.8	240.6	198.6	156.7	114.8	72.8	66.7
105°	329.9	332.6	335.4	338.0	340.7	331.1	308.8	286.7	264.6	242.5	198.9
107.5°	419.0	421.1	423.3	425.4	427.6	430.4	433.9	437.4	440.9	444.4	412.4
110°	478.3	480.3	482.2	484.1	486.1	488.4	491.2	493.9	496.6	499.3	491.2



TEST NUMBER: P332232-935

CATALOG NUMBER: S123DIW-S1165D1320U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	534.9	536.7	538.5	540.3	542.0	544.2	547.0	549.7	552.4	555.1	555.3
115°	618.9	620.4	621.8	623.3	624.7	626.6	628.8	631.0	633.3	635.5	637.9
117.5°	700.2	702.0	703.8	705.6	707.4	708.9	710.0	711.2	712.3	713.4	715.4
120°	750.6	752.9	755.0	757.2	759.5	761.0	761.6	762.4	763.2	763.9	765.9
122.5°	802.0	803.8	805.6	807.4	809.3	810.6	811.6	812.5	813.5	814.4	815.8
125°	872.4	874.3	876.3	878.3	880.3	881.8	882.7	883.7	884.7	885.7	886.1
127.5°	940.6	942.5	944.5	946.5	948.5	950.0	951.2	952.4	953.6	954.8	955.5
130°	983.1	985.1	987.1	989.0	991.0	992.5	993.4	994.5	995.4	996.3	997.4
132.5°	1023.8	1025.8	1027.8	1029.8	1031.7	1033.1	1033.9	1034.7	1035.4	1036.2	1037.2
135°	1086.1	1087.5	1089.0	1090.5	1092.0	1093.2	1094.2	1095.2	1096.1	1097.2	1097.9
137.5°	1139.2	1141.1	1143.0	1144.8	1146.7	1147.9	1148.4	1149.0	1149.5	1150.0	1151.2
140°	1174.7	1176.1	1177.6	1179.1	1180.5	1181.6	1182.4	1183.1	1183.9	1184.6	1185.6
142.5°	1207.4	1208.8	1210.4	1211.9	1213.3	1214.4	1215.1	1215.9	1216.6	1217.4	1218.1
145°	1253.3	1255.0	1256.7	1258.4	1260.2	1261.2	1261.7	1262.2	1262.7	1263.2	1263.7
147.5°	1296.4	1297.5	1298.6	1299.8	1301.0	1301.7	1302.3	1302.7	1303.2	1303.7	1304.2
150°	1323.0	1323.7	1324.5	1325.2	1325.9	1326.5	1327.1	1327.5	1328.0	1328.5	1329.0
152.5°	1346.9	1347.2	1347.6	1347.9	1348.2	1348.6	1348.9	1349.2	1349.4	1349.8	1350.7
155°	1380.5	1380.1	1379.6	1379.1	1378.5	1378.5	1378.7	1379.0	1379.2	1379.4	1380.7
157.5°	1406.7	1406.6	1406.6	1406.5	1406.4	1406.4	1406.1	1405.8	1405.6	1405.3	1406.8
160°	1422.6	1422.4	1422.1	1421.9	1421.6	1421.4	1421.2	1420.9	1420.6	1420.4	1421.9
162.5°	1437.7	1437.0	1436.4	1435.7	1435.1	1434.7	1434.4	1434.2	1433.9	1433.7	1435.4
165°	1455.9	1455.1	1454.3	1453.6	1452.9	1452.4	1452.2	1451.9	1451.6	1451.4	1453.4
167.5°	1470.0	1469.0	1468.0	1467.1	1466.0	1465.6	1465.6	1465.6	1465.6	1465.6	1467.6
170°	1478.0	1477.0	1476.0	1475.1	1474.0	1473.5	1473.5	1473.5	1473.5	1473.5	1475.5
172.5°	1483.3	1482.1	1480.9	1479.7	1478.6	1478.1	1478.3	1478.5	1478.7	1478.9	1480.8
175°	1490.1	1488.9	1487.7	1486.4	1485.2	1484.7	1485.0	1485.2	1485.5	1485.7	1487.5
177.5°	1491.9	1490.9	1490.0	1489.0	1488.0	1487.6	1487.8	1488.0	1488.2	1488.4	1490.0
180°	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1



TEST NUMBER: P332232-935

CATALOG NUMBER: S123DIW-S1165D1320U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1574.0	1574.0	1574.0	1574.0	1574.0	1574.0	1574.0	1574.0
2.5°	1568.0	1570.4	1572.8	1573.9	1573.6	1573.4	1573.1	1573.0
5°	1559.7	1562.7	1565.7	1566.9	1566.3	1565.7	1565.1	1564.5
7.5°	1543.2	1545.8	1548.6	1549.7	1549.4	1549.0	1548.7	1548.3
10°	1528.0	1530.7	1533.4	1534.5	1533.9	1533.3	1532.7	1532.1
12.5°	1511.4	1513.4	1515.4	1516.2	1515.8	1515.4	1515.1	1514.8
15°	1481.4	1483.8	1486.2	1486.5	1484.7	1482.9	1481.1	1479.3
17.5°	1443.4	1445.1	1446.7	1447.3	1446.7	1446.0	1445.3	1444.7
20°	1415.4	1416.6	1417.8	1417.9	1417.0	1416.1	1415.2	1414.3
22.5°	1385.7	1386.6	1387.6	1387.5	1386.4	1385.2	1384.1	1382.9
25°	1336.4	1336.7	1337.0	1336.7	1335.8	1334.9	1334.0	1333.1
27.5°	1284.1	1284.3	1284.5	1284.1	1283.0	1281.8	1280.7	1279.5
30°	1247.8	1247.8	1247.8	1246.8	1244.7	1242.6	1240.4	1238.4
32.5°	1209.8	1208.2	1206.4	1205.1	1203.9	1202.7	1201.6	1200.5
35°	1148.1	1146.3	1144.5	1142.9	1141.3	1139.9	1138.3	1136.9
37.5°	1084.3	1082.2	1080.0	1078.5	1077.5	1076.5	1075.6	1074.6
40°	1042.8	1040.3	1037.9	1036.1	1034.9	1033.7	1032.5	1031.3
42.5°	999.4	997.0	994.6	992.8	991.6	990.4	989.2	988.0
45°	934.8	931.2	927.6	925.0	923.5	922.0	920.5	918.9
47.5°	866.7	863.2	859.5	857.1	855.8	854.5	853.2	851.9
50°	821.7	818.4	815.0	812.5	810.7	808.9	807.1	805.3
52.5°	776.1	773.3	770.4	768.1	766.3	764.5	762.7	760.9
55°	706.6	703.4	700.0	697.6	696.1	694.6	693.1	691.6
57.5°	638.3	635.4	632.4	630.1	628.4	626.6	624.8	623.1
60°	590.1	587.4	584.7	582.6	581.1	579.5	578.1	576.5
62.5°	543.5	540.8	538.1	536.2	535.2	534.2	533.2	532.2
65°	474.3	471.9	469.5	467.9	466.9	466.1	465.1	464.3
67.5°	405.6	403.5	401.4	399.7	398.5	397.2	395.9	394.7
70°	361.2	359.1	357.0	355.2	353.7	352.1	350.7	349.2
72.5°	316.2	314.4	312.5	311.2	310.4	309.6	308.8	308.1
75°	251.4	249.9	248.4	247.2	246.3	245.4	244.5	243.6
77.5°	191.0	189.9	188.9	188.4	188.4	188.4	188.4	188.4
80°	152.3	152.1	151.7	151.6	151.6	151.6	151.6	151.6
82.5°	117.2	116.7	116.1	115.7	115.5	115.3	115.0	114.8
85°	66.5	65.9	65.3	65.0	65.0	65.0	65.0	65.0
87.5°	29.0	29.0	28.9	29.0	29.1	29.2	29.3	29.4
90°	28.5	29.5	30.5	31.3	31.8	32.2	32.7	33.2
92.5°	31.5	33.1	34.6	35.6	35.9	36.2	36.4	36.8
95°	37.8	39.5	41.2	42.1	42.1	42.1	42.1	42.1
97.5°	39.6	41.6	43.5	44.6	44.9	45.1	45.4	45.6
100°	40.5	42.4	44.4	45.5	45.7	46.0	46.2	46.5
102.5°	60.6	54.5	48.5	45.6	46.1	46.5	46.9	47.4
105°	155.3	111.8	68.3	46.8	47.3	47.7	48.2	48.7
107.5°	380.6	348.6	316.7	284.3	251.5	218.6	185.8	153.0
110°	483.0	474.9	466.8	445.1	410.0	374.8	339.7	304.4



TEST NUMBER: P332232-935

CATALOG NUMBER: S123DIW-S1165D1320U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	555.4	555.5	555.7	552.1	544.6	537.2	529.8	522.4
115°	640.4	642.8	645.3	647.0	648.0	649.0	650.0	651.0
117.5°	717.4	719.3	721.3	722.4	722.6	722.7	723.0	723.2
120°	767.8	769.8	771.8	772.7	772.7	772.7	772.7	772.7
122.5°	817.2	818.6	819.9	820.7	820.9	821.0	821.3	821.5
125°	886.7	887.2	887.6	888.1	888.6	889.2	889.6	890.1
127.5°	956.3	957.1	957.9	958.0	957.6	957.1	956.6	956.1
130°	998.3	999.4	1000.3	1000.6	1000.1	999.6	999.1	998.6
132.5°	1038.2	1039.2	1040.2	1040.3	1039.7	1039.0	1038.3	1037.6
135°	1098.6	1099.3	1100.1	1100.1	1099.3	1098.6	1097.9	1097.2
137.5°	1152.4	1153.6	1154.8	1155.1	1154.6	1154.2	1153.7	1153.1
140°	1186.5	1187.6	1188.5	1188.8	1188.3	1187.7	1187.3	1186.8
142.5°	1218.9	1219.7	1220.6	1220.6	1219.9	1219.2	1218.5	1217.8
145°	1264.2	1264.6	1265.2	1265.4	1265.4	1265.4	1265.4	1265.4
147.5°	1304.7	1305.2	1305.7	1305.4	1304.2	1303.1	1302.0	1300.8
150°	1329.5	1330.0	1330.5	1330.3	1329.6	1328.9	1328.2	1327.4
152.5°	1351.5	1352.5	1353.3	1353.2	1352.0	1350.9	1349.8	1348.7
155°	1381.9	1383.1	1384.4	1384.2	1382.8	1381.3	1379.8	1378.4
157.5°	1408.3	1409.8	1411.3	1411.0	1409.1	1407.2	1405.2	1403.3
160°	1423.3	1424.9	1426.3	1426.2	1424.4	1422.7	1421.0	1419.3
162.5°	1437.0	1438.7	1440.4	1440.5	1438.9	1437.4	1435.9	1434.3
165°	1455.3	1457.3	1459.3	1459.4	1457.7	1456.0	1454.2	1452.5
167.5°	1469.6	1471.4	1473.4	1473.4	1471.4	1469.6	1467.6	1465.6
170°	1477.5	1479.5	1481.4	1481.4	1479.5	1477.5	1475.5	1473.5
172.5°	1482.8	1484.8	1486.8	1486.6	1484.5	1482.3	1480.1	1478.0
175°	1489.2	1490.9	1492.6	1492.5	1490.6	1488.6	1486.6	1484.6
177.5°	1491.5	1493.1	1494.7	1494.5	1492.5	1490.6	1488.6	1486.6
180°	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1

(END OF REPORT)