

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332107-935

Luminaire Tested: **S123DIW-S340D1030U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332107-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S340D1030U935-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1030 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4294.0 lumens
Efficiency: N/A
Efficacy: 113.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 38
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332107-935

CATALOG NUMBER: S123DIW-S340D1030U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

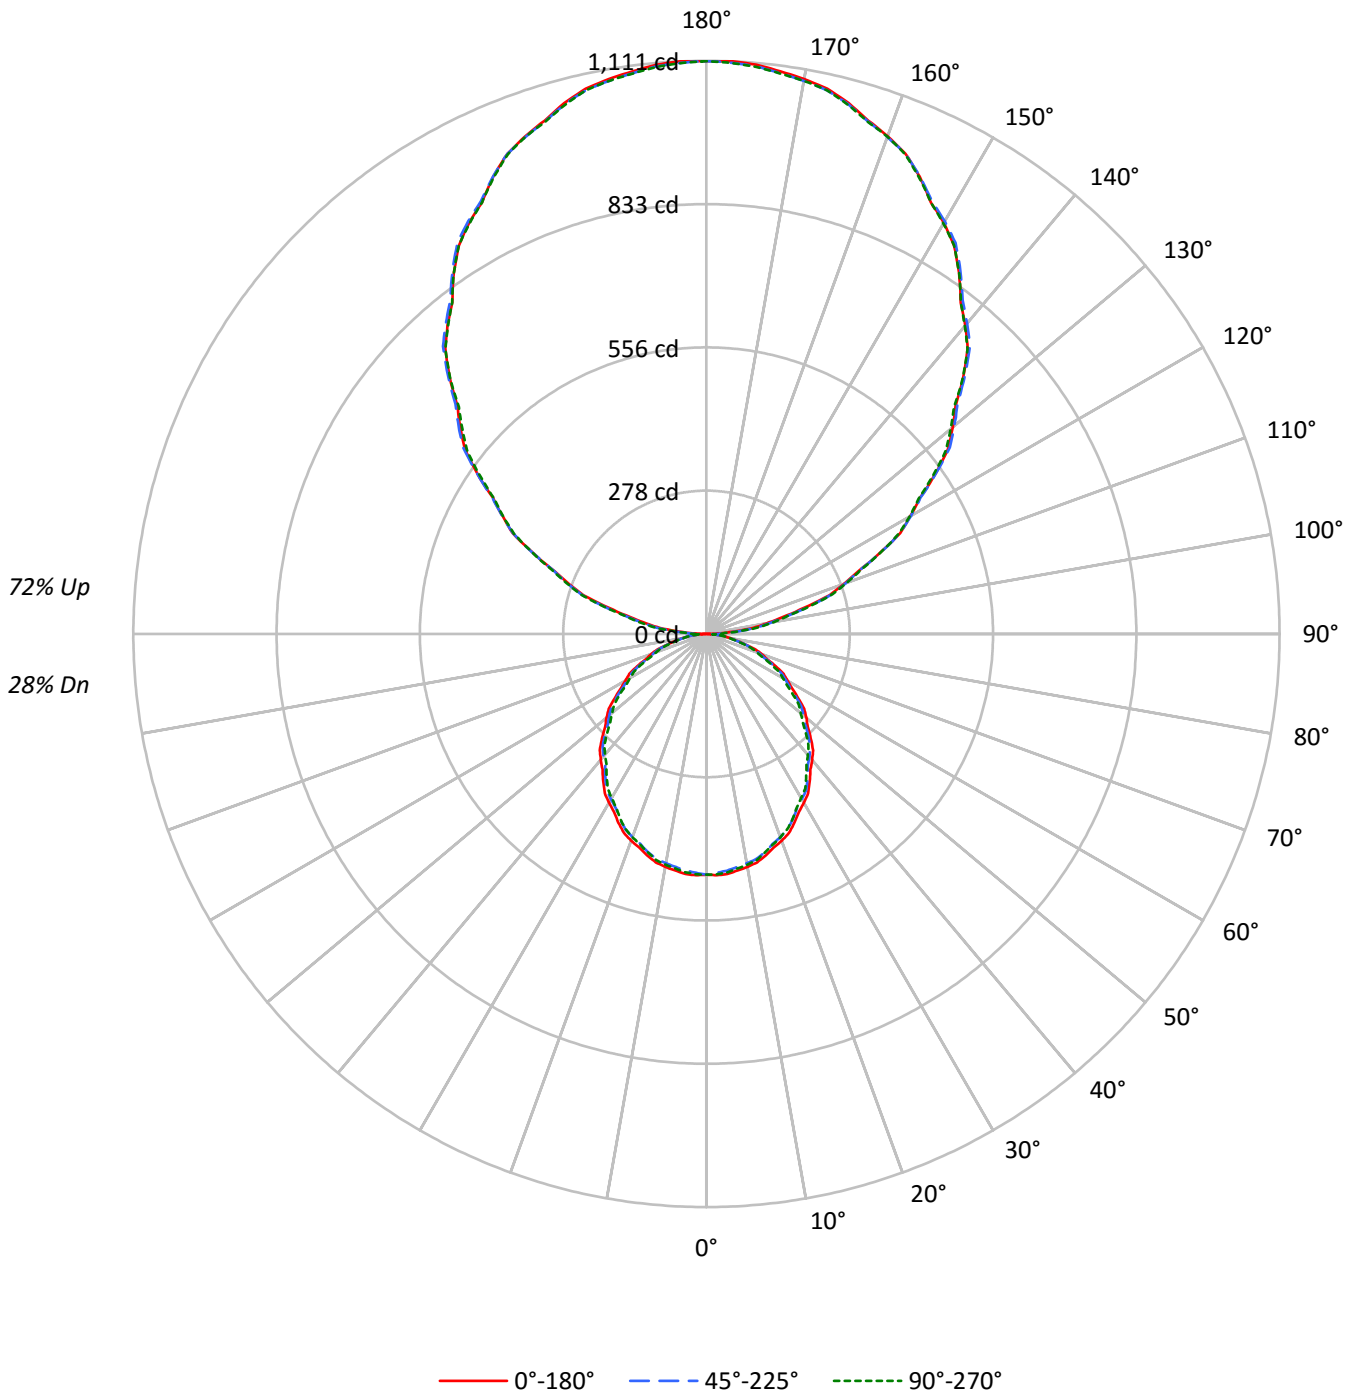



TEST NUMBER: P332107-935

CATALOG NUMBER: S123DIW-S340D1030U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	28
1	93	89	85	81	83	79	76	73	62	60	58	46	45	44	32	31	30	24
2	85	77	71	66	75	69	64	60	55	51	48	41	39	37	28	27	26	20
3	77	68	61	55	69	61	55	50	48	44	40	36	33	31	25	23	22	17
4	70	60	52	47	63	54	47	42	43	38	34	32	29	26	22	20	19	14
5	64	53	45	40	57	48	41	36	38	33	29	29	25	23	20	18	16	13
6	59	48	40	34	53	43	36	31	34	29	25	26	22	20	18	16	14	11
7	55	43	35	30	49	39	32	27	31	26	22	23	20	17	16	14	13	10
8	51	39	31	26	45	35	29	24	28	23	20	21	18	15	15	13	11	9
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10	8
10	44	32	25	21	39	29	23	19	23	19	16	18	15	12	13	11	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5022	5022	5022
5°	5046	4976	5010
10°	5012	4933	4964
15°	4953	4878	4886
20°	4885	4798	4802
25°	4793	4703	4694
30°	4692	4598	4561
35°	4586	4486	4428
40°	4477	4363	4295
45°	4354	4250	4147
50°	4232	4113	3997
55°	4074	3969	3847
60°	3914	3800	3679
65°	3769	3617	3505
70°	3559	3408	3257
75°	3256	3136	3003
80°	2938	2814	2783
85°	2569	2482	2384



TEST NUMBER: P332107-935

CATALOG NUMBER: S123DIW-S340D1030U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.0	1.0
10°-20°	124.1	2.9
20°-30°	183.3	4.3
30°-40°	214.1	5.0
40°-50°	215.3	5.0
50°-60°	189.1	4.4
60°-70°	140.9	3.3
70°-80°	80.3	1.9
80°-90°	26.3	0.6
90°-100°	72.4	1.7
100°-110°	216.5	5.0
110°-120°	368.3	8.6
120°-130°	484.4	11.3
130°-140°	544.4	12.7
140°-150°	535.2	12.5
150°-160°	450.5	10.5
160°-170°	299.9	7.0
170°-180°	105.0	2.4
0°-30°	351.4	8.2
0°-40°	565.5	13.2
0°-60°	969.9	22.6
0°-90°	1217.4	28.4
90°-120°	657.1	15.3
90°-150°	2221.1	51.7
90°-180°	3077.0	71.7
0°-180°	4294.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	467	467	467	467	467	
5°	467	465	460	464	464	44
15°	444	443	438	441	438	125
25°	404	401	396	396	395	186
35°	349	346	341	339	337	218
45°	286	284	279	275	272	221
55°	217	216	212	207	205	194
65°	148	146	142	139	138	146
75°	78	77	75	73	72	84
85°	21	20	20	19	19	23
90°	1	10	21	24	26	4
95°	52	58	65	68	68	58
105°	196	198	206	206	208	210
115°	371	373	372	372	372	367
125°	543	545	544	540	536	484
135°	704	709	708	705	703	542
145°	854	856	858	857	854	533
155°	978	978	979	982	976	450
165°	1065	1063	1062	1067	1062	300
175°	1108	1104	1104	1109	1104	105
180°	1110	1110	1110	1110	1110	



TEST NUMBER: P332107-935

CATALOG NUMBER: S123DIW-S340D1030U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6
2.5°	468.2	467.9	467.6	467.4	467.0	466.5	465.7	464.9	464.2	463.4	464.1
5°	467.0	466.5	466.1	465.6	465.2	464.5	463.5	462.5	461.5	460.5	461.4
7.5°	462.4	461.9	461.5	461.1	460.6	459.9	458.9	457.9	456.8	455.8	456.6
10°	458.6	458.1	457.6	457.2	456.8	456.0	454.8	453.7	452.5	451.3	452.1
12.5°	453.4	453.1	452.6	452.3	451.9	451.2	450.1	449.0	447.9	446.9	447.5
15°	444.5	444.2	443.8	443.4	443.1	442.3	441.2	440.0	438.9	437.7	438.4
17.5°	434.1	433.7	433.3	432.7	432.3	431.5	430.3	429.2	428.0	426.9	427.3
20°	426.5	425.9	425.4	424.8	424.3	423.4	422.3	421.1	420.0	418.9	419.2
22.5°	417.8	417.2	416.7	416.2	415.7	414.8	413.6	412.5	411.3	410.2	410.4
25°	403.6	403.0	402.5	402.0	401.5	400.6	399.4	398.3	397.1	396.0	396.1
27.5°	388.4	387.9	387.4	386.8	386.3	385.5	384.3	383.0	381.8	380.5	380.6
30°	377.5	377.0	376.6	376.2	375.7	374.9	373.7	372.4	371.2	369.9	369.9
32.5°	366.6	366.0	365.4	364.8	364.3	363.4	362.5	361.5	360.6	359.6	359.1
35°	349.0	348.5	347.9	347.4	346.9	346.0	344.9	343.7	342.6	341.4	340.9
37.5°	331.1	330.4	329.7	329.0	328.4	327.4	326.2	325.0	323.9	322.7	322.1
40°	318.6	318.0	317.5	316.9	316.4	315.5	314.3	313.0	311.8	310.5	309.8
42.5°	306.0	305.4	304.8	304.2	303.6	302.6	301.4	300.1	298.9	297.6	297.0
45°	286.0	285.7	285.3	285.0	284.6	283.9	282.7	281.5	280.3	279.2	278.2
47.5°	266.2	265.7	265.2	264.7	264.2	263.4	262.3	261.1	260.1	259.0	258.0
50°	252.7	252.3	251.8	251.4	251.0	250.1	249.0	247.9	246.7	245.6	244.5
52.5°	238.6	238.3	238.0	237.7	237.4	236.6	235.4	234.2	233.0	231.7	230.9
55°	217.1	217.0	216.9	216.8	216.7	216.0	214.9	213.7	212.6	211.5	210.4
57.5°	196.5	196.2	195.9	195.6	195.3	194.7	193.7	192.8	191.9	191.0	190.1
60°	181.8	181.7	181.6	181.5	181.4	180.8	179.7	178.7	177.6	176.5	175.7
62.5°	168.6	168.3	168.2	167.9	167.6	167.0	165.9	164.9	163.8	162.7	162.0
65°	148.0	147.6	147.1	146.7	146.3	145.6	144.7	143.8	142.9	142.0	141.3
67.5°	126.3	125.9	125.5	125.1	124.8	124.2	123.6	122.9	122.2	121.5	120.9
70°	113.1	112.6	112.1	111.5	111.0	110.5	109.9	109.3	108.8	108.3	107.7
72.5°	99.4	98.9	98.6	98.2	97.7	97.3	96.7	96.1	95.5	94.9	94.3
75°	78.3	77.8	77.5	77.1	76.8	76.5	76.2	75.9	75.7	75.4	75.0
77.5°	59.5	59.3	59.2	59.0	58.7	58.5	58.2	57.9	57.5	57.2	56.9
80°	47.4	47.1	46.8	46.6	46.2	46.1	45.9	45.7	45.5	45.4	45.2
82.5°	35.5	35.4	35.4	35.3	35.2	35.2	35.1	35.1	35.1	35.0	34.9
85°	20.8	20.7	20.5	20.3	20.1	20.1	20.1	20.1	20.1	20.1	19.9
87.5°	8.5	8.7	8.9	9.0	9.2	9.6	10.0	10.4	10.8	11.3	11.4
90°	0.9	2.8	4.7	6.7	8.6	10.8	13.3	15.9	18.4	20.9	21.7
92.5°	21.1	22.4	23.8	25.1	26.3	27.7	29.2	30.7	32.0	33.5	34.1
95°	51.5	52.8	54.2	55.5	56.9	58.4	59.9	61.5	63.0	64.6	65.3
97.5°	91.4	92.4	93.4	94.5	95.5	96.5	97.6	98.8	99.9	101.0	101.9
100°	118.6	119.8	121.0	122.1	123.3	124.3	125.4	126.3	127.3	128.2	128.8
102.5°	150.1	150.8	151.4	152.1	152.8	153.8	155.1	156.4	157.6	158.9	159.5
105°	196.3	196.7	197.1	197.4	197.9	198.9	200.6	202.3	204.1	205.9	205.9
107.5°	250.0	250.2	250.5	250.7	250.9	251.4	252.1	252.8	253.5	254.2	254.8
110°	283.5	283.9	284.3	284.6	285.1	285.4	285.9	286.2	286.6	287.0	287.7



TEST NUMBER: P332107-935

CATALOG NUMBER: S123DIW-S340D1030U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	318.4	318.7	318.8	319.1	319.3	319.4	319.5	319.6	319.7	319.8	320.7
115°	370.7	371.3	371.9	372.5	373.1	373.2	372.7	372.4	372.0	371.6	371.8
117.5°	423.4	423.8	424.2	424.6	425.0	424.9	424.4	423.9	423.4	422.9	422.8
120°	456.2	457.4	458.6	459.7	460.9	461.0	459.9	459.0	458.1	457.1	456.8
122.5°	490.4	491.3	492.1	492.9	493.8	494.0	493.5	493.0	492.5	492.0	491.5
125°	542.6	543.1	543.7	544.3	544.9	545.0	544.6	544.2	543.8	543.5	542.7
127.5°	590.7	591.9	593.2	594.4	595.6	596.1	595.6	595.2	594.8	594.3	593.3
130°	622.8	624.4	625.9	627.5	629.0	629.5	629.0	628.4	627.8	627.2	626.4
132.5°	654.9	656.4	658.0	659.6	661.2	661.7	661.2	660.8	660.4	660.0	659.0
135°	704.0	705.1	706.3	707.4	708.6	709.0	708.9	708.7	708.5	708.3	707.5
137.5°	749.3	750.3	751.2	752.2	753.2	753.9	754.4	754.9	755.4	756.0	755.1
140°	780.7	781.7	782.6	783.6	784.5	785.1	785.3	785.6	785.7	785.9	785.7
142.5°	809.3	810.3	811.2	812.2	813.2	813.8	814.2	814.5	814.9	815.3	815.0
145°	853.9	854.4	854.7	855.1	855.5	856.0	856.6	857.2	857.7	858.3	858.2
147.5°	893.0	893.7	894.4	895.2	895.9	896.5	897.0	897.6	898.1	898.6	898.6
150°	920.2	920.7	921.0	921.4	921.8	922.2	922.6	923.0	923.3	923.8	923.8
152.5°	942.6	943.1	943.7	944.3	944.8	945.1	945.4	945.6	945.9	946.1	946.4
155°	977.8	977.8	977.8	977.8	977.8	977.9	978.1	978.4	978.5	978.7	979.5
157.5°	1007.9	1007.6	1007.4	1007.1	1006.9	1006.9	1007.0	1007.2	1007.4	1007.5	1008.3
160°	1026.7	1026.3	1025.9	1025.5	1025.1	1024.9	1024.9	1024.9	1024.9	1024.9	1025.9
162.5°	1043.4	1042.9	1042.3	1041.8	1041.3	1041.0	1041.2	1041.4	1041.6	1041.7	1042.7
165°	1065.1	1064.5	1063.9	1063.3	1062.7	1062.5	1062.5	1062.5	1062.5	1062.5	1063.6
167.5°	1082.4	1081.6	1080.8	1080.0	1079.3	1078.9	1079.1	1079.3	1079.4	1079.5	1080.7
170°	1092.1	1091.3	1090.5	1089.8	1089.0	1088.6	1088.6	1088.6	1088.6	1088.6	1089.9
172.5°	1099.8	1099.0	1098.2	1097.4	1096.7	1096.3	1096.3	1096.3	1096.3	1096.3	1097.5
175°	1107.8	1107.1	1106.3	1105.5	1104.7	1104.3	1104.3	1104.3	1104.3	1104.3	1105.5
177.5°	1111.1	1110.5	1109.9	1109.2	1108.6	1108.4	1108.4	1108.4	1108.4	1108.4	1109.2
180°	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4



TEST NUMBER: P332107-935

CATALOG NUMBER: S123DIW-S340D1030U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6
2.5°	464.8	465.5	466.2	466.6	466.5	466.4	466.3	466.2
5°	462.4	463.2	464.2	464.5	464.3	464.2	463.9	463.7
7.5°	457.4	458.2	459.0	459.3	459.3	459.2	459.1	458.9
10°	453.0	453.7	454.5	454.9	454.7	454.5	454.3	454.2
12.5°	448.0	448.6	449.2	449.4	449.4	449.2	449.1	449.0
15°	439.1	439.8	440.6	440.7	440.1	439.5	439.0	438.5
17.5°	427.8	428.3	428.9	429.0	428.8	428.6	428.4	428.3
20°	419.6	419.9	420.3	420.3	420.0	419.7	419.5	419.2
22.5°	410.7	411.0	411.3	411.3	411.0	410.6	410.3	409.9
25°	396.1	396.2	396.3	396.2	396.0	395.7	395.5	395.2
27.5°	380.6	380.7	380.7	380.6	380.3	380.0	379.6	379.3
30°	369.9	369.9	369.9	369.5	368.9	368.3	367.7	367.0
32.5°	358.6	358.1	357.7	357.2	356.9	356.5	356.2	355.9
35°	340.4	339.8	339.2	338.8	338.4	337.9	337.4	337.0
37.5°	321.4	320.8	320.1	319.7	319.4	319.1	318.8	318.6
40°	309.1	308.4	307.6	307.1	306.8	306.4	306.1	305.7
42.5°	296.3	295.5	294.8	294.3	293.9	293.6	293.3	292.8
45°	277.1	276.0	274.9	274.2	273.7	273.3	272.9	272.4
47.5°	256.9	255.9	254.8	254.1	253.7	253.3	252.9	252.5
50°	243.6	242.5	241.6	240.8	240.3	239.8	239.3	238.7
52.5°	230.1	229.2	228.3	227.6	227.1	226.6	226.1	225.6
55°	209.5	208.4	207.5	206.8	206.4	205.9	205.4	205.0
57.5°	189.2	188.3	187.4	186.8	186.2	185.7	185.2	184.7
60°	175.0	174.1	173.3	172.7	172.2	171.8	171.3	170.9
62.5°	161.1	160.3	159.5	158.9	158.7	158.3	158.1	157.7
65°	140.6	139.9	139.1	138.7	138.4	138.1	137.8	137.6
67.5°	120.2	119.6	119.0	118.5	118.1	117.7	117.4	117.0
70°	107.1	106.4	105.8	105.3	104.9	104.4	103.9	103.5
72.5°	93.8	93.2	92.6	92.2	92.0	91.8	91.5	91.3
75°	74.6	74.0	73.6	73.3	73.0	72.8	72.5	72.2
77.5°	56.6	56.3	56.0	55.9	55.9	55.9	55.9	55.9
80°	45.1	45.0	44.9	44.9	44.9	44.9	44.9	44.9
82.5°	34.8	34.6	34.4	34.3	34.3	34.2	34.1	34.0
85°	19.7	19.5	19.4	19.3	19.3	19.3	19.3	19.3
87.5°	11.5	11.5	11.6	11.6	11.7	11.8	11.9	12.0
90°	22.5	23.2	24.0	24.6	25.0	25.4	25.7	26.2
92.5°	34.7	35.4	36.0	36.2	35.9	35.7	35.5	35.2
95°	66.1	66.9	67.7	68.0	68.0	68.0	68.0	68.0
97.5°	102.8	103.7	104.6	105.0	104.9	104.9	104.8	104.7
100°	129.4	130.0	130.5	131.0	131.4	131.8	132.2	132.6
102.5°	160.1	160.7	161.3	161.5	161.4	161.4	161.3	161.2
105°	205.9	205.9	205.9	206.0	206.5	206.8	207.2	207.6
107.5°	255.5	256.1	256.7	256.8	256.7	256.4	256.1	255.9
110°	288.5	289.3	290.1	290.2	289.9	289.5	289.1	288.7



TEST NUMBER: P332107-935

CATALOG NUMBER: S123DIW-S340D1030U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	321.7	322.5	323.5	323.9	323.8	323.7	323.7	323.6
115°	372.0	372.2	372.4	372.4	372.2	372.0	371.8	371.6
117.5°	422.8	422.8	422.8	422.4	421.9	421.4	420.8	420.3
120°	456.7	456.5	456.3	456.0	455.6	455.2	454.9	454.4
122.5°	490.9	490.4	490.0	489.4	488.9	488.4	487.8	487.2
125°	541.9	541.1	540.4	539.6	538.8	538.0	537.3	536.5
127.5°	592.2	591.2	590.0	589.0	588.1	587.3	586.3	585.5
130°	625.6	624.8	624.1	623.0	621.6	620.3	619.0	617.6
132.5°	658.1	657.2	656.3	655.3	654.2	653.2	652.1	651.1
135°	706.7	705.9	705.2	704.6	704.2	703.9	703.4	703.1
137.5°	754.3	753.5	752.7	751.9	751.1	750.4	749.7	749.0
140°	785.6	785.3	785.1	784.4	783.0	781.7	780.3	778.9
142.5°	814.9	814.7	814.5	813.8	812.8	811.8	810.7	809.7
145°	858.0	857.7	857.6	857.0	856.3	855.5	854.7	853.9
147.5°	898.6	898.6	898.6	898.0	896.9	895.7	894.6	893.4
150°	923.8	923.8	923.8	923.2	922.0	920.8	919.7	918.5
152.5°	946.7	947.0	947.4	947.0	946.0	944.9	943.9	943.0
155°	980.2	981.0	981.8	981.5	980.2	978.8	977.5	976.1
157.5°	1009.1	1010.0	1010.7	1010.6	1009.5	1008.5	1007.4	1006.3
160°	1026.9	1027.9	1028.8	1028.9	1028.1	1027.3	1026.6	1025.8
162.5°	1043.6	1044.6	1045.6	1045.4	1044.2	1042.9	1041.7	1040.4
165°	1064.8	1065.9	1067.1	1067.0	1065.7	1064.3	1062.9	1061.6
167.5°	1081.9	1083.1	1084.3	1084.3	1083.1	1081.9	1080.7	1079.5
170°	1091.3	1092.7	1094.1	1094.1	1092.7	1091.3	1089.9	1088.6
172.5°	1098.7	1099.9	1101.1	1101.0	1099.7	1098.3	1096.9	1095.6
175°	1106.6	1107.8	1109.0	1108.9	1107.5	1106.1	1104.8	1103.5
177.5°	1110.2	1111.1	1112.1	1112.0	1110.9	1109.8	1108.7	1107.7
180°	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4

(END OF REPORT)