

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332118-935

Luminaire Tested: **S123DIW-S340D1535U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332118-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S340D1535U935-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1535 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6502.4 lumens  
Efficiency: N/A  
Efficacy: 121.8 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 53.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332118-935

CATALOG NUMBER: S123DIW-S340D1535U935-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

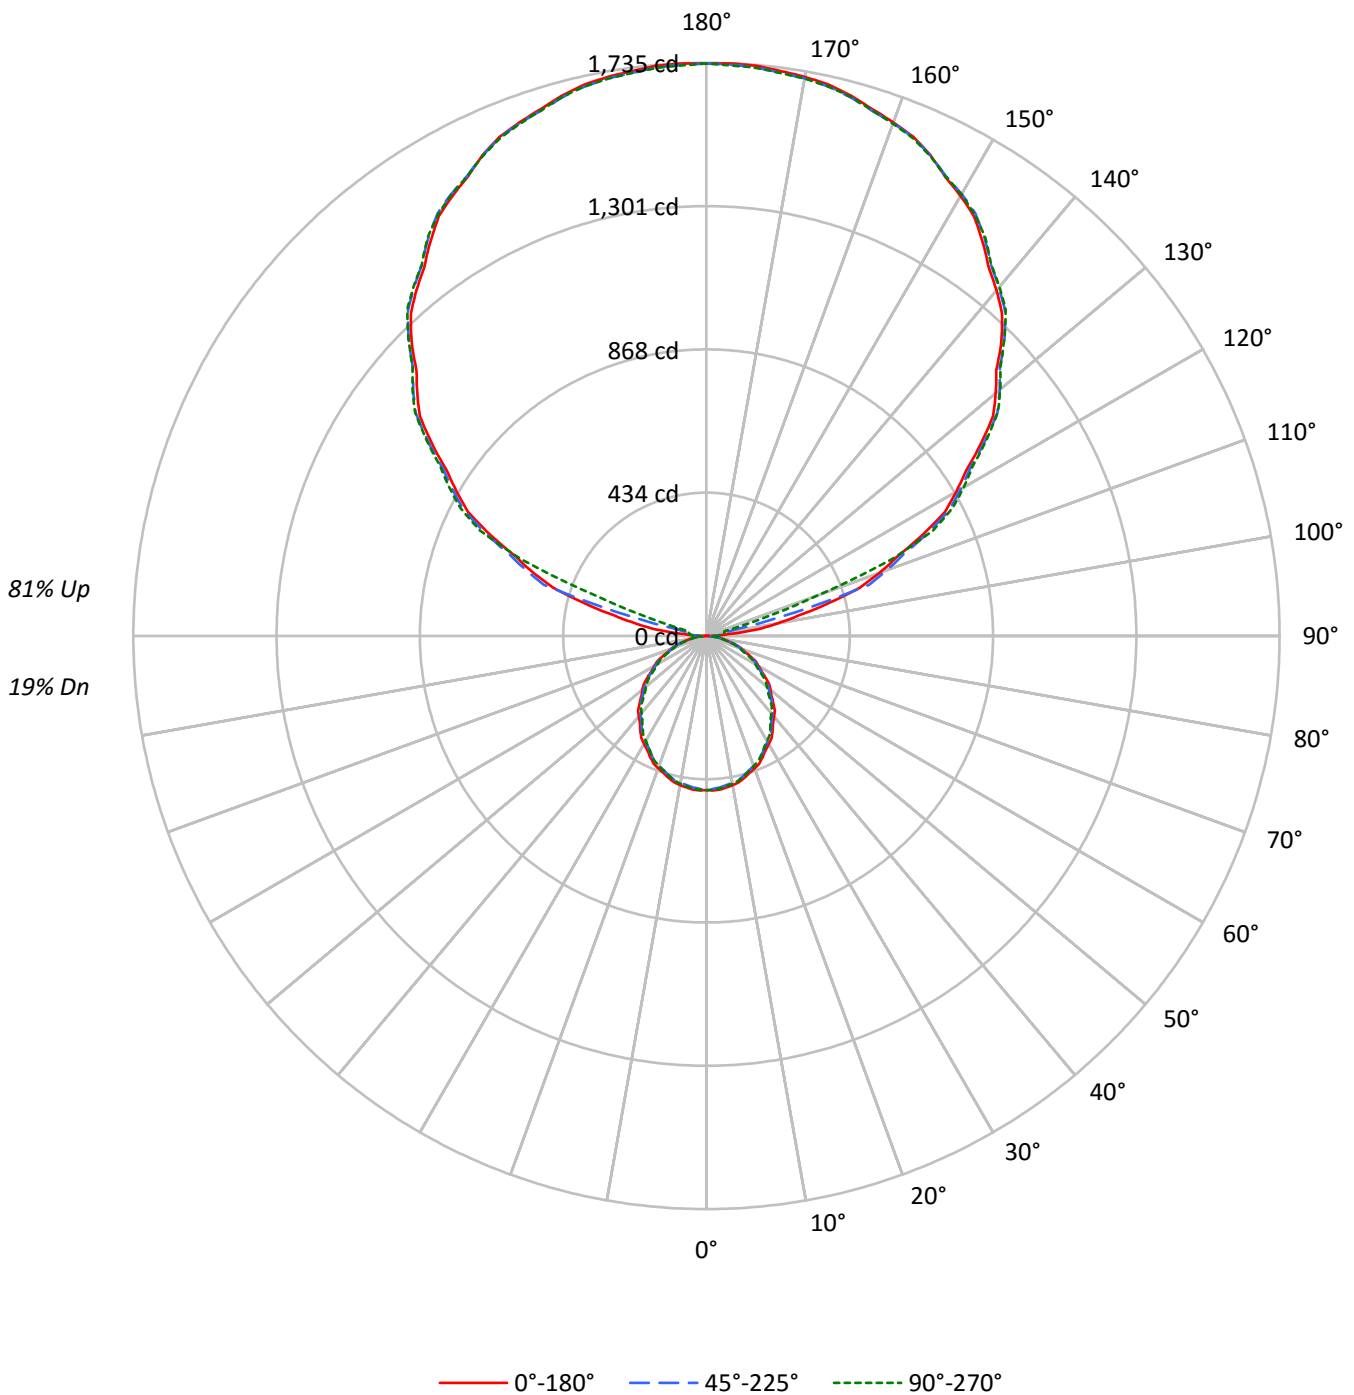



TEST NUMBER: P332118-935

CATALOG NUMBER: S123DIW-S340D1535U935-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	100	100	100	100	88	88	88	88	66	66	66	46	46	46	27	27	27	19				
1	91	87	83	80	80	76	73	71	58	56	54	40	39	38	24	24	23	16				
2	83	76	70	65	73	67	62	58	50	47	44	35	33	32	21	20	19	13				
3	75	66	59	54	66	59	53	48	44	40	37	31	29	27	19	17	16	11				
4	69	58	51	45	60	52	46	41	39	35	32	28	25	23	17	15	14	10				
5	63	52	44	39	55	46	40	35	35	30	27	25	22	20	15	13	12	8				
6	58	46	39	33	51	41	35	30	31	27	23	22	19	17	14	12	11	7				
7	53	42	34	29	47	37	31	26	28	24	20	20	17	15	12	11	9	6				
8	49	38	30	25	43	33	27	23	26	21	18	18	15	13	11	10	8	6				
9	46	34	27	22	40	30	24	20	23	19	16	17	14	12	10	9	8	5				
10	43	31	24	20	37	28	22	18	21	17	14	15	12	10	10	8	7	5				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5022	5022	5022
5°	5046	4976	5010
10°	5012	4933	4964
15°	4953	4878	4886
20°	4885	4798	4802
25°	4793	4703	4694
30°	4692	4598	4561
35°	4586	4486	4428
40°	4477	4363	4295
45°	4354	4250	4147
50°	4232	4113	3997
55°	4074	3969	3847
60°	3914	3800	3679
65°	3769	3617	3505
70°	3559	3408	3257
75°	3256	3136	3003
80°	2938	2814	2783
85°	2569	2482	2384



TEST NUMBER: P332118-935

CATALOG NUMBER: S123DIW-S340D1535U935-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.0	0.7
10°-20°	124.1	1.9
20°-30°	183.3	2.8
30°-40°	214.1	3.3
40°-50°	215.3	3.3
50°-60°	189.1	2.9
60°-70°	140.9	2.2
70°-80°	80.3	1.2
80°-90°	27.9	0.4
90°-100°	63.0	1.0
100°-110°	300.2	4.6
110°-120°	721.1	11.1
120°-130°	918.3	14.1
130°-140°	981.1	15.1
140°-150°	917.5	14.1
150°-160°	740.1	11.4
160°-170°	477.6	7.3
170°-180°	164.6	2.5
0°-30°	351.4	5.4
0°-40°	565.5	8.7
0°-60°	969.9	14.9
0°-90°	1218.9	18.7
90°-120°	1084.3	16.7
90°-150°	3901.2	60.0
90°-180°	5283.0	81.2
0°-180°	6502.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	467	467	467	467	467	
5°	467	465	460	464	464	44
15°	444	443	438	441	438	125
25°	404	401	396	396	395	186
35°	349	346	341	339	337	218
45°	286	284	279	275	272	221
55°	217	216	212	207	205	194
65°	148	146	142	139	138	146
75°	78	77	75	73	72	84
85°	21	20	20	19	19	23
90°	1	14	31	36	39	5
95°	78	29	40	48	49	97
105°	384	390	282	67	57	407
115°	720	728	739	751	757	710
125°	1014	1024	1030	1032	1035	905
135°	1263	1270	1276	1279	1276	972
145°	1457	1466	1469	1471	1471	912
155°	1605	1603	1604	1610	1603	739
165°	1693	1689	1688	1697	1689	478
175°	1732	1726	1727	1735	1726	165
180°	1732	1732	1732	1732	1732	



TEST NUMBER: P332118-935

CATALOG NUMBER: S123DIW-S340D1535U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6
2.5°	468.2	467.9	467.6	467.4	467.0	466.5	465.7	464.9	464.2	463.4	464.1
5°	467.0	466.5	466.1	465.6	465.2	464.5	463.5	462.5	461.5	460.5	461.4
7.5°	462.4	461.9	461.5	461.1	460.6	459.9	458.9	457.9	456.8	455.8	456.6
10°	458.6	458.1	457.6	457.2	456.8	456.0	454.8	453.7	452.5	451.3	452.1
12.5°	453.4	453.1	452.6	452.3	451.9	451.2	450.1	449.0	447.9	446.9	447.5
15°	444.5	444.2	443.8	443.4	443.1	442.3	441.2	440.0	438.9	437.7	438.4
17.5°	434.1	433.7	433.3	432.7	432.3	431.5	430.3	429.2	428.0	426.9	427.3
20°	426.5	425.9	425.4	424.8	424.3	423.4	422.3	421.1	420.0	418.9	419.2
22.5°	417.8	417.2	416.7	416.2	415.7	414.8	413.6	412.5	411.3	410.2	410.4
25°	403.6	403.0	402.5	402.0	401.5	400.6	399.4	398.3	397.1	396.0	396.1
27.5°	388.4	387.9	387.4	386.8	386.3	385.5	384.3	383.0	381.8	380.5	380.6
30°	377.5	377.0	376.6	376.2	375.7	374.9	373.7	372.4	371.2	369.9	369.9
32.5°	366.6	366.0	365.4	364.8	364.3	363.4	362.5	361.5	360.6	359.6	359.1
35°	349.0	348.5	347.9	347.4	346.9	346.0	344.9	343.7	342.6	341.4	340.9
37.5°	331.1	330.4	329.7	329.0	328.4	327.4	326.2	325.0	323.9	322.7	322.1
40°	318.6	318.0	317.5	316.9	316.4	315.5	314.3	313.0	311.8	310.5	309.8
42.5°	306.0	305.4	304.8	304.2	303.6	302.6	301.4	300.1	298.9	297.6	297.0
45°	286.0	285.7	285.3	285.0	284.6	283.9	282.7	281.5	280.3	279.2	278.2
47.5°	266.2	265.7	265.2	264.7	264.2	263.4	262.3	261.1	260.1	259.0	258.0
50°	252.7	252.3	251.8	251.4	251.0	250.1	249.0	247.9	246.7	245.6	244.5
52.5°	238.6	238.3	238.0	237.7	237.4	236.6	235.4	234.2	233.0	231.7	230.9
55°	217.1	217.0	216.9	216.8	216.7	216.0	214.9	213.7	212.6	211.5	210.4
57.5°	196.5	196.2	195.9	195.6	195.3	194.7	193.7	192.8	191.9	191.0	190.1
60°	181.8	181.7	181.6	181.5	181.4	180.8	179.7	178.7	177.6	176.5	175.7
62.5°	168.6	168.3	168.2	167.9	167.6	167.0	165.9	164.9	163.8	162.7	162.0
65°	148.0	147.6	147.1	146.7	146.3	145.6	144.7	143.8	142.9	142.0	141.3
67.5°	126.3	125.9	125.5	125.1	124.8	124.2	123.6	122.9	122.2	121.5	120.9
70°	113.1	112.6	112.1	111.5	111.0	110.5	109.9	109.3	108.8	108.3	107.7
72.5°	99.4	98.9	98.6	98.2	97.7	97.3	96.7	96.1	95.5	94.9	94.3
75°	78.3	77.8	77.5	77.1	76.8	76.5	76.2	75.9	75.7	75.4	75.0
77.5°	59.5	59.3	59.2	59.0	58.7	58.5	58.2	57.9	57.5	57.2	56.9
80°	47.4	47.1	46.8	46.6	46.2	46.1	45.9	45.7	45.5	45.4	45.2
82.5°	35.5	35.4	35.4	35.3	35.2	35.2	35.1	35.1	35.1	35.0	34.9
85°	20.8	20.7	20.5	20.3	20.1	20.1	20.1	20.1	20.1	20.1	19.9
87.5°	8.6	9.0	9.3	9.6	10.1	10.6	11.2	11.9	12.6	13.3	13.4
90°	1.3	4.1	7.0	9.9	12.7	16.0	19.7	23.4	27.2	30.9	32.0
92.5°	23.9	23.2	22.3	21.5	20.8	21.7	24.5	27.4	30.1	33.0	34.8
95°	78.5	66.8	55.1	43.3	31.6	27.3	30.5	33.6	36.8	39.9	41.9
97.5°	157.8	152.6	147.3	142.0	136.7	123.8	103.2	82.7	62.1	41.4	43.7
100°	217.6	223.3	228.9	234.7	240.4	220.9	176.3	131.7	87.1	42.4	44.8
102.5°	285.5	289.6	293.8	297.8	302.0	279.7	230.9	182.2	133.5	84.7	77.6
105°	383.6	386.8	389.9	393.0	396.1	384.9	359.1	333.4	307.6	281.9	231.3
107.5°	487.1	489.6	492.1	494.6	497.1	500.4	504.5	508.6	512.6	516.7	479.6
110°	556.0	558.4	560.6	562.9	565.2	567.9	571.1	574.2	577.4	580.5	571.1



TEST NUMBER: P332118-935

CATALOG NUMBER: S123DIW-S340D1535U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	622.0	624.1	626.1	628.2	630.2	632.8	635.9	639.1	642.2	645.4	645.6
115°	719.5	721.3	723.0	724.7	726.4	728.6	731.2	733.7	736.2	738.8	741.7
117.5°	814.0	816.1	818.2	820.4	822.5	824.2	825.5	826.8	828.1	829.5	831.7
120°	872.7	875.3	877.9	880.5	883.0	884.8	885.5	886.4	887.3	888.1	890.4
122.5°	932.5	934.5	936.7	938.7	940.9	942.5	943.6	944.7	945.7	946.8	948.5
125°	1014.3	1016.6	1018.9	1021.1	1023.5	1025.2	1026.3	1027.4	1028.6	1029.8	1030.4
127.5°	1093.6	1095.9	1098.2	1100.4	1102.8	1104.6	1106.0	1107.3	1108.7	1110.1	1110.9
130°	1143.0	1145.3	1147.6	1149.9	1152.2	1153.9	1155.0	1156.2	1157.4	1158.5	1159.6
132.5°	1190.4	1192.7	1195.0	1197.2	1199.5	1201.2	1202.0	1203.0	1203.9	1204.8	1205.9
135°	1262.7	1264.5	1266.2	1267.9	1269.6	1271.0	1272.1	1273.3	1274.5	1275.6	1276.4
137.5°	1324.5	1326.7	1328.9	1331.0	1333.2	1334.6	1335.2	1335.8	1336.5	1337.1	1338.5
140°	1365.7	1367.4	1369.2	1370.9	1372.6	1373.8	1374.7	1375.5	1376.4	1377.3	1378.5
142.5°	1403.8	1405.5	1407.2	1408.9	1410.7	1412.0	1412.8	1413.7	1414.5	1415.4	1416.3
145°	1457.1	1459.1	1461.1	1463.1	1465.1	1466.4	1467.0	1467.5	1468.1	1468.7	1469.2
147.5°	1507.3	1508.6	1509.9	1511.2	1512.5	1513.5	1514.1	1514.7	1515.2	1515.8	1516.4
150°	1538.2	1539.0	1539.9	1540.8	1541.6	1542.3	1542.9	1543.5	1544.0	1544.6	1545.2
152.5°	1566.0	1566.4	1566.8	1567.2	1567.6	1568.0	1568.3	1568.7	1569.0	1569.3	1570.4
155°	1605.1	1604.6	1604.0	1603.4	1602.8	1602.7	1603.0	1603.3	1603.5	1603.8	1605.2
157.5°	1635.5	1635.5	1635.4	1635.3	1635.3	1635.1	1634.8	1634.5	1634.3	1633.9	1635.6
160°	1654.1	1653.7	1653.5	1653.2	1652.9	1652.6	1652.3	1652.0	1651.7	1651.5	1653.2
162.5°	1671.5	1670.8	1670.1	1669.3	1668.5	1668.0	1667.8	1667.5	1667.2	1666.9	1668.9
165°	1692.6	1691.8	1690.9	1690.1	1689.2	1688.7	1688.3	1688.1	1687.8	1687.5	1689.8
167.5°	1709.1	1708.0	1706.8	1705.7	1704.5	1704.0	1704.0	1704.0	1704.0	1704.0	1706.2
170°	1718.4	1717.3	1716.1	1714.9	1713.8	1713.2	1713.2	1713.2	1713.2	1713.2	1715.5
172.5°	1724.6	1723.2	1721.8	1720.5	1719.1	1718.5	1718.7	1719.0	1719.2	1719.4	1721.7
175°	1732.5	1731.1	1729.7	1728.3	1726.8	1726.2	1726.6	1726.8	1727.1	1727.4	1729.4
177.5°	1734.6	1733.5	1732.3	1731.2	1730.0	1729.6	1729.8	1730.0	1730.3	1730.5	1732.3
180°	1732.5	1732.5	1732.5	1732.5	1732.5	1732.5	1732.5	1732.5	1732.5	1732.5	1732.5



TEST NUMBER: P332118-935

CATALOG NUMBER: S123DIW-S340D1535U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6
2.5°	464.8	465.5	466.2	466.6	466.5	466.4	466.3	466.2
5°	462.4	463.2	464.2	464.5	464.3	464.2	463.9	463.7
7.5°	457.4	458.2	459.0	459.3	459.3	459.2	459.1	458.9
10°	453.0	453.7	454.5	454.9	454.7	454.5	454.3	454.2
12.5°	448.0	448.6	449.2	449.4	449.4	449.2	449.1	449.0
15°	439.1	439.8	440.6	440.7	440.1	439.5	439.0	438.5
17.5°	427.8	428.3	428.9	429.0	428.8	428.6	428.4	428.3
20°	419.6	419.9	420.3	420.3	420.0	419.7	419.5	419.2
22.5°	410.7	411.0	411.3	411.3	411.0	410.6	410.3	409.9
25°	396.1	396.2	396.3	396.2	396.0	395.7	395.5	395.2
27.5°	380.6	380.7	380.7	380.6	380.3	380.0	379.6	379.3
30°	369.9	369.9	369.9	369.5	368.9	368.3	367.7	367.0
32.5°	358.6	358.1	357.7	357.2	356.9	356.5	356.2	355.9
35°	340.4	339.8	339.2	338.8	338.4	337.9	337.4	337.0
37.5°	321.4	320.8	320.1	319.7	319.4	319.1	318.8	318.6
40°	309.1	308.4	307.6	307.1	306.8	306.4	306.1	305.7
42.5°	296.3	295.5	294.8	294.3	293.9	293.6	293.3	292.8
45°	277.1	276.0	274.9	274.2	273.7	273.3	272.9	272.4
47.5°	256.9	255.9	254.8	254.1	253.7	253.3	252.9	252.5
50°	243.6	242.5	241.6	240.8	240.3	239.8	239.3	238.7
52.5°	230.1	229.2	228.3	227.6	227.1	226.6	226.1	225.6
55°	209.5	208.4	207.5	206.8	206.4	205.9	205.4	205.0
57.5°	189.2	188.3	187.4	186.8	186.2	185.7	185.2	184.7
60°	175.0	174.1	173.3	172.7	172.2	171.8	171.3	170.9
62.5°	161.1	160.3	159.5	158.9	158.7	158.3	158.1	157.7
65°	140.6	139.9	139.1	138.7	138.4	138.1	137.8	137.6
67.5°	120.2	119.6	119.0	118.5	118.1	117.7	117.4	117.0
70°	107.1	106.4	105.8	105.3	104.9	104.4	103.9	103.5
72.5°	93.8	93.2	92.6	92.2	92.0	91.8	91.5	91.3
75°	74.6	74.0	73.6	73.3	73.0	72.8	72.5	72.2
77.5°	56.6	56.3	56.0	55.9	55.9	55.9	55.9	55.9
80°	45.1	45.0	44.9	44.9	44.9	44.9	44.9	44.9
82.5°	34.8	34.6	34.4	34.3	34.3	34.2	34.1	34.0
85°	19.7	19.5	19.4	19.3	19.3	19.3	19.3	19.3
87.5°	13.5	13.7	13.9	14.0	14.1	14.2	14.4	14.5
90°	33.1	34.4	35.5	36.3	36.9	37.5	38.1	38.6
92.5°	36.6	38.5	40.3	41.3	41.7	42.0	42.4	42.7
95°	43.9	45.9	47.9	48.9	48.9	48.9	48.9	48.9
97.5°	46.1	48.3	50.6	51.9	52.2	52.4	52.8	53.0
100°	47.0	49.3	51.7	53.0	53.2	53.5	53.8	54.1
102.5°	70.5	63.5	56.3	53.0	53.6	54.1	54.6	55.1
105°	180.6	130.0	79.4	54.3	54.9	55.5	56.1	56.7
107.5°	442.4	405.3	368.2	330.5	292.4	254.2	216.0	177.9
110°	561.6	552.2	542.8	517.5	476.6	435.8	394.9	354.0





TEST NUMBER: P332118-935

CATALOG NUMBER: S123DIW-S340D1535U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	645.8	645.9	646.1	641.9	633.2	624.6	616.0	607.3
115°	744.6	747.4	750.3	752.3	753.5	754.6	755.7	756.9
117.5°	834.1	836.3	838.6	839.9	840.1	840.3	840.6	840.8
120°	892.8	895.0	897.3	898.5	898.5	898.5	898.5	898.5
122.5°	950.0	951.7	953.3	954.2	954.4	954.6	954.8	955.1
125°	1030.9	1031.5	1032.0	1032.6	1033.2	1033.7	1034.3	1034.9
127.5°	1111.9	1112.8	1113.7	1113.9	1113.4	1112.8	1112.2	1111.6
130°	1160.7	1161.9	1163.0	1163.3	1162.8	1162.2	1161.6	1161.1
132.5°	1207.1	1208.2	1209.4	1209.5	1208.8	1208.0	1207.1	1206.3
135°	1277.3	1278.2	1279.0	1279.0	1278.2	1277.3	1276.4	1275.6
137.5°	1339.9	1341.3	1342.6	1343.0	1342.5	1341.9	1341.3	1340.7
140°	1379.6	1380.7	1381.8	1382.2	1381.6	1381.0	1380.4	1379.8
142.5°	1417.2	1418.2	1419.0	1419.1	1418.3	1417.5	1416.7	1415.9
145°	1469.8	1470.4	1470.9	1471.3	1471.3	1471.3	1471.3	1471.3
147.5°	1516.9	1517.5	1518.1	1517.7	1516.4	1515.1	1513.7	1512.4
150°	1545.8	1546.4	1546.9	1546.8	1545.9	1545.1	1544.2	1543.3
152.5°	1571.4	1572.4	1573.5	1573.3	1572.0	1570.6	1569.3	1568.1
155°	1606.7	1608.1	1609.6	1609.4	1607.7	1605.9	1604.2	1602.6
157.5°	1637.4	1639.1	1640.8	1640.5	1638.3	1636.1	1633.8	1631.6
160°	1654.9	1656.6	1658.3	1658.2	1656.1	1654.2	1652.2	1650.2
162.5°	1670.8	1672.8	1674.6	1674.7	1673.0	1671.2	1669.5	1667.7
165°	1692.0	1694.4	1696.7	1696.8	1694.8	1692.8	1690.7	1688.8
167.5°	1708.6	1710.8	1713.1	1713.1	1710.8	1708.6	1706.2	1704.0
170°	1717.8	1720.1	1722.4	1722.4	1720.1	1717.8	1715.5	1713.2
172.5°	1724.0	1726.3	1728.5	1728.5	1726.0	1723.5	1720.9	1718.4
175°	1731.4	1733.4	1735.4	1735.3	1732.9	1730.7	1728.4	1726.1
177.5°	1734.1	1735.9	1737.8	1737.6	1735.3	1733.0	1730.7	1728.5
180°	1732.5	1732.5	1732.5	1732.5	1732.5	1732.5	1732.5	1732.5

(END OF REPORT)