

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332125-935

Luminaire Tested: **S123DIW-S560D460U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332125-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S560D460U935-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 460 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3373.6 lumens
Efficiency: N/A
Efficacy: 111.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 30.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332125-935

CATALOG NUMBER: S123DIW-S560D460U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

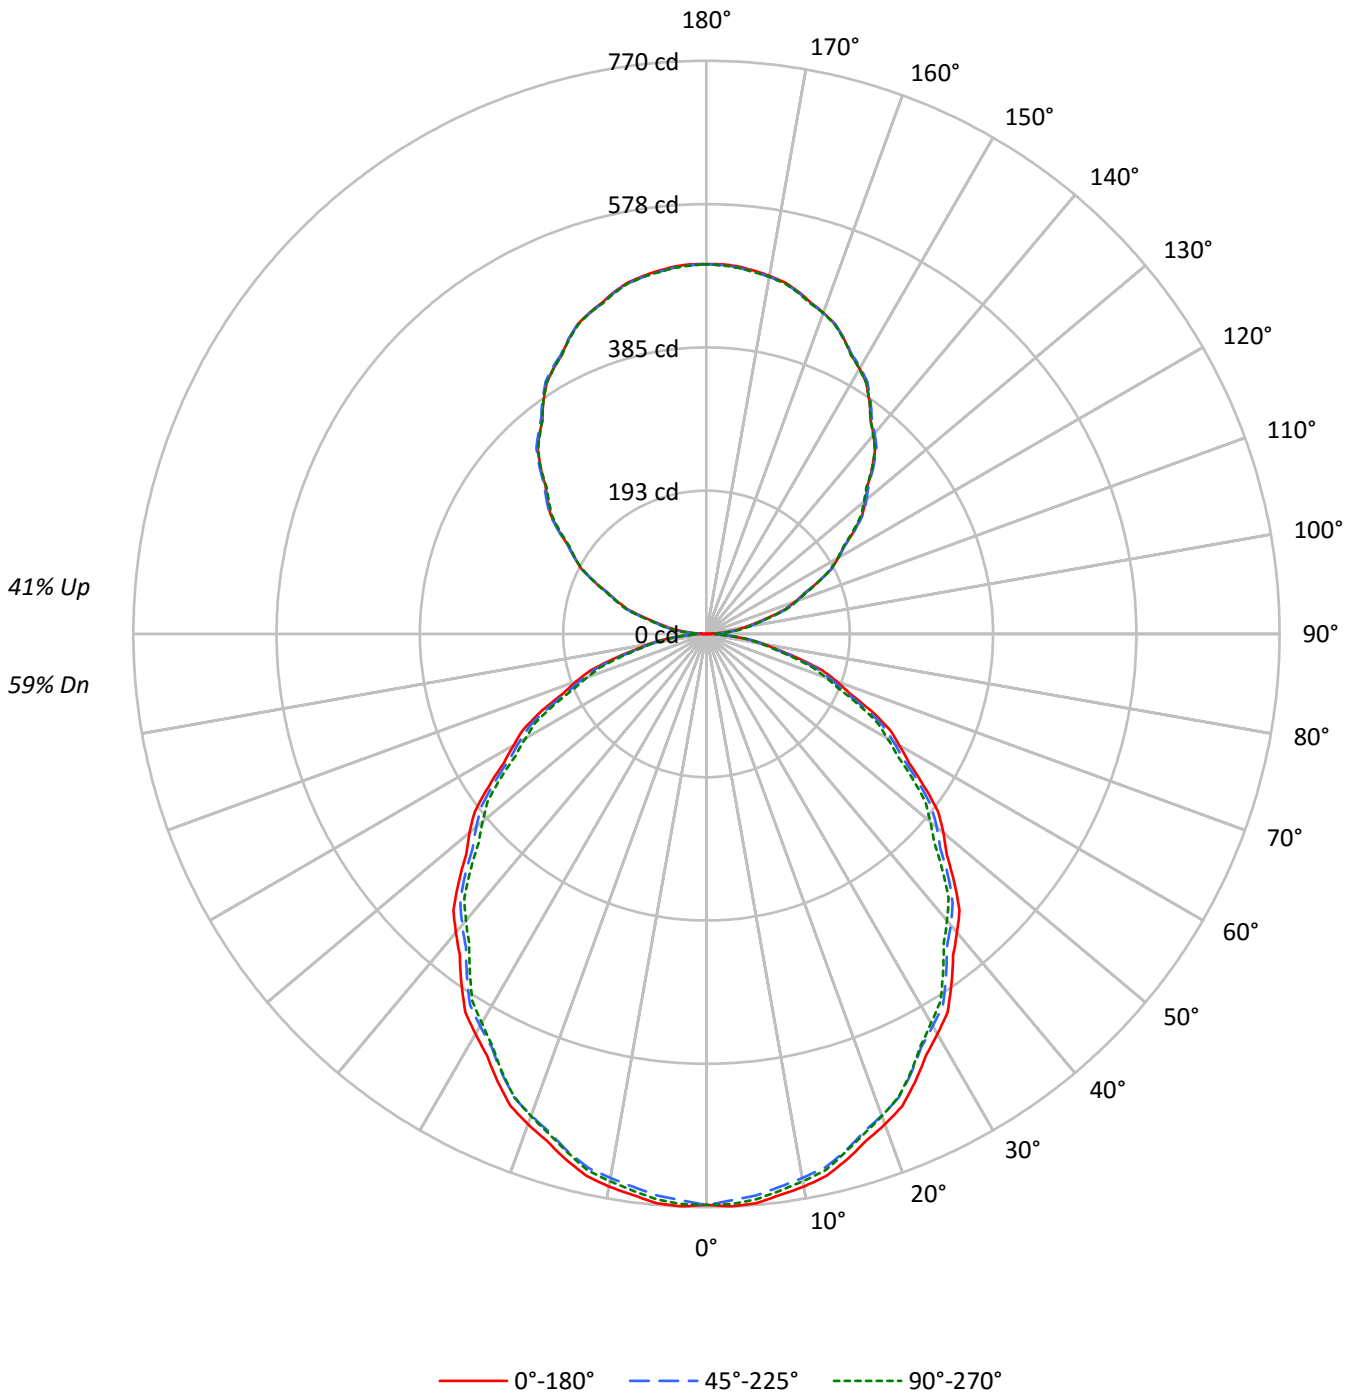



TEST NUMBER: P332125-935

CATALOG NUMBER: S123DIW-S560D460U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	65	65	65	59																			
1	100	95	91	88	93	89	86	83	78	75	73	67	65	63	57	56	54	50																			
2	91	83	77	72	84	78	72	68	68	64	60	59	55	53	50	48	46	42																			
3	83	73	66	60	77	69	62	57	60	55	50	52	48	45	44	41	39	35																			
4	76	65	57	51	70	61	54	48	53	48	43	46	42	38	40	36	34	30																			
5	70	58	49	43	65	54	47	41	48	42	37	41	37	33	36	32	29	26																			
6	64	52	44	38	60	49	41	36	43	37	32	38	33	29	32	29	26	23																			
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	30	26	23	20																			
8	55	43	35	29	51	40	33	28	36	30	25	31	26	23	27	23	20	18																			
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	19	16																			
10	48	36	28	24	45	34	27	23	30	24	21	27	22	19	23	20	17	15																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8257	8257	8257
5°	8295	8182	8238
10°	8240	8110	8160
15°	8143	8018	8033
20°	8031	7887	7895
25°	7880	7732	7715
30°	7713	7558	7501
35°	7540	7376	7281
40°	7359	7173	7062
45°	7159	6987	6817
50°	6958	6759	6571
55°	6696	6523	6324
60°	6433	6247	6047
65°	6199	5947	5761
70°	5854	5605	5353
75°	5348	5157	4937
80°	4823	4624	4581
85°	4236	4076	3915



TEST NUMBER: P332125-935

CATALOG NUMBER: S123DIW-S560D460U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.3	2.1
10°-20°	204.0	6.0
20°-30°	301.4	8.9
30°-40°	352.0	10.4
40°-50°	353.9	10.5
50°-60°	310.9	9.2
60°-70°	231.6	6.9
70°-80°	132.0	3.9
80°-90°	39.3	1.2
90°-100°	32.4	1.0
100°-110°	96.8	2.9
110°-120°	164.7	4.9
120°-130°	216.7	6.4
130°-140°	243.5	7.2
140°-150°	239.4	7.1
150°-160°	201.5	6.0
160°-170°	134.2	4.0
170°-180°	47.0	1.4
0°-30°	577.6	17.1
0°-40°	929.7	27.6
0°-60°	1594.5	47.3
0°-90°	1997.4	59.2
90°-120°	293.9	8.7
90°-150°	993.5	29.5
90°-180°	1376.0	40.8
0°-180°	3373.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	767	767	767	767	767	
5°	768	764	757	763	762	73
15°	731	728	720	724	721	206
25°	664	659	651	651	650	305
35°	574	570	561	557	554	359
45°	470	467	459	451	448	363
55°	357	356	348	340	337	319
65°	243	240	234	228	226	240
75°	129	126	124	121	119	138
85°	34	33	33	32	32	38
90°	0	4	9	11	12	3
95°	23	26	29	30	30	26
105°	88	89	92	92	93	94
115°	166	167	166	167	166	164
125°	243	244	243	242	240	216
135°	315	317	317	315	314	243
145°	382	383	384	384	382	239
155°	437	437	438	439	437	201
165°	476	475	475	477	475	134
175°	496	494	494	496	494	47
180°	497	497	497	497	497	



TEST NUMBER: P332125-935

CATALOG NUMBER: S123DIW-S560D460U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1
2.5°	769.6	769.2	768.8	768.3	767.8	766.9	765.6	764.3	763.1	761.8	762.9
5°	767.7	767.0	766.2	765.5	764.7	763.6	762.0	760.3	758.8	757.2	758.6
7.5°	760.2	759.5	758.7	758.0	757.2	756.0	754.4	752.7	751.1	749.4	750.7
10°	753.9	753.1	752.4	751.7	751.0	749.6	747.7	745.8	743.9	742.0	743.3
12.5°	745.5	744.8	744.2	743.6	743.0	741.8	739.9	738.1	736.4	734.6	735.6
15°	730.7	730.2	729.6	729.0	728.4	727.2	725.3	723.4	721.4	719.5	720.7
17.5°	713.8	713.0	712.2	711.4	710.7	709.4	707.5	705.6	703.7	701.7	702.6
20°	701.1	700.3	699.3	698.4	697.6	696.2	694.3	692.4	690.4	688.5	689.1
22.5°	686.8	686.0	685.1	684.2	683.3	681.9	680.0	678.1	676.2	674.3	674.8
25°	663.5	662.6	661.8	660.9	660.0	658.6	656.7	654.8	652.9	651.0	651.1
27.5°	638.6	637.7	636.9	636.0	635.2	633.7	631.6	629.6	627.6	625.5	625.6
30°	620.6	619.9	619.1	618.5	617.7	616.3	614.2	612.2	610.2	608.1	608.1
32.5°	602.7	601.8	600.7	599.8	598.8	597.5	596.0	594.3	592.8	591.2	590.4
35°	573.8	572.9	572.0	571.2	570.3	568.9	567.0	565.1	563.2	561.3	560.4
37.5°	544.2	543.1	542.0	540.9	539.8	538.3	536.3	534.4	532.4	530.5	529.5
40°	523.7	522.8	521.9	521.1	520.1	518.7	516.6	514.6	512.6	510.5	509.3
42.5°	503.1	502.1	501.1	500.1	499.1	497.6	495.5	493.5	491.5	489.4	488.2
45°	470.3	469.7	469.1	468.5	467.9	466.7	464.8	462.9	461.0	459.0	457.3
47.5°	437.6	436.8	436.0	435.1	434.3	432.9	431.2	429.4	427.6	425.8	424.0
50°	415.5	414.7	414.1	413.3	412.6	411.3	409.3	407.4	405.5	403.6	402.0
52.5°	392.3	391.8	391.3	390.8	390.3	389.0	387.0	385.0	383.0	381.0	379.6
55°	356.8	356.6	356.5	356.4	356.2	355.2	353.3	351.4	349.5	347.6	345.9
57.5°	323.0	322.5	322.0	321.6	321.1	320.0	318.5	317.0	315.5	313.9	312.5
60°	298.8	298.6	298.5	298.3	298.2	297.2	295.5	293.7	292.0	290.2	288.9
62.5°	277.2	276.7	276.4	276.0	275.6	274.6	272.8	271.0	269.2	267.5	266.2
65°	243.4	242.6	241.9	241.2	240.5	239.4	237.9	236.4	235.0	233.5	232.3
67.5°	207.6	207.0	206.3	205.7	205.0	204.1	203.0	201.9	200.8	199.8	198.7
70°	186.0	185.1	184.3	183.4	182.4	181.6	180.7	179.9	178.9	178.1	177.0
72.5°	163.3	162.6	162.0	161.4	160.7	159.9	158.9	157.9	156.9	155.9	155.0
75°	128.6	128.0	127.4	126.8	126.3	125.8	125.3	124.8	124.4	124.0	123.3
77.5°	97.9	97.6	97.2	96.9	96.6	96.2	95.7	95.1	94.5	94.0	93.6
80°	77.8	77.4	77.0	76.5	76.0	75.7	75.4	75.1	74.8	74.6	74.4
82.5°	58.3	58.2	58.1	58.0	57.9	57.9	57.9	57.8	57.7	57.7	57.3
85°	34.3	34.0	33.8	33.4	33.1	33.0	33.0	33.0	33.0	33.0	32.7
87.5°	13.8	13.6	13.4	13.3	13.1	13.1	13.2	13.3	13.3	13.5	13.4
90°	0.4	1.3	2.2	3.0	3.9	4.8	5.9	7.1	8.3	9.4	9.7
92.5°	9.5	10.1	10.6	11.2	11.8	12.4	13.1	13.7	14.4	15.0	15.2
95°	23.0	23.6	24.2	24.9	25.5	26.1	26.8	27.5	28.2	28.8	29.2
97.5°	40.9	41.3	41.8	42.3	42.7	43.1	43.7	44.2	44.7	45.2	45.5
100°	53.0	53.6	54.1	54.6	55.1	55.6	56.1	56.5	56.9	57.3	57.6
102.5°	67.1	67.4	67.8	68.0	68.4	68.8	69.4	69.9	70.5	71.1	71.4
105°	87.8	88.0	88.2	88.3	88.5	88.9	89.7	90.5	91.3	92.0	92.0
107.5°	111.8	111.9	112.0	112.1	112.3	112.4	112.8	113.0	113.4	113.7	114.0
110°	126.8	127.0	127.2	127.3	127.5	127.7	127.9	128.0	128.2	128.4	128.7



TEST NUMBER: P332125-935

CATALOG NUMBER: S123DIW-S560D460U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	142.4	142.5	142.7	142.8	142.8	142.9	142.9	143.0	143.0	143.0	143.4
115°	165.8	166.1	166.3	166.6	166.9	166.9	166.8	166.6	166.4	166.3	166.3
117.5°	189.4	189.6	189.8	189.9	190.1	190.0	189.9	189.6	189.4	189.2	189.2
120°	204.1	204.6	205.1	205.6	206.1	206.2	205.8	205.3	204.9	204.5	204.4
122.5°	219.4	219.7	220.2	220.5	220.8	220.9	220.8	220.5	220.3	220.1	219.8
125°	242.7	243.0	243.2	243.5	243.7	243.7	243.6	243.4	243.2	243.1	242.7
127.5°	264.2	264.8	265.4	265.9	266.5	266.7	266.5	266.2	266.0	265.9	265.4
130°	278.6	279.3	280.0	280.7	281.4	281.5	281.3	281.0	280.8	280.5	280.2
132.5°	292.9	293.6	294.4	295.1	295.8	296.0	295.8	295.6	295.4	295.2	294.8
135°	314.9	315.4	315.9	316.4	316.9	317.2	317.1	317.0	316.9	316.8	316.5
137.5°	335.2	335.6	336.0	336.5	336.9	337.3	337.4	337.7	337.9	338.1	337.8
140°	349.2	349.7	350.1	350.5	350.9	351.2	351.3	351.4	351.5	351.5	351.5
142.5°	362.1	362.5	362.9	363.3	363.8	364.0	364.2	364.4	364.5	364.6	364.5
145°	382.0	382.2	382.4	382.5	382.7	382.9	383.1	383.4	383.7	383.9	383.8
147.5°	399.5	399.8	400.1	400.4	400.7	401.0	401.2	401.5	401.7	402.0	402.0
150°	411.6	411.8	412.0	412.2	412.3	412.5	412.7	412.8	413.0	413.2	413.2
152.5°	421.6	421.9	422.1	422.3	422.6	422.8	422.8	423.0	423.1	423.2	423.4
155°	437.4	437.4	437.4	437.4	437.4	437.5	437.6	437.6	437.7	437.8	438.2
157.5°	450.8	450.7	450.6	450.5	450.4	450.4	450.5	450.6	450.6	450.6	451.0
160°	459.3	459.1	458.9	458.7	458.6	458.5	458.5	458.5	458.5	458.5	458.9
162.5°	466.7	466.5	466.2	466.0	465.8	465.7	465.7	465.8	465.9	466.0	466.4
165°	476.4	476.1	475.9	475.6	475.4	475.3	475.3	475.3	475.3	475.3	475.8
167.5°	484.1	483.8	483.5	483.1	482.8	482.6	482.7	482.8	482.8	482.8	483.5
170°	488.5	488.2	487.8	487.5	487.2	487.0	487.0	487.0	487.0	487.0	487.6
172.5°	492.0	491.6	491.3	490.9	490.5	490.3	490.3	490.3	490.3	490.3	490.9
175°	495.5	495.2	494.8	494.5	494.1	494.0	494.0	494.0	494.0	494.0	494.5
177.5°	497.1	496.7	496.5	496.2	495.9	495.8	495.8	495.8	495.8	495.8	496.2
180°	496.7	496.7	496.7	496.7	496.7	496.7	496.7	496.7	496.7	496.7	496.7



TEST NUMBER: P332125-935

CATALOG NUMBER: S123DIW-S560D460U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1
2.5°	764.1	765.3	766.5	767.0	766.9	766.7	766.6	766.5
5°	760.1	761.6	763.0	763.6	763.3	763.0	762.8	762.4
7.5°	752.0	753.3	754.7	755.2	755.0	754.8	754.7	754.5
10°	744.6	746.0	747.3	747.8	747.5	747.2	746.9	746.6
12.5°	736.5	737.5	738.5	738.8	738.7	738.5	738.3	738.1
15°	721.9	723.1	724.3	724.4	723.5	722.6	721.8	720.9
17.5°	703.4	704.2	705.1	705.2	705.0	704.6	704.3	704.0
20°	689.7	690.3	690.9	691.0	690.5	690.1	689.7	689.2
22.5°	675.3	675.7	676.2	676.1	675.6	675.0	674.5	673.9
25°	651.3	651.4	651.5	651.4	651.0	650.6	650.1	649.6
27.5°	625.8	625.9	625.9	625.8	625.2	624.7	624.1	623.5
30°	608.1	608.1	608.1	607.6	606.6	605.5	604.5	603.5
32.5°	589.6	588.8	587.9	587.2	586.7	586.2	585.6	585.0
35°	559.5	558.6	557.8	557.0	556.2	555.5	554.7	554.1
37.5°	528.4	527.4	526.3	525.6	525.1	524.6	524.2	523.7
40°	508.2	507.0	505.8	504.9	504.3	503.8	503.2	502.6
42.5°	487.1	485.9	484.7	483.8	483.2	482.7	482.1	481.5
45°	455.6	453.7	452.0	450.7	450.0	449.3	448.6	447.8
47.5°	422.3	420.6	418.9	417.7	417.1	416.4	415.8	415.1
50°	400.5	398.8	397.2	396.0	395.0	394.2	393.3	392.4
52.5°	378.2	376.9	375.5	374.3	373.4	372.6	371.7	370.8
55°	344.3	342.8	341.1	339.9	339.2	338.5	337.8	337.0
57.5°	311.1	309.6	308.2	307.0	306.2	305.4	304.5	303.7
60°	287.6	286.3	284.9	283.9	283.2	282.4	281.7	280.9
62.5°	264.8	263.6	262.3	261.3	260.8	260.4	259.8	259.3
65°	231.1	230.0	228.8	228.0	227.6	227.1	226.7	226.2
67.5°	197.7	196.7	195.6	194.8	194.2	193.6	193.0	192.3
70°	176.0	175.0	174.0	173.1	172.4	171.6	170.9	170.1
72.5°	154.1	153.2	152.3	151.6	151.3	150.8	150.5	150.1
75°	122.5	121.8	121.1	120.5	120.0	119.6	119.2	118.7
77.5°	93.1	92.6	92.0	91.8	91.8	91.8	91.8	91.8
80°	74.2	74.0	74.0	73.9	73.9	73.9	73.9	73.9
82.5°	57.1	56.8	56.6	56.4	56.3	56.1	56.1	56.0
85°	32.4	32.1	31.8	31.7	31.7	31.7	31.7	31.7
87.5°	13.3	13.3	13.3	13.3	13.3	13.3	13.3	13.4
90°	10.1	10.4	10.8	11.0	11.2	11.4	11.5	11.7
92.5°	15.5	15.8	16.1	16.2	16.1	15.9	15.8	15.8
95°	29.5	29.9	30.2	30.4	30.4	30.4	30.4	30.4
97.5°	46.0	46.4	46.8	46.9	46.9	46.9	46.8	46.8
100°	57.9	58.1	58.4	58.6	58.8	59.0	59.2	59.3
102.5°	71.6	71.9	72.2	72.2	72.2	72.2	72.2	72.1
105°	92.0	92.0	92.0	92.1	92.4	92.6	92.7	92.9
107.5°	114.3	114.5	114.8	114.9	114.8	114.7	114.6	114.5
110°	129.1	129.4	129.8	129.8	129.7	129.5	129.3	129.2



TEST NUMBER: P332125-935

CATALOG NUMBER: S123DIW-S560D460U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	143.9	144.3	144.7	144.9	144.8	144.8	144.8	144.7
115°	166.4	166.5	166.6	166.6	166.5	166.4	166.3	166.3
117.5°	189.2	189.1	189.1	189.0	188.7	188.5	188.2	188.0
120°	204.3	204.2	204.1	204.0	203.8	203.6	203.5	203.3
122.5°	219.6	219.4	219.1	219.0	218.7	218.4	218.2	217.9
125°	242.4	242.0	241.7	241.3	241.0	240.6	240.3	240.0
127.5°	264.9	264.4	263.9	263.5	263.1	262.7	262.3	261.9
130°	279.8	279.5	279.1	278.7	278.1	277.5	276.9	276.2
132.5°	294.4	293.9	293.5	293.1	292.7	292.1	291.7	291.2
135°	316.2	315.8	315.5	315.2	315.0	314.9	314.7	314.5
137.5°	337.4	337.1	336.7	336.3	336.0	335.7	335.4	335.0
140°	351.4	351.3	351.2	350.9	350.3	349.7	349.0	348.4
142.5°	364.5	364.4	364.3	364.0	363.6	363.1	362.7	362.1
145°	383.7	383.7	383.6	383.4	383.1	382.7	382.4	382.0
147.5°	402.0	402.0	402.0	401.7	401.2	400.6	400.1	399.6
150°	413.2	413.2	413.2	412.9	412.4	411.9	411.4	410.9
152.5°	423.4	423.6	423.8	423.6	423.2	422.7	422.2	421.8
155°	438.5	438.9	439.2	439.0	438.4	437.8	437.2	436.6
157.5°	451.4	451.8	452.1	452.0	451.6	451.1	450.6	450.1
160°	459.3	459.8	460.2	460.2	459.9	459.5	459.2	458.8
162.5°	466.8	467.3	467.7	467.6	467.1	466.5	466.0	465.4
165°	476.3	476.8	477.3	477.3	476.6	476.0	475.4	474.8
167.5°	484.0	484.5	485.0	485.0	484.5	484.0	483.5	482.8
170°	488.2	488.8	489.4	489.4	488.8	488.2	487.6	487.0
172.5°	491.5	492.0	492.5	492.5	491.9	491.3	490.7	490.1
175°	495.0	495.5	496.0	496.0	495.4	494.8	494.2	493.6
177.5°	496.6	497.1	497.4	497.4	496.9	496.5	495.9	495.4
180°	496.7	496.7	496.7	496.7	496.7	496.7	496.7	496.7

(END OF REPORT)