

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332179-935

Luminaire Tested: **S123DIW-S775D1535U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332179-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S775D1535U935-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1535 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7312.5 lumens
Efficiency: N/A
Efficacy: 107.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332179-935

CATALOG NUMBER: S123DIW-S775D1535U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

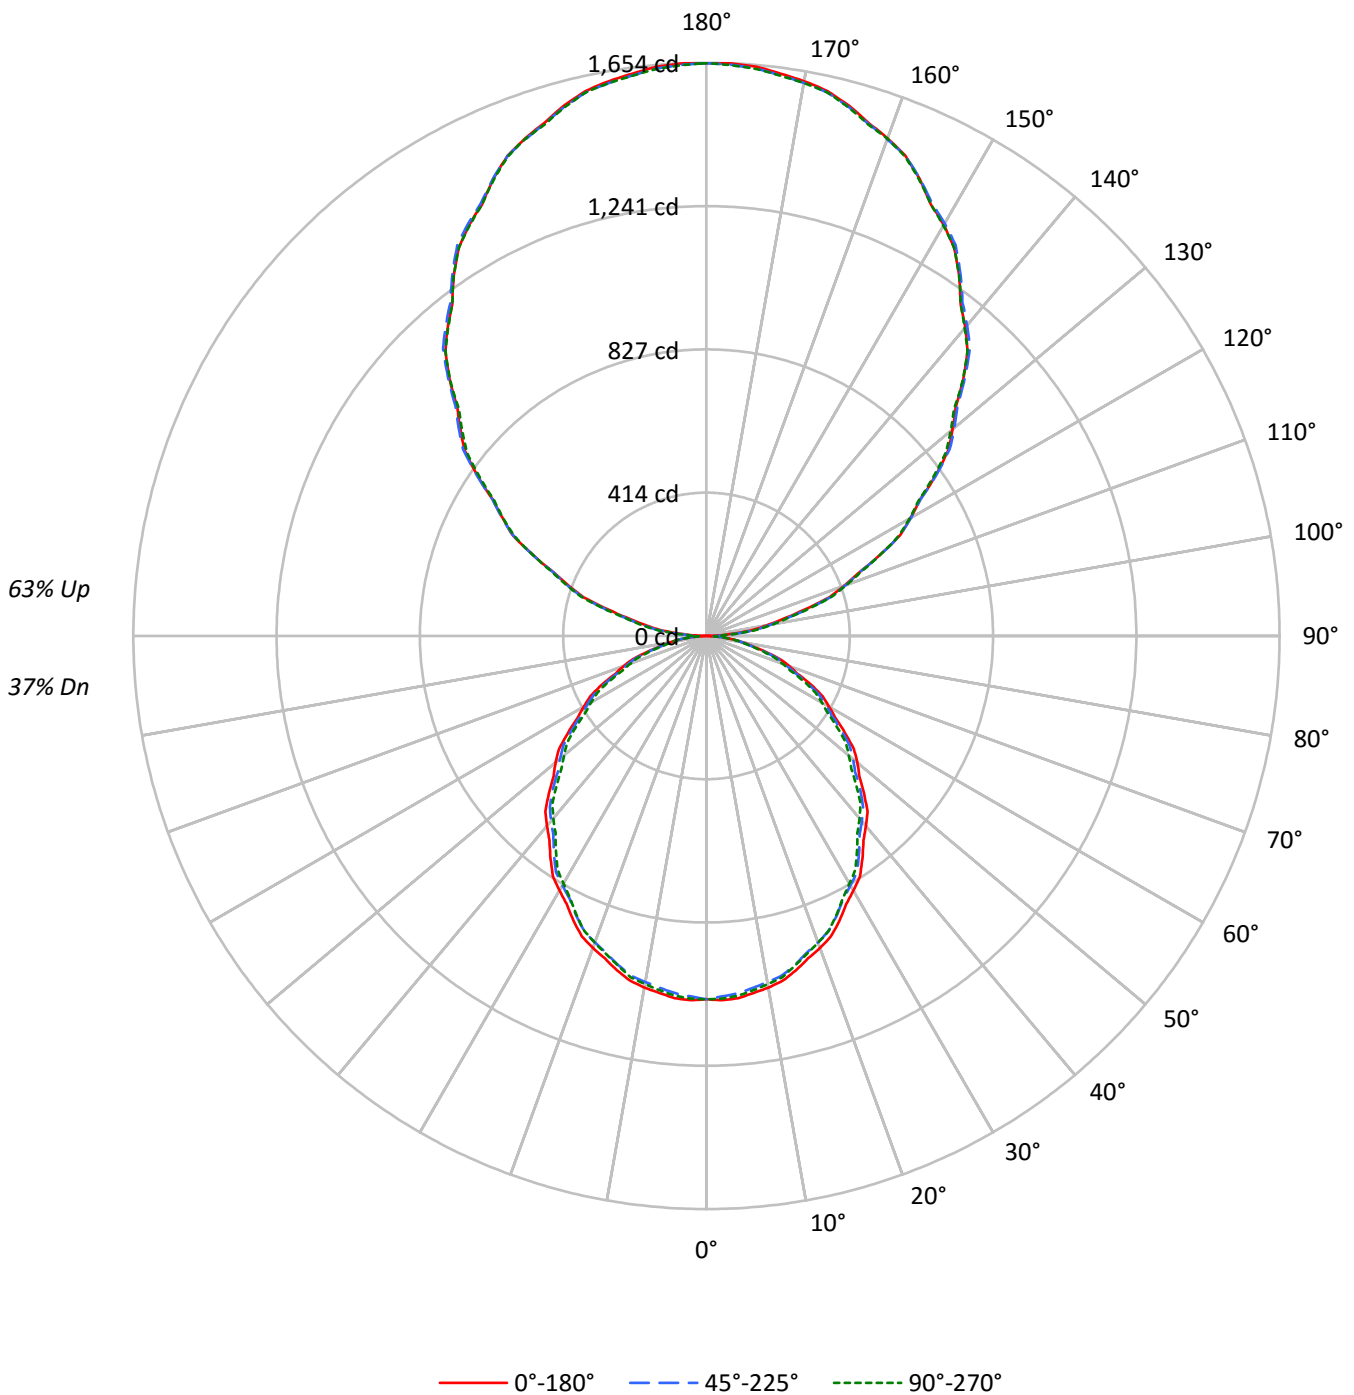



TEST NUMBER: P332179-935

CATALOG NUMBER: S123DIW-S775D1535U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45	37
1	95	91	87	83	86	82	79	76	67	64	62	52	51	50	39	38	37	31
2	86	79	73	68	78	72	67	62	58	55	52	46	43	41	34	33	31	26
3	79	69	62	57	71	63	57	52	51	47	43	41	38	35	31	29	27	22
4	72	61	54	48	65	56	49	44	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	25	22	20	17
6	61	49	41	35	55	45	38	33	37	31	28	29	25	23	22	20	18	14
7	56	44	36	31	51	40	33	29	33	28	24	27	23	20	20	18	16	13
8	52	40	32	27	47	37	30	25	30	25	21	24	20	18	19	16	14	11
9	48	36	29	24	44	33	27	22	28	23	19	22	19	16	17	15	13	10
10	45	33	26	21	41	31	24	20	25	20	17	21	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11286	11286	11286
5°	11339	11182	11261
10°	11262	11086	11154
15°	11131	10961	10981
20°	10977	10781	10791
25°	10772	10568	10546
30°	10544	10331	10253
35°	10307	10081	9950
40°	10058	9805	9653
45°	9785	9552	9319
50°	9512	9239	8982
55°	9154	8916	8646
60°	8792	8540	8269
65°	8474	8130	7875
70°	8003	7660	7320
75°	7311	7049	6750
80°	6595	6316	6261
85°	5780	5570	5348



TEST NUMBER: P332179-935

CATALOG NUMBER: S123DIW-S775D1535U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.8	1.4
10°-20°	278.9	3.8
20°-30°	411.9	5.6
30°-40°	481.2	6.6
40°-50°	483.8	6.6
50°-60°	425.0	5.8
60°-70°	316.6	4.3
70°-80°	180.4	2.5
80°-90°	56.7	0.8
90°-100°	107.7	1.5
100°-110°	322.3	4.4
110°-120°	548.1	7.5
120°-130°	721.0	9.9
130°-140°	810.4	11.1
140°-150°	796.6	10.9
150°-160°	670.6	9.2
160°-170°	446.4	6.1
170°-180°	156.3	2.1
0°-30°	789.6	10.8
0°-40°	1270.8	17.4
0°-60°	2179.5	29.8
0°-90°	2733.2	37.4
90°-120°	978.1	13.4
90°-150°	3306.0	45.2
90°-180°	4579.0	62.6
0°-180°	7312.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1048	1048	1048	1048	1048	
5°	1049	1045	1035	1043	1042	99
15°	999	995	984	990	985	281
25°	907	901	890	890	888	418
35°	784	779	767	762	757	490
45°	643	639	628	617	612	496
55°	488	486	475	466	461	437
65°	333	328	319	312	309	328
75°	176	172	170	165	162	188
85°	47	45	45	43	43	51
90°	1	14	31	36	39	7
95°	77	86	96	101	101	86
105°	292	295	306	307	309	313
115°	552	555	553	554	553	546
125°	808	811	809	804	798	720
135°	1048	1055	1054	1049	1046	807
145°	1271	1274	1278	1276	1271	794
155°	1455	1456	1457	1461	1453	670
165°	1585	1582	1581	1588	1580	447
175°	1649	1644	1644	1651	1642	157
180°	1653	1653	1653	1653	1653	



TEST NUMBER: P332179-935

CATALOG NUMBER: S123DIW-S775D1535U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5
2.5°	1052.1	1051.5	1050.9	1050.2	1049.6	1048.4	1046.5	1044.8	1043.0	1041.3	1042.8
5°	1049.4	1048.4	1047.4	1046.4	1045.3	1043.8	1041.6	1039.4	1037.2	1034.9	1037.0
7.5°	1039.1	1038.1	1037.1	1036.1	1035.1	1033.5	1031.1	1028.9	1026.6	1024.3	1026.1
10°	1030.4	1029.4	1028.5	1027.4	1026.5	1024.7	1022.0	1019.4	1016.8	1014.3	1016.1
12.5°	1018.9	1018.0	1017.3	1016.4	1015.5	1013.9	1011.5	1009.0	1006.6	1004.1	1005.5
15°	998.9	998.1	997.3	996.5	995.7	994.0	991.4	988.8	986.2	983.6	985.2
17.5°	975.6	974.6	973.5	972.5	971.5	969.7	967.1	964.4	961.8	959.2	960.4
20°	958.3	957.1	956.0	954.8	953.6	951.6	949.0	946.4	943.8	941.2	942.0
22.5°	938.8	937.6	936.4	935.2	934.0	932.1	929.5	927.0	924.4	921.7	922.4
25°	907.0	905.8	904.6	903.4	902.2	900.3	897.6	895.0	892.4	889.8	890.0
27.5°	872.9	871.7	870.6	869.4	868.2	866.3	863.4	860.7	857.8	855.0	855.1
30°	848.3	847.3	846.4	845.3	844.3	842.4	839.6	836.8	834.1	831.2	831.2
32.5°	823.8	822.5	821.1	819.8	818.6	816.8	814.6	812.4	810.3	808.1	807.0
35°	784.4	783.2	782.0	780.8	779.5	777.7	775.0	772.4	769.8	767.2	766.0
37.5°	743.9	742.4	740.9	739.3	737.9	735.8	733.1	730.5	727.8	725.2	723.8
40°	715.8	714.6	713.4	712.2	711.0	709.0	706.2	703.4	700.6	697.8	696.2
42.5°	687.7	686.3	684.9	683.6	682.3	680.2	677.3	674.5	671.8	668.9	667.4
45°	642.8	642.0	641.2	640.4	639.6	637.9	635.2	632.7	630.1	627.5	625.1
47.5°	598.2	597.1	595.9	594.8	593.6	591.8	589.4	586.9	584.4	582.0	579.6
50°	568.0	567.0	565.9	565.0	564.0	562.1	559.6	557.0	554.3	551.7	549.6
52.5°	536.2	535.5	534.9	534.2	533.5	531.8	529.0	526.2	523.5	520.7	518.8
55°	487.8	487.5	487.3	487.2	486.9	485.5	482.9	480.4	477.7	475.1	472.9
57.5°	441.6	440.9	440.2	439.5	438.9	437.5	435.4	433.3	431.2	429.1	427.1
60°	408.4	408.2	408.0	407.8	407.6	406.3	403.9	401.5	399.1	396.7	394.9
62.5°	378.8	378.3	377.8	377.3	376.8	375.3	372.9	370.5	368.1	365.7	363.9
65°	332.7	331.7	330.6	329.7	328.6	327.2	325.1	323.1	321.2	319.2	317.5
67.5°	283.8	282.9	282.1	281.1	280.3	279.1	277.6	276.0	274.5	273.0	271.6
70°	254.3	253.0	251.8	250.6	249.4	248.2	247.0	245.8	244.6	243.4	242.0
72.5°	223.3	222.3	221.4	220.6	219.7	218.6	217.2	215.9	214.5	213.1	211.9
75°	175.8	175.0	174.2	173.4	172.6	171.9	171.3	170.7	170.0	169.5	168.5
77.5°	133.8	133.4	132.9	132.5	132.0	131.5	130.7	130.0	129.3	128.5	127.9
80°	106.4	105.8	105.2	104.6	104.0	103.5	103.1	102.7	102.3	101.9	101.7
82.5°	79.7	79.6	79.5	79.3	79.2	79.1	79.0	79.0	78.9	78.8	78.4
85°	46.8	46.5	46.1	45.7	45.3	45.1	45.1	45.1	45.1	45.1	44.7
87.5°	19.0	19.1	19.2	19.3	19.4	19.7	20.3	20.9	21.5	22.1	22.1
90°	1.3	4.2	7.1	10.0	12.8	16.2	19.9	23.7	27.4	31.2	32.3
92.5°	31.4	33.4	35.3	37.3	39.3	41.3	43.5	45.5	47.7	49.9	50.8
95°	76.6	78.6	80.7	82.7	84.7	86.9	89.1	91.4	93.8	96.1	97.2
97.5°	136.0	137.6	139.1	140.6	142.1	143.6	145.3	147.0	148.7	150.3	151.7
100°	176.6	178.3	180.0	181.8	183.5	185.1	186.5	188.0	189.4	190.9	191.7
102.5°	223.3	224.4	225.4	226.4	227.5	228.9	230.8	232.7	234.6	236.5	237.5
105°	292.1	292.7	293.3	293.9	294.5	296.0	298.6	301.2	303.8	306.4	306.4
107.5°	372.1	372.5	372.8	373.2	373.5	374.2	375.2	376.3	377.3	378.3	379.3
110°	422.0	422.6	423.1	423.7	424.3	424.8	425.4	426.0	426.5	427.1	428.3



TEST NUMBER: P332179-935

CATALOG NUMBER: S123DIW-S775D1535U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	473.9	474.2	474.6	474.9	475.3	475.5	475.6	475.7	475.9	476.0	477.3
115°	551.8	552.7	553.5	554.4	555.3	555.4	554.8	554.2	553.7	553.1	553.4
117.5°	630.3	630.8	631.4	632.0	632.5	632.4	631.7	630.9	630.2	629.5	629.4
120°	679.1	680.8	682.5	684.2	686.0	686.1	684.7	683.2	681.7	680.4	680.0
122.5°	730.0	731.2	732.5	733.7	735.0	735.3	734.5	733.7	733.1	732.3	731.5
125°	807.5	808.4	809.3	810.2	811.1	811.1	810.6	810.0	809.4	808.9	807.7
127.5°	879.3	881.1	883.0	884.8	886.7	887.3	886.6	886.0	885.4	884.7	883.0
130°	927.0	929.4	931.6	933.9	936.3	936.9	936.1	935.2	934.4	933.5	932.4
132.5°	974.8	977.1	979.4	981.7	984.0	984.9	984.2	983.6	982.9	982.3	980.9
135°	1047.8	1049.5	1051.2	1052.9	1054.7	1055.4	1055.2	1054.8	1054.6	1054.3	1053.1
137.5°	1115.3	1116.7	1118.2	1119.6	1121.0	1122.1	1122.9	1123.6	1124.4	1125.2	1123.9
140°	1162.0	1163.5	1164.9	1166.3	1167.8	1168.6	1169.0	1169.2	1169.5	1169.8	1169.5
142.5°	1204.6	1206.0	1207.5	1208.9	1210.4	1211.3	1211.9	1212.4	1212.9	1213.4	1213.1
145°	1271.1	1271.7	1272.2	1272.8	1273.4	1274.1	1275.0	1275.8	1276.7	1277.6	1277.3
147.5°	1329.2	1330.2	1331.3	1332.4	1333.4	1334.3	1335.2	1335.9	1336.7	1337.6	1337.6
150°	1369.8	1370.4	1370.9	1371.5	1372.1	1372.6	1373.2	1373.8	1374.3	1374.9	1374.9
152.5°	1403.0	1403.8	1404.6	1405.4	1406.2	1406.8	1407.1	1407.5	1407.8	1408.2	1408.7
155°	1455.4	1455.4	1455.4	1455.4	1455.4	1455.6	1455.9	1456.1	1456.5	1456.7	1457.9
157.5°	1500.1	1499.8	1499.4	1499.1	1498.7	1498.7	1498.9	1499.1	1499.3	1499.6	1500.8
160°	1528.2	1527.6	1527.0	1526.4	1525.9	1525.5	1525.5	1525.5	1525.5	1525.5	1527.0
162.5°	1553.1	1552.3	1551.4	1550.7	1549.9	1549.5	1549.8	1550.1	1550.2	1550.5	1552.0
165°	1585.3	1584.4	1583.6	1582.7	1581.8	1581.4	1581.4	1581.4	1581.4	1581.4	1583.1
167.5°	1611.0	1609.8	1608.7	1607.5	1606.4	1605.9	1606.1	1606.4	1606.6	1606.8	1608.6
170°	1625.5	1624.4	1623.2	1622.0	1620.9	1620.3	1620.3	1620.3	1620.3	1620.3	1622.4
172.5°	1636.9	1635.8	1634.6	1633.5	1632.4	1631.8	1631.8	1631.8	1631.8	1631.8	1633.6
175°	1648.9	1647.8	1646.6	1645.5	1644.3	1643.7	1643.7	1643.7	1643.7	1643.7	1645.5
177.5°	1653.8	1652.9	1652.0	1651.1	1650.1	1649.7	1649.7	1649.7	1649.7	1649.7	1651.1
180°	1652.8	1652.8	1652.8	1652.8	1652.8	1652.8	1652.8	1652.8	1652.8	1652.8	1652.8



TEST NUMBER: P332179-935

CATALOG NUMBER: S123DIW-S775D1535U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5
2.5°	1044.5	1046.1	1047.7	1048.4	1048.3	1048.1	1047.9	1047.8
5°	1039.0	1040.9	1043.0	1043.8	1043.4	1043.0	1042.6	1042.2
7.5°	1027.9	1029.8	1031.6	1032.3	1032.1	1031.8	1031.6	1031.4
10°	1017.9	1019.6	1021.4	1022.2	1021.7	1021.3	1021.0	1020.5
12.5°	1006.8	1008.1	1009.4	1010.0	1009.7	1009.4	1009.3	1009.0
15°	986.8	988.3	990.0	990.2	988.9	987.7	986.6	985.4
17.5°	961.5	962.6	963.7	964.1	963.6	963.2	962.8	962.3
20°	942.8	943.6	944.4	944.5	943.9	943.3	942.7	942.1
22.5°	923.0	923.7	924.3	924.2	923.5	922.7	922.0	921.2
25°	890.2	890.4	890.6	890.4	889.8	889.2	888.6	888.0
27.5°	855.3	855.5	855.7	855.3	854.6	853.9	853.1	852.3
30°	831.2	831.2	831.2	830.5	829.1	827.7	826.3	824.9
32.5°	805.9	804.8	803.7	802.7	801.9	801.2	800.4	799.7
35°	764.8	763.6	762.4	761.3	760.3	759.3	758.3	757.2
37.5°	722.3	720.8	719.5	718.4	717.7	717.1	716.4	715.8
40°	694.6	693.0	691.4	690.2	689.4	688.5	687.8	687.0
42.5°	665.7	664.1	662.5	661.3	660.6	659.7	658.9	658.1
45°	622.7	620.3	617.9	616.1	615.2	614.2	613.1	612.2
47.5°	577.3	575.0	572.6	570.9	570.1	569.2	568.3	567.4
50°	547.3	545.1	542.9	541.2	540.0	538.8	537.6	536.4
52.5°	516.9	515.1	513.2	511.7	510.5	509.3	508.1	506.9
55°	470.7	468.5	466.3	464.7	463.6	462.7	461.7	460.7
57.5°	425.2	423.3	421.3	419.7	418.5	417.4	416.2	415.1
60°	393.0	391.2	389.4	388.1	387.0	386.1	385.0	384.1
62.5°	362.1	360.2	358.4	357.2	356.5	355.9	355.2	354.5
65°	315.9	314.4	312.7	311.6	311.0	310.4	309.8	309.2
67.5°	270.2	268.8	267.3	266.2	265.4	264.6	263.7	262.9
70°	240.6	239.2	237.8	236.6	235.6	234.6	233.6	232.6
72.5°	210.6	209.4	208.2	207.2	206.7	206.2	205.7	205.2
75°	167.5	166.5	165.5	164.7	164.1	163.5	162.9	162.3
77.5°	127.2	126.5	125.8	125.5	125.5	125.5	125.5	125.5
80°	101.5	101.3	101.1	101.0	101.0	101.0	101.0	101.0
82.5°	78.1	77.7	77.3	77.1	77.0	76.8	76.6	76.5
85°	44.3	43.9	43.5	43.3	43.3	43.3	43.3	43.3
87.5°	22.2	22.3	22.4	22.5	22.6	22.7	22.8	22.9
90°	33.5	34.6	35.8	36.7	37.2	37.8	38.4	38.9
92.5°	51.7	52.6	53.6	53.8	53.5	53.1	52.8	52.4
95°	98.4	99.5	100.7	101.3	101.3	101.3	101.3	101.3
97.5°	153.0	154.3	155.7	156.3	156.2	156.0	155.9	155.8
100°	192.6	193.5	194.3	195.0	195.6	196.2	196.7	197.3
102.5°	238.3	239.2	240.0	240.4	240.3	240.1	240.0	240.0
105°	306.4	306.4	306.4	306.7	307.3	307.9	308.4	309.0
107.5°	380.2	381.1	382.0	382.3	381.9	381.6	381.3	380.9
110°	429.5	430.6	431.8	432.0	431.4	430.9	430.3	429.7



TEST NUMBER: P332179-935

CATALOG NUMBER: S123DIW-S775D1535U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	478.7	480.1	481.5	482.2	482.1	481.9	481.8	481.6
115°	553.7	554.0	554.2	554.2	554.0	553.7	553.4	553.1
117.5°	629.3	629.3	629.2	628.8	627.9	627.2	626.4	625.5
120°	679.8	679.5	679.2	678.7	678.2	677.6	677.0	676.4
122.5°	730.7	730.0	729.3	728.5	727.7	726.9	726.1	725.2
125°	806.6	805.4	804.3	803.1	801.9	800.8	799.6	798.5
127.5°	881.5	879.9	878.2	876.8	875.5	874.1	872.8	871.4
130°	931.2	930.1	928.9	927.3	925.3	923.3	921.3	919.2
132.5°	979.6	978.2	976.8	975.3	973.8	972.2	970.6	969.1
135°	1052.0	1050.8	1049.6	1048.8	1048.2	1047.6	1047.1	1046.5
137.5°	1122.7	1121.5	1120.3	1119.1	1118.0	1117.0	1115.9	1114.7
140°	1169.2	1169.0	1168.6	1167.5	1165.4	1163.5	1161.4	1159.4
142.5°	1212.9	1212.5	1212.3	1211.3	1209.8	1208.2	1206.7	1205.1
145°	1276.9	1276.7	1276.4	1275.7	1274.5	1273.4	1272.2	1271.1
147.5°	1337.6	1337.6	1337.6	1336.7	1335.0	1333.3	1331.5	1329.7
150°	1374.9	1374.9	1374.9	1374.1	1372.3	1370.6	1368.9	1367.2
152.5°	1409.1	1409.5	1410.1	1409.5	1408.0	1406.5	1405.0	1403.5
155°	1459.1	1460.2	1461.4	1460.9	1458.9	1456.9	1454.8	1452.9
157.5°	1502.0	1503.2	1504.4	1504.3	1502.6	1501.0	1499.3	1497.8
160°	1528.4	1529.9	1531.3	1531.5	1530.3	1529.1	1528.0	1526.8
162.5°	1553.3	1554.8	1556.3	1556.1	1554.2	1552.4	1550.5	1548.7
165°	1584.8	1586.6	1588.3	1588.2	1586.1	1584.2	1582.1	1580.1
167.5°	1610.4	1612.2	1613.9	1613.9	1612.2	1610.4	1608.6	1606.8
170°	1624.4	1626.4	1628.4	1628.4	1626.4	1624.4	1622.4	1620.3
172.5°	1635.3	1637.1	1638.9	1638.8	1636.8	1634.8	1632.7	1630.7
175°	1647.2	1648.9	1650.6	1650.5	1648.5	1646.4	1644.4	1642.4
177.5°	1652.4	1653.8	1655.2	1655.1	1653.5	1651.8	1650.3	1648.6
180°	1652.8	1652.8	1652.8	1652.8	1652.8	1652.8	1652.8	1652.8

(END OF REPORT)