

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332459-935

Luminaire Tested: **S123RDIW-S1000D1030U935-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332459-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1030 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6487.9 lumens
Efficiency: N/A
Efficacy: 106.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

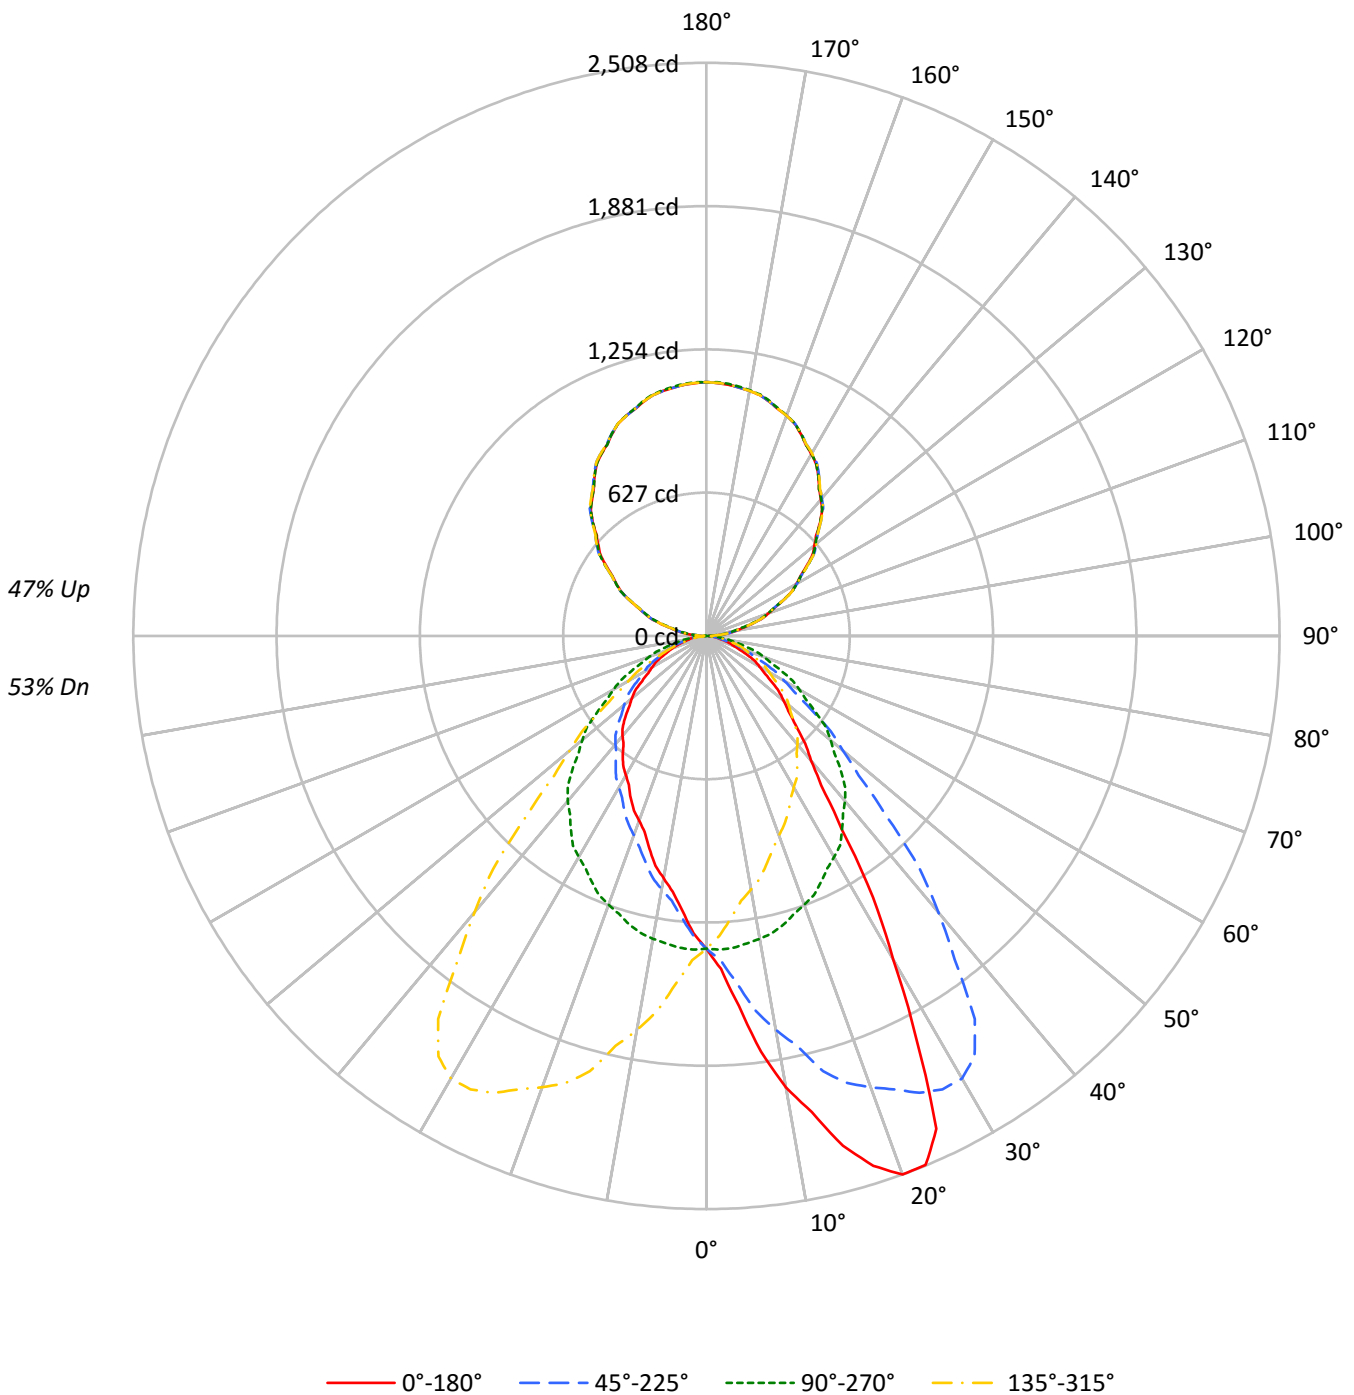



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	58	58	58	53
1	99	95	91	88	92	88	85	82	75	73	71	63	62	60	53	52	51	46
2	91	84	78	73	84	78	73	68	67	63	60	56	54	51	47	45	44	39
3	83	74	67	61	77	69	63	58	59	55	51	50	47	44	42	40	38	34
4	76	66	58	52	70	61	55	50	53	48	44	45	42	38	38	35	33	30
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	29	26
6	65	53	45	40	60	50	43	38	43	38	34	37	33	30	32	28	26	23
7	60	48	40	35	56	45	38	33	39	34	30	34	30	27	29	26	23	21
8	56	44	36	31	52	41	34	30	36	31	27	31	27	24	27	23	21	19
9	52	40	33	28	48	38	31	27	33	28	24	29	25	22	25	21	19	17
10	49	37	30	25	45	35	28	24	31	25	22	27	23	20	23	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	14733	14733	14733	14733
5°	17562	14795	13029	14795
10°	21928	14711	11770	14711
15°	25740	14561	10735	14561
20°	28726	14336	9852	14336
25°	28268	14099	9311	14099
30°	20319	13881	8754	13881
35°	13566	13596	8393	13596
40°	9996	13256	8019	13256
45°	8385	12657	7652	12657
50°	7398	11871	7142	11871
55°	6488	10975	6444	10975
60°	5778	10116	5903	10116
65°	5074	9192	5491	9192
70°	3984	8371	5017	8371
75°	3510	7311	4579	7311
80°	3050	6211	4506	6211
85°	2458	5002	4780	5002



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	134.6	2.1
10°-20°	420.5	6.5
20°-30°	660.6	10.2
30°-40°	689.3	10.6
40°-50°	589.9	9.1
50°-60°	449.6	6.9
60°-70°	288.2	4.4
70°-80°	138.6	2.1
80°-90°	40.0	0.6
90°-100°	72.4	1.1
100°-110°	216.5	3.3
110°-120°	368.3	5.7
120°-130°	484.4	7.5
130°-140°	544.4	8.4
140°-150°	535.2	8.2
150°-160°	450.5	6.9
160°-170°	299.9	4.6
170°-180°	105.0	1.6
0°-30°	1215.8	18.7
0°-40°	1905.0	29.4
0°-60°	2944.5	45.4
0°-90°	3411.3	52.6
90°-120°	657.1	10.1
90°-150°	2221.1	34.2
90°-180°	3077.0	47.4
0°-180°	6487.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1369	1369	1369	1369	1369	
5°	1625	1369	1206	1369	1625	168
15°	2310	1307	963	1307	2310	655
25°	2380	1187	784	1187	2380	1023
35°	1032	1035	639	1035	1032	677
45°	551	832	503	832	551	433
55°	346	585	343	585	346	313
65°	199	361	216	361	199	196
75°	84	176	110	176	84	90
85°	20	40	39	40	20	24
90°	26	1	26	1	26	13
95°	68	52	68	52	68	70
105°	208	196	208	196	208	220
115°	372	371	372	371	372	368
125°	536	543	536	543	536	480
135°	703	704	703	704	703	541
145°	854	854	854	854	854	533
155°	976	978	976	978	976	449
165°	1062	1065	1062	1065	1062	299
175°	1104	1108	1104	1108	1104	105
180°	1110	1110	1110	1110	1110	



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1457.8	1459.7	1453.6	1452.7	1445.6	1443.7	1443.7	1433.9	1427.8	1419.9	1415.1
5°	1625.4	1634.8	1630.0	1619.5	1602.0	1597.8	1586.7	1569.2	1549.2	1524.6	1512.9
7.5°	1834.7	1847.4	1842.5	1826.3	1807.8	1792.9	1761.6	1732.4	1691.5	1655.6	1625.0
10°	2006.2	1992.8	1982.2	1966.4	1949.4	1921.8	1889.0	1843.9	1791.8	1750.8	1705.1
12.5°	2134.7	2132.4	2119.1	2102.8	2078.8	2052.6	2012.3	1957.4	1896.8	1837.5	1785.2
15°	2309.8	2313.2	2304.5	2287.5	2253.5	2207.3	2146.3	2123.5	2036.7	1972.3	1907.8
17.5°	2430.9	2430.3	2429.1	2405.5	2370.8	2337.9	2281.4	2221.3	2142.8	2051.9	1965.1
20°	2507.8	2502.0	2503.1	2476.8	2451.0	2412.9	2357.8	2270.5	2206.1	2101.2	2011.6
22.5°	2505.9	2504.7	2509.2	2500.2	2481.5	2452.3	2408.9	2335.2	2252.9	2147.1	2046.3
25°	2380.1	2375.4	2403.0	2410.5	2440.4	2445.7	2432.8	2392.4	2314.5	2205.5	2080.7
27.5°	1991.9	1989.3	2040.5	2104.5	2185.6	2248.6	2309.5	2339.0	2314.5	2236.4	2111.3
30°	1634.8	1689.9	1715.6	1808.2	1911.3	2034.4	2142.2	2244.7	2269.9	2235.9	2133.4
32.5°	1357.3	1405.3	1426.8	1506.3	1602.4	1746.5	1908.3	2053.5	2156.0	2182.0	2120.3
35°	1032.4	1033.0	1082.2	1117.4	1206.4	1354.7	1511.7	1706.2	1899.6	2046.1	2061.3
37.5°	823.8	826.7	856.5	891.6	958.4	1036.7	1175.0	1336.8	1560.1	1785.0	1916.8
40°	711.4	716.6	738.9	773.4	821.5	880.6	988.5	1140.8	1327.1	1577.4	1781.8
42.5°	639.1	647.7	659.2	685.8	715.6	770.9	858.2	975.9	1145.3	1381.9	1617.8
45°	550.8	555.4	564.3	576.5	603.5	642.2	700.8	779.9	920.5	1110.9	1347.0
47.5°	485.9	483.4	492.7	502.7	520.6	546.9	586.2	650.7	751.1	903.9	1104.1
50°	441.8	441.2	447.6	455.3	472.3	491.6	523.8	572.5	652.1	778.7	962.1
52.5°	400.5	402.8	407.3	416.8	429.1	444.7	473.6	508.7	577.1	686.4	839.3
55°	345.7	347.5	353.9	359.2	368.0	383.7	401.9	431.3	478.1	554.3	680.3
57.5°	299.3	298.5	304.7	306.0	315.9	328.8	342.9	365.7	399.6	456.2	541.1
60°	268.4	266.6	271.9	276.0	281.3	291.8	303.5	325.8	352.8	394.3	467.0
62.5°	240.2	239.4	243.3	247.4	251.8	261.3	271.2	288.3	309.6	344.7	402.3
65°	199.2	201.0	202.8	204.5	206.8	212.7	222.1	233.8	248.4	273.0	314.6
67.5°	156.5	158.3	158.9	162.6	167.6	171.3	176.9	187.4	197.6	218.3	242.0
70°	126.6	126.0	126.6	128.3	134.7	141.2	148.9	156.4	162.9	177.5	197.4
72.5°	108.7	107.7	109.3	109.6	112.7	114.5	119.3	126.5	134.7	144.7	159.0
75°	84.4	84.4	84.4	84.4	86.7	87.9	89.6	91.4	94.4	99.0	109.6
77.5°	62.3	62.4	63.3	63.9	64.3	65.0	66.1	67.8	68.9	71.4	75.9
80°	49.2	49.8	49.2	49.8	49.8	51.0	51.6	53.3	53.9	56.8	58.6
82.5°	37.0	36.7	37.0	37.6	37.6	38.8	38.9	40.2	40.3	41.8	43.6
85°	19.9	18.8	19.9	19.4	20.5	19.4	19.9	21.1	21.1	21.7	24.0
87.5°	9.9	10.8	9.7	10.2	10.1	10.4	10.2	10.2	10.9	10.2	10.2
90°	26.2	25.7	25.4	25.0	24.6	24.0	23.2	22.5	21.7	20.9	18.4
92.5°	35.2	35.5	35.7	35.9	36.2	36.0	35.4	34.7	34.1	33.5	32.0
95°	68.0	68.0	68.0	68.0	68.0	67.7	66.9	66.1	65.3	64.6	63.0
97.5°	104.7	104.8	104.9	104.9	105.0	104.6	103.7	102.8	101.9	101.0	99.9
100°	132.6	132.2	131.8	131.4	131.0	130.5	130.0	129.4	128.8	128.2	127.3
102.5°	161.2	161.3	161.4	161.4	161.5	161.3	160.7	160.1	159.5	158.9	157.6
105°	207.6	207.2	206.8	206.5	206.0	205.9	205.9	205.9	205.9	205.9	204.1
107.5°	255.9	256.1	256.4	256.7	256.8	256.7	256.1	255.5	254.8	254.2	253.5
110°	288.7	289.1	289.5	289.9	290.2	290.1	289.3	288.5	287.7	287.0	286.6



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	323.6	323.7	323.7	323.8	323.9	323.5	322.5	321.7	320.7	319.8	319.7
115°	371.6	371.8	372.0	372.2	372.4	372.4	372.2	372.0	371.8	371.6	372.0
117.5°	420.3	420.8	421.4	421.9	422.4	422.8	422.8	422.8	422.8	422.9	423.4
120°	454.4	454.9	455.2	455.6	456.0	456.3	456.5	456.7	456.8	457.1	458.1
122.5°	487.2	487.8	488.4	488.9	489.4	490.0	490.4	490.9	491.5	492.0	492.5
125°	536.5	537.3	538.0	538.8	539.6	540.4	541.1	541.9	542.7	543.5	543.8
127.5°	585.5	586.3	587.3	588.1	589.0	590.0	591.2	592.2	593.3	594.3	594.8
130°	617.6	619.0	620.3	621.6	623.0	624.1	624.8	625.6	626.4	627.2	627.8
132.5°	651.1	652.1	653.2	654.2	655.3	656.3	657.2	658.1	659.0	660.0	660.4
135°	703.1	703.4	703.9	704.2	704.6	705.2	705.9	706.7	707.5	708.3	708.5
137.5°	749.0	749.7	750.4	751.1	751.9	752.7	753.5	754.3	755.1	756.0	755.4
140°	778.9	780.3	781.7	783.0	784.4	785.1	785.3	785.6	785.7	785.9	785.7
142.5°	809.7	810.7	811.8	812.8	813.8	814.5	814.7	814.9	815.0	815.3	814.9
145°	853.9	854.7	855.5	856.3	857.0	857.6	857.7	858.0	858.2	858.3	857.7
147.5°	893.4	894.6	895.7	896.9	898.0	898.6	898.6	898.6	898.6	898.6	898.1
150°	918.5	919.7	920.8	922.0	923.2	923.8	923.8	923.8	923.8	923.8	923.3
152.5°	943.0	943.9	944.9	946.0	947.0	947.4	947.0	946.7	946.4	946.1	945.9
155°	976.1	977.5	978.8	980.2	981.5	981.8	981.0	980.2	979.5	978.7	978.5
157.5°	1006.3	1007.4	1008.5	1009.5	1010.6	1010.7	1010.0	1009.1	1008.3	1007.5	1007.4
160°	1025.8	1026.6	1027.3	1028.1	1028.9	1028.8	1027.9	1026.9	1025.9	1024.9	1024.9
162.5°	1040.4	1041.7	1042.9	1044.2	1045.4	1045.6	1044.6	1043.6	1042.7	1041.7	1041.6
165°	1061.6	1062.9	1064.3	1065.7	1067.0	1067.1	1065.9	1064.8	1063.6	1062.5	1062.5
167.5°	1079.5	1080.7	1081.9	1083.1	1084.3	1084.3	1083.1	1081.9	1080.7	1079.5	1079.4
170°	1088.6	1089.9	1091.3	1092.7	1094.1	1094.1	1092.7	1091.3	1089.9	1088.6	1088.6
172.5°	1095.6	1096.9	1098.3	1099.7	1101.0	1101.1	1099.9	1098.7	1097.5	1096.3	1096.3
175°	1103.5	1104.8	1106.1	1107.5	1108.9	1109.0	1107.8	1106.6	1105.5	1104.3	1104.3
177.5°	1107.7	1108.7	1109.8	1110.9	1112.0	1112.1	1111.1	1110.2	1109.2	1108.4	1108.4
180°	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1413.2	1411.9	1405.3	1397.8	1387.9	1381.4	1376.2	1373.5	1365.0	1354.7	1347.6
5°	1500.6	1483.0	1464.3	1441.4	1420.3	1398.6	1385.2	1369.3	1350.0	1328.4	1313.1
7.5°	1594.1	1559.6	1522.5	1484.2	1446.3	1412.4	1382.3	1356.7	1325.9	1294.8	1273.0
10°	1665.9	1615.4	1563.3	1509.9	1461.3	1415.7	1380.4	1345.9	1309.0	1273.2	1246.3
12.5°	1731.0	1664.7	1604.6	1539.0	1476.8	1422.2	1371.6	1330.9	1286.5	1248.4	1217.7
15°	1813.4	1745.5	1672.8	1573.2	1490.6	1421.5	1359.9	1306.7	1252.8	1205.8	1176.0
17.5°	1890.6	1788.3	1690.7	1607.6	1500.2	1413.8	1338.8	1275.0	1215.8	1166.1	1129.4
20°	1922.4	1823.4	1717.4	1611.4	1505.9	1409.2	1321.9	1251.5	1190.1	1133.8	1099.8
22.5°	1941.6	1829.5	1717.9	1603.9	1491.8	1391.4	1305.0	1227.7	1161.0	1107.5	1065.6
25°	1964.0	1830.5	1707.4	1594.9	1480.7	1371.7	1269.1	1187.1	1115.1	1058.2	1013.7
27.5°	1978.8	1821.7	1676.3	1551.2	1435.3	1326.8	1232.8	1145.8	1072.7	1012.6	964.8
30°	1981.7	1814.6	1652.3	1517.0	1399.2	1299.6	1200.0	1116.8	1039.5	975.6	931.1
32.5°	1985.4	1797.3	1620.0	1476.2	1355.6	1257.0	1166.7	1087.3	1008.1	945.1	899.7
35°	1970.0	1787.7	1570.9	1405.7	1285.0	1189.5	1108.0	1034.7	956.8	895.9	849.6
37.5°	1903.3	1749.6	1520.0	1326.2	1200.0	1111.6	1045.2	981.4	909.8	844.1	800.5
40°	1836.3	1712.1	1480.7	1277.9	1146.1	1055.2	995.5	943.4	874.3	812.7	765.9
42.5°	1736.5	1661.0	1443.2	1227.3	1085.1	997.6	947.2	898.4	837.7	775.2	731.2
45°	1553.3	1563.3	1366.4	1146.7	1000.7	912.9	865.4	831.5	777.6	726.0	680.9
47.5°	1323.6	1416.8	1276.3	1060.8	911.8	829.3	787.8	758.2	721.9	671.2	630.1
50°	1173.6	1306.7	1204.1	1003.2	856.1	774.0	733.0	708.9	677.3	637.5	598.2
52.5°	1035.4	1178.2	1116.9	938.9	795.6	720.6	680.5	660.7	635.6	598.1	562.6
55°	844.3	989.0	975.0	842.0	704.9	637.5	607.0	584.8	567.7	539.7	511.5
57.5°	682.9	820.2	827.4	734.2	625.0	558.4	532.2	515.4	504.3	483.0	457.0
60°	581.3	707.2	731.8	661.5	567.7	509.2	483.4	469.9	461.2	444.1	424.2
62.5°	496.9	604.1	632.0	581.3	512.9	458.1	437.9	424.9	419.0	404.3	386.8
65°	380.3	469.3	496.3	468.1	432.4	388.5	372.0	360.9	355.7	347.5	334.6
67.5°	285.9	350.9	380.4	360.6	347.7	319.9	309.5	303.5	298.9	293.2	282.4
70°	229.7	277.8	308.2	302.9	292.4	277.8	270.1	266.0	261.3	256.7	247.3
72.5°	184.7	217.7	246.3	249.0	240.4	237.5	230.7	229.0	226.2	220.6	215.4
75°	122.4	145.3	165.2	172.9	176.3	179.3	176.3	175.8	175.2	170.5	167.6
77.5°	80.2	92.6	105.1	118.1	123.6	127.6	128.5	130.7	129.2	126.7	125.3
80°	61.6	64.5	73.3	84.4	93.2	96.7	99.0	100.2	99.6	99.0	96.7
82.5°	44.7	47.1	51.2	59.1	66.5	72.3	73.7	73.4	74.7	75.1	73.3
85°	24.0	24.6	25.7	26.9	31.1	37.5	39.3	40.5	41.6	41.6	38.1
87.5°	10.7	9.7	10.2	9.7	10.7	10.8	13.3	15.2	16.0	14.6	14.9
90°	15.9	13.3	10.8	8.6	6.7	4.7	2.8	0.9	2.8	4.7	6.7
92.5°	30.7	29.2	27.7	26.3	25.1	23.8	22.4	21.1	22.4	23.8	25.1
95°	61.5	59.9	58.4	56.9	55.5	54.2	52.8	51.5	52.8	54.2	55.5
97.5°	98.8	97.6	96.5	95.5	94.5	93.4	92.4	91.4	92.4	93.4	94.5
100°	126.3	125.4	124.3	123.3	122.1	121.0	119.8	118.6	119.8	121.0	122.1
102.5°	156.4	155.1	153.8	152.8	152.1	151.4	150.8	150.1	150.8	151.4	152.1
105°	202.3	200.6	198.9	197.9	197.4	197.1	196.7	196.3	196.7	197.1	197.4
107.5°	252.8	252.1	251.4	250.9	250.7	250.5	250.2	250.0	250.2	250.5	250.7
110°	286.2	285.9	285.4	285.1	284.6	284.3	283.9	283.5	283.9	284.3	284.6



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	319.6	319.5	319.4	319.3	319.1	318.8	318.7	318.4	318.7	318.8	319.1
115°	372.4	372.7	373.2	373.1	372.5	371.9	371.3	370.7	371.3	371.9	372.5
117.5°	423.9	424.4	424.9	425.0	424.6	424.2	423.8	423.4	423.8	424.2	424.6
120°	459.0	459.9	461.0	460.9	459.7	458.6	457.4	456.2	457.4	458.6	459.7
122.5°	493.0	493.5	494.0	493.8	492.9	492.1	491.3	490.4	491.3	492.1	492.9
125°	544.2	544.6	545.0	544.9	544.3	543.7	543.1	542.6	543.1	543.7	544.3
127.5°	595.2	595.6	596.1	595.6	594.4	593.2	591.9	590.7	591.9	593.2	594.4
130°	628.4	629.0	629.5	629.0	627.5	625.9	624.4	622.8	624.4	625.9	627.5
132.5°	660.8	661.2	661.7	661.2	659.6	658.0	656.4	654.9	656.4	658.0	659.6
135°	708.7	708.9	709.0	708.6	707.4	706.3	705.1	704.0	705.1	706.3	707.4
137.5°	754.9	754.4	753.9	753.2	752.2	751.2	750.3	749.3	750.3	751.2	752.2
140°	785.6	785.3	785.1	784.5	783.6	782.6	781.7	780.7	781.7	782.6	783.6
142.5°	814.5	814.2	813.8	813.2	812.2	811.2	810.3	809.3	810.3	811.2	812.2
145°	857.2	856.6	856.0	855.5	855.1	854.7	854.4	853.9	854.4	854.7	855.1
147.5°	897.6	897.0	896.5	895.9	895.2	894.4	893.7	893.0	893.7	894.4	895.2
150°	923.0	922.6	922.2	921.8	921.4	921.0	920.7	920.2	920.7	921.0	921.4
152.5°	945.6	945.4	945.1	944.8	944.3	943.7	943.1	942.6	943.1	943.7	944.3
155°	978.4	978.1	977.9	977.8	977.8	977.8	977.8	977.8	977.8	977.8	977.8
157.5°	1007.2	1007.0	1006.9	1006.9	1007.1	1007.4	1007.6	1007.9	1007.6	1007.4	1007.1
160°	1024.9	1024.9	1024.9	1025.1	1025.5	1025.9	1026.3	1026.7	1026.3	1025.9	1025.5
162.5°	1041.4	1041.2	1041.0	1041.3	1041.8	1042.3	1042.9	1043.4	1042.9	1042.3	1041.8
165°	1062.5	1062.5	1062.5	1062.7	1063.3	1063.9	1064.5	1065.1	1064.5	1063.9	1063.3
167.5°	1079.3	1079.1	1078.9	1079.3	1080.0	1080.8	1081.6	1082.4	1081.6	1080.8	1080.0
170°	1088.6	1088.6	1088.6	1089.0	1089.8	1090.5	1091.3	1092.1	1091.3	1090.5	1089.8
172.5°	1096.3	1096.3	1096.3	1096.7	1097.4	1098.2	1099.0	1099.8	1099.0	1098.2	1097.4
175°	1104.3	1104.3	1104.3	1104.7	1105.5	1106.3	1107.1	1107.8	1107.1	1106.3	1105.5
177.5°	1108.4	1108.4	1108.4	1108.6	1109.2	1109.9	1110.5	1111.1	1110.5	1109.9	1109.2
180°	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1345.3	1339.2	1335.0	1325.6	1319.6	1312.9	1306.4	1310.6	1310.2	1309.7	1309.7
5°	1300.2	1286.7	1274.5	1258.6	1248.6	1236.3	1226.9	1225.8	1228.1	1220.0	1215.2
7.5°	1255.4	1237.0	1219.6	1202.1	1183.6	1168.8	1159.6	1155.2	1149.3	1144.2	1138.9
10°	1224.0	1202.4	1185.3	1163.6	1143.8	1126.2	1115.1	1107.4	1103.3	1099.2	1091.6
12.5°	1191.7	1170.4	1148.8	1124.3	1105.4	1084.9	1076.6	1068.1	1060.2	1055.6	1045.2
15°	1144.4	1116.8	1094.0	1068.2	1047.1	1027.2	1015.5	998.4	996.1	990.2	979.7
17.5°	1096.9	1067.0	1035.4	1016.4	992.6	971.8	954.0	948.3	931.5	925.2	916.0
20°	1059.4	1031.8	1007.8	982.7	948.0	928.7	914.6	907.1	893.5	885.4	879.5
22.5°	1027.0	999.0	971.3	941.8	913.3	891.7	881.4	869.5	862.1	850.7	844.3
25°	980.9	950.4	917.0	885.4	864.9	848.4	832.1	821.5	811.0	805.6	793.9
27.5°	927.2	895.4	864.1	840.1	814.9	798.7	783.9	774.5	761.8	752.9	746.5
30°	897.7	860.1	833.2	811.5	779.3	764.1	752.9	741.2	731.8	722.5	716.0
32.5°	863.4	829.2	803.7	776.9	752.1	735.5	721.1	710.8	702.7	693.9	687.4
35°	809.8	781.1	754.7	727.7	709.6	692.6	675.6	666.8	659.2	651.0	645.1
37.5°	761.2	734.4	709.4	683.8	661.2	647.5	633.8	627.1	616.7	611.2	605.3
40°	731.2	704.9	678.0	653.3	629.9	619.3	607.0	597.1	587.7	583.6	577.1
42.5°	698.4	672.1	649.4	622.8	603.6	589.4	578.0	567.1	560.1	554.1	550.4
45°	649.8	626.4	604.1	577.7	559.6	547.3	534.3	524.4	518.0	513.8	507.4
47.5°	602.6	579.1	556.6	533.6	516.0	501.9	489.0	482.1	473.6	468.6	464.2
50°	568.3	547.3	523.2	502.1	484.6	470.5	459.9	451.2	443.6	437.1	434.2
52.5°	536.9	514.4	493.7	474.1	455.5	439.5	430.0	420.7	415.0	407.6	404.2
55°	485.2	463.5	445.9	426.5	408.4	394.9	383.2	375.0	369.1	360.9	356.3
57.5°	436.5	417.1	396.1	379.4	360.6	349.2	339.5	328.4	321.2	314.8	310.2
60°	403.7	381.4	363.3	347.5	331.1	316.4	307.6	298.9	291.2	284.7	280.7
62.5°	369.5	350.1	332.8	315.6	300.6	287.8	277.6	270.3	263.6	259.4	255.4
65°	317.0	301.8	284.2	270.1	256.1	246.7	238.5	232.0	227.3	224.4	220.9
67.5°	268.7	253.9	238.6	224.8	215.4	208.3	202.9	197.3	195.0	191.2	188.9
70°	237.3	222.1	208.6	198.0	188.6	183.4	179.9	175.8	173.4	168.8	166.4
72.5°	203.1	192.1	182.4	173.7	166.2	161.4	156.9	151.9	148.1	142.9	140.6
75°	160.0	150.0	142.4	136.6	131.8	125.4	118.9	113.7	111.9	110.1	109.6
77.5°	118.5	112.2	106.7	101.7	95.8	91.2	89.8	88.6	88.3	87.3	87.3
80°	93.2	87.3	83.2	77.3	73.8	73.8	73.8	72.7	73.3	73.3	73.3
82.5°	69.2	63.9	61.6	59.5	58.8	59.3	59.3	59.5	59.2	60.1	59.7
85°	35.7	36.3	37.5	36.9	37.5	37.5	38.7	38.1	38.7	37.5	38.7
87.5°	14.8	16.7	17.7	18.7	19.6	19.6	20.3	20.4	21.1	21.2	21.4
90°	8.6	10.8	13.3	15.9	18.4	20.9	21.7	22.5	23.2	24.0	24.6
92.5°	26.3	27.7	29.2	30.7	32.0	33.5	34.1	34.7	35.4	36.0	36.2
95°	56.9	58.4	59.9	61.5	63.0	64.6	65.3	66.1	66.9	67.7	68.0
97.5°	95.5	96.5	97.6	98.8	99.9	101.0	101.9	102.8	103.7	104.6	105.0
100°	123.3	124.3	125.4	126.3	127.3	128.2	128.8	129.4	130.0	130.5	131.0
102.5°	152.8	153.8	155.1	156.4	157.6	158.9	159.5	160.1	160.7	161.3	161.5
105°	197.9	198.9	200.6	202.3	204.1	205.9	205.9	205.9	205.9	205.9	206.0
107.5°	250.9	251.4	252.1	252.8	253.5	254.2	254.8	255.5	256.1	256.7	256.8
110°	285.1	285.4	285.9	286.2	286.6	287.0	287.7	288.5	289.3	290.1	290.2



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	319.3	319.4	319.5	319.6	319.7	319.8	320.7	321.7	322.5	323.5	323.9
115°	373.1	373.2	372.7	372.4	372.0	371.6	371.8	372.0	372.2	372.4	372.4
117.5°	425.0	424.9	424.4	423.9	423.4	422.9	422.8	422.8	422.8	422.8	422.4
120°	460.9	461.0	459.9	459.0	458.1	457.1	456.8	456.7	456.5	456.3	456.0
122.5°	493.8	494.0	493.5	493.0	492.5	492.0	491.5	490.9	490.4	490.0	489.4
125°	544.9	545.0	544.6	544.2	543.8	543.5	542.7	541.9	541.1	540.4	539.6
127.5°	595.6	596.1	595.6	595.2	594.8	594.3	593.3	592.2	591.2	590.0	589.0
130°	629.0	629.5	629.0	628.4	627.8	627.2	626.4	625.6	624.8	624.1	623.0
132.5°	661.2	661.7	661.2	660.8	660.4	660.0	659.0	658.1	657.2	656.3	655.3
135°	708.6	709.0	708.9	708.7	708.5	708.3	707.5	706.7	705.9	705.2	704.6
137.5°	753.2	753.9	754.4	754.9	755.4	756.0	755.1	754.3	753.5	752.7	751.9
140°	784.5	785.1	785.3	785.6	785.7	785.9	785.7	785.6	785.3	785.1	784.4
142.5°	813.2	813.8	814.2	814.5	814.9	815.3	815.0	814.9	814.7	814.5	813.8
145°	855.5	856.0	856.6	857.2	857.7	858.3	858.2	858.0	857.7	857.6	857.0
147.5°	895.9	896.5	897.0	897.6	898.1	898.6	898.6	898.6	898.6	898.6	898.0
150°	921.8	922.2	922.6	923.0	923.3	923.8	923.8	923.8	923.8	923.8	923.2
152.5°	944.8	945.1	945.4	945.6	945.9	946.1	946.4	946.7	947.0	947.4	947.0
155°	977.8	977.9	978.1	978.4	978.5	978.7	979.5	980.2	981.0	981.8	981.5
157.5°	1006.9	1006.9	1007.0	1007.2	1007.4	1007.5	1008.3	1009.1	1010.0	1010.7	1010.6
160°	1025.1	1024.9	1024.9	1024.9	1024.9	1024.9	1025.9	1026.9	1027.9	1028.8	1028.9
162.5°	1041.3	1041.0	1041.2	1041.4	1041.6	1041.7	1042.7	1043.6	1044.6	1045.6	1045.4
165°	1062.7	1062.5	1062.5	1062.5	1062.5	1062.5	1063.6	1064.8	1065.9	1067.1	1067.0
167.5°	1079.3	1078.9	1079.1	1079.3	1079.4	1079.5	1080.7	1081.9	1083.1	1084.3	1084.3
170°	1089.0	1088.6	1088.6	1088.6	1088.6	1088.6	1089.9	1091.3	1092.7	1094.1	1094.1
172.5°	1096.7	1096.3	1096.3	1096.3	1096.3	1096.3	1097.5	1098.7	1099.9	1101.1	1101.0
175°	1104.7	1104.3	1104.3	1104.3	1104.3	1104.3	1105.5	1106.6	1107.8	1109.0	1108.9
177.5°	1108.6	1108.4	1108.4	1108.4	1108.4	1108.4	1109.2	1110.2	1111.1	1112.1	1112.0
180°	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1304.1	1303.6	1304.1	1302.2	1304.1	1303.6	1304.1	1309.7	1309.7	1310.2	1310.6
5°	1213.5	1212.9	1211.2	1205.8	1211.2	1212.9	1213.5	1215.2	1220.0	1228.1	1225.8
7.5°	1134.4	1133.6	1128.4	1128.5	1128.4	1133.6	1134.4	1138.9	1144.2	1149.3	1155.2
10°	1087.5	1088.0	1081.1	1076.9	1081.1	1088.0	1087.5	1091.6	1099.2	1103.3	1107.4
12.5°	1042.1	1039.3	1033.7	1029.2	1033.7	1039.3	1042.1	1045.2	1055.6	1060.2	1068.1
15°	982.1	976.2	962.1	963.3	962.1	976.2	982.1	979.7	990.2	996.1	998.4
17.5°	911.4	907.1	906.8	898.6	906.8	907.1	911.4	916.0	925.2	931.5	948.3
20°	870.1	867.2	868.3	860.1	868.3	867.2	870.1	879.5	885.4	893.5	907.1
22.5°	837.8	834.8	829.9	827.3	829.9	834.8	837.8	844.3	850.7	862.1	869.5
25°	790.4	785.7	781.1	784.0	781.1	785.7	790.4	793.9	805.6	811.0	821.5
27.5°	743.1	739.6	734.9	734.3	734.9	739.6	743.1	746.5	752.9	761.8	774.5
30°	713.1	709.6	707.2	704.3	707.2	709.6	713.1	716.0	722.5	731.8	741.2
32.5°	682.6	681.9	677.7	677.1	677.7	681.9	682.6	687.4	693.9	702.7	710.8
35°	642.7	639.3	638.1	638.7	638.1	639.3	642.7	645.1	651.0	659.2	666.8
37.5°	604.9	600.2	598.1	596.0	598.1	600.2	604.9	605.3	611.2	616.7	627.1
40°	577.7	573.1	571.9	570.7	571.9	573.1	577.7	577.1	583.6	587.7	597.1
42.5°	547.3	545.4	544.7	542.6	544.7	545.4	547.3	550.4	554.1	560.1	567.1
45°	505.7	505.1	501.5	502.7	501.5	505.1	505.7	507.4	513.8	518.0	524.4
47.5°	461.8	459.3	456.8	458.4	456.8	459.3	461.8	464.2	468.6	473.6	482.1
50°	431.9	430.7	425.4	426.5	425.4	430.7	431.9	434.2	437.1	443.6	451.2
52.5°	401.8	397.4	395.4	394.7	395.4	397.4	401.8	404.2	407.6	415.0	420.7
55°	352.1	346.9	344.6	343.4	344.6	346.9	352.1	356.3	360.9	369.1	375.0
57.5°	303.4	302.0	300.1	301.4	300.1	302.0	303.4	310.2	314.8	321.2	328.4
60°	274.8	274.8	274.8	274.2	274.8	274.8	274.8	280.7	284.7	291.2	298.9
62.5°	252.8	251.3	250.9	251.8	250.9	251.3	252.8	255.4	259.4	263.6	270.3
65°	219.1	218.5	216.2	215.6	216.2	218.5	219.1	220.9	224.4	227.3	232.0
67.5°	187.4	185.3	184.6	183.7	184.6	185.3	187.4	188.9	191.2	195.0	197.3
70°	163.5	162.3	158.8	159.4	158.8	162.3	163.5	166.4	168.8	173.4	175.8
72.5°	137.7	136.6	135.8	135.0	135.8	136.6	137.7	140.6	142.9	148.1	151.9
75°	109.0	108.4	107.8	110.1	107.8	108.4	109.0	109.6	110.1	111.9	113.7
77.5°	87.3	87.3	87.6	86.7	87.6	87.3	87.3	87.3	87.3	88.3	88.6
80°	73.3	73.3	72.7	72.7	72.7	73.3	73.3	73.3	73.3	73.3	72.7
82.5°	58.7	59.2	59.5	58.6	59.5	59.2	58.7	59.7	60.1	59.2	59.5
85°	38.7	38.1	39.3	38.7	39.3	38.1	38.7	38.7	37.5	38.7	38.1
87.5°	22.4	21.5	21.5	22.1	21.5	21.5	22.4	21.4	21.2	21.1	20.4
90°	25.0	25.4	25.7	26.2	25.7	25.4	25.0	24.6	24.0	23.2	22.5
92.5°	35.9	35.7	35.5	35.2	35.5	35.7	35.9	36.2	36.0	35.4	34.7
95°	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	67.7	66.9	66.1
97.5°	104.9	104.9	104.8	104.7	104.8	104.9	104.9	105.0	104.6	103.7	102.8
100°	131.4	131.8	132.2	132.6	132.2	131.8	131.4	131.0	130.5	130.0	129.4
102.5°	161.4	161.4	161.3	161.2	161.3	161.4	161.4	161.5	161.3	160.7	160.1
105°	206.5	206.8	207.2	207.6	207.2	206.8	206.5	206.0	205.9	205.9	205.9
107.5°	256.7	256.4	256.1	255.9	256.1	256.4	256.7	256.8	256.7	256.1	255.5
110°	289.9	289.5	289.1	288.7	289.1	289.5	289.9	290.2	290.1	289.3	288.5



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	323.8	323.7	323.7	323.6	323.7	323.7	323.8	323.9	323.5	322.5	321.7
115°	372.2	372.0	371.8	371.6	371.8	372.0	372.2	372.4	372.4	372.2	372.0
117.5°	421.9	421.4	420.8	420.3	420.8	421.4	421.9	422.4	422.8	422.8	422.8
120°	455.6	455.2	454.9	454.4	454.9	455.2	455.6	456.0	456.3	456.5	456.7
122.5°	488.9	488.4	487.8	487.2	487.8	488.4	488.9	489.4	490.0	490.4	490.9
125°	538.8	538.0	537.3	536.5	537.3	538.0	538.8	539.6	540.4	541.1	541.9
127.5°	588.1	587.3	586.3	585.5	586.3	587.3	588.1	589.0	590.0	591.2	592.2
130°	621.6	620.3	619.0	617.6	619.0	620.3	621.6	623.0	624.1	624.8	625.6
132.5°	654.2	653.2	652.1	651.1	652.1	653.2	654.2	655.3	656.3	657.2	658.1
135°	704.2	703.9	703.4	703.1	703.4	703.9	704.2	704.6	705.2	705.9	706.7
137.5°	751.1	750.4	749.7	749.0	749.7	750.4	751.1	751.9	752.7	753.5	754.3
140°	783.0	781.7	780.3	778.9	780.3	781.7	783.0	784.4	785.1	785.3	785.6
142.5°	812.8	811.8	810.7	809.7	810.7	811.8	812.8	813.8	814.5	814.7	814.9
145°	856.3	855.5	854.7	853.9	854.7	855.5	856.3	857.0	857.6	857.7	858.0
147.5°	896.9	895.7	894.6	893.4	894.6	895.7	896.9	898.0	898.6	898.6	898.6
150°	922.0	920.8	919.7	918.5	919.7	920.8	922.0	923.2	923.8	923.8	923.8
152.5°	946.0	944.9	943.9	943.0	943.9	944.9	946.0	947.0	947.4	947.0	946.7
155°	980.2	978.8	977.5	976.1	977.5	978.8	980.2	981.5	981.8	981.0	980.2
157.5°	1009.5	1008.5	1007.4	1006.3	1007.4	1008.5	1009.5	1010.6	1010.7	1010.0	1009.1
160°	1028.1	1027.3	1026.6	1025.8	1026.6	1027.3	1028.1	1028.9	1028.8	1027.9	1026.9
162.5°	1044.2	1042.9	1041.7	1040.4	1041.7	1042.9	1044.2	1045.4	1045.6	1044.6	1043.6
165°	1065.7	1064.3	1062.9	1061.6	1062.9	1064.3	1065.7	1067.0	1067.1	1065.9	1064.8
167.5°	1083.1	1081.9	1080.7	1079.5	1080.7	1081.9	1083.1	1084.3	1084.3	1083.1	1081.9
170°	1092.7	1091.3	1089.9	1088.6	1089.9	1091.3	1092.7	1094.1	1094.1	1092.7	1091.3
172.5°	1099.7	1098.3	1096.9	1095.6	1096.9	1098.3	1099.7	1101.0	1101.1	1099.9	1098.7
175°	1107.5	1106.1	1104.8	1103.5	1104.8	1106.1	1107.5	1108.9	1109.0	1107.8	1106.6
177.5°	1110.9	1109.8	1108.7	1107.7	1108.7	1109.8	1110.9	1112.0	1112.1	1111.1	1110.2
180°	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1306.4	1312.9	1319.6	1325.6	1335.0	1339.2	1345.3	1347.6	1354.7	1365.0	1373.5
5°	1226.9	1236.3	1248.6	1258.6	1274.5	1286.7	1300.2	1313.1	1328.4	1350.0	1369.3
7.5°	1159.6	1168.8	1183.6	1202.1	1219.6	1237.0	1255.4	1273.0	1294.8	1325.9	1356.7
10°	1115.1	1126.2	1143.8	1163.6	1185.3	1202.4	1224.0	1246.3	1273.2	1309.0	1345.9
12.5°	1076.6	1084.9	1105.4	1124.3	1148.8	1170.4	1191.7	1217.7	1248.4	1286.5	1330.9
15°	1015.5	1027.2	1047.1	1068.2	1094.0	1116.8	1144.4	1176.0	1205.8	1252.8	1306.7
17.5°	954.0	971.8	992.6	1016.4	1035.4	1067.0	1096.9	1129.4	1166.1	1215.8	1275.0
20°	914.6	928.7	948.0	982.7	1007.8	1031.8	1059.4	1099.8	1133.8	1190.1	1251.5
22.5°	881.4	891.7	913.3	941.8	971.3	999.0	1027.0	1065.6	1107.5	1161.0	1227.7
25°	832.1	848.4	864.9	885.4	917.0	950.4	980.9	1013.7	1058.2	1115.1	1187.1
27.5°	783.9	798.7	814.9	840.1	864.1	895.4	927.2	964.8	1012.6	1072.7	1145.8
30°	752.9	764.1	779.3	811.5	833.2	860.1	897.7	931.1	975.6	1039.5	1116.8
32.5°	721.1	735.5	752.1	776.9	803.7	829.2	863.4	899.7	945.1	1008.1	1087.3
35°	675.6	692.6	709.6	727.7	754.7	781.1	809.8	849.6	895.9	956.8	1034.7
37.5°	633.8	647.5	661.2	683.8	709.4	734.4	761.2	800.5	844.1	909.8	981.4
40°	607.0	619.3	629.9	653.3	678.0	704.9	731.2	765.9	812.7	874.3	943.4
42.5°	578.0	589.4	603.6	622.8	649.4	672.1	698.4	731.2	775.2	837.7	898.4
45°	534.3	547.3	559.6	577.7	604.1	626.4	649.8	680.9	726.0	777.6	831.5
47.5°	489.0	501.9	516.0	533.6	556.6	579.1	602.6	630.1	671.2	721.9	758.2
50°	459.9	470.5	484.6	502.1	523.2	547.3	568.3	598.2	637.5	677.3	708.9
52.5°	430.0	439.5	455.5	474.1	493.7	514.4	536.9	562.6	598.1	635.6	660.7
55°	383.2	394.9	408.4	426.5	445.9	463.5	485.2	511.5	539.7	567.7	584.8
57.5°	339.5	349.2	360.6	379.4	396.1	417.1	436.5	457.0	483.0	504.3	515.4
60°	307.6	316.4	331.1	347.5	363.3	381.4	403.7	424.2	444.1	461.2	469.9
62.5°	277.6	287.8	300.6	315.6	332.8	350.1	369.5	386.8	404.3	419.0	424.9
65°	238.5	246.7	256.1	270.1	284.2	301.8	317.0	334.6	347.5	355.7	360.9
67.5°	202.9	208.3	215.4	224.8	238.6	253.9	268.7	282.4	293.2	298.9	303.5
70°	179.9	183.4	188.6	198.0	208.6	222.1	237.3	247.3	256.7	261.3	266.0
72.5°	156.9	161.4	166.2	173.7	182.4	192.1	203.1	215.4	220.6	226.2	229.0
75°	118.9	125.4	131.8	136.6	142.4	150.0	160.0	167.6	170.5	175.2	175.8
77.5°	89.8	91.2	95.8	101.7	106.7	112.2	118.5	125.3	126.7	129.2	130.7
80°	73.8	73.8	73.8	77.3	83.2	87.3	93.2	96.7	99.0	99.6	100.2
82.5°	59.3	59.3	58.8	59.5	61.6	63.9	69.2	73.3	75.1	74.7	73.4
85°	38.7	37.5	37.5	36.9	37.5	36.3	35.7	38.1	41.6	41.6	40.5
87.5°	20.3	19.6	19.6	18.7	17.7	16.7	14.8	14.9	14.6	16.0	15.2
90°	21.7	20.9	18.4	15.9	13.3	10.8	8.6	6.7	4.7	2.8	0.9
92.5°	34.1	33.5	32.0	30.7	29.2	27.7	26.3	25.1	23.8	22.4	21.1
95°	65.3	64.6	63.0	61.5	59.9	58.4	56.9	55.5	54.2	52.8	51.5
97.5°	101.9	101.0	99.9	98.8	97.6	96.5	95.5	94.5	93.4	92.4	91.4
100°	128.8	128.2	127.3	126.3	125.4	124.3	123.3	122.1	121.0	119.8	118.6
102.5°	159.5	158.9	157.6	156.4	155.1	153.8	152.8	152.1	151.4	150.8	150.1
105°	205.9	205.9	204.1	202.3	200.6	198.9	197.9	197.4	197.1	196.7	196.3
107.5°	254.8	254.2	253.5	252.8	252.1	251.4	250.9	250.7	250.5	250.2	250.0
110°	287.7	287.0	286.6	286.2	285.9	285.4	285.1	284.6	284.3	283.9	283.5



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	320.7	319.8	319.7	319.6	319.5	319.4	319.3	319.1	318.8	318.7	318.4
115°	371.8	371.6	372.0	372.4	372.7	373.2	373.1	372.5	371.9	371.3	370.7
117.5°	422.8	422.9	423.4	423.9	424.4	424.9	425.0	424.6	424.2	423.8	423.4
120°	456.8	457.1	458.1	459.0	459.9	461.0	460.9	459.7	458.6	457.4	456.2
122.5°	491.5	492.0	492.5	493.0	493.5	494.0	493.8	492.9	492.1	491.3	490.4
125°	542.7	543.5	543.8	544.2	544.6	545.0	544.9	544.3	543.7	543.1	542.6
127.5°	593.3	594.3	594.8	595.2	595.6	596.1	595.6	594.4	593.2	591.9	590.7
130°	626.4	627.2	627.8	628.4	629.0	629.5	629.0	627.5	625.9	624.4	622.8
132.5°	659.0	660.0	660.4	660.8	661.2	661.7	661.2	659.6	658.0	656.4	654.9
135°	707.5	708.3	708.5	708.7	708.9	709.0	708.6	707.4	706.3	705.1	704.0
137.5°	755.1	756.0	755.4	754.9	754.4	753.9	753.2	752.2	751.2	750.3	749.3
140°	785.7	785.9	785.7	785.6	785.3	785.1	784.5	783.6	782.6	781.7	780.7
142.5°	815.0	815.3	814.9	814.5	814.2	813.8	813.2	812.2	811.2	810.3	809.3
145°	858.2	858.3	857.7	857.2	856.6	856.0	855.5	855.1	854.7	854.4	853.9
147.5°	898.6	898.6	898.1	897.6	897.0	896.5	895.9	895.2	894.4	893.7	893.0
150°	923.8	923.8	923.3	923.0	922.6	922.2	921.8	921.4	921.0	920.7	920.2
152.5°	946.4	946.1	945.9	945.6	945.4	945.1	944.8	944.3	943.7	943.1	942.6
155°	979.5	978.7	978.5	978.4	978.1	977.9	977.8	977.8	977.8	977.8	977.8
157.5°	1008.3	1007.5	1007.4	1007.2	1007.0	1006.9	1006.9	1007.1	1007.4	1007.6	1007.9
160°	1025.9	1024.9	1024.9	1024.9	1024.9	1024.9	1025.1	1025.5	1025.9	1026.3	1026.7
162.5°	1042.7	1041.7	1041.6	1041.4	1041.2	1041.0	1041.3	1041.8	1042.3	1042.9	1043.4
165°	1063.6	1062.5	1062.5	1062.5	1062.5	1062.5	1062.7	1063.3	1063.9	1064.5	1065.1
167.5°	1080.7	1079.5	1079.4	1079.3	1079.1	1078.9	1079.3	1080.0	1080.8	1081.6	1082.4
170°	1089.9	1088.6	1088.6	1088.6	1088.6	1088.6	1089.0	1089.8	1090.5	1091.3	1092.1
172.5°	1097.5	1096.3	1096.3	1096.3	1096.3	1096.3	1096.7	1097.4	1098.2	1099.0	1099.8
175°	1105.5	1104.3	1104.3	1104.3	1104.3	1104.3	1104.7	1105.5	1106.3	1107.1	1107.8
177.5°	1109.2	1108.4	1108.4	1108.4	1108.4	1108.4	1108.6	1109.2	1109.9	1110.5	1111.1
180°	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1376.2	1381.4	1387.9	1397.8	1405.3	1411.9	1413.2	1415.1	1419.9	1427.8	1433.9
5°	1385.2	1398.6	1420.3	1441.4	1464.3	1483.0	1500.6	1512.9	1524.6	1549.2	1569.2
7.5°	1382.3	1412.4	1446.3	1484.2	1522.5	1559.6	1594.1	1625.0	1655.6	1691.5	1732.4
10°	1380.4	1415.7	1461.3	1509.9	1563.3	1615.4	1665.9	1705.1	1750.8	1791.8	1843.9
12.5°	1371.6	1422.2	1476.8	1539.0	1604.6	1664.7	1731.0	1785.2	1837.5	1896.8	1957.4
15°	1359.9	1421.5	1490.6	1573.2	1672.8	1745.5	1813.4	1907.8	1972.3	2036.7	2123.5
17.5°	1338.8	1413.8	1500.2	1607.6	1690.7	1788.3	1890.6	1965.1	2051.9	2142.8	2221.3
20°	1321.9	1409.2	1505.9	1611.4	1717.4	1823.4	1922.4	2011.6	2101.2	2206.1	2270.5
22.5°	1305.0	1391.4	1491.8	1603.9	1717.9	1829.5	1941.6	2046.3	2147.1	2252.9	2335.2
25°	1269.1	1371.7	1480.7	1594.9	1707.4	1830.5	1964.0	2080.7	2205.5	2314.5	2392.4
27.5°	1232.8	1326.8	1435.3	1551.2	1676.3	1821.7	1978.8	2111.3	2236.4	2314.5	2339.0
30°	1200.0	1299.6	1399.2	1517.0	1652.3	1814.6	1981.7	2133.4	2235.9	2269.9	2244.7
32.5°	1166.7	1257.0	1355.6	1476.2	1620.0	1797.3	1985.4	2120.3	2182.0	2156.0	2053.5
35°	1108.0	1189.5	1285.0	1405.7	1570.9	1787.7	1970.0	2061.3	2046.1	1899.6	1706.2
37.5°	1045.2	1111.6	1200.0	1326.2	1520.0	1749.6	1903.3	1916.8	1785.0	1560.1	1336.8
40°	995.5	1055.2	1146.1	1277.9	1480.7	1712.1	1836.3	1781.8	1577.4	1327.1	1140.8
42.5°	947.2	997.6	1085.1	1227.3	1443.2	1661.0	1736.5	1617.8	1381.9	1145.3	975.9
45°	865.4	912.9	1000.7	1146.7	1366.4	1563.3	1553.3	1347.0	1110.9	920.5	779.9
47.5°	787.8	829.3	911.8	1060.8	1276.3	1416.8	1323.6	1104.1	903.9	751.1	650.7
50°	733.0	774.0	856.1	1003.2	1204.1	1306.7	1173.6	962.1	778.7	652.1	572.5
52.5°	680.5	720.6	795.6	938.9	1116.9	1178.2	1035.4	839.3	686.4	577.1	508.7
55°	607.0	637.5	704.9	842.0	975.0	989.0	844.3	680.3	554.3	478.1	431.3
57.5°	532.2	558.4	625.0	734.2	827.4	820.2	682.9	541.1	456.2	399.6	365.7
60°	483.4	509.2	567.7	661.5	731.8	707.2	581.3	467.0	394.3	352.8	325.8
62.5°	437.9	458.1	512.9	581.3	632.0	604.1	496.9	402.3	344.7	309.6	288.3
65°	372.0	388.5	432.4	468.1	496.3	469.3	380.3	314.6	273.0	248.4	233.8
67.5°	309.5	319.9	347.7	360.6	380.4	350.9	285.9	242.0	218.3	197.6	187.4
70°	270.1	277.8	292.4	302.9	308.2	277.8	229.7	197.4	177.5	162.9	156.4
72.5°	230.7	237.5	240.4	249.0	246.3	217.7	184.7	159.0	144.7	134.7	126.5
75°	176.3	179.3	176.3	172.9	165.2	145.3	122.4	109.6	99.0	94.4	91.4
77.5°	128.5	127.6	123.6	118.1	105.1	92.6	80.2	75.9	71.4	68.9	67.8
80°	99.0	96.7	93.2	84.4	73.3	64.5	61.6	58.6	56.8	53.9	53.3
82.5°	73.7	72.3	66.5	59.1	51.2	47.1	44.7	43.6	41.8	40.3	40.2
85°	39.3	37.5	31.1	26.9	25.7	24.6	24.0	24.0	21.7	21.1	21.1
87.5°	13.3	10.8	10.7	9.7	10.2	9.7	10.7	10.2	10.2	10.9	10.2
90°	2.8	4.7	6.7	8.6	10.8	13.3	15.9	18.4	20.9	21.7	22.5
92.5°	22.4	23.8	25.1	26.3	27.7	29.2	30.7	32.0	33.5	34.1	34.7
95°	52.8	54.2	55.5	56.9	58.4	59.9	61.5	63.0	64.6	65.3	66.1
97.5°	92.4	93.4	94.5	95.5	96.5	97.6	98.8	99.9	101.0	101.9	102.8
100°	119.8	121.0	122.1	123.3	124.3	125.4	126.3	127.3	128.2	128.8	129.4
102.5°	150.8	151.4	152.1	152.8	153.8	155.1	156.4	157.6	158.9	159.5	160.1
105°	196.7	197.1	197.4	197.9	198.9	200.6	202.3	204.1	205.9	205.9	205.9
107.5°	250.2	250.5	250.7	250.9	251.4	252.1	252.8	253.5	254.2	254.8	255.5
110°	283.9	284.3	284.6	285.1	285.4	285.9	286.2	286.6	287.0	287.7	288.5



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	318.7	318.8	319.1	319.3	319.4	319.5	319.6	319.7	319.8	320.7	321.7
115°	371.3	371.9	372.5	373.1	373.2	372.7	372.4	372.0	371.6	371.8	372.0
117.5°	423.8	424.2	424.6	425.0	424.9	424.4	423.9	423.4	422.9	422.8	422.8
120°	457.4	458.6	459.7	460.9	461.0	459.9	459.0	458.1	457.1	456.8	456.7
122.5°	491.3	492.1	492.9	493.8	494.0	493.5	493.0	492.5	492.0	491.5	490.9
125°	543.1	543.7	544.3	544.9	545.0	544.6	544.2	543.8	543.5	542.7	541.9
127.5°	591.9	593.2	594.4	595.6	596.1	595.6	595.2	594.8	594.3	593.3	592.2
130°	624.4	625.9	627.5	629.0	629.5	629.0	628.4	627.8	627.2	626.4	625.6
132.5°	656.4	658.0	659.6	661.2	661.7	661.2	660.8	660.4	660.0	659.0	658.1
135°	705.1	706.3	707.4	708.6	709.0	708.9	708.7	708.5	708.3	707.5	706.7
137.5°	750.3	751.2	752.2	753.2	753.9	754.4	754.9	755.4	756.0	755.1	754.3
140°	781.7	782.6	783.6	784.5	785.1	785.3	785.6	785.7	785.9	785.7	785.6
142.5°	810.3	811.2	812.2	813.2	813.8	814.2	814.5	814.9	815.3	815.0	814.9
145°	854.4	854.7	855.1	855.5	856.0	856.6	857.2	857.7	858.3	858.2	858.0
147.5°	893.7	894.4	895.2	895.9	896.5	897.0	897.6	898.1	898.6	898.6	898.6
150°	920.7	921.0	921.4	921.8	922.2	922.6	923.0	923.3	923.8	923.8	923.8
152.5°	943.1	943.7	944.3	944.8	945.1	945.4	945.6	945.9	946.1	946.4	946.7
155°	977.8	977.8	977.8	977.8	977.9	978.1	978.4	978.5	978.7	979.5	980.2
157.5°	1007.6	1007.4	1007.1	1006.9	1006.9	1007.0	1007.2	1007.4	1007.5	1008.3	1009.1
160°	1026.3	1025.9	1025.5	1025.1	1024.9	1024.9	1024.9	1024.9	1024.9	1025.9	1026.9
162.5°	1042.9	1042.3	1041.8	1041.3	1041.0	1041.2	1041.4	1041.6	1041.7	1042.7	1043.6
165°	1064.5	1063.9	1063.3	1062.7	1062.5	1062.5	1062.5	1062.5	1062.5	1063.6	1064.8
167.5°	1081.6	1080.8	1080.0	1079.3	1078.9	1079.1	1079.3	1079.4	1079.5	1080.7	1081.9
170°	1091.3	1090.5	1089.8	1089.0	1088.6	1088.6	1088.6	1088.6	1088.6	1089.9	1091.3
172.5°	1099.0	1098.2	1097.4	1096.7	1096.3	1096.3	1096.3	1096.3	1096.3	1097.5	1098.7
175°	1107.1	1106.3	1105.5	1104.7	1104.3	1104.3	1104.3	1104.3	1104.3	1105.5	1106.6
177.5°	1110.5	1109.9	1109.2	1108.6	1108.4	1108.4	1108.4	1108.4	1108.4	1109.2	1110.2
180°	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1443.7	1443.7	1445.6	1452.7	1453.6	1459.7	1457.8
5°	1586.7	1597.8	1602.0	1619.5	1630.0	1634.8	1625.4
7.5°	1761.6	1792.9	1807.8	1826.3	1842.5	1847.4	1834.7
10°	1889.0	1921.8	1949.4	1966.4	1982.2	1992.8	2006.2
12.5°	2012.3	2052.6	2078.8	2102.8	2119.1	2132.4	2134.7
15°	2146.3	2207.3	2253.5	2287.5	2304.5	2313.2	2309.8
17.5°	2281.4	2337.9	2370.8	2405.5	2429.1	2430.3	2430.9
20°	2357.8	2412.9	2451.0	2476.8	2503.1	2502.0	2507.8
22.5°	2408.9	2452.3	2481.5	2500.2	2509.2	2504.7	2505.9
25°	2432.8	2445.7	2440.4	2410.5	2403.0	2375.4	2380.1
27.5°	2309.5	2248.6	2185.6	2104.5	2040.5	1989.3	1991.9
30°	2142.2	2034.4	1911.3	1808.2	1715.6	1689.9	1634.8
32.5°	1908.3	1746.5	1602.4	1506.3	1426.8	1405.3	1357.3
35°	1511.7	1354.7	1206.4	1117.4	1082.2	1033.0	1032.4
37.5°	1175.0	1036.7	958.4	891.6	856.5	826.7	823.8
40°	988.5	880.6	821.5	773.4	738.9	716.6	711.4
42.5°	858.2	770.9	715.6	685.8	659.2	647.7	639.1
45°	700.8	642.2	603.5	576.5	564.3	555.4	550.8
47.5°	586.2	546.9	520.6	502.7	492.7	483.4	485.9
50°	523.8	491.6	472.3	455.3	447.6	441.2	441.8
52.5°	473.6	444.7	429.1	416.8	407.3	402.8	400.5
55°	401.9	383.7	368.0	359.2	353.9	347.5	345.7
57.5°	342.9	328.8	315.9	306.0	304.7	298.5	299.3
60°	303.5	291.8	281.3	276.0	271.9	266.6	268.4
62.5°	271.2	261.3	251.8	247.4	243.3	239.4	240.2
65°	222.1	212.7	206.8	204.5	202.8	201.0	199.2
67.5°	176.9	171.3	167.6	162.6	158.9	158.3	156.5
70°	148.9	141.2	134.7	128.3	126.6	126.0	126.6
72.5°	119.3	114.5	112.7	109.6	109.3	107.7	108.7
75°	89.6	87.9	86.7	84.4	84.4	84.4	84.4
77.5°	66.1	65.0	64.3	63.9	63.3	62.4	62.3
80°	51.6	51.0	49.8	49.8	49.2	49.8	49.2
82.5°	38.9	38.8	37.6	37.6	37.0	36.7	37.0
85°	19.9	19.4	20.5	19.4	19.9	18.8	19.9
87.5°	10.2	10.4	10.1	10.2	9.7	10.8	9.9
90°	23.2	24.0	24.6	25.0	25.4	25.7	26.2
92.5°	35.4	36.0	36.2	35.9	35.7	35.5	35.2
95°	66.9	67.7	68.0	68.0	68.0	68.0	68.0
97.5°	103.7	104.6	105.0	104.9	104.9	104.8	104.7
100°	130.0	130.5	131.0	131.4	131.8	132.2	132.6
102.5°	160.7	161.3	161.5	161.4	161.4	161.3	161.2
105°	205.9	205.9	206.0	206.5	206.8	207.2	207.6
107.5°	256.1	256.7	256.8	256.7	256.4	256.1	255.9
110°	289.3	290.1	290.2	289.9	289.5	289.1	288.7



TEST NUMBER: P332459-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	322.5	323.5	323.9	323.8	323.7	323.7	323.6
115°	372.2	372.4	372.4	372.2	372.0	371.8	371.6
117.5°	422.8	422.8	422.4	421.9	421.4	420.8	420.3
120°	456.5	456.3	456.0	455.6	455.2	454.9	454.4
122.5°	490.4	490.0	489.4	488.9	488.4	487.8	487.2
125°	541.1	540.4	539.6	538.8	538.0	537.3	536.5
127.5°	591.2	590.0	589.0	588.1	587.3	586.3	585.5
130°	624.8	624.1	623.0	621.6	620.3	619.0	617.6
132.5°	657.2	656.3	655.3	654.2	653.2	652.1	651.1
135°	705.9	705.2	704.6	704.2	703.9	703.4	703.1
137.5°	753.5	752.7	751.9	751.1	750.4	749.7	749.0
140°	785.3	785.1	784.4	783.0	781.7	780.3	778.9
142.5°	814.7	814.5	813.8	812.8	811.8	810.7	809.7
145°	857.7	857.6	857.0	856.3	855.5	854.7	853.9
147.5°	898.6	898.6	898.0	896.9	895.7	894.6	893.4
150°	923.8	923.8	923.2	922.0	920.8	919.7	918.5
152.5°	947.0	947.4	947.0	946.0	944.9	943.9	943.0
155°	981.0	981.8	981.5	980.2	978.8	977.5	976.1
157.5°	1010.0	1010.7	1010.6	1009.5	1008.5	1007.4	1006.3
160°	1027.9	1028.8	1028.9	1028.1	1027.3	1026.6	1025.8
162.5°	1044.6	1045.6	1045.4	1044.2	1042.9	1041.7	1040.4
165°	1065.9	1067.1	1067.0	1065.7	1064.3	1062.9	1061.6
167.5°	1083.1	1084.3	1084.3	1083.1	1081.9	1080.7	1079.5
170°	1092.7	1094.1	1094.1	1092.7	1091.3	1089.9	1088.6
172.5°	1099.9	1101.1	1101.0	1099.7	1098.3	1096.9	1095.6
175°	1107.8	1109.0	1108.9	1107.5	1106.1	1104.8	1103.5
177.5°	1111.1	1112.1	1112.0	1110.9	1109.8	1108.7	1107.7
180°	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4

(END OF REPORT)