

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332460-935

Luminaire Tested: **S123RDIW-S1000D1030U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332460-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S1000D1030U935-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1030 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6817.1 lumens
Efficiency: N/A
Efficacy: 111.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332460-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

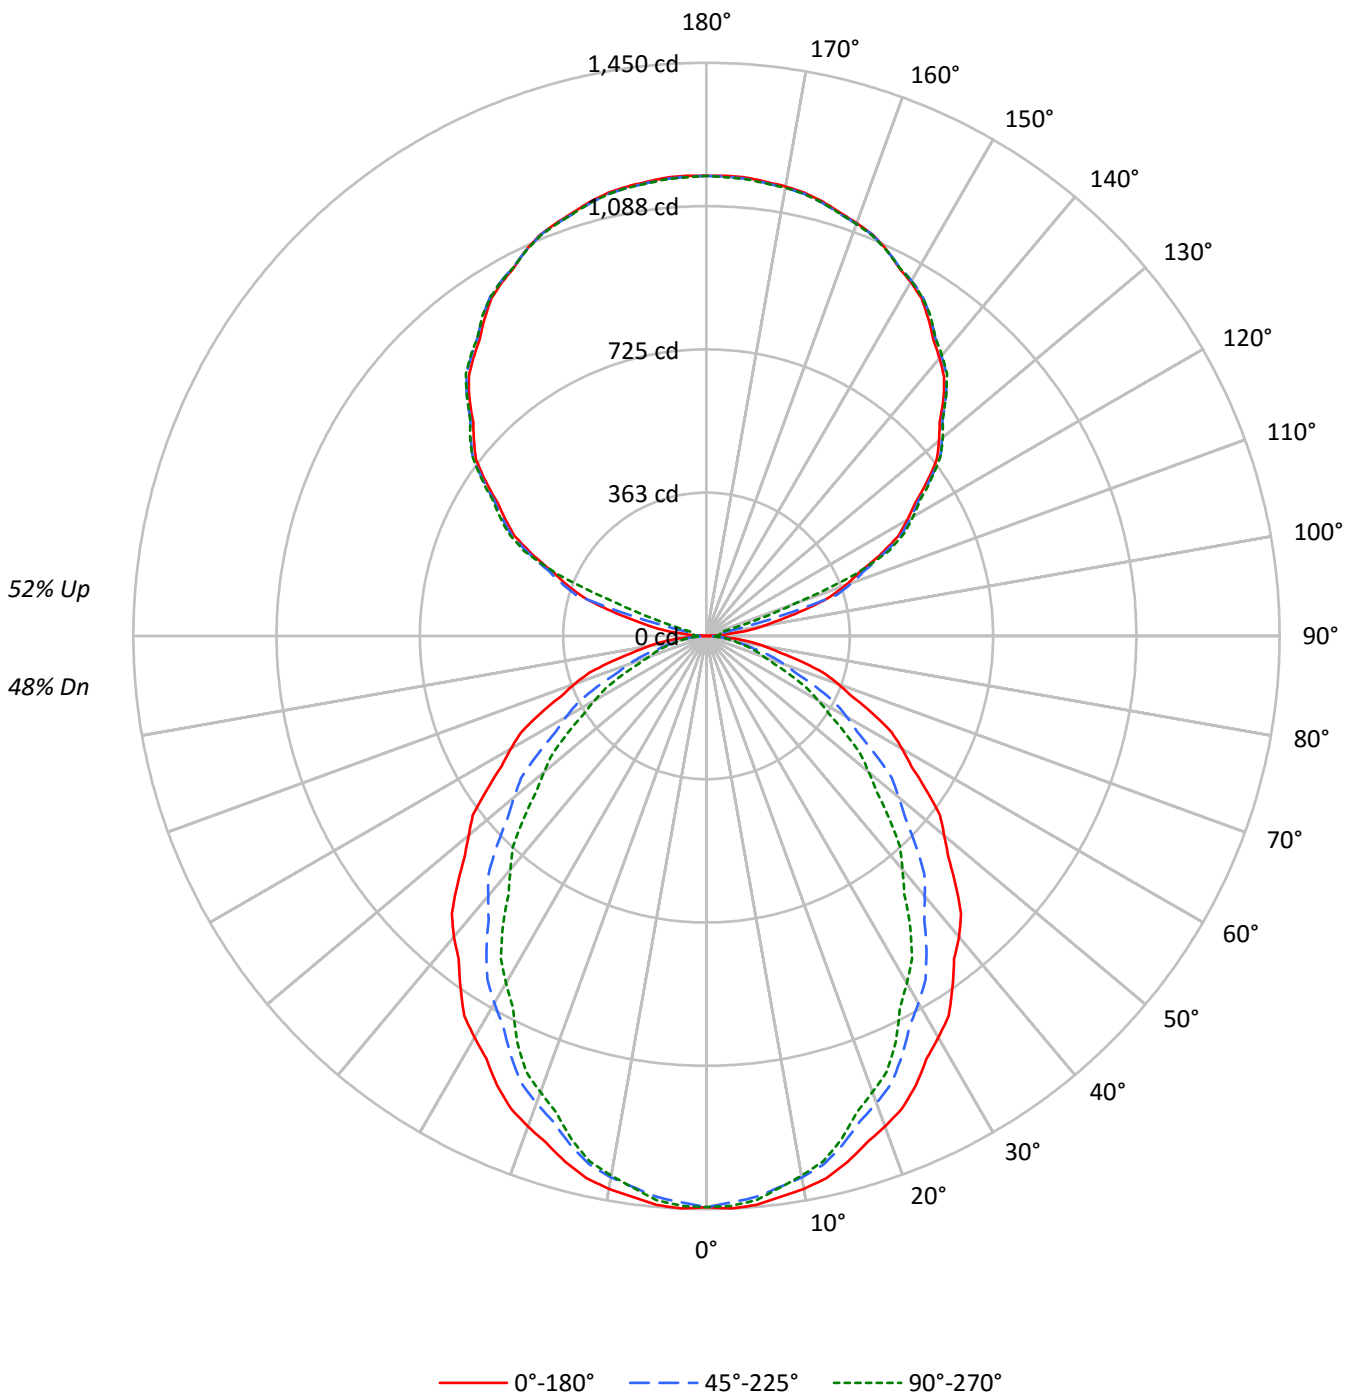



TEST NUMBER: P332460-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48
1	98	93	90	86	90	86	83	80	72	70	68	60	58	57	48	47	46	41
2	89	82	76	71	82	76	71	66	64	60	57	53	50	48	43	41	40	35
3	81	72	65	59	75	67	61	56	57	52	48	47	44	41	38	36	34	30
4	75	64	56	51	68	59	53	47	50	45	41	42	38	35	34	32	30	26
5	69	57	49	43	63	53	46	41	45	40	36	38	34	31	31	28	26	23
6	63	51	43	38	58	48	41	36	41	35	31	34	30	27	28	25	23	20
7	59	47	39	33	54	43	36	31	37	32	28	31	27	24	26	23	20	18
8	54	42	35	29	50	39	33	28	34	28	25	29	25	21	24	21	18	16
9	51	39	31	26	47	36	29	25	31	26	22	26	22	19	22	19	17	15
10	47	35	28	24	44	33	27	22	29	24	20	24	20	18	21	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15553	15553	15553
5°	15612	15397	15486
10°	15524	15204	15152
15°	15357	14848	14692
20°	15128	14403	14068
25°	14892	13904	13459
30°	14579	13328	12599
35°	14259	12750	11811
40°	13964	12069	10835
45°	13575	11399	9954
50°	13147	10637	8967
55°	12710	9764	8049
60°	12312	8831	7037
65°	11790	7819	6029
70°	11138	6565	4869
75°	10189	5165	4579
80°	9081	4575	4209
85°	7669	4051	3767



TEST NUMBER: P332460-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	135.7	2.0
10°-20°	377.5	5.5
20°-30°	543.6	8.0
30°-40°	612.3	9.0
40°-50°	585.8	8.6
50°-60°	479.7	7.0
60°-70°	323.7	4.7
70°-80°	162.8	2.4
80°-90°	46.3	0.7
90°-100°	42.3	0.6
100°-110°	201.7	3.0
110°-120°	484.5	7.1
120°-130°	616.9	9.0
130°-140°	659.2	9.7
140°-150°	616.4	9.0
150°-160°	497.2	7.3
160°-170°	320.9	4.7
170°-180°	110.6	1.6
0°-30°	1056.8	15.5
0°-40°	1669.1	24.5
0°-60°	2734.6	40.1
0°-90°	3267.4	47.9
90°-120°	728.5	10.7
90°-150°	2621.0	38.4
90°-180°	3550.0	52.1
0°-180°	6817.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1445	1445	1445	1445	1445	
5°	1445	1439	1425	1435	1433	137
15°	1378	1364	1332	1326	1318	388
25°	1254	1223	1171	1147	1133	576
35°	1085	1041	970	922	899	679
45°	892	837	749	684	654	688
55°	677	618	520	455	429	607
65°	463	397	307	252	237	458
75°	245	188	124	113	110	261
85°	62	38	33	31	30	70
90°	1	10	21	24	26	6
95°	53	20	27	33	33	65
105°	258	262	189	45	38	273
115°	484	489	496	505	508	477
125°	682	688	692	694	695	608
135°	848	853	857	859	857	653
145°	979	985	987	988	988	613
155°	1078	1077	1078	1081	1077	497
165°	1137	1135	1134	1140	1135	321
175°	1164	1160	1160	1166	1160	111
180°	1164	1164	1164	1164	1164	



TEST NUMBER: P332460-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9
2.5°	1449.6	1448.7	1447.9	1447.1	1446.2	1444.6	1442.1	1439.6	1437.1	1434.6	1436.8
5°	1444.9	1443.6	1442.3	1441.0	1439.7	1437.4	1434.3	1431.2	1428.1	1425.0	1427.3
7.5°	1431.5	1430.1	1428.7	1427.3	1425.9	1423.1	1419.1	1415.1	1411.0	1407.0	1408.3
10°	1420.3	1418.5	1416.6	1414.8	1413.0	1409.7	1405.1	1400.3	1395.7	1391.0	1391.3
12.5°	1404.4	1402.3	1400.3	1398.3	1396.2	1392.3	1386.6	1380.9	1375.2	1369.4	1369.2
15°	1378.1	1375.3	1372.3	1369.5	1366.7	1361.6	1354.3	1346.9	1339.7	1332.4	1331.1
17.5°	1345.1	1341.7	1338.4	1335.1	1331.7	1325.4	1316.1	1306.9	1297.6	1288.3	1285.6
20°	1320.7	1316.6	1312.3	1308.2	1304.0	1297.0	1287.1	1277.2	1267.3	1257.4	1254.0
22.5°	1293.5	1288.7	1283.9	1279.1	1274.4	1266.7	1256.1	1245.6	1235.1	1224.6	1220.4
25°	1253.9	1247.4	1240.9	1234.3	1227.9	1218.6	1206.6	1194.6	1182.7	1170.7	1165.2
27.5°	1205.8	1198.7	1191.5	1184.3	1177.1	1166.8	1153.5	1140.1	1126.8	1113.5	1105.9
30°	1173.0	1165.2	1157.4	1149.6	1141.8	1130.6	1116.0	1101.4	1086.8	1072.3	1063.4
32.5°	1140.2	1131.4	1122.5	1113.6	1104.8	1092.7	1077.3	1061.9	1046.4	1031.0	1021.3
35°	1085.1	1075.7	1066.3	1057.0	1047.7	1034.8	1018.7	1002.5	986.4	970.3	959.1
37.5°	1029.3	1018.9	1008.5	998.1	987.7	973.9	956.7	939.4	922.1	904.9	892.2
40°	993.8	982.3	970.8	959.3	947.9	932.9	914.5	896.0	877.4	858.9	845.4
42.5°	953.4	941.9	930.5	919.0	907.6	892.3	873.2	854.1	835.0	815.9	801.1
45°	891.8	880.0	868.3	856.6	844.9	829.1	809.0	788.9	768.9	748.8	734.0
47.5°	830.2	817.3	804.4	791.5	778.7	762.2	742.2	722.1	702.1	682.0	665.9
50°	785.1	772.9	760.7	748.5	736.2	719.5	698.4	677.3	656.3	635.2	619.0
52.5°	744.9	731.6	718.2	705.0	691.7	674.6	653.8	632.8	612.0	591.1	574.3
55°	677.3	664.6	651.8	639.0	626.3	608.8	586.7	564.6	542.4	520.3	505.2
57.5°	615.0	601.1	587.2	573.3	559.4	541.3	519.0	496.8	474.6	452.4	438.1
60°	571.9	557.6	543.2	528.9	514.5	496.6	475.0	453.4	431.8	410.2	396.1
62.5°	528.7	514.4	500.1	485.8	471.5	453.5	431.9	410.3	388.7	367.0	353.8
65°	462.9	448.6	434.2	419.9	405.6	388.3	368.0	347.7	327.4	307.0	294.3
67.5°	397.0	382.5	368.1	353.6	339.1	322.1	302.6	283.2	263.7	244.2	234.7
70°	353.9	339.8	325.8	311.7	297.6	281.5	263.3	245.0	226.8	208.6	199.5
72.5°	310.7	297.0	283.1	269.2	255.4	240.1	223.6	207.1	190.5	173.9	166.4
75°	245.0	232.4	219.9	207.4	194.9	181.5	167.2	152.8	138.5	124.2	121.6
77.5°	184.9	173.6	162.3	151.0	139.7	129.4	120.2	111.0	101.8	92.6	91.2
80°	146.5	135.8	125.1	114.4	103.8	95.7	90.2	84.7	79.3	73.8	73.0
82.5°	109.9	100.7	91.5	82.2	73.0	67.2	64.6	62.1	59.5	56.9	56.1
85°	62.1	56.4	50.6	44.9	39.2	35.9	35.1	34.4	33.6	32.8	32.3
87.5°	22.6	20.8	18.9	17.0	15.1	14.4	14.8	15.3	15.8	16.4	16.3
90°	0.9	2.8	4.7	6.6	8.5	10.8	13.3	15.8	18.3	20.8	21.5
92.5°	16.1	15.6	15.0	14.5	13.9	14.6	16.5	18.3	20.2	22.1	23.3
95°	52.8	44.9	37.0	29.1	21.3	18.3	20.5	22.6	24.7	26.8	28.2
97.5°	106.0	102.5	98.9	95.4	91.9	83.2	69.4	55.5	41.7	27.8	29.4
100°	146.1	150.0	153.9	157.6	161.5	148.4	118.5	88.5	58.5	28.5	30.0
102.5°	191.8	194.6	197.3	200.1	202.9	187.9	155.2	122.4	89.6	56.9	52.2
105°	257.7	259.8	261.9	264.1	266.1	258.6	241.3	223.9	206.7	189.4	155.4
107.5°	327.3	328.9	330.6	332.3	334.0	336.2	339.0	341.6	344.4	347.2	322.2
110°	373.6	375.1	376.7	378.2	379.7	381.6	383.7	385.8	387.9	390.0	383.7



TEST NUMBER: P332460-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	417.8	419.2	420.6	422.1	423.4	425.2	427.2	429.4	431.5	433.6	433.7
115°	483.5	484.6	485.7	486.9	488.0	489.5	491.2	492.9	494.6	496.4	498.3
117.5°	546.9	548.3	549.7	551.1	552.6	553.7	554.7	555.5	556.4	557.2	558.8
120°	586.3	588.1	589.8	591.5	593.2	594.4	595.0	595.6	596.2	596.7	598.2
122.5°	626.5	627.8	629.3	630.7	632.1	633.2	634.0	634.6	635.4	636.1	637.2
125°	681.5	683.0	684.5	686.0	687.6	688.8	689.5	690.3	691.0	691.8	692.2
127.5°	734.7	736.2	737.8	739.3	740.9	742.1	743.0	744.0	744.9	745.8	746.4
130°	767.9	769.5	771.0	772.6	774.1	775.2	776.0	776.8	777.6	778.3	779.1
132.5°	799.8	801.3	802.8	804.3	805.9	807.0	807.6	808.2	808.8	809.4	810.2
135°	848.3	849.5	850.7	851.8	853.0	853.9	854.7	855.5	856.3	857.0	857.6
137.5°	889.8	891.3	892.8	894.2	895.7	896.6	897.1	897.5	897.9	898.4	899.2
140°	917.6	918.7	919.9	921.0	922.1	923.0	923.6	924.2	924.7	925.3	926.1
142.5°	943.1	944.3	945.5	946.6	947.8	948.6	949.2	949.8	950.4	950.9	951.6
145°	979.0	980.2	981.6	983.0	984.3	985.2	985.6	985.9	986.4	986.7	987.1
147.5°	1012.7	1013.6	1014.4	1015.3	1016.2	1016.8	1017.2	1017.6	1018.0	1018.4	1018.7
150°	1033.5	1034.0	1034.6	1035.2	1035.7	1036.2	1036.6	1037.0	1037.3	1037.8	1038.1
152.5°	1052.1	1052.4	1052.7	1052.9	1053.2	1053.4	1053.7	1053.9	1054.1	1054.4	1055.1
155°	1078.4	1078.0	1077.6	1077.3	1076.9	1076.8	1076.9	1077.1	1077.4	1077.5	1078.5
157.5°	1098.8	1098.8	1098.7	1098.7	1098.6	1098.5	1098.4	1098.1	1097.9	1097.8	1098.9
160°	1111.3	1111.0	1110.9	1110.7	1110.5	1110.3	1110.1	1109.9	1109.7	1109.6	1110.7
162.5°	1123.0	1122.5	1122.1	1121.5	1121.0	1120.7	1120.5	1120.3	1120.1	1119.9	1121.2
165°	1137.2	1136.6	1136.1	1135.5	1134.9	1134.5	1134.3	1134.1	1133.9	1133.8	1135.3
167.5°	1148.2	1147.5	1146.8	1146.0	1145.2	1144.8	1144.8	1144.8	1144.8	1144.8	1146.3
170°	1154.5	1153.7	1153.0	1152.2	1151.4	1151.1	1151.1	1151.1	1151.1	1151.1	1152.5
172.5°	1158.6	1157.7	1156.8	1155.9	1154.9	1154.6	1154.7	1154.9	1155.0	1155.2	1156.8
175°	1164.0	1163.0	1162.1	1161.1	1160.2	1159.8	1159.9	1160.2	1160.4	1160.5	1161.9
177.5°	1165.4	1164.6	1163.9	1163.1	1162.4	1162.0	1162.2	1162.4	1162.4	1162.6	1163.9
180°	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0



TEST NUMBER: P332460-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9
2.5°	1439.2	1441.5	1443.7	1444.7	1444.2	1443.9	1443.5	1443.0
5°	1429.7	1432.0	1434.3	1435.3	1434.8	1434.3	1433.7	1433.2
7.5°	1409.5	1410.8	1412.1	1412.4	1411.4	1410.6	1409.7	1408.8
10°	1391.5	1391.8	1392.1	1391.5	1390.2	1388.9	1387.6	1386.3
12.5°	1369.1	1369.0	1368.8	1368.0	1366.5	1364.9	1363.5	1361.9
15°	1329.8	1328.5	1327.2	1325.6	1323.8	1322.0	1320.2	1318.4
17.5°	1282.8	1280.0	1277.3	1274.5	1271.9	1269.1	1266.4	1263.7
20°	1250.6	1247.2	1243.9	1240.6	1237.5	1234.3	1231.2	1228.1
22.5°	1216.2	1211.9	1207.7	1204.1	1201.3	1198.3	1195.4	1192.5
25°	1159.8	1154.3	1148.8	1144.6	1141.8	1138.9	1136.1	1133.2
27.5°	1098.3	1090.7	1083.1	1077.1	1072.7	1068.3	1063.9	1059.6
30°	1054.6	1045.7	1036.8	1030.4	1026.1	1022.0	1017.8	1013.7
32.5°	1011.6	1001.9	992.2	985.2	980.9	976.5	972.1	967.7
35°	947.9	936.7	925.5	917.6	912.9	908.2	903.5	898.8
37.5°	879.5	866.8	854.1	844.8	839.0	833.3	827.5	821.7
40°	831.9	818.4	804.8	795.0	789.0	783.1	777.1	771.1
42.5°	786.3	771.5	756.6	746.6	741.2	735.9	730.5	725.1
45°	719.1	704.3	689.4	678.9	672.6	666.4	660.1	653.9
47.5°	649.7	633.6	617.4	606.6	601.0	595.5	589.9	584.3
50°	602.9	586.7	570.6	559.5	553.5	547.5	541.6	535.5
52.5°	557.6	540.8	524.0	512.9	507.6	502.2	496.9	491.5
55°	490.1	475.0	459.9	449.7	444.5	439.3	434.1	428.9
57.5°	423.8	409.5	395.3	385.9	381.5	377.0	372.6	368.2
60°	382.0	368.0	353.9	344.7	340.3	335.8	331.4	326.9
62.5°	340.5	327.4	314.1	305.1	300.6	295.9	291.3	286.6
65°	281.5	268.7	256.0	248.1	245.3	242.5	239.6	236.7
67.5°	225.2	215.6	206.1	199.8	196.7	193.6	190.5	187.5
70°	190.4	181.2	172.1	166.2	163.2	160.4	157.6	154.7
72.5°	159.0	151.5	144.1	139.8	138.6	137.4	136.2	135.0
75°	119.0	116.4	113.8	112.3	111.8	111.2	110.6	110.1
77.5°	89.8	88.3	87.0	86.0	85.5	85.0	84.5	83.9
80°	72.2	71.5	70.7	70.1	69.6	69.1	68.4	67.9
82.5°	55.4	54.6	53.8	53.4	53.3	53.2	53.0	53.0
85°	31.8	31.3	30.7	30.5	30.5	30.5	30.5	30.5
87.5°	16.2	16.2	16.1	16.0	15.9	15.8	15.7	15.5
90°	22.3	23.1	23.8	24.4	24.8	25.1	25.6	25.9
92.5°	24.6	25.8	27.0	27.8	28.0	28.2	28.5	28.7
95°	29.5	30.8	32.2	32.9	32.9	32.9	32.9	32.9
97.5°	30.9	32.5	34.0	34.9	35.0	35.2	35.5	35.6
100°	31.6	33.1	34.7	35.6	35.7	35.9	36.2	36.3
102.5°	47.4	42.6	37.8	35.6	36.0	36.3	36.7	37.0
105°	121.4	87.3	53.3	36.5	36.9	37.3	37.6	38.1
107.5°	297.2	272.3	247.4	222.1	196.4	170.8	145.2	119.5
110°	377.4	371.0	364.6	347.8	320.3	292.7	265.3	237.8



TEST NUMBER: P332460-935

CATALOG NUMBER: S123RDIW-S1000D1030U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	433.9	433.9	434.0	431.2	425.4	419.7	413.8	408.0
115°	500.2	502.1	504.1	505.4	506.2	507.0	507.7	508.5
117.5°	560.3	561.9	563.4	564.3	564.4	564.6	564.7	564.9
120°	599.8	601.3	602.9	603.6	603.6	603.6	603.6	603.6
122.5°	638.3	639.4	640.4	641.1	641.2	641.4	641.5	641.7
125°	692.6	693.0	693.4	693.8	694.1	694.5	694.9	695.3
127.5°	747.0	747.6	748.3	748.4	748.0	747.6	747.3	746.8
130°	779.9	780.6	781.4	781.6	781.2	780.8	780.4	780.1
132.5°	811.0	811.8	812.5	812.6	812.1	811.6	811.1	810.5
135°	858.2	858.8	859.3	859.3	858.8	858.2	857.6	857.0
137.5°	900.2	901.1	902.1	902.3	901.9	901.6	901.1	900.8
140°	926.9	927.6	928.4	928.6	928.2	927.8	927.5	927.0
142.5°	952.2	952.8	953.4	953.4	952.9	952.4	951.8	951.2
145°	987.5	987.9	988.3	988.4	988.4	988.4	988.4	988.4
147.5°	1019.2	1019.5	1019.9	1019.7	1018.8	1017.9	1017.0	1016.2
150°	1038.5	1038.9	1039.3	1039.2	1038.6	1038.0	1037.5	1036.9
152.5°	1055.8	1056.4	1057.1	1057.0	1056.1	1055.2	1054.4	1053.5
155°	1079.4	1080.4	1081.4	1081.2	1080.1	1079.0	1077.8	1076.7
157.5°	1100.1	1101.2	1102.3	1102.2	1100.7	1099.2	1097.7	1096.2
160°	1111.8	1113.0	1114.1	1114.0	1112.7	1111.4	1110.0	1108.6
162.5°	1122.5	1123.9	1125.2	1125.2	1124.0	1122.8	1121.6	1120.4
165°	1136.8	1138.3	1139.9	1140.0	1138.7	1137.3	1135.9	1134.6
167.5°	1147.9	1149.4	1151.0	1151.0	1149.4	1147.9	1146.3	1144.8
170°	1154.1	1155.6	1157.2	1157.2	1155.6	1154.1	1152.5	1151.1
172.5°	1158.3	1159.8	1161.3	1161.2	1159.6	1157.9	1156.2	1154.5
175°	1163.2	1164.6	1166.0	1165.9	1164.3	1162.8	1161.2	1159.7
177.5°	1165.1	1166.3	1167.5	1167.4	1165.9	1164.3	1162.8	1161.2
180°	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0	1164.0

(END OF REPORT)