

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332464-935

Luminaire Tested: **S123RDIW-S1000D1320U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332464-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIW-S1000D1320U935-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1320 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7812.6 lumens  
Efficiency: N/A  
Efficacy: 111.9 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 69.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332464-935

CATALOG NUMBER: S123RDIW-S1000D1320U935-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

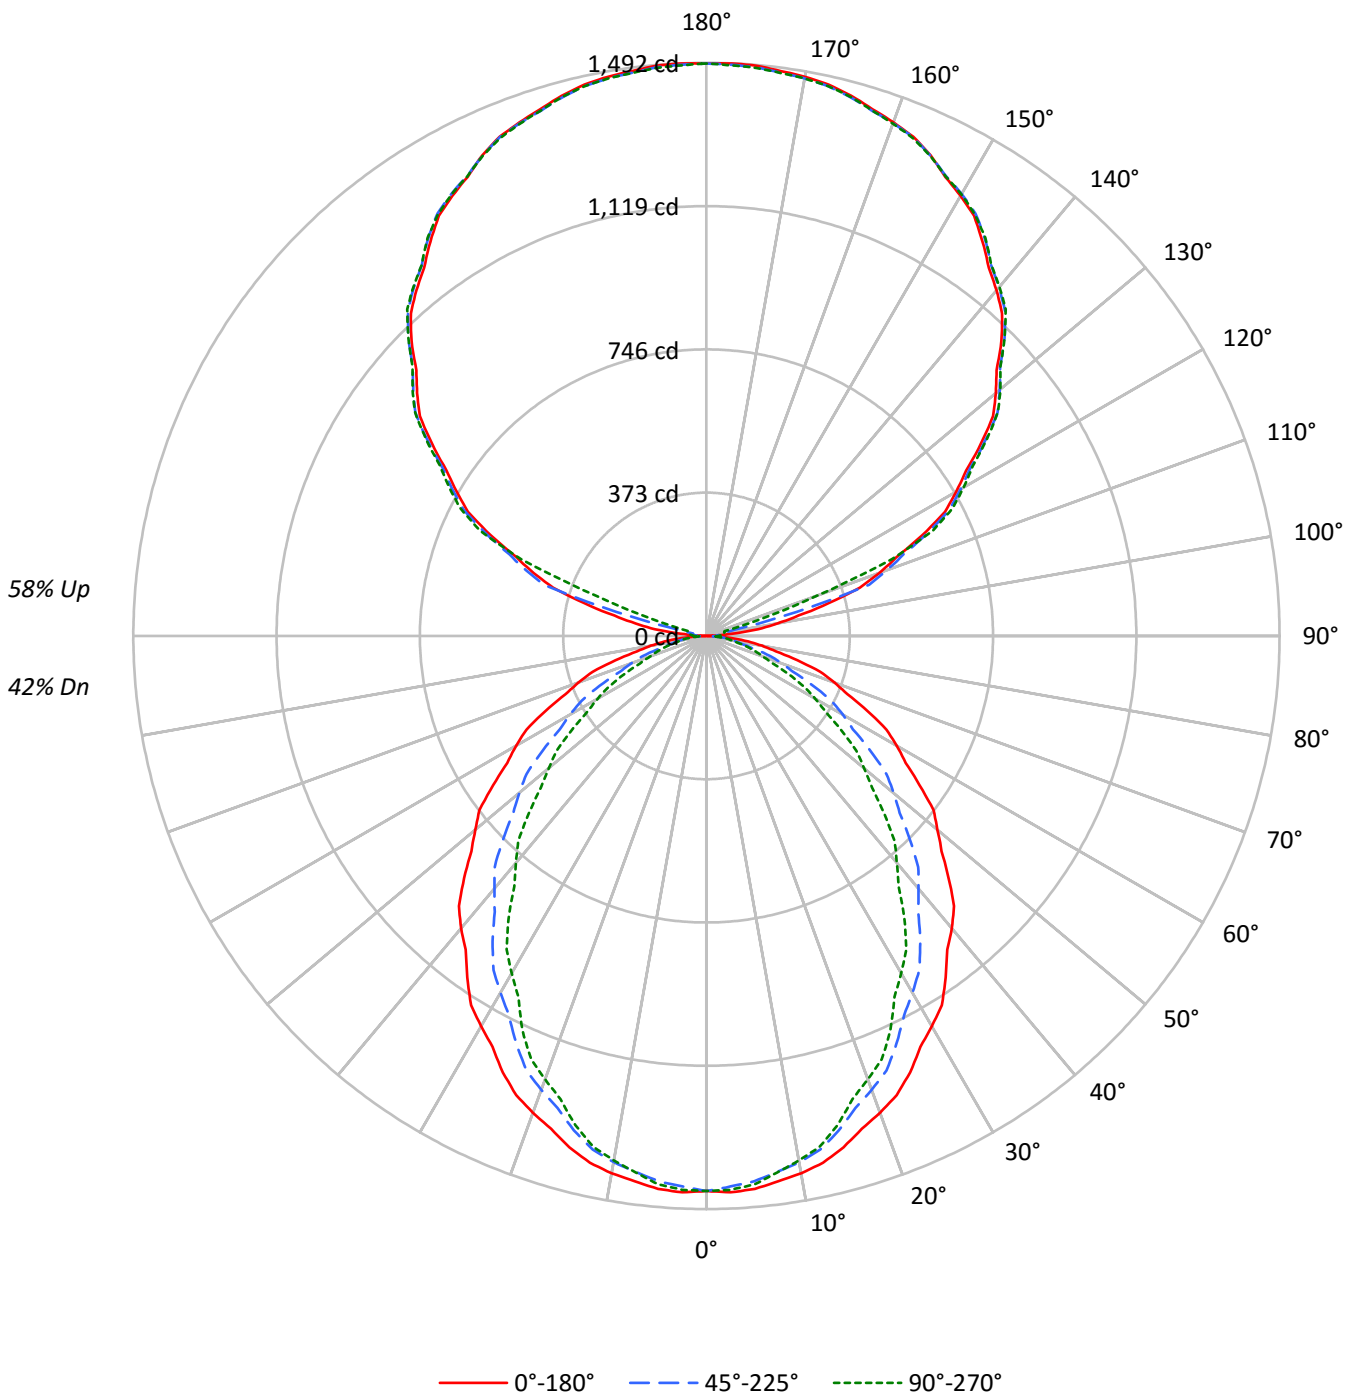



TEST NUMBER: P332464-935

CATALOG NUMBER: S123RDIW-S1000D1320U935-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	42	36
2	88	81	75	70	80	74	69	65	61	57	54	49	47	45	38	37	35	30
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	34	32	30	26
4	73	63	55	50	67	58	51	46	48	43	39	39	36	33	31	28	26	23
5	68	56	48	43	61	52	45	40	43	38	34	35	31	29	28	25	23	20
6	62	50	43	37	57	46	40	35	39	34	30	32	28	25	25	23	20	17
7	58	46	38	32	52	42	35	30	35	30	26	29	25	22	23	20	18	16
8	53	41	34	29	49	38	32	27	32	27	23	27	23	20	21	19	16	14
9	50	38	30	26	45	35	28	24	30	24	21	25	21	18	20	17	15	13
10	46	35	28	23	42	32	26	22	27	22	19	23	19	16	18	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	15553	15553	15553
5°	15612	15397	15486
10°	15524	15204	15152
15°	15357	14848	14692
20°	15128	14403	14068
25°	14892	13904	13459
30°	14579	13328	12599
35°	14259	12750	11811
40°	13964	12069	10835
45°	13575	11399	9954
50°	13147	10637	8967
55°	12710	9764	8049
60°	12312	8831	7037
65°	11790	7819	6029
70°	11138	6565	4869
75°	10189	5165	4579
80°	9081	4575	4209
85°	7669	4051	3767



TEST NUMBER: P332464-935

CATALOG NUMBER: S123RDIW-S1000D1320U935-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	135.7	1.7
10°-20°	377.5	4.8
20°-30°	543.6	7.0
30°-40°	612.3	7.8
40°-50°	585.8	7.5
50°-60°	479.7	6.1
60°-70°	323.7	4.1
70°-80°	162.8	2.1
80°-90°	47.2	0.6
90°-100°	54.2	0.7
100°-110°	258.2	3.3
110°-120°	620.2	7.9
120°-130°	789.8	10.1
130°-140°	843.9	10.8
140°-150°	789.1	10.1
150°-160°	636.5	8.1
160°-170°	410.8	5.3
170°-180°	141.6	1.8
0°-30°	1056.8	13.5
0°-40°	1669.1	21.4
0°-60°	2734.6	35.0
0°-90°	3268.3	41.8
90°-120°	932.6	11.9
90°-150°	3355.4	42.9
90°-180°	4544.0	58.2
0°-180°	7812.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1445	1445	1445	1445	1445	
5°	1445	1439	1425	1435	1433	137
15°	1378	1364	1332	1326	1318	388
25°	1254	1223	1171	1147	1133	576
35°	1085	1041	970	922	899	679
45°	892	837	749	684	654	688
55°	677	618	520	455	429	607
65°	463	397	307	252	237	458
75°	245	188	124	113	110	261
85°	62	38	33	31	30	70
90°	1	12	27	31	33	6
95°	68	25	34	42	42	83
105°	330	336	242	58	49	350
115°	619	626	636	646	651	611
125°	872	881	886	888	890	779
135°	1086	1093	1097	1100	1097	836
145°	1253	1261	1263	1265	1265	784
155°	1380	1378	1379	1384	1378	636
165°	1456	1453	1451	1459	1452	411
175°	1490	1485	1486	1493	1485	142
180°	1490	1490	1490	1490	1490	



TEST NUMBER: P332464-935

CATALOG NUMBER: S123RDIW-S1000D1320U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9
2.5°	1449.6	1448.7	1447.9	1447.1	1446.2	1444.6	1442.1	1439.6	1437.1	1434.6	1436.8
5°	1444.9	1443.6	1442.3	1441.0	1439.7	1437.4	1434.3	1431.2	1428.1	1425.0	1427.3
7.5°	1431.5	1430.1	1428.7	1427.3	1425.9	1423.1	1419.1	1415.1	1411.0	1407.0	1408.3
10°	1420.3	1418.5	1416.6	1414.8	1413.0	1409.7	1405.1	1400.3	1395.7	1391.0	1391.3
12.5°	1404.4	1402.3	1400.3	1398.3	1396.2	1392.3	1386.6	1380.9	1375.2	1369.4	1369.2
15°	1378.1	1375.3	1372.3	1369.5	1366.7	1361.6	1354.3	1346.9	1339.7	1332.4	1331.1
17.5°	1345.1	1341.7	1338.4	1335.1	1331.7	1325.4	1316.1	1306.9	1297.6	1288.3	1285.6
20°	1320.7	1316.6	1312.3	1308.2	1304.0	1297.0	1287.1	1277.2	1267.3	1257.4	1254.0
22.5°	1293.5	1288.7	1283.9	1279.1	1274.4	1266.7	1256.1	1245.6	1235.1	1224.6	1220.4
25°	1253.9	1247.4	1240.9	1234.3	1227.9	1218.6	1206.6	1194.6	1182.7	1170.7	1165.2
27.5°	1205.8	1198.7	1191.5	1184.3	1177.1	1166.8	1153.5	1140.1	1126.8	1113.5	1105.9
30°	1173.0	1165.2	1157.4	1149.6	1141.8	1130.6	1116.0	1101.4	1086.8	1072.3	1063.4
32.5°	1140.2	1131.4	1122.5	1113.6	1104.8	1092.7	1077.3	1061.9	1046.4	1031.0	1021.3
35°	1085.1	1075.7	1066.3	1057.0	1047.7	1034.8	1018.7	1002.5	986.4	970.3	959.1
37.5°	1029.3	1018.9	1008.5	998.1	987.7	973.9	956.7	939.4	922.1	904.9	892.2
40°	993.8	982.3	970.8	959.3	947.9	932.9	914.5	896.0	877.4	858.9	845.4
42.5°	953.4	941.9	930.5	919.0	907.6	892.3	873.2	854.1	835.0	815.9	801.1
45°	891.8	880.0	868.3	856.6	844.9	829.1	809.0	788.9	768.9	748.8	734.0
47.5°	830.2	817.3	804.4	791.5	778.7	762.2	742.2	722.1	702.1	682.0	665.9
50°	785.1	772.9	760.7	748.5	736.2	719.5	698.4	677.3	656.3	635.2	619.0
52.5°	744.9	731.6	718.2	705.0	691.7	674.6	653.8	632.8	612.0	591.1	574.3
55°	677.3	664.6	651.8	639.0	626.3	608.8	586.7	564.6	542.4	520.3	505.2
57.5°	615.0	601.1	587.2	573.3	559.4	541.3	519.0	496.8	474.6	452.4	438.1
60°	571.9	557.6	543.2	528.9	514.5	496.6	475.0	453.4	431.8	410.2	396.1
62.5°	528.7	514.4	500.1	485.8	471.5	453.5	431.9	410.3	388.7	367.0	353.8
65°	462.9	448.6	434.2	419.9	405.6	388.3	368.0	347.7	327.4	307.0	294.3
67.5°	397.0	382.5	368.1	353.6	339.1	322.1	302.6	283.2	263.7	244.2	234.7
70°	353.9	339.8	325.8	311.7	297.6	281.5	263.3	245.0	226.8	208.6	199.5
72.5°	310.7	297.0	283.1	269.2	255.4	240.1	223.6	207.1	190.5	173.9	166.4
75°	245.0	232.4	219.9	207.4	194.9	181.5	167.2	152.8	138.5	124.2	121.6
77.5°	184.9	173.6	162.3	151.0	139.7	129.4	120.2	111.0	101.8	92.6	91.2
80°	146.5	135.8	125.1	114.4	103.8	95.7	90.2	84.7	79.3	73.8	73.0
82.5°	109.9	100.7	91.5	82.2	73.0	67.2	64.6	62.1	59.5	56.9	56.1
85°	62.1	56.4	50.6	44.9	39.2	35.9	35.1	34.4	33.6	32.8	32.3
87.5°	22.7	20.9	19.1	17.3	15.5	15.0	15.6	16.2	16.9	17.5	17.5
90°	1.1	3.5	6.0	8.5	10.9	13.8	17.0	20.1	23.3	26.6	27.6
92.5°	20.6	19.9	19.2	18.5	17.8	18.7	21.1	23.5	25.9	28.3	29.9
95°	67.5	57.4	47.4	37.3	27.2	23.5	26.2	28.9	31.6	34.4	36.1
97.5°	135.7	131.2	126.7	122.2	117.6	106.5	88.8	71.1	53.4	35.6	37.6
100°	187.1	192.0	196.9	201.8	206.8	190.0	151.7	113.3	74.9	36.5	38.5
102.5°	245.6	249.1	252.6	256.1	259.8	240.6	198.6	156.7	114.8	72.8	66.7
105°	329.9	332.6	335.4	338.0	340.7	331.1	308.8	286.7	264.6	242.5	198.9
107.5°	419.0	421.1	423.3	425.4	427.6	430.4	433.9	437.4	440.9	444.4	412.4
110°	478.3	480.3	482.2	484.1	486.1	488.4	491.2	493.9	496.6	499.3	491.2



TEST NUMBER: P332464-935

CATALOG NUMBER: S123RDIW-S1000D1320U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	534.9	536.7	538.5	540.3	542.0	544.2	547.0	549.7	552.4	555.1	555.3
115°	618.9	620.4	621.8	623.3	624.7	626.6	628.8	631.0	633.3	635.5	637.9
117.5°	700.2	702.0	703.8	705.6	707.4	708.9	710.0	711.2	712.3	713.4	715.4
120°	750.6	752.9	755.0	757.2	759.5	761.0	761.6	762.4	763.2	763.9	765.9
122.5°	802.0	803.8	805.6	807.4	809.3	810.6	811.6	812.5	813.5	814.4	815.8
125°	872.4	874.3	876.3	878.3	880.3	881.8	882.7	883.7	884.7	885.7	886.1
127.5°	940.6	942.5	944.5	946.5	948.5	950.0	951.2	952.4	953.6	954.8	955.5
130°	983.1	985.1	987.1	989.0	991.0	992.5	993.4	994.5	995.4	996.3	997.4
132.5°	1023.8	1025.8	1027.8	1029.8	1031.7	1033.1	1033.9	1034.7	1035.4	1036.2	1037.2
135°	1086.1	1087.5	1089.0	1090.5	1092.0	1093.2	1094.2	1095.2	1096.1	1097.2	1097.9
137.5°	1139.2	1141.1	1143.0	1144.8	1146.7	1147.9	1148.4	1149.0	1149.5	1150.0	1151.2
140°	1174.7	1176.1	1177.6	1179.1	1180.5	1181.6	1182.4	1183.1	1183.9	1184.6	1185.6
142.5°	1207.4	1208.8	1210.4	1211.9	1213.3	1214.4	1215.1	1215.9	1216.6	1217.4	1218.1
145°	1253.3	1255.0	1256.7	1258.4	1260.2	1261.2	1261.7	1262.2	1262.7	1263.2	1263.7
147.5°	1296.4	1297.5	1298.6	1299.8	1301.0	1301.7	1302.3	1302.7	1303.2	1303.7	1304.2
150°	1323.0	1323.7	1324.5	1325.2	1325.9	1326.5	1327.1	1327.5	1328.0	1328.5	1329.0
152.5°	1346.9	1347.2	1347.6	1347.9	1348.2	1348.6	1348.9	1349.2	1349.4	1349.8	1350.7
155°	1380.5	1380.1	1379.6	1379.1	1378.5	1378.5	1378.7	1379.0	1379.2	1379.4	1380.7
157.5°	1406.7	1406.6	1406.6	1406.5	1406.4	1406.4	1406.1	1405.8	1405.6	1405.3	1406.8
160°	1422.6	1422.4	1422.1	1421.9	1421.6	1421.4	1421.2	1420.9	1420.6	1420.4	1421.9
162.5°	1437.7	1437.0	1436.4	1435.7	1435.1	1434.7	1434.4	1434.2	1433.9	1433.7	1435.4
165°	1455.9	1455.1	1454.3	1453.6	1452.9	1452.4	1452.2	1451.9	1451.6	1451.4	1453.4
167.5°	1470.0	1469.0	1468.0	1467.1	1466.0	1465.6	1465.6	1465.6	1465.6	1465.6	1467.6
170°	1478.0	1477.0	1476.0	1475.1	1474.0	1473.5	1473.5	1473.5	1473.5	1473.5	1475.5
172.5°	1483.3	1482.1	1480.9	1479.7	1478.6	1478.1	1478.3	1478.5	1478.7	1478.9	1480.8
175°	1490.1	1488.9	1487.7	1486.4	1485.2	1484.7	1485.0	1485.2	1485.5	1485.7	1487.5
177.5°	1491.9	1490.9	1490.0	1489.0	1488.0	1487.6	1487.8	1488.0	1488.2	1488.4	1490.0
180°	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1



TEST NUMBER: P332464-935

CATALOG NUMBER: S123RDIW-S1000D1320U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9
2.5°	1439.2	1441.5	1443.7	1444.7	1444.2	1443.9	1443.5	1443.0
5°	1429.7	1432.0	1434.3	1435.3	1434.8	1434.3	1433.7	1433.2
7.5°	1409.5	1410.8	1412.1	1412.4	1411.4	1410.6	1409.7	1408.8
10°	1391.5	1391.8	1392.1	1391.5	1390.2	1388.9	1387.6	1386.3
12.5°	1369.1	1369.0	1368.8	1368.0	1366.5	1364.9	1363.5	1361.9
15°	1329.8	1328.5	1327.2	1325.6	1323.8	1322.0	1320.2	1318.4
17.5°	1282.8	1280.0	1277.3	1274.5	1271.9	1269.1	1266.4	1263.7
20°	1250.6	1247.2	1243.9	1240.6	1237.5	1234.3	1231.2	1228.1
22.5°	1216.2	1211.9	1207.7	1204.1	1201.3	1198.3	1195.4	1192.5
25°	1159.8	1154.3	1148.8	1144.6	1141.8	1138.9	1136.1	1133.2
27.5°	1098.3	1090.7	1083.1	1077.1	1072.7	1068.3	1063.9	1059.6
30°	1054.6	1045.7	1036.8	1030.4	1026.1	1022.0	1017.8	1013.7
32.5°	1011.6	1001.9	992.2	985.2	980.9	976.5	972.1	967.7
35°	947.9	936.7	925.5	917.6	912.9	908.2	903.5	898.8
37.5°	879.5	866.8	854.1	844.8	839.0	833.3	827.5	821.7
40°	831.9	818.4	804.8	795.0	789.0	783.1	777.1	771.1
42.5°	786.3	771.5	756.6	746.6	741.2	735.9	730.5	725.1
45°	719.1	704.3	689.4	678.9	672.6	666.4	660.1	653.9
47.5°	649.7	633.6	617.4	606.6	601.0	595.5	589.9	584.3
50°	602.9	586.7	570.6	559.5	553.5	547.5	541.6	535.5
52.5°	557.6	540.8	524.0	512.9	507.6	502.2	496.9	491.5
55°	490.1	475.0	459.9	449.7	444.5	439.3	434.1	428.9
57.5°	423.8	409.5	395.3	385.9	381.5	377.0	372.6	368.2
60°	382.0	368.0	353.9	344.7	340.3	335.8	331.4	326.9
62.5°	340.5	327.4	314.1	305.1	300.6	295.9	291.3	286.6
65°	281.5	268.7	256.0	248.1	245.3	242.5	239.6	236.7
67.5°	225.2	215.6	206.1	199.8	196.7	193.6	190.5	187.5
70°	190.4	181.2	172.1	166.2	163.2	160.4	157.6	154.7
72.5°	159.0	151.5	144.1	139.8	138.6	137.4	136.2	135.0
75°	119.0	116.4	113.8	112.3	111.8	111.2	110.6	110.1
77.5°	89.8	88.3	87.0	86.0	85.5	85.0	84.5	83.9
80°	72.2	71.5	70.7	70.1	69.6	69.1	68.4	67.9
82.5°	55.4	54.6	53.8	53.4	53.3	53.2	53.0	53.0
85°	31.8	31.3	30.7	30.5	30.5	30.5	30.5	30.5
87.5°	17.5	17.5	17.5	17.4	17.3	17.1	17.0	17.0
90°	28.5	29.5	30.5	31.3	31.8	32.2	32.7	33.2
92.5°	31.5	33.1	34.6	35.6	35.9	36.2	36.4	36.8
95°	37.8	39.5	41.2	42.1	42.1	42.1	42.1	42.1
97.5°	39.6	41.6	43.5	44.6	44.9	45.1	45.4	45.6
100°	40.5	42.4	44.4	45.5	45.7	46.0	46.2	46.5
102.5°	60.6	54.5	48.5	45.6	46.1	46.5	46.9	47.4
105°	155.3	111.8	68.3	46.8	47.3	47.7	48.2	48.7
107.5°	380.6	348.6	316.7	284.3	251.5	218.6	185.8	153.0
110°	483.0	474.9	466.8	445.1	410.0	374.8	339.7	304.4





TEST NUMBER: P332464-935

CATALOG NUMBER: S123RDIW-S1000D1320U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	555.4	555.5	555.7	552.1	544.6	537.2	529.8	522.4
115°	640.4	642.8	645.3	647.0	648.0	649.0	650.0	651.0
117.5°	717.4	719.3	721.3	722.4	722.6	722.7	723.0	723.2
120°	767.8	769.8	771.8	772.7	772.7	772.7	772.7	772.7
122.5°	817.2	818.6	819.9	820.7	820.9	821.0	821.3	821.5
125°	886.7	887.2	887.6	888.1	888.6	889.2	889.6	890.1
127.5°	956.3	957.1	957.9	958.0	957.6	957.1	956.6	956.1
130°	998.3	999.4	1000.3	1000.6	1000.1	999.6	999.1	998.6
132.5°	1038.2	1039.2	1040.2	1040.3	1039.7	1039.0	1038.3	1037.6
135°	1098.6	1099.3	1100.1	1100.1	1099.3	1098.6	1097.9	1097.2
137.5°	1152.4	1153.6	1154.8	1155.1	1154.6	1154.2	1153.7	1153.1
140°	1186.5	1187.6	1188.5	1188.8	1188.3	1187.7	1187.3	1186.8
142.5°	1218.9	1219.7	1220.6	1220.6	1219.9	1219.2	1218.5	1217.8
145°	1264.2	1264.6	1265.2	1265.4	1265.4	1265.4	1265.4	1265.4
147.5°	1304.7	1305.2	1305.7	1305.4	1304.2	1303.1	1302.0	1300.8
150°	1329.5	1330.0	1330.5	1330.3	1329.6	1328.9	1328.2	1327.4
152.5°	1351.5	1352.5	1353.3	1353.2	1352.0	1350.9	1349.8	1348.7
155°	1381.9	1383.1	1384.4	1384.2	1382.8	1381.3	1379.8	1378.4
157.5°	1408.3	1409.8	1411.3	1411.0	1409.1	1407.2	1405.2	1403.3
160°	1423.3	1424.9	1426.3	1426.2	1424.4	1422.7	1421.0	1419.3
162.5°	1437.0	1438.7	1440.4	1440.5	1438.9	1437.4	1435.9	1434.3
165°	1455.3	1457.3	1459.3	1459.4	1457.7	1456.0	1454.2	1452.5
167.5°	1469.6	1471.4	1473.4	1473.4	1471.4	1469.6	1467.6	1465.6
170°	1477.5	1479.5	1481.4	1481.4	1479.5	1477.5	1475.5	1473.5
172.5°	1482.8	1484.8	1486.8	1486.6	1484.5	1482.3	1480.1	1478.0
175°	1489.2	1490.9	1492.6	1492.5	1490.6	1488.6	1486.6	1484.6
177.5°	1491.5	1493.1	1494.7	1494.5	1492.5	1490.6	1488.6	1486.6
180°	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1

(END OF REPORT)