

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332457-935

Luminaire Tested: **S123RDIW-S1000D755U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332457-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIW-S1000D755U935-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 755 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5520.6 lumens  
Efficiency: N/A  
Efficacy: 103.0 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 53.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332457-935

CATALOG NUMBER: S123RDIW-S1000D755U935-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

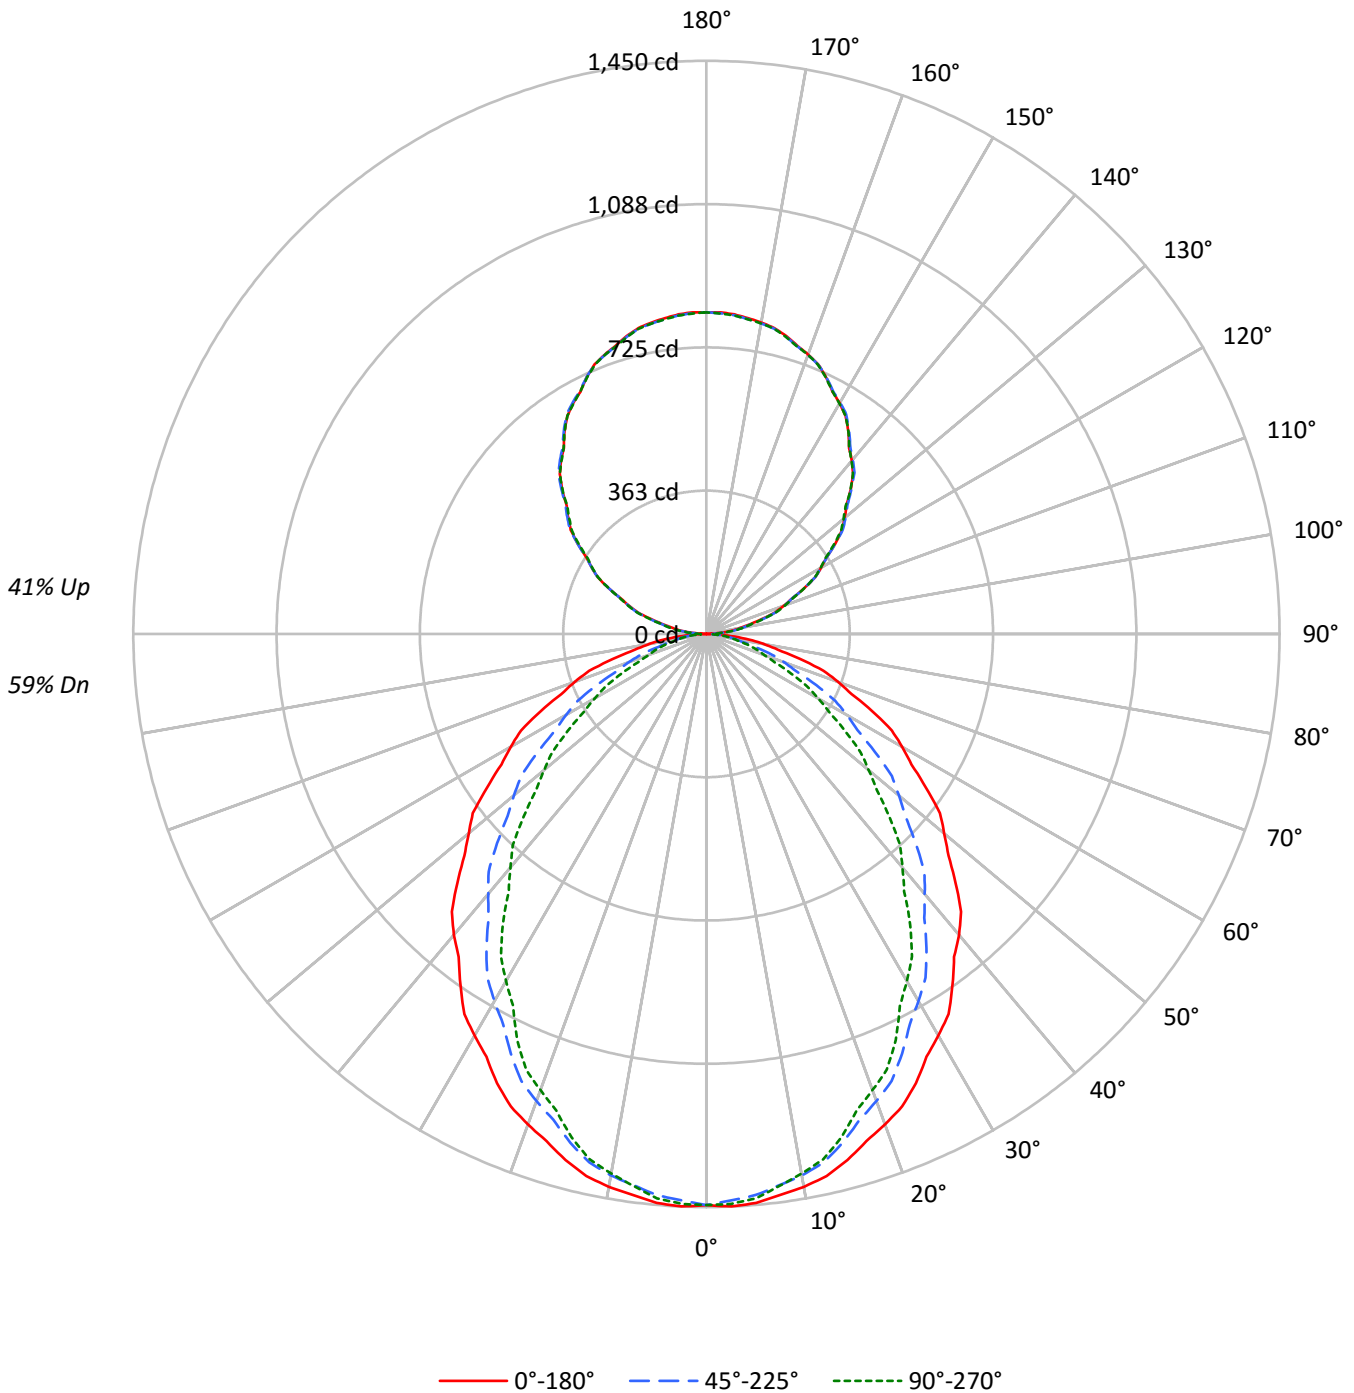



TEST NUMBER: P332457-935

CATALOG NUMBER: S123RDIW-S1000D755U935-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	65	65	65	59
1	100	96	92	89	93	90	86	84	78	76	74	67	66	64	58	56	55	51
2	92	84	78	73	85	79	74	69	69	65	61	60	57	54	51	49	47	43
3	84	74	67	61	78	70	63	58	61	56	52	53	49	46	46	43	41	37
4	77	66	58	52	72	62	55	50	55	49	45	48	43	40	41	38	35	32
5	71	59	51	45	66	56	48	43	49	43	39	43	38	35	37	34	31	28
6	65	53	45	39	61	50	43	38	44	39	34	39	34	31	34	30	27	25
7	60	48	40	35	56	46	38	33	40	35	30	36	31	27	31	27	24	22
8	56	44	36	31	52	42	34	30	37	31	27	33	28	25	29	25	22	20
9	52	40	33	28	49	38	31	27	34	28	24	30	25	22	26	23	20	18
10	49	37	30	25	46	35	28	24	31	26	22	28	23	20	25	21	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	15553	15553	15553
5°	15612	15397	15486
10°	15524	15204	15152
15°	15357	14848	14692
20°	15128	14403	14068
25°	14892	13904	13459
30°	14579	13328	12599
35°	14259	12750	11811
40°	13964	12069	10835
45°	13575	11399	9954
50°	13147	10637	8967
55°	12710	9764	8049
60°	12312	8831	7037
65°	11790	7819	6029
70°	11138	6565	4869
75°	10189	5165	4579
80°	9081	4575	4209
85°	7669	4051	3767



TEST NUMBER: P332457-935

CATALOG NUMBER: S123RDIW-S1000D755U935-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	135.7	2.5
10°-20°	377.5	6.8
20°-30°	543.6	9.8
30°-40°	612.3	11.1
40°-50°	585.8	10.6
50°-60°	479.7	8.7
60°-70°	323.7	5.9
70°-80°	162.8	2.9
80°-90°	45.5	0.8
90°-100°	53.0	1.0
100°-110°	158.6	2.9
110°-120°	269.8	4.9
120°-130°	354.9	6.4
130°-140°	398.9	7.2
140°-150°	392.1	7.1
150°-160°	330.1	6.0
160°-170°	219.7	4.0
170°-180°	76.9	1.4
0°-30°	1056.8	19.1
0°-40°	1669.1	30.2
0°-60°	2734.6	49.5
0°-90°	3266.6	59.2
90°-120°	481.4	8.7
90°-150°	1627.3	29.5
90°-180°	2254.0	40.8
0°-180°	5520.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1445	1445	1445	1445	1445	
5°	1445	1439	1425	1435	1433	137
15°	1378	1364	1332	1326	1318	388
25°	1254	1223	1171	1147	1133	576
35°	1085	1041	970	922	899	679
45°	892	837	749	684	654	688
55°	677	618	520	455	429	607
65°	463	397	307	252	237	458
75°	245	188	124	113	110	261
85°	62	38	33	31	30	70
90°	1	7	15	18	19	5
95°	38	42	47	50	50	42
105°	144	145	151	151	152	154
115°	272	273	272	273	272	269
125°	398	399	398	396	393	354
135°	516	519	519	516	515	397
145°	626	627	629	628	626	391
155°	716	716	717	719	715	330
165°	780	778	778	782	778	220
175°	812	809	809	812	808	77
180°	814	814	814	814	814	



TEST NUMBER: P332457-935

CATALOG NUMBER: S123RDIW-S1000D755U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9
2.5°	1449.6	1448.7	1447.9	1447.1	1446.2	1444.6	1442.1	1439.6	1437.1	1434.6	1436.8
5°	1444.9	1443.6	1442.3	1441.0	1439.7	1437.4	1434.3	1431.2	1428.1	1425.0	1427.3
7.5°	1431.5	1430.1	1428.7	1427.3	1425.9	1423.1	1419.1	1415.1	1411.0	1407.0	1408.3
10°	1420.3	1418.5	1416.6	1414.8	1413.0	1409.7	1405.1	1400.3	1395.7	1391.0	1391.3
12.5°	1404.4	1402.3	1400.3	1398.3	1396.2	1392.3	1386.6	1380.9	1375.2	1369.4	1369.2
15°	1378.1	1375.3	1372.3	1369.5	1366.7	1361.6	1354.3	1346.9	1339.7	1332.4	1331.1
17.5°	1345.1	1341.7	1338.4	1335.1	1331.7	1325.4	1316.1	1306.9	1297.6	1288.3	1285.6
20°	1320.7	1316.6	1312.3	1308.2	1304.0	1297.0	1287.1	1277.2	1267.3	1257.4	1254.0
22.5°	1293.5	1288.7	1283.9	1279.1	1274.4	1266.7	1256.1	1245.6	1235.1	1224.6	1220.4
25°	1253.9	1247.4	1240.9	1234.3	1227.9	1218.6	1206.6	1194.6	1182.7	1170.7	1165.2
27.5°	1205.8	1198.7	1191.5	1184.3	1177.1	1166.8	1153.5	1140.1	1126.8	1113.5	1105.9
30°	1173.0	1165.2	1157.4	1149.6	1141.8	1130.6	1116.0	1101.4	1086.8	1072.3	1063.4
32.5°	1140.2	1131.4	1122.5	1113.6	1104.8	1092.7	1077.3	1061.9	1046.4	1031.0	1021.3
35°	1085.1	1075.7	1066.3	1057.0	1047.7	1034.8	1018.7	1002.5	986.4	970.3	959.1
37.5°	1029.3	1018.9	1008.5	998.1	987.7	973.9	956.7	939.4	922.1	904.9	892.2
40°	993.8	982.3	970.8	959.3	947.9	932.9	914.5	896.0	877.4	858.9	845.4
42.5°	953.4	941.9	930.5	919.0	907.6	892.3	873.2	854.1	835.0	815.9	801.1
45°	891.8	880.0	868.3	856.6	844.9	829.1	809.0	788.9	768.9	748.8	734.0
47.5°	830.2	817.3	804.4	791.5	778.7	762.2	742.2	722.1	702.1	682.0	665.9
50°	785.1	772.9	760.7	748.5	736.2	719.5	698.4	677.3	656.3	635.2	619.0
52.5°	744.9	731.6	718.2	705.0	691.7	674.6	653.8	632.8	612.0	591.1	574.3
55°	677.3	664.6	651.8	639.0	626.3	608.8	586.7	564.6	542.4	520.3	505.2
57.5°	615.0	601.1	587.2	573.3	559.4	541.3	519.0	496.8	474.6	452.4	438.1
60°	571.9	557.6	543.2	528.9	514.5	496.6	475.0	453.4	431.8	410.2	396.1
62.5°	528.7	514.4	500.1	485.8	471.5	453.5	431.9	410.3	388.7	367.0	353.8
65°	462.9	448.6	434.2	419.9	405.6	388.3	368.0	347.7	327.4	307.0	294.3
67.5°	397.0	382.5	368.1	353.6	339.1	322.1	302.6	283.2	263.7	244.2	234.7
70°	353.9	339.8	325.8	311.7	297.6	281.5	263.3	245.0	226.8	208.6	199.5
72.5°	310.7	297.0	283.1	269.2	255.4	240.1	223.6	207.1	190.5	173.9	166.4
75°	245.0	232.4	219.9	207.4	194.9	181.5	167.2	152.8	138.5	124.2	121.6
77.5°	184.9	173.6	162.3	151.0	139.7	129.4	120.2	111.0	101.8	92.6	91.2
80°	146.5	135.8	125.1	114.4	103.8	95.7	90.2	84.7	79.3	73.8	73.0
82.5°	109.9	100.7	91.5	82.2	73.0	67.2	64.6	62.1	59.5	56.9	56.1
85°	62.1	56.4	50.6	44.9	39.2	35.9	35.1	34.4	33.6	32.8	32.3
87.5°	22.6	20.6	18.6	16.6	14.6	13.8	14.1	14.6	14.9	15.2	15.2
90°	0.6	2.1	3.4	4.9	6.3	7.9	9.8	11.6	13.5	15.3	15.9
92.5°	15.5	16.4	17.4	18.3	19.3	20.3	21.4	22.5	23.5	24.5	25.0
95°	37.7	38.7	39.7	40.7	41.7	42.7	43.9	45.0	46.1	47.3	47.9
97.5°	67.0	67.7	68.4	69.2	69.9	70.7	71.5	72.3	73.2	74.0	74.6
100°	86.9	87.7	88.6	89.5	90.3	91.1	91.8	92.6	93.2	93.9	94.4
102.5°	109.9	110.5	111.0	111.4	111.9	112.7	113.7	114.6	115.5	116.4	116.8
105°	143.8	144.0	144.4	144.6	144.9	145.7	147.0	148.3	149.6	150.8	150.8
107.5°	183.1	183.3	183.5	183.7	183.8	184.2	184.7	185.2	185.7	186.2	186.7
110°	207.7	208.0	208.3	208.5	208.8	209.1	209.4	209.7	210.0	210.3	210.9



TEST NUMBER: P332457-935

CATALOG NUMBER: S123RDIW-S1000D755U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	233.2	233.4	233.6	233.8	233.9	234.0	234.1	234.2	234.2	234.3	235.0
115°	271.6	272.0	272.4	272.9	273.3	273.4	273.1	272.9	272.5	272.2	272.4
117.5°	310.2	310.5	310.7	311.1	311.3	311.3	310.9	310.6	310.2	309.8	309.8
120°	334.2	335.1	336.0	336.8	337.7	337.7	337.0	336.3	335.6	334.8	334.8
122.5°	359.3	359.9	360.5	361.2	361.8	361.9	361.5	361.2	360.8	360.4	360.1
125°	397.5	398.0	398.4	398.8	399.2	399.2	399.0	398.7	398.4	398.1	397.6
127.5°	432.7	433.7	434.6	435.5	436.4	436.7	436.4	436.1	435.8	435.5	434.6
130°	456.3	457.4	458.6	459.7	460.8	461.2	460.8	460.4	459.9	459.5	458.9
132.5°	479.8	481.0	482.1	483.2	484.4	484.7	484.5	484.1	483.8	483.5	482.8
135°	515.7	516.6	517.5	518.3	519.1	519.5	519.4	519.2	519.1	518.9	518.3
137.5°	549.0	549.7	550.4	551.1	551.8	552.3	552.7	553.1	553.5	553.8	553.2
140°	572.0	572.7	573.4	574.1	574.8	575.2	575.4	575.5	575.7	575.8	575.7
142.5°	593.0	593.7	594.3	595.0	595.7	596.2	596.5	596.8	597.0	597.3	597.1
145°	625.7	625.9	626.2	626.5	626.8	627.2	627.6	628.0	628.4	628.9	628.7
147.5°	654.3	654.8	655.3	655.8	656.3	656.8	657.2	657.5	658.0	658.4	658.4
150°	674.2	674.5	674.8	675.1	675.4	675.6	675.9	676.2	676.5	676.7	676.7
152.5°	690.6	691.0	691.4	691.8	692.2	692.4	692.6	692.8	692.9	693.1	693.4
155°	716.4	716.4	716.4	716.4	716.4	716.4	716.6	716.8	716.9	717.0	717.6
157.5°	738.4	738.2	738.0	737.9	737.7	737.7	737.8	737.9	738.0	738.1	738.7
160°	752.2	751.9	751.7	751.3	751.1	750.9	750.9	750.9	750.9	750.9	751.7
162.5°	764.5	764.1	763.6	763.3	762.8	762.8	762.8	762.9	763.1	763.2	763.9
165°	780.3	779.9	779.5	779.0	778.6	778.3	778.3	778.3	778.3	778.3	779.2
167.5°	793.0	792.4	791.9	791.3	790.7	790.5	790.6	790.7	790.8	790.9	791.8
170°	800.1	799.5	799.0	798.4	797.8	797.5	797.5	797.5	797.5	797.5	798.6
172.5°	805.7	805.2	804.6	804.0	803.5	803.1	803.1	803.1	803.1	803.1	804.1
175°	811.6	811.1	810.5	809.9	809.3	809.1	809.1	809.1	809.1	809.1	809.9
177.5°	814.1	813.6	813.1	812.7	812.3	812.0	812.0	812.0	812.0	812.0	812.7
180°	813.6	813.6	813.6	813.6	813.6	813.6	813.6	813.6	813.6	813.6	813.6



TEST NUMBER: P332457-935

CATALOG NUMBER: S123RDIW-S1000D755U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9
2.5°	1439.2	1441.5	1443.7	1444.7	1444.2	1443.9	1443.5	1443.0
5°	1429.7	1432.0	1434.3	1435.3	1434.8	1434.3	1433.7	1433.2
7.5°	1409.5	1410.8	1412.1	1412.4	1411.4	1410.6	1409.7	1408.8
10°	1391.5	1391.8	1392.1	1391.5	1390.2	1388.9	1387.6	1386.3
12.5°	1369.1	1369.0	1368.8	1368.0	1366.5	1364.9	1363.5	1361.9
15°	1329.8	1328.5	1327.2	1325.6	1323.8	1322.0	1320.2	1318.4
17.5°	1282.8	1280.0	1277.3	1274.5	1271.9	1269.1	1266.4	1263.7
20°	1250.6	1247.2	1243.9	1240.6	1237.5	1234.3	1231.2	1228.1
22.5°	1216.2	1211.9	1207.7	1204.1	1201.3	1198.3	1195.4	1192.5
25°	1159.8	1154.3	1148.8	1144.6	1141.8	1138.9	1136.1	1133.2
27.5°	1098.3	1090.7	1083.1	1077.1	1072.7	1068.3	1063.9	1059.6
30°	1054.6	1045.7	1036.8	1030.4	1026.1	1022.0	1017.8	1013.7
32.5°	1011.6	1001.9	992.2	985.2	980.9	976.5	972.1	967.7
35°	947.9	936.7	925.5	917.6	912.9	908.2	903.5	898.8
37.5°	879.5	866.8	854.1	844.8	839.0	833.3	827.5	821.7
40°	831.9	818.4	804.8	795.0	789.0	783.1	777.1	771.1
42.5°	786.3	771.5	756.6	746.6	741.2	735.9	730.5	725.1
45°	719.1	704.3	689.4	678.9	672.6	666.4	660.1	653.9
47.5°	649.7	633.6	617.4	606.6	601.0	595.5	589.9	584.3
50°	602.9	586.7	570.6	559.5	553.5	547.5	541.6	535.5
52.5°	557.6	540.8	524.0	512.9	507.6	502.2	496.9	491.5
55°	490.1	475.0	459.9	449.7	444.5	439.3	434.1	428.9
57.5°	423.8	409.5	395.3	385.9	381.5	377.0	372.6	368.2
60°	382.0	368.0	353.9	344.7	340.3	335.8	331.4	326.9
62.5°	340.5	327.4	314.1	305.1	300.6	295.9	291.3	286.6
65°	281.5	268.7	256.0	248.1	245.3	242.5	239.6	236.7
67.5°	225.2	215.6	206.1	199.8	196.7	193.6	190.5	187.5
70°	190.4	181.2	172.1	166.2	163.2	160.4	157.6	154.7
72.5°	159.0	151.5	144.1	139.8	138.6	137.4	136.2	135.0
75°	119.0	116.4	113.8	112.3	111.8	111.2	110.6	110.1
77.5°	89.8	88.3	87.0	86.0	85.5	85.0	84.5	83.9
80°	72.2	71.5	70.7	70.1	69.6	69.1	68.4	67.9
82.5°	55.4	54.6	53.8	53.4	53.3	53.2	53.0	53.0
85°	31.8	31.3	30.7	30.5	30.5	30.5	30.5	30.5
87.5°	15.1	15.0	14.9	14.7	14.6	14.5	14.3	14.1
90°	16.4	17.0	17.7	18.0	18.3	18.6	18.9	19.2
92.5°	25.5	25.9	26.3	26.5	26.3	26.2	26.0	25.8
95°	48.4	49.0	49.6	49.9	49.9	49.9	49.9	49.9
97.5°	75.3	75.9	76.6	76.9	76.9	76.8	76.7	76.7
100°	94.8	95.2	95.7	96.0	96.3	96.6	96.9	97.1
102.5°	117.3	117.7	118.1	118.3	118.3	118.2	118.1	118.1
105°	150.8	150.8	150.8	150.9	151.3	151.5	151.8	152.1
107.5°	187.1	187.6	188.0	188.2	188.0	187.9	187.7	187.5
110°	211.4	212.0	212.5	212.7	212.4	212.1	211.8	211.5





TEST NUMBER: P332457-935

CATALOG NUMBER: S123RDIW-S1000D755U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	235.7	236.3	237.0	237.3	237.3	237.2	237.1	237.1
115°	272.5	272.7	272.9	272.9	272.7	272.5	272.4	272.2
117.5°	309.8	309.7	309.7	309.5	309.1	308.7	308.3	307.9
120°	334.6	334.4	334.3	334.1	333.8	333.6	333.2	332.9
122.5°	359.7	359.3	359.0	358.6	358.2	357.7	357.4	357.0
125°	397.0	396.4	395.9	395.3	394.8	394.2	393.6	393.0
127.5°	433.9	433.1	432.3	431.5	430.9	430.2	429.6	429.0
130°	458.4	457.8	457.2	456.4	455.5	454.4	453.5	452.5
132.5°	482.2	481.5	480.8	480.1	479.3	478.5	477.8	477.0
135°	517.8	517.2	516.7	516.3	515.9	515.7	515.4	515.1
137.5°	552.6	552.0	551.5	550.9	550.4	549.7	549.2	548.7
140°	575.5	575.4	575.2	574.6	573.7	572.7	571.7	570.7
142.5°	597.0	596.8	596.7	596.2	595.5	594.7	593.9	593.1
145°	628.5	628.4	628.3	627.9	627.3	626.8	626.2	625.7
147.5°	658.4	658.4	658.4	658.0	657.1	656.3	655.4	654.5
150°	676.7	676.7	676.7	676.3	675.5	674.7	673.8	673.0
152.5°	693.6	693.8	694.1	693.8	693.0	692.3	691.6	690.9
155°	718.2	718.8	719.3	719.1	718.1	717.1	716.1	715.1
157.5°	739.3	739.9	740.5	740.4	739.6	738.8	738.0	737.2
160°	752.3	753.0	753.7	753.8	753.3	752.7	752.1	751.6
162.5°	764.6	765.3	766.0	765.9	765.0	764.1	763.2	762.2
165°	780.1	780.9	781.8	781.7	780.8	779.7	778.8	777.7
167.5°	792.6	793.6	794.4	794.4	793.6	792.6	791.8	790.9
170°	799.5	800.6	801.5	801.5	800.6	799.5	798.6	797.5
172.5°	804.9	805.8	806.7	806.7	805.6	804.7	803.7	802.7
175°	810.8	811.6	812.4	812.4	811.4	810.4	809.4	808.4
177.5°	813.4	814.1	814.8	814.7	813.9	813.0	812.3	811.5
180°	813.6	813.6	813.6	813.6	813.6	813.6	813.6	813.6

(END OF REPORT)