

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332402-935

Luminaire Tested: **S123RDIW-S340D1320U935-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332402-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIW-S340D1320U935-4F0-1E-UDD-A  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 1320 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5715.2 lumens  
Efficiency: N/A  
Efficacy: 122.6 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 46.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

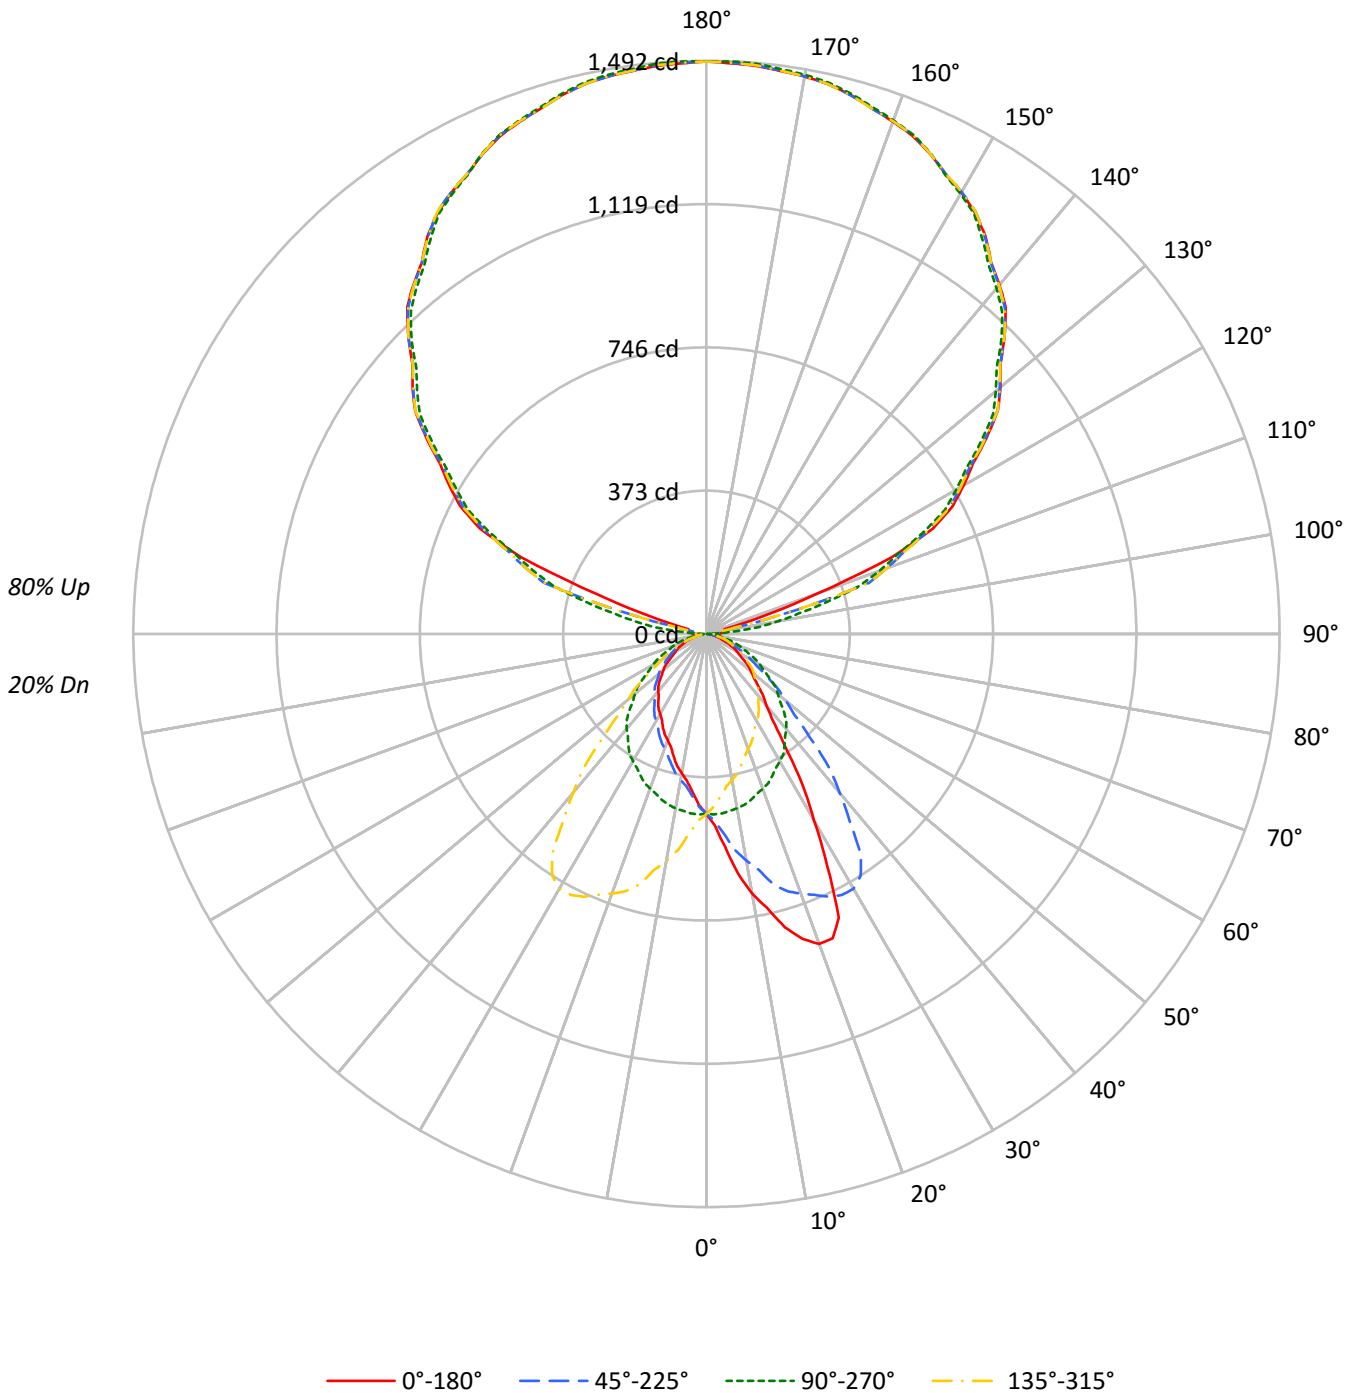



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	100	100	100	100	89	89	89	89	67	67	67	47	47	47	29	29	29	20				
1	91	87	84	80	81	77	74	72	59	57	55	42	41	40	26	25	25	18				
2	83	76	71	66	74	68	63	59	52	49	46	37	35	33	23	22	21	15				
3	76	67	61	55	67	60	54	50	46	42	39	33	30	28	21	19	18	13				
4	70	60	52	47	61	53	47	42	41	36	33	29	27	24	19	17	16	11				
5	64	53	45	40	56	47	41	36	36	32	29	26	23	21	17	15	14	10				
6	59	47	40	34	52	42	36	31	33	28	25	24	21	19	15	14	12	9				
7	54	43	35	30	48	38	32	27	30	25	22	22	19	16	14	12	11	8				
8	50	39	31	26	44	35	28	24	27	22	19	20	17	15	13	11	10	7				
9	47	35	28	23	41	31	25	21	25	20	17	18	15	13	12	10	9	7				
10	43	32	25	21	38	29	23	19	22	18	15	17	14	12	11	9	8	6				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	5044	5044	5044	5044
5°	6013	5065	4460	5065
10°	7507	5037	4030	5037
15°	8811	4985	3675	4985
20°	9835	4907	3373	4907
25°	9678	4827	3188	4827
30°	6955	4753	2997	4753
35°	4644	4654	2872	4654
40°	3421	4539	2746	4539
45°	2871	4332	2620	4332
50°	2534	4064	2445	4064
55°	2222	3757	2205	3757
60°	1978	3462	2019	3462
65°	1737	3148	1880	3148
70°	1363	2867	1718	2867
75°	1198	2504	1568	2504
80°	1048	2126	1543	2126
85°	840	1717	1643	1717



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	46.1	0.8
10°-20°	144.0	2.5
20°-30°	226.2	4.0
30°-40°	236.0	4.1
40°-50°	201.9	3.5
50°-60°	153.9	2.7
60°-70°	98.7	1.7
70°-80°	47.5	0.8
80°-90°	16.7	0.3
90°-100°	54.2	0.9
100°-110°	258.2	4.5
110°-120°	620.2	10.9
120°-130°	789.8	13.8
130°-140°	843.9	14.8
140°-150°	789.1	13.8
150°-160°	636.5	11.1
160°-170°	410.8	7.2
170°-180°	141.6	2.5
0°-30°	416.2	7.3
0°-40°	652.2	11.4
0°-60°	1008.0	17.6
0°-90°	1170.9	20.5
90°-120°	932.6	16.3
90°-150°	3355.4	58.7
90°-180°	4544.0	79.5
0°-180°	5715.2	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	469	469	469	469	469	
5°	556	469	413	469	556	57
15°	791	447	330	447	791	224
25°	815	406	268	406	815	350
35°	353	354	219	354	353	232
45°	189	285	172	285	189	148
55°	118	200	118	200	118	107
65°	68	124	74	124	68	67
75°	29	60	38	60	29	31
85°	7	14	13	14	7	9
90°	33	1	33	1	33	15
95°	42	68	42	68	42	35
105°	49	330	49	330	49	111
115°	651	619	651	619	651	602
125°	890	872	890	872	890	795
135°	1097	1086	1097	1086	1097	846
145°	1265	1253	1265	1253	1265	790
155°	1378	1380	1378	1380	1378	636
165°	1452	1456	1452	1456	1452	410
175°	1485	1490	1485	1490	1485	141
180°	1490	1490	1490	1490	1490	



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6
2.5°	499.1	499.7	497.7	497.3	494.9	494.3	494.3	490.9	488.8	486.1	484.5
5°	556.5	559.6	558.0	554.5	548.5	547.0	543.2	537.2	530.4	521.9	518.0
7.5°	628.1	632.5	630.8	625.3	618.9	613.8	603.0	593.1	579.1	566.8	556.3
10°	686.8	682.3	678.6	673.2	667.4	658.0	646.7	631.3	613.5	599.3	583.8
12.5°	730.8	730.0	725.5	719.9	711.7	702.7	688.9	670.1	649.4	629.0	611.1
15°	790.7	791.9	788.9	783.2	771.5	755.6	734.8	726.9	697.2	675.2	653.2
17.5°	832.2	832.0	831.6	823.5	811.7	800.4	781.0	760.4	733.6	702.5	672.8
20°	858.6	856.5	857.0	847.9	839.1	826.0	807.2	777.3	755.3	719.4	688.6
22.5°	857.9	857.5	859.0	855.9	849.5	839.6	824.7	799.4	771.3	735.0	700.5
25°	814.9	813.2	822.6	825.3	835.5	837.3	832.8	819.1	792.4	755.0	712.3
27.5°	681.9	681.1	698.5	720.5	748.2	769.8	790.7	800.7	792.4	765.6	722.8
30°	559.6	578.5	587.4	619.1	654.4	696.5	733.4	768.4	777.1	765.4	730.4
32.5°	464.7	481.1	488.5	515.7	548.6	598.0	653.3	703.0	738.1	747.0	725.9
35°	353.4	353.6	370.5	382.5	413.0	463.7	517.5	584.1	650.3	700.5	705.7
37.5°	282.1	283.0	293.3	305.2	328.1	354.9	402.3	457.6	534.1	611.1	656.3
40°	243.5	245.3	253.0	264.8	281.2	301.5	338.4	390.5	454.3	540.0	610.0
42.5°	218.8	221.7	225.7	234.8	245.0	264.0	293.8	334.1	392.1	473.1	553.9
45°	188.6	190.2	193.2	197.4	206.6	219.8	239.9	267.0	315.1	380.3	461.2
47.5°	166.3	165.5	168.7	172.0	178.2	187.3	200.7	222.7	257.1	309.4	378.0
50°	151.3	151.0	153.3	155.8	161.7	168.3	179.3	196.0	223.3	266.6	329.4
52.5°	137.2	137.8	139.5	142.7	146.9	152.2	162.1	174.2	197.6	235.0	287.3
55°	118.4	119.0	121.1	123.0	126.0	131.4	137.6	147.7	163.7	189.8	232.9
57.5°	102.5	102.2	104.3	104.8	108.1	112.5	117.4	125.2	136.8	156.2	185.2
60°	91.9	91.3	93.1	94.5	96.3	99.9	103.9	111.5	120.8	135.0	159.9
62.5°	82.2	82.0	83.3	84.7	86.2	89.5	92.8	98.7	106.0	118.0	137.8
65°	68.2	68.8	69.4	70.0	70.8	72.8	76.0	80.1	85.1	93.5	107.7
67.5°	53.6	54.2	54.4	55.6	57.3	58.6	60.6	64.1	67.7	74.7	82.8
70°	43.3	43.1	43.3	43.9	46.1	48.3	51.0	53.6	55.8	60.8	67.6
72.5°	37.2	36.9	37.4	37.5	38.6	39.2	40.8	43.3	46.1	49.5	54.4
75°	28.8	28.8	28.8	28.8	29.7	30.0	30.7	31.3	32.3	33.9	37.5
77.5°	21.4	21.4	21.7	21.9	22.0	22.3	22.6	23.2	23.6	24.5	26.0
80°	16.9	17.0	16.9	17.0	17.0	17.5	17.7	18.3	18.4	19.5	20.1
82.5°	12.7	12.6	12.7	12.9	12.9	13.3	13.3	13.8	13.8	14.3	14.9
85°	6.8	6.5	6.8	6.6	7.1	6.6	6.8	7.2	7.2	7.4	8.3
87.5°	8.3	8.4	8.1	8.1	8.0	8.0	7.8	7.7	7.7	7.4	6.9
90°	33.2	32.7	32.2	31.8	31.3	30.5	29.5	28.5	27.6	26.6	23.3
92.5°	36.8	36.4	36.2	35.9	35.6	34.6	33.1	31.5	29.9	28.3	25.9
95°	42.1	42.1	42.1	42.1	42.1	41.2	39.5	37.8	36.1	34.4	31.6
97.5°	45.6	45.4	45.1	44.9	44.6	43.5	41.6	39.6	37.6	35.6	53.4
100°	46.5	46.2	46.0	45.7	45.5	44.4	42.4	40.5	38.5	36.5	74.9
102.5°	47.4	46.9	46.5	46.1	45.6	48.5	54.5	60.6	66.7	72.8	114.8
105°	48.7	48.2	47.7	47.3	46.8	68.3	111.8	155.3	198.9	242.5	264.6
107.5°	153.0	185.8	218.6	251.5	284.3	316.7	348.6	380.6	412.4	444.4	440.9
110°	304.4	339.7	374.8	410.0	445.1	466.8	474.9	483.0	491.2	499.3	496.6



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	522.4	529.8	537.2	544.6	552.1	555.7	555.5	555.4	555.3	555.1	552.4
115°	651.0	650.0	649.0	648.0	647.0	645.3	642.8	640.4	637.9	635.5	633.3
117.5°	723.2	723.0	722.7	722.6	722.4	721.3	719.3	717.4	715.4	713.4	712.3
120°	772.7	772.7	772.7	772.7	772.7	771.8	769.8	767.8	765.9	763.9	763.2
122.5°	821.5	821.3	821.0	820.9	820.7	819.9	818.6	817.2	815.8	814.4	813.5
125°	890.1	889.6	889.2	888.6	888.1	887.6	887.2	886.7	886.1	885.7	884.7
127.5°	956.1	956.6	957.1	957.6	958.0	957.9	957.1	956.3	955.5	954.8	953.6
130°	998.6	999.1	999.6	1000.1	1000.6	1000.3	999.4	998.3	997.4	996.3	995.4
132.5°	1037.6	1038.3	1039.0	1039.7	1040.3	1040.2	1039.2	1038.2	1037.2	1036.2	1035.4
135°	1097.2	1097.9	1098.6	1099.3	1100.1	1100.1	1099.3	1098.6	1097.9	1097.2	1096.1
137.5°	1153.1	1153.7	1154.2	1154.6	1155.1	1154.8	1153.6	1152.4	1151.2	1150.0	1149.5
140°	1186.8	1187.3	1187.7	1188.3	1188.8	1188.5	1187.6	1186.5	1185.6	1184.6	1183.9
142.5°	1217.8	1218.5	1219.2	1219.9	1220.6	1220.6	1219.7	1218.9	1218.1	1217.4	1216.6
145°	1265.4	1265.4	1265.4	1265.4	1265.4	1265.2	1264.6	1264.2	1263.7	1263.2	1262.7
147.5°	1300.8	1302.0	1303.1	1304.2	1305.4	1305.7	1305.2	1304.7	1304.2	1303.7	1303.2
150°	1327.4	1328.2	1328.9	1329.6	1330.3	1330.5	1330.0	1329.5	1329.0	1328.5	1328.0
152.5°	1348.7	1349.8	1350.9	1352.0	1353.2	1353.3	1352.5	1351.5	1350.7	1349.8	1349.4
155°	1378.4	1379.8	1381.3	1382.8	1384.2	1384.4	1383.1	1381.9	1380.7	1379.4	1379.2
157.5°	1403.3	1405.2	1407.2	1409.1	1411.0	1411.3	1409.8	1408.3	1406.8	1405.3	1405.6
160°	1419.3	1421.0	1422.7	1424.4	1426.2	1426.3	1424.9	1423.3	1421.9	1420.4	1420.6
162.5°	1434.3	1435.9	1437.4	1438.9	1440.5	1440.4	1438.7	1437.0	1435.4	1433.7	1433.9
165°	1452.5	1454.2	1456.0	1457.7	1459.4	1459.3	1457.3	1455.3	1453.4	1451.4	1451.6
167.5°	1465.6	1467.6	1469.6	1471.4	1473.4	1473.4	1471.4	1469.6	1467.6	1465.6	1465.6
170°	1473.5	1475.5	1477.5	1479.5	1481.4	1481.4	1479.5	1477.5	1475.5	1473.5	1473.5
172.5°	1478.0	1480.1	1482.3	1484.5	1486.6	1486.8	1484.8	1482.8	1480.8	1478.9	1478.7
175°	1484.6	1486.6	1488.6	1490.6	1492.5	1492.6	1490.9	1489.2	1487.5	1485.7	1485.5
177.5°	1486.6	1488.6	1490.6	1492.5	1494.5	1494.7	1493.1	1491.5	1490.0	1488.4	1488.2
180°	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6
2.5°	483.8	483.4	481.1	478.5	475.2	472.9	471.1	470.2	467.3	463.7	461.4
5°	513.8	507.7	501.3	493.4	486.2	478.8	474.2	468.8	462.2	454.8	449.5
7.5°	545.7	533.9	521.2	508.1	495.2	483.5	473.2	464.4	453.9	443.2	435.8
10°	570.3	553.0	535.2	516.9	500.3	484.7	472.6	460.8	448.2	435.9	426.6
12.5°	592.6	569.9	549.3	526.8	505.6	486.9	469.6	455.6	440.4	427.4	416.9
15°	620.9	597.5	572.7	538.6	510.3	486.6	465.5	447.3	428.9	412.8	402.6
17.5°	647.2	612.3	578.8	550.4	513.6	484.1	458.3	436.5	416.2	399.2	386.6
20°	658.1	624.2	588.0	551.6	515.6	482.4	452.5	428.4	407.4	388.1	376.5
22.5°	664.7	626.4	588.1	549.1	510.7	476.3	446.8	420.3	397.4	379.2	364.8
25°	672.4	626.6	584.5	546.0	506.9	469.6	434.5	406.4	381.8	362.3	347.1
27.5°	677.4	623.6	573.9	531.1	491.4	454.3	422.1	392.3	367.2	346.6	330.3
30°	678.4	621.2	565.7	519.4	479.1	444.9	410.8	382.4	355.9	334.0	318.7
32.5°	679.7	615.3	554.6	505.4	464.1	430.3	399.4	372.2	345.1	323.6	308.0
35°	674.4	612.0	537.8	481.2	439.9	407.2	379.4	354.2	327.6	306.7	290.8
37.5°	651.6	599.0	520.4	454.0	410.8	380.6	357.8	336.0	311.5	289.0	274.1
40°	628.7	586.2	506.9	437.5	392.4	361.3	340.8	323.0	299.3	278.2	262.2
42.5°	594.5	568.6	494.0	420.2	371.5	341.6	324.3	307.5	286.8	265.4	250.3
45°	531.8	535.2	467.8	392.5	342.6	312.5	296.3	284.6	266.2	248.6	233.1
47.5°	453.1	485.0	437.0	363.2	312.2	284.0	269.8	259.6	247.1	229.8	215.7
50°	401.8	447.3	412.2	343.5	293.1	265.0	251.0	242.7	231.9	218.3	204.8
52.5°	354.5	403.4	382.4	321.4	272.3	246.7	233.0	226.2	217.6	204.7	192.6
55°	289.0	338.6	333.8	288.3	241.3	218.3	207.8	200.2	194.4	184.8	175.1
57.5°	233.8	280.8	283.3	251.3	214.0	191.1	182.2	176.4	172.6	165.4	156.4
60°	199.0	242.1	250.6	226.4	194.4	174.4	165.5	160.8	157.9	152.1	145.3
62.5°	170.1	206.8	216.4	199.1	175.6	156.8	149.9	145.5	143.4	138.4	132.4
65°	130.2	160.7	169.9	160.3	148.0	133.0	127.3	123.6	121.7	119.0	114.5
67.5°	97.9	120.1	130.3	123.5	119.0	109.5	106.0	103.9	102.3	100.4	96.7
70°	78.6	95.1	105.5	103.8	100.1	95.1	92.5	91.1	89.5	87.8	84.6
72.5°	63.2	74.6	84.3	85.2	82.3	81.3	79.0	78.4	77.4	75.5	73.7
75°	41.9	49.8	56.6	59.2	60.4	61.4	60.4	60.2	60.0	58.4	57.3
77.5°	27.5	31.7	36.0	40.5	42.4	43.7	44.0	44.8	44.2	43.4	42.9
80°	21.1	22.0	25.1	28.8	31.9	33.1	33.9	34.3	34.1	33.9	33.1
82.5°	15.3	16.1	17.6	20.2	22.7	24.7	25.2	25.1	25.6	25.7	25.1
85°	8.3	8.4	8.9	9.2	10.6	12.8	13.4	13.9	14.2	14.2	13.0
87.5°	6.6	5.8	5.5	4.9	4.9	4.6	5.1	5.3	6.0	5.9	6.4
90°	20.1	17.0	13.8	10.9	8.5	6.0	3.5	1.1	3.5	6.0	8.5
92.5°	23.5	21.1	18.7	17.8	18.5	19.2	19.9	20.6	19.9	19.2	18.5
95°	28.9	26.2	23.5	27.2	37.3	47.4	57.4	67.5	57.4	47.4	37.3
97.5°	71.1	88.8	106.5	117.6	122.2	126.7	131.2	135.7	131.2	126.7	122.2
100°	113.3	151.7	190.0	206.8	201.8	196.9	192.0	187.1	192.0	196.9	201.8
102.5°	156.7	198.6	240.6	259.8	256.1	252.6	249.1	245.6	249.1	252.6	256.1
105°	286.7	308.8	331.1	340.7	338.0	335.4	332.6	329.9	332.6	335.4	338.0
107.5°	437.4	433.9	430.4	427.6	425.4	423.3	421.1	419.0	421.1	423.3	425.4
110°	493.9	491.2	488.4	486.1	484.1	482.2	480.3	478.3	480.3	482.2	484.1





TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	549.7	547.0	544.2	542.0	540.3	538.5	536.7	534.9	536.7	538.5	540.3
115°	631.0	628.8	626.6	624.7	623.3	621.8	620.4	618.9	620.4	621.8	623.3
117.5°	711.2	710.0	708.9	707.4	705.6	703.8	702.0	700.2	702.0	703.8	705.6
120°	762.4	761.6	761.0	759.5	757.2	755.0	752.9	750.6	752.9	755.0	757.2
122.5°	812.5	811.6	810.6	809.3	807.4	805.6	803.8	802.0	803.8	805.6	807.4
125°	883.7	882.7	881.8	880.3	878.3	876.3	874.3	872.4	874.3	876.3	878.3
127.5°	952.4	951.2	950.0	948.5	946.5	944.5	942.5	940.6	942.5	944.5	946.5
130°	994.5	993.4	992.5	991.0	989.0	987.1	985.1	983.1	985.1	987.1	989.0
132.5°	1034.7	1033.9	1033.1	1031.7	1029.8	1027.8	1025.8	1023.8	1025.8	1027.8	1029.8
135°	1095.2	1094.2	1093.2	1092.0	1090.5	1089.0	1087.5	1086.1	1087.5	1089.0	1090.5
137.5°	1149.0	1148.4	1147.9	1146.7	1144.8	1143.0	1141.1	1139.2	1141.1	1143.0	1144.8
140°	1183.1	1182.4	1181.6	1180.5	1179.1	1177.6	1176.1	1174.7	1176.1	1177.6	1179.1
142.5°	1215.9	1215.1	1214.4	1213.3	1211.9	1210.4	1208.8	1207.4	1208.8	1210.4	1211.9
145°	1262.2	1261.7	1261.2	1260.2	1258.4	1256.7	1255.0	1253.3	1255.0	1256.7	1258.4
147.5°	1302.7	1302.3	1301.7	1301.0	1299.8	1298.6	1297.5	1296.4	1297.5	1298.6	1299.8
150°	1327.5	1327.1	1326.5	1325.9	1325.2	1324.5	1323.7	1323.0	1323.7	1324.5	1325.2
152.5°	1349.2	1348.9	1348.6	1348.2	1347.9	1347.6	1347.2	1346.9	1347.2	1347.6	1347.9
155°	1379.0	1378.7	1378.5	1378.5	1379.1	1379.6	1380.1	1380.5	1380.1	1379.6	1379.1
157.5°	1405.8	1406.1	1406.4	1406.4	1406.5	1406.6	1406.6	1406.7	1406.6	1406.6	1406.5
160°	1420.9	1421.2	1421.4	1421.6	1421.9	1422.1	1422.4	1422.6	1422.4	1422.1	1421.9
162.5°	1434.2	1434.4	1434.7	1435.1	1435.7	1436.4	1437.0	1437.7	1437.0	1436.4	1435.7
165°	1451.9	1452.2	1452.4	1452.9	1453.6	1454.3	1455.1	1455.9	1455.1	1454.3	1453.6
167.5°	1465.6	1465.6	1465.6	1466.0	1467.1	1468.0	1469.0	1470.0	1469.0	1468.0	1467.1
170°	1473.5	1473.5	1473.5	1474.0	1475.1	1476.0	1477.0	1478.0	1477.0	1476.0	1475.1
172.5°	1478.5	1478.3	1478.1	1478.6	1479.7	1480.9	1482.1	1483.3	1482.1	1480.9	1479.7
175°	1485.2	1485.0	1484.7	1485.2	1486.4	1487.7	1488.9	1490.1	1488.9	1487.7	1486.4
177.5°	1488.0	1487.8	1487.6	1488.0	1489.0	1490.0	1490.9	1491.9	1490.9	1490.0	1489.0
180°	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6
2.5°	460.5	458.5	457.0	453.8	451.8	449.5	447.3	448.7	448.5	448.4	448.4
5°	445.1	440.5	436.3	430.8	427.5	423.3	420.1	419.7	420.4	417.7	416.0
7.5°	429.8	423.5	417.5	411.6	405.2	400.1	397.0	395.5	393.5	391.8	389.9
10°	419.0	411.6	405.8	398.4	391.6	385.6	381.8	379.1	377.7	376.3	373.7
12.5°	407.9	400.7	393.3	384.9	378.4	371.4	368.6	365.7	363.0	361.4	357.8
15°	391.8	382.4	374.5	365.7	358.4	351.6	347.7	341.8	341.0	339.0	335.4
17.5°	375.5	365.3	354.5	347.9	339.8	332.7	326.6	324.7	318.9	316.8	313.6
20°	362.7	353.3	345.0	336.4	324.6	318.0	313.1	310.6	305.9	303.1	301.1
22.5°	351.6	342.0	332.5	322.4	312.7	305.2	301.7	297.6	295.2	291.2	289.0
25°	335.8	325.4	313.9	303.1	296.1	290.5	284.8	281.2	277.6	275.8	271.8
27.5°	317.5	306.5	295.8	287.6	279.0	273.5	268.4	265.2	260.8	257.8	255.5
30°	307.3	294.5	285.2	277.8	266.8	261.6	257.8	253.7	250.6	247.4	245.1
32.5°	295.6	283.9	275.2	266.0	257.5	251.8	246.8	243.3	240.6	237.5	235.3
35°	277.2	267.4	258.4	249.2	242.9	237.1	231.3	228.3	225.7	222.8	220.8
37.5°	260.6	251.4	242.8	234.1	226.4	221.6	217.0	214.6	211.1	209.2	207.2
40°	250.4	241.3	232.1	223.7	215.7	212.1	207.8	204.4	201.2	199.8	197.6
42.5°	239.1	230.1	222.3	213.3	206.6	201.7	197.9	194.2	191.7	189.7	188.5
45°	222.5	214.5	206.8	197.8	191.6	187.4	183.0	179.5	177.4	175.9	173.7
47.5°	206.3	198.3	190.5	182.7	176.7	171.9	167.4	165.1	162.1	160.4	158.9
50°	194.6	187.4	179.2	171.9	165.9	161.1	157.5	154.5	151.9	149.6	148.6
52.5°	183.8	176.2	169.0	162.3	155.9	150.5	147.2	144.0	142.1	139.6	138.4
55°	166.1	158.7	152.7	146.0	139.8	135.2	131.2	128.4	126.4	123.6	122.0
57.5°	149.5	142.8	135.6	129.8	123.5	119.6	116.2	112.4	109.9	107.8	106.2
60°	138.2	130.6	124.3	119.0	113.3	108.3	105.3	102.3	99.7	97.5	96.1
62.5°	126.5	119.9	113.9	108.1	102.9	98.5	95.1	92.6	90.2	88.9	87.4
65°	108.5	103.3	97.3	92.5	87.6	84.5	81.6	79.5	77.8	76.8	75.6
67.5°	92.0	87.0	81.7	77.0	73.7	71.3	69.5	67.6	66.7	65.4	64.7
70°	81.3	76.0	71.4	67.8	64.6	62.8	61.6	60.2	59.4	57.8	57.0
72.5°	69.6	65.8	62.4	59.5	56.9	55.3	53.7	52.0	50.7	48.9	48.1
75°	54.8	51.3	48.7	46.8	45.1	43.0	40.7	38.9	38.3	37.7	37.5
77.5°	40.6	38.4	36.5	34.8	32.8	31.3	30.7	30.3	30.2	29.9	29.9
80°	31.9	29.9	28.5	26.5	25.3	25.3	25.3	24.9	25.1	25.1	25.1
82.5°	23.7	21.9	21.1	20.4	20.1	20.3	20.3	20.4	20.2	20.6	20.4
85°	12.2	12.4	12.8	12.7	12.8	12.8	13.3	13.0	13.3	12.8	13.3
87.5°	6.7	7.7	8.5	9.3	10.2	10.6	10.9	11.2	11.5	11.7	11.9
90°	10.9	13.8	17.0	20.1	23.3	26.6	27.6	28.5	29.5	30.5	31.3
92.5°	17.8	18.7	21.1	23.5	25.9	28.3	29.9	31.5	33.1	34.6	35.6
95°	27.2	23.5	26.2	28.9	31.6	34.4	36.1	37.8	39.5	41.2	42.1
97.5°	117.6	106.5	88.8	71.1	53.4	35.6	37.6	39.6	41.6	43.5	44.6
100°	206.8	190.0	151.7	113.3	74.9	36.5	38.5	40.5	42.4	44.4	45.5
102.5°	259.8	240.6	198.6	156.7	114.8	72.8	66.7	60.6	54.5	48.5	45.6
105°	340.7	331.1	308.8	286.7	264.6	242.5	198.9	155.3	111.8	68.3	46.8
107.5°	427.6	430.4	433.9	437.4	440.9	444.4	412.4	380.6	348.6	316.7	284.3
110°	486.1	488.4	491.2	493.9	496.6	499.3	491.2	483.0	474.9	466.8	445.1



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	542.0	544.2	547.0	549.7	552.4	555.1	555.3	555.4	555.5	555.7	552.1
115°	624.7	626.6	628.8	631.0	633.3	635.5	637.9	640.4	642.8	645.3	647.0
117.5°	707.4	708.9	710.0	711.2	712.3	713.4	715.4	717.4	719.3	721.3	722.4
120°	759.5	761.0	761.6	762.4	763.2	763.9	765.9	767.8	769.8	771.8	772.7
122.5°	809.3	810.6	811.6	812.5	813.5	814.4	815.8	817.2	818.6	819.9	820.7
125°	880.3	881.8	882.7	883.7	884.7	885.7	886.1	886.7	887.2	887.6	888.1
127.5°	948.5	950.0	951.2	952.4	953.6	954.8	955.5	956.3	957.1	957.9	958.0
130°	991.0	992.5	993.4	994.5	995.4	996.3	997.4	998.3	999.4	1000.3	1000.6
132.5°	1031.7	1033.1	1033.9	1034.7	1035.4	1036.2	1037.2	1038.2	1039.2	1040.2	1040.3
135°	1092.0	1093.2	1094.2	1095.2	1096.1	1097.2	1097.9	1098.6	1099.3	1100.1	1100.1
137.5°	1146.7	1147.9	1148.4	1149.0	1149.5	1150.0	1151.2	1152.4	1153.6	1154.8	1155.1
140°	1180.5	1181.6	1182.4	1183.1	1183.9	1184.6	1185.6	1186.5	1187.6	1188.5	1188.8
142.5°	1213.3	1214.4	1215.1	1215.9	1216.6	1217.4	1218.1	1218.9	1219.7	1220.6	1220.6
145°	1260.2	1261.2	1261.7	1262.2	1262.7	1263.2	1263.7	1264.2	1264.6	1265.2	1265.4
147.5°	1301.0	1301.7	1302.3	1302.7	1303.2	1303.7	1304.2	1304.7	1305.2	1305.7	1305.4
150°	1325.9	1326.5	1327.1	1327.5	1328.0	1328.5	1329.0	1329.5	1330.0	1330.5	1330.3
152.5°	1348.2	1348.6	1348.9	1349.2	1349.4	1349.8	1350.7	1351.5	1352.5	1353.3	1353.2
155°	1378.5	1378.5	1378.7	1379.0	1379.2	1379.4	1380.7	1381.9	1383.1	1384.4	1384.2
157.5°	1406.4	1406.4	1406.1	1405.8	1405.6	1405.3	1406.8	1408.3	1409.8	1411.3	1411.0
160°	1421.6	1421.4	1421.2	1420.9	1420.6	1420.4	1421.9	1423.3	1424.9	1426.3	1426.2
162.5°	1435.1	1434.7	1434.4	1434.2	1433.9	1433.7	1435.4	1437.0	1438.7	1440.4	1440.5
165°	1452.9	1452.4	1452.2	1451.9	1451.6	1451.4	1453.4	1455.3	1457.3	1459.3	1459.4
167.5°	1466.0	1465.6	1465.6	1465.6	1465.6	1465.6	1467.6	1469.6	1471.4	1473.4	1473.4
170°	1474.0	1473.5	1473.5	1473.5	1473.5	1473.5	1475.5	1477.5	1479.5	1481.4	1481.4
172.5°	1478.6	1478.1	1478.3	1478.5	1478.7	1478.9	1480.8	1482.8	1484.8	1486.8	1486.6
175°	1485.2	1484.7	1485.0	1485.2	1485.5	1485.7	1487.5	1489.2	1490.9	1492.6	1492.5
177.5°	1488.0	1487.6	1487.8	1488.0	1488.2	1488.4	1490.0	1491.5	1493.1	1494.7	1494.5
180°	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6
2.5°	446.4	446.3	446.4	445.8	446.4	446.3	446.4	448.4	448.4	448.5	448.7
5°	415.4	415.3	414.7	412.8	414.7	415.3	415.4	416.0	417.7	420.4	419.7
7.5°	388.3	388.1	386.3	386.3	386.3	388.1	388.3	389.9	391.8	393.5	395.5
10°	372.3	372.5	370.1	368.7	370.1	372.5	372.3	373.7	376.3	377.7	379.1
12.5°	356.7	355.9	353.9	352.3	353.9	355.9	356.7	357.8	361.4	363.0	365.7
15°	336.2	334.2	329.4	329.8	329.4	334.2	336.2	335.4	339.0	341.0	341.8
17.5°	312.0	310.6	310.5	307.6	310.5	310.6	312.0	313.6	316.8	318.9	324.7
20°	297.9	296.9	297.3	294.5	297.3	296.9	297.9	301.1	303.1	305.9	310.6
22.5°	286.8	285.8	284.1	283.3	284.1	285.8	286.8	289.0	291.2	295.2	297.6
25°	270.6	269.0	267.4	268.4	267.4	269.0	270.6	271.8	275.8	277.6	281.2
27.5°	254.4	253.2	251.6	251.4	251.6	253.2	254.4	255.5	257.8	260.8	265.2
30°	244.1	242.9	242.1	241.1	242.1	242.9	244.1	245.1	247.4	250.6	253.7
32.5°	233.7	233.4	232.0	231.8	232.0	233.4	233.7	235.3	237.5	240.6	243.3
35°	220.1	218.9	218.4	218.6	218.4	218.9	220.1	220.8	222.8	225.7	228.3
37.5°	207.1	205.5	204.7	204.1	204.7	205.5	207.1	207.2	209.2	211.1	214.6
40°	197.8	196.2	195.8	195.4	195.8	196.2	197.8	197.6	199.8	201.2	204.4
42.5°	187.4	186.8	186.5	185.7	186.5	186.8	187.4	188.5	189.7	191.7	194.2
45°	173.1	172.9	171.7	172.1	171.7	172.9	173.1	173.7	175.9	177.4	179.5
47.5°	158.1	157.2	156.4	157.0	156.4	157.2	158.1	158.9	160.4	162.1	165.1
50°	147.8	147.4	145.6	146.0	145.6	147.4	147.8	148.6	149.6	151.9	154.5
52.5°	137.6	136.0	135.3	135.1	135.3	136.0	137.6	138.4	139.6	142.1	144.0
55°	120.5	118.7	118.0	117.5	118.0	118.7	120.5	122.0	123.6	126.4	128.4
57.5°	103.8	103.4	102.7	103.1	102.7	103.4	103.8	106.2	107.8	109.9	112.4
60°	94.1	94.1	94.1	93.8	94.1	94.1	94.1	96.1	97.5	99.7	102.3
62.5°	86.5	86.0	85.9	86.2	85.9	86.0	86.5	87.4	88.9	90.2	92.6
65°	75.0	74.8	74.0	73.8	74.0	74.8	75.0	75.6	76.8	77.8	79.5
67.5°	64.1	63.5	63.2	62.9	63.2	63.5	64.1	64.7	65.4	66.7	67.6
70°	56.0	55.5	54.3	54.6	54.3	55.5	56.0	57.0	57.8	59.4	60.2
72.5°	47.2	46.8	46.5	46.2	46.5	46.8	47.2	48.1	48.9	50.7	52.0
75°	37.3	37.1	36.9	37.7	36.9	37.1	37.3	37.5	37.7	38.3	38.9
77.5°	29.9	29.9	30.0	29.7	30.0	29.9	29.9	29.9	29.9	30.2	30.3
80°	25.1	25.1	24.9	24.9	24.9	25.1	25.1	25.1	25.1	25.1	24.9
82.5°	20.1	20.2	20.4	20.1	20.4	20.2	20.1	20.4	20.6	20.2	20.4
85°	13.3	13.0	13.4	13.3	13.4	13.0	13.3	13.3	12.8	13.3	13.0
87.5°	12.3	12.1	12.1	12.4	12.1	12.1	12.3	11.9	11.7	11.5	11.2
90°	31.8	32.2	32.7	33.2	32.7	32.2	31.8	31.3	30.5	29.5	28.5
92.5°	35.9	36.2	36.4	36.8	36.4	36.2	35.9	35.6	34.6	33.1	31.5
95°	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	41.2	39.5	37.8
97.5°	44.9	45.1	45.4	45.6	45.4	45.1	44.9	44.6	43.5	41.6	39.6
100°	45.7	46.0	46.2	46.5	46.2	46.0	45.7	45.5	44.4	42.4	40.5
102.5°	46.1	46.5	46.9	47.4	46.9	46.5	46.1	45.6	48.5	54.5	60.6
105°	47.3	47.7	48.2	48.7	48.2	47.7	47.3	46.8	68.3	111.8	155.3
107.5°	251.5	218.6	185.8	153.0	185.8	218.6	251.5	284.3	316.7	348.6	380.6
110°	410.0	374.8	339.7	304.4	339.7	374.8	410.0	445.1	466.8	474.9	483.0



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	544.6	537.2	529.8	522.4	529.8	537.2	544.6	552.1	555.7	555.5	555.4
115°	648.0	649.0	650.0	651.0	650.0	649.0	648.0	647.0	645.3	642.8	640.4
117.5°	722.6	722.7	723.0	723.2	723.0	722.7	722.6	722.4	721.3	719.3	717.4
120°	772.7	772.7	772.7	772.7	772.7	772.7	772.7	772.7	771.8	769.8	767.8
122.5°	820.9	821.0	821.3	821.5	821.3	821.0	820.9	820.7	819.9	818.6	817.2
125°	888.6	889.2	889.6	890.1	889.6	889.2	888.6	888.1	887.6	887.2	886.7
127.5°	957.6	957.1	956.6	956.1	956.6	957.1	957.6	958.0	957.9	957.1	956.3
130°	1000.1	999.6	999.1	998.6	999.1	999.6	1000.1	1000.6	1000.3	999.4	998.3
132.5°	1039.7	1039.0	1038.3	1037.6	1038.3	1039.0	1039.7	1040.3	1040.2	1039.2	1038.2
135°	1099.3	1098.6	1097.9	1097.2	1097.9	1098.6	1099.3	1100.1	1100.1	1099.3	1098.6
137.5°	1154.6	1154.2	1153.7	1153.1	1153.7	1154.2	1154.6	1155.1	1154.8	1153.6	1152.4
140°	1188.3	1187.7	1187.3	1186.8	1187.3	1187.7	1188.3	1188.8	1188.5	1187.6	1186.5
142.5°	1219.9	1219.2	1218.5	1217.8	1218.5	1219.2	1219.9	1220.6	1220.6	1219.7	1218.9
145°	1265.4	1265.4	1265.4	1265.4	1265.4	1265.4	1265.4	1265.4	1265.2	1264.6	1264.2
147.5°	1304.2	1303.1	1302.0	1300.8	1302.0	1303.1	1304.2	1305.4	1305.7	1305.2	1304.7
150°	1329.6	1328.9	1328.2	1327.4	1328.2	1328.9	1329.6	1330.3	1330.5	1330.0	1329.5
152.5°	1352.0	1350.9	1349.8	1348.7	1349.8	1350.9	1352.0	1353.2	1353.3	1352.5	1351.5
155°	1382.8	1381.3	1379.8	1378.4	1379.8	1381.3	1382.8	1384.2	1384.4	1383.1	1381.9
157.5°	1409.1	1407.2	1405.2	1403.3	1405.2	1407.2	1409.1	1411.0	1411.3	1409.8	1408.3
160°	1424.4	1422.7	1421.0	1419.3	1421.0	1422.7	1424.4	1426.2	1426.3	1424.9	1423.3
162.5°	1438.9	1437.4	1435.9	1434.3	1435.9	1437.4	1438.9	1440.5	1440.4	1438.7	1437.0
165°	1457.7	1456.0	1454.2	1452.5	1454.2	1456.0	1457.7	1459.4	1459.3	1457.3	1455.3
167.5°	1471.4	1469.6	1467.6	1465.6	1467.6	1469.6	1471.4	1473.4	1473.4	1471.4	1469.6
170°	1479.5	1477.5	1475.5	1473.5	1475.5	1477.5	1479.5	1481.4	1481.4	1479.5	1477.5
172.5°	1484.5	1482.3	1480.1	1478.0	1480.1	1482.3	1484.5	1486.6	1486.8	1484.8	1482.8
175°	1490.6	1488.6	1486.6	1484.6	1486.6	1488.6	1490.6	1492.5	1492.6	1490.9	1489.2
177.5°	1492.5	1490.6	1488.6	1486.6	1488.6	1490.6	1492.5	1494.5	1494.7	1493.1	1491.5
180°	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6
2.5°	447.3	449.5	451.8	453.8	457.0	458.5	460.5	461.4	463.7	467.3	470.2
5°	420.1	423.3	427.5	430.8	436.3	440.5	445.1	449.5	454.8	462.2	468.8
7.5°	397.0	400.1	405.2	411.6	417.5	423.5	429.8	435.8	443.2	453.9	464.4
10°	381.8	385.6	391.6	398.4	405.8	411.6	419.0	426.6	435.9	448.2	460.8
12.5°	368.6	371.4	378.4	384.9	393.3	400.7	407.9	416.9	427.4	440.4	455.6
15°	347.7	351.6	358.4	365.7	374.5	382.4	391.8	402.6	412.8	428.9	447.3
17.5°	326.6	332.7	339.8	347.9	354.5	365.3	375.5	386.6	399.2	416.2	436.5
20°	313.1	318.0	324.6	336.4	345.0	353.3	362.7	376.5	388.1	407.4	428.4
22.5°	301.7	305.2	312.7	322.4	332.5	342.0	351.6	364.8	379.2	397.4	420.3
25°	284.8	290.5	296.1	303.1	313.9	325.4	335.8	347.1	362.3	381.8	406.4
27.5°	268.4	273.5	279.0	287.6	295.8	306.5	317.5	330.3	346.6	367.2	392.3
30°	257.8	261.6	266.8	277.8	285.2	294.5	307.3	318.7	334.0	355.9	382.4
32.5°	246.8	251.8	257.5	266.0	275.2	283.9	295.6	308.0	323.6	345.1	372.2
35°	231.3	237.1	242.9	249.2	258.4	267.4	277.2	290.8	306.7	327.6	354.2
37.5°	217.0	221.6	226.4	234.1	242.8	251.4	260.6	274.1	289.0	311.5	336.0
40°	207.8	212.1	215.7	223.7	232.1	241.3	250.4	262.2	278.2	299.3	323.0
42.5°	197.9	201.7	206.6	213.3	222.3	230.1	239.1	250.3	265.4	286.8	307.5
45°	183.0	187.4	191.6	197.8	206.8	214.5	222.5	233.1	248.6	266.2	284.6
47.5°	167.4	171.9	176.7	182.7	190.5	198.3	206.3	215.7	229.8	247.1	259.6
50°	157.5	161.1	165.9	171.9	179.2	187.4	194.6	204.8	218.3	231.9	242.7
52.5°	147.2	150.5	155.9	162.3	169.0	176.2	183.8	192.6	204.7	217.6	226.2
55°	131.2	135.2	139.8	146.0	152.7	158.7	166.1	175.1	184.8	194.4	200.2
57.5°	116.2	119.6	123.5	129.8	135.6	142.8	149.5	156.4	165.4	172.6	176.4
60°	105.3	108.3	113.3	119.0	124.3	130.6	138.2	145.3	152.1	157.9	160.8
62.5°	95.1	98.5	102.9	108.1	113.9	119.9	126.5	132.4	138.4	143.4	145.5
65°	81.6	84.5	87.6	92.5	97.3	103.3	108.5	114.5	119.0	121.7	123.6
67.5°	69.5	71.3	73.7	77.0	81.7	87.0	92.0	96.7	100.4	102.3	103.9
70°	61.6	62.8	64.6	67.8	71.4	76.0	81.3	84.6	87.8	89.5	91.1
72.5°	53.7	55.3	56.9	59.5	62.4	65.8	69.6	73.7	75.5	77.4	78.4
75°	40.7	43.0	45.1	46.8	48.7	51.3	54.8	57.3	58.4	60.0	60.2
77.5°	30.7	31.3	32.8	34.8	36.5	38.4	40.6	42.9	43.4	44.2	44.8
80°	25.3	25.3	25.3	26.5	28.5	29.9	31.9	33.1	33.9	34.1	34.3
82.5°	20.3	20.3	20.1	20.4	21.1	21.9	23.7	25.1	25.7	25.6	25.1
85°	13.3	12.8	12.8	12.7	12.8	12.4	12.2	13.0	14.2	14.2	13.9
87.5°	10.9	10.6	10.2	9.3	8.5	7.7	6.7	6.4	5.9	6.0	5.3
90°	27.6	26.6	23.3	20.1	17.0	13.8	10.9	8.5	6.0	3.5	1.1
92.5°	29.9	28.3	25.9	23.5	21.1	18.7	17.8	18.5	19.2	19.9	20.6
95°	36.1	34.4	31.6	28.9	26.2	23.5	27.2	37.3	47.4	57.4	67.5
97.5°	37.6	35.6	53.4	71.1	88.8	106.5	117.6	122.2	126.7	131.2	135.7
100°	38.5	36.5	74.9	113.3	151.7	190.0	206.8	201.8	196.9	192.0	187.1
102.5°	66.7	72.8	114.8	156.7	198.6	240.6	259.8	256.1	252.6	249.1	245.6
105°	198.9	242.5	264.6	286.7	308.8	331.1	340.7	338.0	335.4	332.6	329.9
107.5°	412.4	444.4	440.9	437.4	433.9	430.4	427.6	425.4	423.3	421.1	419.0
110°	491.2	499.3	496.6	493.9	491.2	488.4	486.1	484.1	482.2	480.3	478.3



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	555.3	555.1	552.4	549.7	547.0	544.2	542.0	540.3	538.5	536.7	534.9
115°	637.9	635.5	633.3	631.0	628.8	626.6	624.7	623.3	621.8	620.4	618.9
117.5°	715.4	713.4	712.3	711.2	710.0	708.9	707.4	705.6	703.8	702.0	700.2
120°	765.9	763.9	763.2	762.4	761.6	761.0	759.5	757.2	755.0	752.9	750.6
122.5°	815.8	814.4	813.5	812.5	811.6	810.6	809.3	807.4	805.6	803.8	802.0
125°	886.1	885.7	884.7	883.7	882.7	881.8	880.3	878.3	876.3	874.3	872.4
127.5°	955.5	954.8	953.6	952.4	951.2	950.0	948.5	946.5	944.5	942.5	940.6
130°	997.4	996.3	995.4	994.5	993.4	992.5	991.0	989.0	987.1	985.1	983.1
132.5°	1037.2	1036.2	1035.4	1034.7	1033.9	1033.1	1031.7	1029.8	1027.8	1025.8	1023.8
135°	1097.9	1097.2	1096.1	1095.2	1094.2	1093.2	1092.0	1090.5	1089.0	1087.5	1086.1
137.5°	1151.2	1150.0	1149.5	1149.0	1148.4	1147.9	1146.7	1144.8	1143.0	1141.1	1139.2
140°	1185.6	1184.6	1183.9	1183.1	1182.4	1181.6	1180.5	1179.1	1177.6	1176.1	1174.7
142.5°	1218.1	1217.4	1216.6	1215.9	1215.1	1214.4	1213.3	1211.9	1210.4	1208.8	1207.4
145°	1263.7	1263.2	1262.7	1262.2	1261.7	1261.2	1260.2	1258.4	1256.7	1255.0	1253.3
147.5°	1304.2	1303.7	1303.2	1302.7	1302.3	1301.7	1301.0	1299.8	1298.6	1297.5	1296.4
150°	1329.0	1328.5	1328.0	1327.5	1327.1	1326.5	1325.9	1325.2	1324.5	1323.7	1323.0
152.5°	1350.7	1349.8	1349.4	1349.2	1348.9	1348.6	1348.2	1347.9	1347.6	1347.2	1346.9
155°	1380.7	1379.4	1379.2	1379.0	1378.7	1378.5	1378.5	1379.1	1379.6	1380.1	1380.5
157.5°	1406.8	1405.3	1405.6	1405.8	1406.1	1406.4	1406.4	1406.5	1406.6	1406.6	1406.7
160°	1421.9	1420.4	1420.6	1420.9	1421.2	1421.4	1421.6	1421.9	1422.1	1422.4	1422.6
162.5°	1435.4	1433.7	1433.9	1434.2	1434.4	1434.7	1435.1	1435.7	1436.4	1437.0	1437.7
165°	1453.4	1451.4	1451.6	1451.9	1452.2	1452.4	1452.9	1453.6	1454.3	1455.1	1455.9
167.5°	1467.6	1465.6	1465.6	1465.6	1465.6	1465.6	1466.0	1467.1	1468.0	1469.0	1470.0
170°	1475.5	1473.5	1473.5	1473.5	1473.5	1473.5	1474.0	1475.1	1476.0	1477.0	1478.0
172.5°	1480.8	1478.9	1478.7	1478.5	1478.3	1478.1	1478.6	1479.7	1480.9	1482.1	1483.3
175°	1487.5	1485.7	1485.5	1485.2	1485.0	1484.7	1485.2	1486.4	1487.7	1488.9	1490.1
177.5°	1490.0	1488.4	1488.2	1488.0	1487.8	1487.6	1488.0	1489.0	1490.0	1490.9	1491.9
180°	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6
2.5°	471.1	472.9	475.2	478.5	481.1	483.4	483.8	484.5	486.1	488.8	490.9
5°	474.2	478.8	486.2	493.4	501.3	507.7	513.8	518.0	521.9	530.4	537.2
7.5°	473.2	483.5	495.2	508.1	521.2	533.9	545.7	556.3	566.8	579.1	593.1
10°	472.6	484.7	500.3	516.9	535.2	553.0	570.3	583.8	599.3	613.5	631.3
12.5°	469.6	486.9	505.6	526.8	549.3	569.9	592.6	611.1	629.0	649.4	670.1
15°	465.5	486.6	510.3	538.6	572.7	597.5	620.9	653.2	675.2	697.2	726.9
17.5°	458.3	484.1	513.6	550.4	578.8	612.3	647.2	672.8	702.5	733.6	760.4
20°	452.5	482.4	515.6	551.6	588.0	624.2	658.1	688.6	719.4	755.3	777.3
22.5°	446.8	476.3	510.7	549.1	588.1	626.4	664.7	700.5	735.0	771.3	799.4
25°	434.5	469.6	506.9	546.0	584.5	626.6	672.4	712.3	755.0	792.4	819.1
27.5°	422.1	454.3	491.4	531.1	573.9	623.6	677.4	722.8	765.6	792.4	800.7
30°	410.8	444.9	479.1	519.4	565.7	621.2	678.4	730.4	765.4	777.1	768.4
32.5°	399.4	430.3	464.1	505.4	554.6	615.3	679.7	725.9	747.0	738.1	703.0
35°	379.4	407.2	439.9	481.2	537.8	612.0	674.4	705.7	700.5	650.3	584.1
37.5°	357.8	380.6	410.8	454.0	520.4	599.0	651.6	656.3	611.1	534.1	457.6
40°	340.8	361.3	392.4	437.5	506.9	586.2	628.7	610.0	540.0	454.3	390.5
42.5°	324.3	341.6	371.5	420.2	494.0	568.6	594.5	553.9	473.1	392.1	334.1
45°	296.3	312.5	342.6	392.5	467.8	535.2	531.8	461.2	380.3	315.1	267.0
47.5°	269.8	284.0	312.2	363.2	437.0	485.0	453.1	378.0	309.4	257.1	222.7
50°	251.0	265.0	293.1	343.5	412.2	447.3	401.8	329.4	266.6	223.3	196.0
52.5°	233.0	246.7	272.3	321.4	382.4	403.4	354.5	287.3	235.0	197.6	174.2
55°	207.8	218.3	241.3	288.3	333.8	338.6	289.0	232.9	189.8	163.7	147.7
57.5°	182.2	191.1	214.0	251.3	283.3	280.8	233.8	185.2	156.2	136.8	125.2
60°	165.5	174.4	194.4	226.4	250.6	242.1	199.0	159.9	135.0	120.8	111.5
62.5°	149.9	156.8	175.6	199.1	216.4	206.8	170.1	137.8	118.0	106.0	98.7
65°	127.3	133.0	148.0	160.3	169.9	160.7	130.2	107.7	93.5	85.1	80.1
67.5°	106.0	109.5	119.0	123.5	130.3	120.1	97.9	82.8	74.7	67.7	64.1
70°	92.5	95.1	100.1	103.8	105.5	95.1	78.6	67.6	60.8	55.8	53.6
72.5°	79.0	81.3	82.3	85.2	84.3	74.6	63.2	54.4	49.5	46.1	43.3
75°	60.4	61.4	60.4	59.2	56.6	49.8	41.9	37.5	33.9	32.3	31.3
77.5°	44.0	43.7	42.4	40.5	36.0	31.7	27.5	26.0	24.5	23.6	23.2
80°	33.9	33.1	31.9	28.8	25.1	22.0	21.1	20.1	19.5	18.4	18.3
82.5°	25.2	24.7	22.7	20.2	17.6	16.1	15.3	14.9	14.3	13.8	13.8
85°	13.4	12.8	10.6	9.2	8.9	8.4	8.3	8.3	7.4	7.2	7.2
87.5°	5.1	4.6	4.9	4.9	5.5	5.8	6.6	6.9	7.4	7.7	7.7
90°	3.5	6.0	8.5	10.9	13.8	17.0	20.1	23.3	26.6	27.6	28.5
92.5°	19.9	19.2	18.5	17.8	18.7	21.1	23.5	25.9	28.3	29.9	31.5
95°	57.4	47.4	37.3	27.2	23.5	26.2	28.9	31.6	34.4	36.1	37.8
97.5°	131.2	126.7	122.2	117.6	106.5	88.8	71.1	53.4	35.6	37.6	39.6
100°	192.0	196.9	201.8	206.8	190.0	151.7	113.3	74.9	36.5	38.5	40.5
102.5°	249.1	252.6	256.1	259.8	240.6	198.6	156.7	114.8	72.8	66.7	60.6
105°	332.6	335.4	338.0	340.7	331.1	308.8	286.7	264.6	242.5	198.9	155.3
107.5°	421.1	423.3	425.4	427.6	430.4	433.9	437.4	440.9	444.4	412.4	380.6
110°	480.3	482.2	484.1	486.1	488.4	491.2	493.9	496.6	499.3	491.2	483.0





TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	536.7	538.5	540.3	542.0	544.2	547.0	549.7	552.4	555.1	555.3	555.4
115°	620.4	621.8	623.3	624.7	626.6	628.8	631.0	633.3	635.5	637.9	640.4
117.5°	702.0	703.8	705.6	707.4	708.9	710.0	711.2	712.3	713.4	715.4	717.4
120°	752.9	755.0	757.2	759.5	761.0	761.6	762.4	763.2	763.9	765.9	767.8
122.5°	803.8	805.6	807.4	809.3	810.6	811.6	812.5	813.5	814.4	815.8	817.2
125°	874.3	876.3	878.3	880.3	881.8	882.7	883.7	884.7	885.7	886.1	886.7
127.5°	942.5	944.5	946.5	948.5	950.0	951.2	952.4	953.6	954.8	955.5	956.3
130°	985.1	987.1	989.0	991.0	992.5	993.4	994.5	995.4	996.3	997.4	998.3
132.5°	1025.8	1027.8	1029.8	1031.7	1033.1	1033.9	1034.7	1035.4	1036.2	1037.2	1038.2
135°	1087.5	1089.0	1090.5	1092.0	1093.2	1094.2	1095.2	1096.1	1097.2	1097.9	1098.6
137.5°	1141.1	1143.0	1144.8	1146.7	1147.9	1148.4	1149.0	1149.5	1150.0	1151.2	1152.4
140°	1176.1	1177.6	1179.1	1180.5	1181.6	1182.4	1183.1	1183.9	1184.6	1185.6	1186.5
142.5°	1208.8	1210.4	1211.9	1213.3	1214.4	1215.1	1215.9	1216.6	1217.4	1218.1	1218.9
145°	1255.0	1256.7	1258.4	1260.2	1261.2	1261.7	1262.2	1262.7	1263.2	1263.7	1264.2
147.5°	1297.5	1298.6	1299.8	1301.0	1301.7	1302.3	1302.7	1303.2	1303.7	1304.2	1304.7
150°	1323.7	1324.5	1325.2	1325.9	1326.5	1327.1	1327.5	1328.0	1328.5	1329.0	1329.5
152.5°	1347.2	1347.6	1347.9	1348.2	1348.6	1348.9	1349.2	1349.4	1349.8	1350.7	1351.5
155°	1380.1	1379.6	1379.1	1378.5	1378.5	1378.7	1379.0	1379.2	1379.4	1380.7	1381.9
157.5°	1406.6	1406.6	1406.5	1406.4	1406.4	1406.1	1405.8	1405.6	1405.3	1406.8	1408.3
160°	1422.4	1422.1	1421.9	1421.6	1421.4	1421.2	1420.9	1420.6	1420.4	1421.9	1423.3
162.5°	1437.0	1436.4	1435.7	1435.1	1434.7	1434.4	1434.2	1433.9	1433.7	1435.4	1437.0
165°	1455.1	1454.3	1453.6	1452.9	1452.4	1452.2	1451.9	1451.6	1451.4	1453.4	1455.3
167.5°	1469.0	1468.0	1467.1	1466.0	1465.6	1465.6	1465.6	1465.6	1465.6	1467.6	1469.6
170°	1477.0	1476.0	1475.1	1474.0	1473.5	1473.5	1473.5	1473.5	1473.5	1475.5	1477.5
172.5°	1482.1	1480.9	1479.7	1478.6	1478.1	1478.3	1478.5	1478.7	1478.9	1480.8	1482.8
175°	1488.9	1487.7	1486.4	1485.2	1484.7	1485.0	1485.2	1485.5	1485.7	1487.5	1489.2
177.5°	1490.9	1490.0	1489.0	1488.0	1487.6	1487.8	1488.0	1488.2	1488.4	1490.0	1491.5
180°	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	468.6	468.6	468.6	468.6	468.6	468.6	468.6
2.5°	494.3	494.3	494.9	497.3	497.7	499.7	499.1
5°	543.2	547.0	548.5	554.5	558.0	559.6	556.5
7.5°	603.0	613.8	618.9	625.3	630.8	632.5	628.1
10°	646.7	658.0	667.4	673.2	678.6	682.3	686.8
12.5°	688.9	702.7	711.7	719.9	725.5	730.0	730.8
15°	734.8	755.6	771.5	783.2	788.9	791.9	790.7
17.5°	781.0	800.4	811.7	823.5	831.6	832.0	832.2
20°	807.2	826.0	839.1	847.9	857.0	856.5	858.6
22.5°	824.7	839.6	849.5	855.9	859.0	857.5	857.9
25°	832.8	837.3	835.5	825.3	822.6	813.2	814.9
27.5°	790.7	769.8	748.2	720.5	698.5	681.1	681.9
30°	733.4	696.5	654.4	619.1	587.4	578.5	559.6
32.5°	653.3	598.0	548.6	515.7	488.5	481.1	464.7
35°	517.5	463.7	413.0	382.5	370.5	353.6	353.4
37.5°	402.3	354.9	328.1	305.2	293.3	283.0	282.1
40°	338.4	301.5	281.2	264.8	253.0	245.3	243.5
42.5°	293.8	264.0	245.0	234.8	225.7	221.7	218.8
45°	239.9	219.8	206.6	197.4	193.2	190.2	188.6
47.5°	200.7	187.3	178.2	172.0	168.7	165.5	166.3
50°	179.3	168.3	161.7	155.8	153.3	151.0	151.3
52.5°	162.1	152.2	146.9	142.7	139.5	137.8	137.2
55°	137.6	131.4	126.0	123.0	121.1	119.0	118.4
57.5°	117.4	112.5	108.1	104.8	104.3	102.2	102.5
60°	103.9	99.9	96.3	94.5	93.1	91.3	91.9
62.5°	92.8	89.5	86.2	84.7	83.3	82.0	82.2
65°	76.0	72.8	70.8	70.0	69.4	68.8	68.2
67.5°	60.6	58.6	57.3	55.6	54.4	54.2	53.6
70°	51.0	48.3	46.1	43.9	43.3	43.1	43.3
72.5°	40.8	39.2	38.6	37.5	37.4	36.9	37.2
75°	30.7	30.0	29.7	28.8	28.8	28.8	28.8
77.5°	22.6	22.3	22.0	21.9	21.7	21.4	21.4
80°	17.7	17.5	17.0	17.0	16.9	17.0	16.9
82.5°	13.3	13.3	12.9	12.9	12.7	12.6	12.7
85°	6.8	6.6	7.1	6.6	6.8	6.5	6.8
87.5°	7.8	8.0	8.0	8.1	8.1	8.4	8.3
90°	29.5	30.5	31.3	31.8	32.2	32.7	33.2
92.5°	33.1	34.6	35.6	35.9	36.2	36.4	36.8
95°	39.5	41.2	42.1	42.1	42.1	42.1	42.1
97.5°	41.6	43.5	44.6	44.9	45.1	45.4	45.6
100°	42.4	44.4	45.5	45.7	46.0	46.2	46.5
102.5°	54.5	48.5	45.6	46.1	46.5	46.9	47.4
105°	111.8	68.3	46.8	47.3	47.7	48.2	48.7
107.5°	348.6	316.7	284.3	251.5	218.6	185.8	153.0
110°	474.9	466.8	445.1	410.0	374.8	339.7	304.4



TEST NUMBER: P332402-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	555.5	555.7	552.1	544.6	537.2	529.8	522.4
115°	642.8	645.3	647.0	648.0	649.0	650.0	651.0
117.5°	719.3	721.3	722.4	722.6	722.7	723.0	723.2
120°	769.8	771.8	772.7	772.7	772.7	772.7	772.7
122.5°	818.6	819.9	820.7	820.9	821.0	821.3	821.5
125°	887.2	887.6	888.1	888.6	889.2	889.6	890.1
127.5°	957.1	957.9	958.0	957.6	957.1	956.6	956.1
130°	999.4	1000.3	1000.6	1000.1	999.6	999.1	998.6
132.5°	1039.2	1040.2	1040.3	1039.7	1039.0	1038.3	1037.6
135°	1099.3	1100.1	1100.1	1099.3	1098.6	1097.9	1097.2
137.5°	1153.6	1154.8	1155.1	1154.6	1154.2	1153.7	1153.1
140°	1187.6	1188.5	1188.8	1188.3	1187.7	1187.3	1186.8
142.5°	1219.7	1220.6	1220.6	1219.9	1219.2	1218.5	1217.8
145°	1264.6	1265.2	1265.4	1265.4	1265.4	1265.4	1265.4
147.5°	1305.2	1305.7	1305.4	1304.2	1303.1	1302.0	1300.8
150°	1330.0	1330.5	1330.3	1329.6	1328.9	1328.2	1327.4
152.5°	1352.5	1353.3	1353.2	1352.0	1350.9	1349.8	1348.7
155°	1383.1	1384.4	1384.2	1382.8	1381.3	1379.8	1378.4
157.5°	1409.8	1411.3	1411.0	1409.1	1407.2	1405.2	1403.3
160°	1424.9	1426.3	1426.2	1424.4	1422.7	1421.0	1419.3
162.5°	1438.7	1440.4	1440.5	1438.9	1437.4	1435.9	1434.3
165°	1457.3	1459.3	1459.4	1457.7	1456.0	1454.2	1452.5
167.5°	1471.4	1473.4	1473.4	1471.4	1469.6	1467.6	1465.6
170°	1479.5	1481.4	1481.4	1479.5	1477.5	1475.5	1473.5
172.5°	1484.8	1486.8	1486.6	1484.5	1482.3	1480.1	1478.0
175°	1490.9	1492.6	1492.5	1490.6	1488.6	1486.6	1484.6
177.5°	1493.1	1494.7	1494.5	1492.5	1490.6	1488.6	1486.6
180°	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1	1490.1

(END OF REPORT)