

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332405-935

Luminaire Tested: **S123RDIW-S340D1320U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332405-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIW-S340D1320U935-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1320 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5060.3 lumens  
Efficiency: N/A  
Efficacy: 108.6 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 46.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332405-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

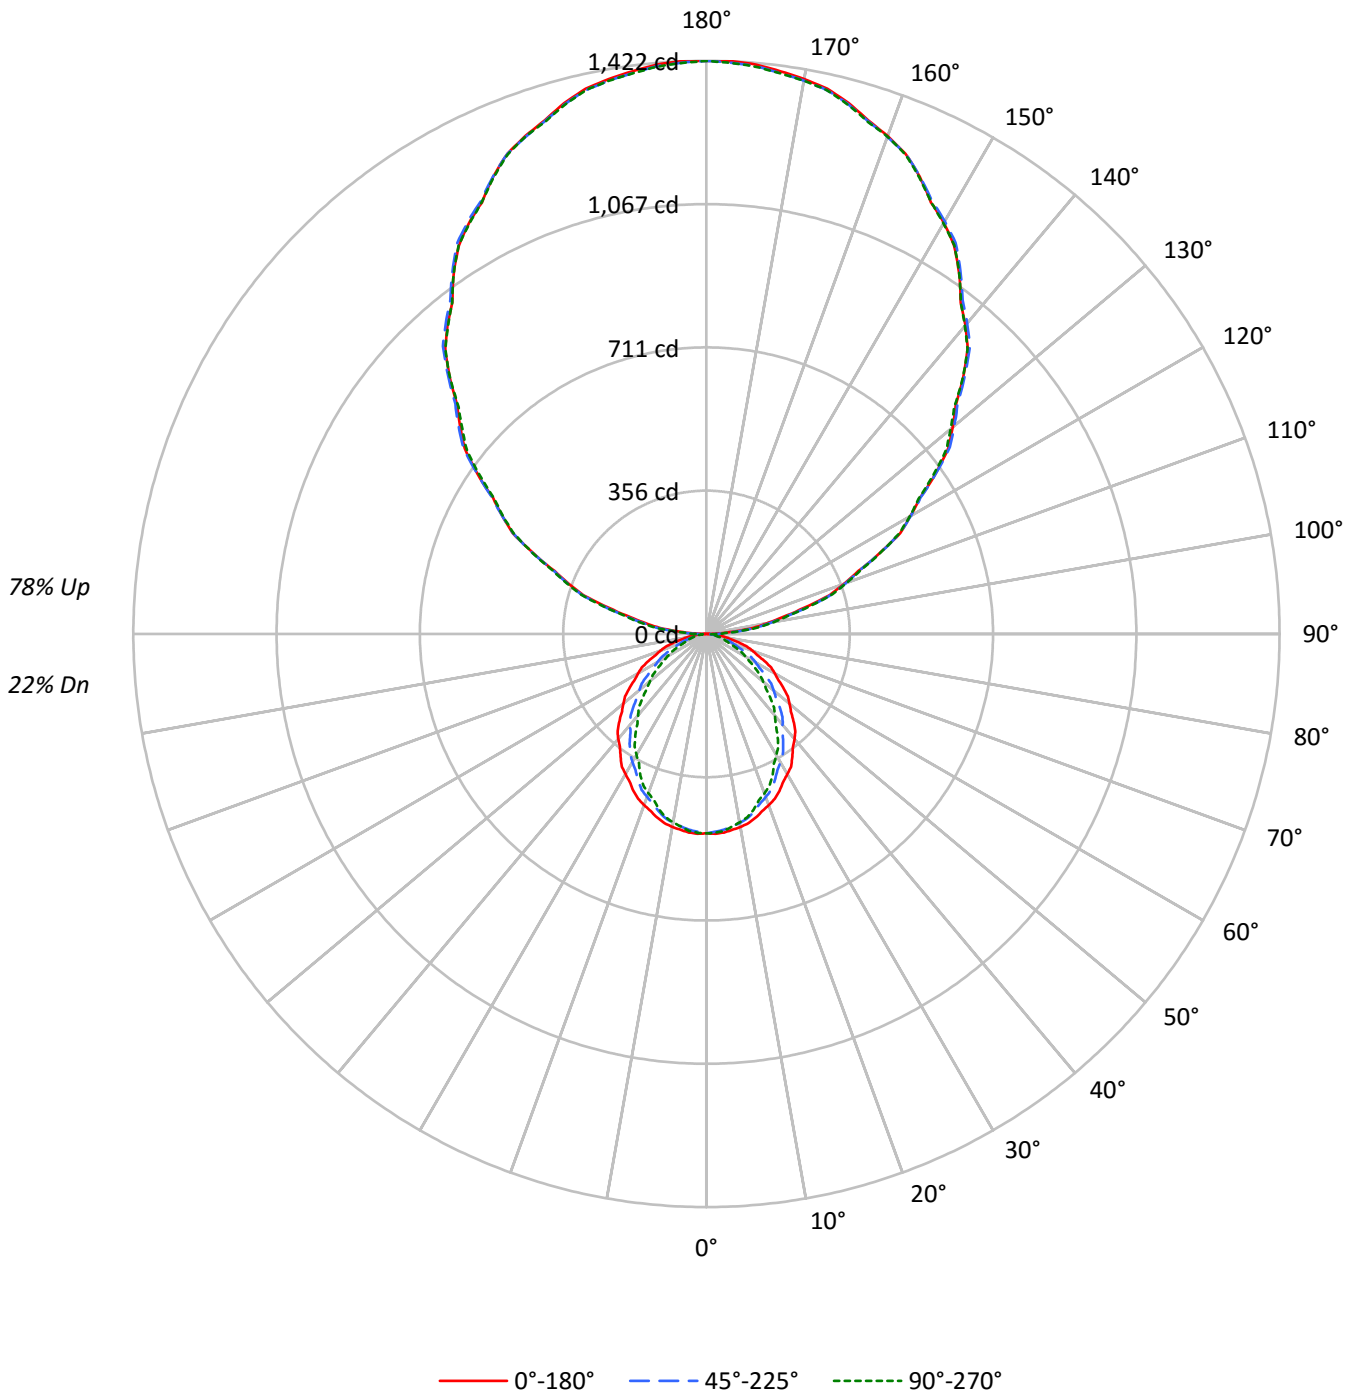



TEST NUMBER: P332405-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	89	89	89	89	68	68	68	48	48	48	31	31	31
1	92	88	84	81	81	78	75	72	59	58	56	43	41	40	27	27	26
2	84	77	71	66	74	68	63	59	52	49	46	38	36	34	24	23	22
3	76	67	60	55	67	60	54	50	46	42	39	33	31	29	21	20	19
4	70	60	52	46	62	53	47	42	41	37	33	30	27	25	19	18	16
5	64	53	45	40	56	47	41	36	37	32	29	27	24	21	17	16	14
6	59	47	40	34	52	42	36	31	33	28	25	24	21	19	16	14	13
7	54	43	35	30	48	38	32	27	30	25	22	22	19	16	14	13	11
8	50	38	31	26	44	35	28	24	27	22	19	20	17	15	13	11	10
9	47	35	28	23	41	31	25	21	25	20	17	18	15	13	12	10	9
10	43	32	25	21	38	29	23	19	23	18	15	17	14	12	11	9	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5324	5324	5324
5°	5344	5271	5302
10°	5314	5205	5187
15°	5258	5084	5029
20°	5179	4931	4816
25°	5099	4760	4608
30°	4992	4561	4313
35°	4882	4365	4043
40°	4780	4131	3710
45°	4647	3902	3408
50°	4501	3641	3069
55°	4352	3342	2755
60°	4215	3023	2409
65°	4037	2677	2063
70°	3811	2247	1668
75°	3489	1768	1568
80°	3106	1568	1438
85°	2631	1383	1284



TEST NUMBER: P332405-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	46.5	0.9
10°-20°	129.2	2.6
20°-30°	186.1	3.7
30°-40°	209.6	4.1
40°-50°	200.5	4.0
50°-60°	164.2	3.2
60°-70°	110.8	2.2
70°-80°	55.7	1.1
80°-90°	19.0	0.4
90°-100°	92.6	1.8
100°-110°	277.2	5.5
110°-120°	471.4	9.3
120°-130°	620.1	12.3
130°-140°	697.0	13.8
140°-150°	685.1	13.5
150°-160°	576.8	11.4
160°-170°	383.9	7.6
170°-180°	134.4	2.7
0°-30°	361.8	7.1
0°-40°	571.4	11.3
0°-60°	936.2	18.5
0°-90°	1121.7	22.2
90°-120°	841.3	16.6
90°-150°	2843.5	56.2
90°-180°	3939.0	77.8
0°-180°	5060.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	495	495	495	495	495	
5°	495	492	488	491	491	47
15°	472	467	456	454	451	133
25°	429	419	401	393	388	197
35°	372	356	332	315	308	232
45°	305	286	256	234	224	235
55°	232	211	178	156	147	208
65°	158	136	105	86	81	157
75°	84	64	42	39	38	89
85°	21	13	11	10	10	24
90°	1	12	27	31	34	5
95°	66	74	83	87	87	74
105°	251	254	264	264	266	269
115°	475	478	476	477	476	469
125°	695	698	696	691	687	619
135°	901	907	907	902	900	694
145°	1093	1096	1099	1098	1093	683
155°	1252	1252	1253	1257	1250	576
165°	1364	1360	1360	1366	1359	384
175°	1418	1414	1414	1420	1413	135
180°	1422	1422	1422	1422	1422	



TEST NUMBER: P332405-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6
2.5°	496.3	495.9	495.7	495.4	495.2	494.6	493.7	492.8	492.0	491.1	491.9
5°	494.6	494.2	493.8	493.4	492.8	492.1	491.0	490.0	488.9	487.8	488.6
7.5°	490.1	489.6	489.1	488.6	488.2	487.2	485.9	484.5	483.0	481.6	482.1
10°	486.2	485.6	485.0	484.4	483.7	482.6	481.0	479.4	477.8	476.2	476.3
12.5°	480.8	480.1	479.4	478.7	478.0	476.6	474.7	472.8	470.8	468.8	468.7
15°	471.8	470.8	469.8	468.8	467.9	466.1	463.6	461.2	458.7	456.2	455.7
17.5°	460.5	459.3	458.2	457.0	455.9	453.7	450.6	447.4	444.3	441.1	440.1
20°	452.1	450.7	449.3	447.9	446.4	444.0	440.7	437.2	433.9	430.5	429.3
22.5°	442.8	441.2	439.5	437.9	436.3	433.7	430.1	426.5	422.8	419.2	417.8
25°	429.3	427.1	424.8	422.6	420.3	417.2	413.1	409.0	404.8	400.8	398.9
27.5°	412.8	410.4	407.9	405.4	402.9	399.5	394.9	390.3	385.7	381.2	378.6
30°	401.6	398.9	396.2	393.6	390.9	387.0	382.0	377.0	372.0	367.0	364.0
32.5°	390.4	387.3	384.3	381.3	378.2	374.1	368.8	363.5	358.3	352.9	349.7
35°	371.5	368.2	365.1	361.9	358.7	354.3	348.8	343.2	337.7	332.2	328.4
37.5°	352.4	348.8	345.3	341.7	338.1	333.4	327.5	321.6	315.7	309.8	305.5
40°	340.2	336.3	332.3	328.5	324.5	319.3	313.1	306.7	300.4	294.0	289.5
42.5°	326.4	322.4	318.6	314.6	310.7	305.5	298.9	292.4	285.9	279.3	274.2
45°	305.3	301.3	297.3	293.3	289.2	283.8	277.0	270.1	263.2	256.3	251.2
47.5°	284.2	279.8	275.3	271.0	266.6	261.0	254.1	247.2	240.4	233.5	228.0
50°	268.8	264.6	260.5	256.2	252.0	246.3	239.1	231.9	224.6	217.4	211.9
52.5°	255.0	250.5	245.9	241.3	236.8	230.9	223.8	216.6	209.5	202.3	196.7
55°	231.9	227.5	223.2	218.8	214.4	208.4	200.9	193.3	185.7	178.1	173.0
57.5°	210.5	205.8	201.0	196.2	191.5	185.3	177.7	170.0	162.5	154.9	150.0
60°	195.8	190.9	186.0	181.1	176.2	170.0	162.6	155.2	147.8	140.4	135.6
62.5°	181.0	176.1	171.2	166.3	161.4	155.2	147.8	140.4	133.0	125.6	121.1
65°	158.5	153.6	148.7	143.8	138.9	132.9	126.0	119.0	112.1	105.1	100.7
67.5°	136.0	131.0	126.0	121.1	116.1	110.3	103.6	96.9	90.2	83.6	80.3
70°	121.1	116.3	111.5	106.7	101.9	96.3	90.1	83.9	77.7	71.4	68.3
72.5°	106.4	101.7	96.9	92.1	87.4	82.2	76.5	70.9	65.2	59.5	57.0
75°	83.9	79.6	75.3	71.0	66.7	62.2	57.3	52.3	47.4	42.5	41.7
77.5°	63.3	59.4	55.5	51.7	47.9	44.3	41.2	38.0	34.9	31.7	31.3
80°	50.1	46.5	42.9	39.2	35.6	32.8	30.9	29.0	27.1	25.3	25.0
82.5°	37.6	34.4	31.3	28.2	25.0	23.0	22.1	21.3	20.4	19.5	19.2
85°	21.3	19.3	17.3	15.4	13.4	12.3	12.1	11.8	11.5	11.2	11.0
87.5°	7.9	7.7	7.3	7.1	6.8	7.0	7.6	8.3	8.9	9.6	9.6
90°	1.1	3.6	6.1	8.5	11.0	13.9	17.1	20.3	23.6	26.8	27.8
92.5°	27.0	28.7	30.4	32.1	33.8	35.6	37.4	39.2	41.1	42.9	43.7
95°	65.9	67.6	69.4	71.1	72.8	74.7	76.7	78.7	80.7	82.7	83.6
97.5°	117.0	118.3	119.6	120.9	122.2	123.6	125.0	126.4	127.9	129.3	130.4
100°	151.9	153.3	154.8	156.4	157.8	159.2	160.4	161.7	162.9	164.2	164.9
102.5°	192.1	193.0	193.9	194.8	195.6	196.9	198.5	200.2	201.8	203.5	204.2
105°	251.2	251.8	252.3	252.7	253.2	254.6	256.8	259.1	261.3	263.6	263.6
107.5°	320.0	320.4	320.6	321.0	321.2	321.8	322.7	323.6	324.5	325.4	326.2
110°	362.9	363.4	363.9	364.4	364.9	365.4	365.9	366.4	366.9	367.4	368.4



TEST NUMBER: P332405-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	407.6	407.9	408.2	408.5	408.8	409.0	409.1	409.1	409.3	409.4	410.6
115°	474.6	475.4	476.0	476.8	477.6	477.7	477.2	476.7	476.2	475.7	476.0
117.5°	542.1	542.5	543.0	543.5	544.1	544.0	543.3	542.7	542.0	541.4	541.3
120°	584.0	585.5	587.0	588.5	590.0	590.1	588.8	587.6	586.4	585.1	584.9
122.5°	627.8	628.9	630.0	631.1	632.1	632.4	631.7	631.1	630.4	629.8	629.1
125°	694.6	695.3	696.0	696.8	697.6	697.7	697.2	696.7	696.2	695.7	694.7
127.5°	756.2	757.9	759.4	761.0	762.6	763.1	762.6	762.0	761.5	761.0	759.5
130°	797.3	799.3	801.3	803.3	805.3	805.9	805.1	804.4	803.7	802.9	801.9
132.5°	838.4	840.4	842.4	844.4	846.4	847.1	846.5	846.0	845.4	844.9	843.7
135°	901.2	902.7	904.1	905.6	907.1	907.8	907.5	907.2	907.0	906.7	905.8
137.5°	959.2	960.4	961.7	962.9	964.2	965.2	965.8	966.5	967.1	967.8	966.6
140°	999.4	1000.7	1001.9	1003.2	1004.4	1005.1	1005.4	1005.6	1005.9	1006.2	1005.9
142.5°	1036.0	1037.3	1038.5	1039.8	1041.0	1041.9	1042.3	1042.8	1043.2	1043.7	1043.4
145°	1093.2	1093.7	1094.2	1094.8	1095.2	1095.9	1096.6	1097.3	1098.1	1098.8	1098.5
147.5°	1143.2	1144.2	1145.0	1146.0	1146.9	1147.6	1148.3	1149.0	1149.7	1150.4	1150.4
150°	1178.1	1178.6	1179.1	1179.6	1180.1	1180.6	1181.1	1181.6	1182.1	1182.6	1182.6
152.5°	1206.7	1207.4	1208.1	1208.8	1209.4	1210.0	1210.3	1210.6	1210.9	1211.2	1211.6
155°	1251.8	1251.8	1251.8	1251.8	1251.8	1252.0	1252.2	1252.4	1252.7	1252.9	1254.0
157.5°	1290.2	1290.0	1289.6	1289.3	1289.0	1289.0	1289.2	1289.3	1289.6	1289.8	1290.8
160°	1314.3	1313.9	1313.4	1312.9	1312.3	1312.1	1312.1	1312.1	1312.1	1312.1	1313.4
162.5°	1335.8	1335.1	1334.4	1333.7	1333.0	1332.7	1333.0	1333.2	1333.3	1333.5	1334.8
165°	1363.5	1362.7	1362.0	1361.2	1360.6	1360.1	1360.1	1360.1	1360.1	1360.1	1361.6
167.5°	1385.6	1384.6	1383.6	1382.6	1381.6	1381.2	1381.4	1381.6	1381.8	1382.0	1383.5
170°	1398.1	1397.1	1396.1	1395.2	1394.1	1393.6	1393.6	1393.6	1393.6	1393.6	1395.3
172.5°	1407.9	1407.0	1405.9	1405.0	1403.9	1403.4	1403.4	1403.4	1403.4	1403.4	1405.0
175°	1418.2	1417.2	1416.3	1415.2	1414.2	1413.8	1413.8	1413.8	1413.8	1413.8	1415.2
177.5°	1422.5	1421.7	1420.8	1420.0	1419.3	1418.8	1418.8	1418.8	1418.8	1418.8	1420.0
180°	1421.6	1421.6	1421.6	1421.6	1421.6	1421.6	1421.6	1421.6	1421.6	1421.6	1421.6



TEST NUMBER: P332405-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6
2.5°	492.7	493.4	494.3	494.6	494.5	494.3	494.1	494.0
5°	489.5	490.3	491.0	491.4	491.2	491.0	490.9	490.7
7.5°	482.6	483.0	483.5	483.5	483.2	482.9	482.6	482.3
10°	476.4	476.5	476.6	476.4	476.0	475.5	475.0	474.6
12.5°	468.7	468.6	468.6	468.3	467.8	467.3	466.7	466.2
15°	455.2	454.8	454.3	453.8	453.2	452.5	451.9	451.3
17.5°	439.2	438.2	437.3	436.4	435.4	434.5	433.6	432.7
20°	428.2	427.0	425.9	424.7	423.6	422.6	421.5	420.4
22.5°	416.4	414.9	413.5	412.2	411.2	410.3	409.2	408.3
25°	397.0	395.2	393.3	391.8	390.9	389.9	388.9	388.0
27.5°	376.0	373.4	370.8	368.8	367.2	365.8	364.3	362.7
30°	361.0	358.0	355.0	352.8	351.3	349.9	348.4	347.0
32.5°	346.3	343.0	339.7	337.3	335.8	334.3	332.8	331.3
35°	324.5	320.6	316.8	314.1	312.5	310.9	309.3	307.7
37.5°	301.1	296.7	292.4	289.2	287.2	285.2	283.3	281.3
40°	284.8	280.2	275.5	272.2	270.1	268.1	266.0	264.0
42.5°	269.1	264.2	259.1	255.6	253.7	251.9	250.1	248.2
45°	246.2	241.1	236.0	232.4	230.3	228.2	226.0	223.9
47.5°	222.4	216.9	211.4	207.7	205.8	203.9	201.9	200.0
50°	206.4	200.9	195.4	191.6	189.5	187.4	185.4	183.3
52.5°	190.9	185.1	179.4	175.6	173.7	171.9	170.1	168.2
55°	167.8	162.6	157.5	153.9	152.2	150.4	148.6	146.8
57.5°	145.1	140.2	135.3	132.1	130.6	129.1	127.6	126.1
60°	130.8	126.0	121.1	118.0	116.5	114.9	113.5	111.9
62.5°	116.6	112.1	107.5	104.4	102.9	101.3	99.7	98.2
65°	96.3	92.0	87.6	85.0	83.9	83.0	82.1	81.0
67.5°	77.1	73.8	70.5	68.4	67.3	66.3	65.3	64.2
70°	65.2	62.1	58.9	56.9	55.9	54.9	53.9	53.0
72.5°	54.4	51.9	49.3	47.9	47.4	47.0	46.7	46.2
75°	40.7	39.9	38.9	38.4	38.2	38.1	37.9	37.7
77.5°	30.7	30.2	29.8	29.4	29.3	29.1	28.9	28.8
80°	24.7	24.5	24.2	24.0	23.8	23.6	23.4	23.2
82.5°	18.9	18.7	18.4	18.3	18.3	18.2	18.2	18.2
85°	10.8	10.7	10.5	10.4	10.4	10.4	10.4	10.4
87.5°	9.8	9.9	10.1	10.2	10.2	10.2	10.2	10.2
90°	28.8	29.8	30.7	31.5	32.0	32.5	33.0	33.5
92.5°	44.4	45.3	46.1	46.3	46.0	45.7	45.4	45.1
95°	84.6	85.6	86.6	87.1	87.1	87.1	87.1	87.1
97.5°	131.6	132.8	133.9	134.4	134.3	134.2	134.1	134.0
100°	165.7	166.3	167.1	167.7	168.2	168.8	169.3	169.7
102.5°	204.9	205.7	206.5	206.7	206.6	206.6	206.5	206.4
105°	263.6	263.6	263.6	263.8	264.3	264.8	265.3	265.8
107.5°	327.0	327.8	328.6	328.8	328.6	328.2	328.0	327.6
110°	369.4	370.4	371.3	371.6	371.1	370.7	370.1	369.6





TEST NUMBER: P332405-935

CATALOG NUMBER: S123RDIW-S340D1320U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	411.7	412.9	414.1	414.7	414.6	414.5	414.4	414.3
115°	476.2	476.5	476.7	476.7	476.5	476.2	476.0	475.7
117.5°	541.3	541.2	541.1	540.8	540.1	539.4	538.7	538.0
120°	584.6	584.4	584.2	583.8	583.3	582.8	582.3	581.8
122.5°	628.5	627.8	627.2	626.5	625.9	625.2	624.5	623.8
125°	693.7	692.8	691.7	690.8	689.7	688.7	687.8	686.7
127.5°	758.1	756.7	755.4	754.1	752.9	751.8	750.7	749.5
130°	800.9	800.0	798.9	797.5	795.8	794.1	792.4	790.7
132.5°	842.5	841.3	840.2	838.9	837.5	836.2	834.8	833.5
135°	904.7	903.8	902.8	902.1	901.6	901.0	900.5	900.1
137.5°	965.6	964.6	963.5	962.6	961.7	960.7	959.8	958.8
140°	1005.6	1005.4	1005.1	1004.2	1002.5	1000.7	998.9	997.2
142.5°	1043.2	1042.9	1042.7	1041.9	1040.5	1039.2	1037.8	1036.6
145°	1098.3	1098.1	1097.9	1097.3	1096.2	1095.2	1094.2	1093.2
147.5°	1150.4	1150.4	1150.4	1149.7	1148.2	1146.7	1145.2	1143.8
150°	1182.6	1182.6	1182.6	1181.8	1180.3	1178.9	1177.3	1175.9
152.5°	1211.9	1212.4	1212.7	1212.3	1211.0	1209.7	1208.4	1207.1
155°	1254.9	1255.9	1256.9	1256.5	1254.8	1253.1	1251.3	1249.6
157.5°	1291.8	1292.9	1294.0	1293.7	1292.4	1291.0	1289.6	1288.2
160°	1314.6	1315.9	1317.1	1317.2	1316.2	1315.3	1314.2	1313.2
162.5°	1336.0	1337.3	1338.5	1338.3	1336.8	1335.2	1333.6	1332.0
165°	1363.1	1364.6	1366.1	1366.0	1364.3	1362.5	1360.7	1359.0
167.5°	1385.1	1386.6	1388.2	1388.2	1386.6	1385.1	1383.5	1382.0
170°	1397.1	1398.9	1400.6	1400.6	1398.9	1397.1	1395.3	1393.6
172.5°	1406.5	1408.1	1409.6	1409.5	1407.8	1406.0	1404.3	1402.6
175°	1416.7	1418.2	1419.7	1419.5	1417.8	1416.1	1414.4	1412.6
177.5°	1421.3	1422.5	1423.7	1423.6	1422.1	1420.7	1419.4	1418.0
180°	1421.6	1421.6	1421.6	1421.6	1421.6	1421.6	1421.6	1421.6

(END OF REPORT)