

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332421-935

Luminaire Tested: **S123RDIW-S560D1030U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332421-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S560D1030U935-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1030 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4917.0 lumens
Efficiency: N/A
Efficacy: 108.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.23
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332421-935

CATALOG NUMBER: S123RDIW-S560D1030U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

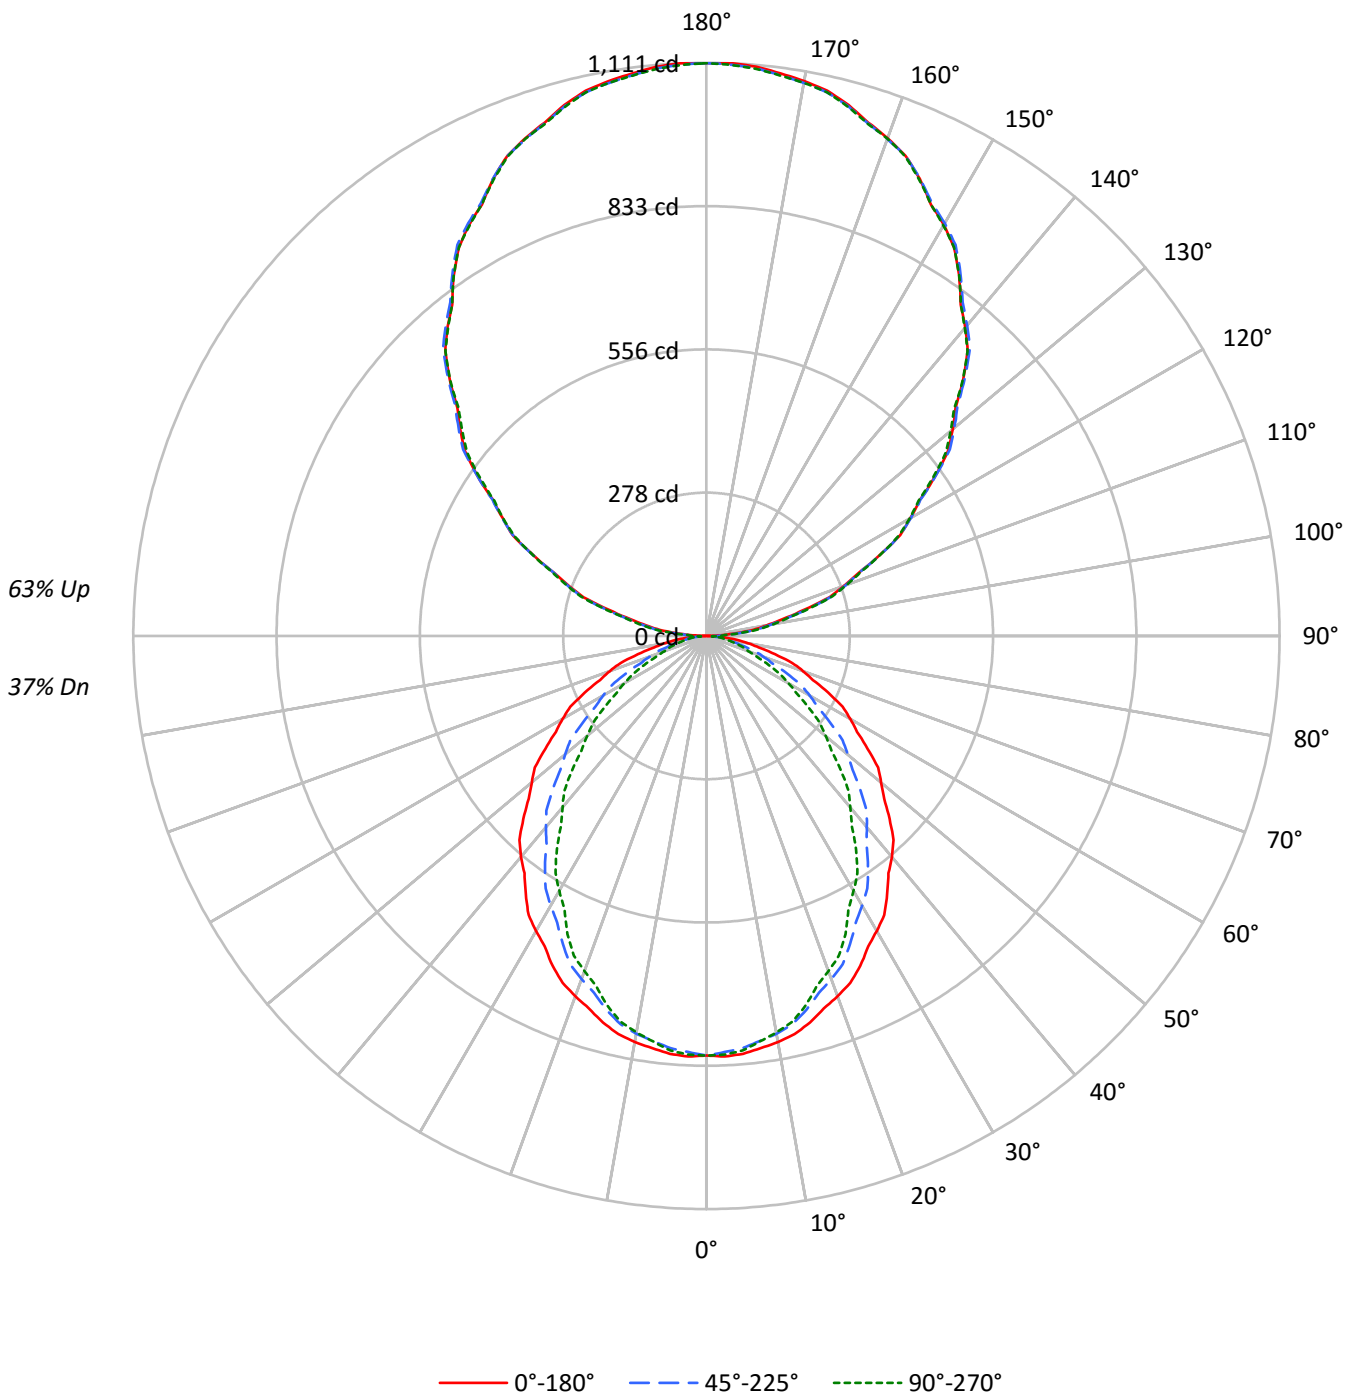



TEST NUMBER: P332421-935

CATALOG NUMBER: S123RDIW-S560D1030U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	104	104	104	104	94	94	94	94	76	76	76		60	60	60		45	45	45	37
1	95	91	87	84	86	83	80	77	67	65	63		53	51	50		40	39	38	32
2	87	80	74	69	79	73	68	63	59	56	53		47	44	42		35	34	32	27
3	79	70	63	58	72	64	58	53	52	48	44		41	38	36		31	29	28	23
4	73	62	55	49	66	57	50	45	47	42	38		37	34	31		28	26	24	20
5	67	55	48	42	60	51	44	39	42	37	33		33	30	27		25	23	21	18
6	61	50	42	36	56	46	39	34	38	32	29		30	26	24		23	21	19	16
7	57	45	37	32	51	41	34	30	34	29	25		27	24	21		21	19	17	14
8	53	41	33	28	48	37	31	26	31	26	22		25	21	19		20	17	15	13
9	49	37	30	25	44	34	28	23	28	24	20		23	19	17		18	15	14	11
10	46	34	27	22	42	31	25	21	26	21	18		21	18	15		17	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8753	8753	8753
5°	8787	8666	8715
10°	8737	8557	8528
15°	8643	8357	8269
20°	8514	8107	7918
25°	8381	7826	7574
30°	8206	7501	7091
35°	8025	7176	6646
40°	7859	6794	6097
45°	7640	6416	5602
50°	7400	5987	5047
55°	7156	5495	4530
60°	6928	4969	3961
65°	6635	4401	3393
70°	6266	3695	2738
75°	5731	2907	2578
80°	5114	2579	2368
85°	4323	2272	2112



TEST NUMBER: P332421-935

CATALOG NUMBER: S123RDIW-S560D1030U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.4	1.6
10°-20°	212.5	4.3
20°-30°	305.9	6.2
30°-40°	344.6	7.0
40°-50°	329.7	6.7
50°-60°	270.0	5.5
60°-70°	182.2	3.7
70°-80°	91.6	1.9
80°-90°	27.5	0.6
90°-100°	72.4	1.5
100°-110°	216.5	4.4
110°-120°	368.3	7.5
120°-130°	484.4	9.9
130°-140°	544.4	11.1
140°-150°	535.2	10.9
150°-160°	450.5	9.2
160°-170°	299.9	6.1
170°-180°	105.0	2.1
0°-30°	594.8	12.1
0°-40°	939.4	19.1
0°-60°	1539.1	31.3
0°-90°	1840.4	37.4
90°-120°	657.1	13.4
90°-150°	2221.1	45.2
90°-180°	3077.0	62.6
0°-180°	4917.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	813	813	813	813	813	
5°	813	810	802	808	807	77
15°	776	768	750	747	742	218
25°	706	688	659	645	638	324
35°	611	586	546	519	506	382
45°	502	471	422	385	368	387
55°	381	348	293	256	241	342
65°	260	223	173	142	133	258
75°	138	106	70	64	62	147
85°	35	21	18	17	17	39
90°	1	10	21	24	26	5
95°	52	58	65	68	68	58
105°	196	198	206	206	208	210
115°	371	373	372	372	372	367
125°	543	545	544	540	536	484
135°	704	709	708	705	703	542
145°	854	856	858	857	854	533
155°	978	978	979	982	976	450
165°	1065	1063	1062	1067	1062	300
175°	1108	1104	1104	1109	1104	105
180°	1110	1110	1110	1110	1110	



TEST NUMBER: P332421-935

CATALOG NUMBER: S123RDIW-S560D1030U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2
2.5°	815.9	815.4	814.9	814.4	814.0	813.0	811.7	810.2	808.8	807.4	808.7
5°	813.2	812.5	811.8	811.1	810.3	809.1	807.3	805.6	803.7	802.0	803.3
7.5°	805.7	804.9	804.1	803.3	802.5	801.0	798.7	796.4	794.1	791.9	792.6
10°	799.4	798.3	797.3	796.3	795.3	793.4	790.8	788.2	785.5	782.9	783.0
12.5°	790.4	789.3	788.1	787.0	785.8	783.7	780.4	777.2	774.0	770.8	770.7
15°	775.6	774.0	772.4	770.8	769.2	766.3	762.2	758.1	754.0	749.9	749.2
17.5°	757.0	755.2	753.3	751.4	749.5	746.0	740.7	735.6	730.3	725.1	723.6
20°	743.3	741.0	738.7	736.2	733.9	730.0	724.4	718.8	713.3	707.7	705.8
22.5°	728.0	725.3	722.6	719.9	717.2	712.9	707.0	701.0	695.2	689.2	686.8
25°	705.7	702.1	698.4	694.7	691.0	685.9	679.1	672.4	665.6	658.9	655.8
27.5°	678.6	674.6	670.5	666.5	662.5	656.7	649.2	641.7	634.2	626.7	622.4
30°	660.2	655.8	651.4	647.0	642.7	636.3	628.1	619.9	611.7	603.5	598.5
32.5°	641.7	636.8	631.8	626.8	621.8	615.0	606.3	597.6	588.9	580.2	574.8
35°	610.7	605.5	600.2	595.0	589.6	582.5	573.3	564.3	555.2	546.1	539.8
37.5°	579.4	573.5	567.7	561.7	555.9	548.1	538.4	528.7	519.0	509.3	502.1
40°	559.3	552.8	546.4	539.9	533.5	525.0	514.7	504.3	493.9	483.5	475.8
42.5°	536.6	530.1	523.7	517.3	510.8	502.2	491.5	480.7	469.9	459.2	450.8
45°	501.9	495.3	488.7	482.2	475.5	466.6	455.3	444.0	432.7	421.5	413.1
47.5°	467.2	459.9	452.7	445.5	438.2	429.0	417.7	406.4	395.1	383.8	374.8
50°	441.9	435.0	428.1	421.2	414.3	404.9	393.0	381.3	369.4	357.5	348.4
52.5°	419.2	411.7	404.2	396.7	389.3	379.7	367.9	356.2	344.4	332.7	323.2
55°	381.3	374.0	366.9	359.6	352.5	342.7	330.2	317.8	305.3	292.8	284.3
57.5°	346.1	338.3	330.5	322.6	314.8	304.6	292.1	279.7	267.1	254.6	246.6
60°	321.8	313.8	305.7	297.6	289.6	279.5	267.3	255.2	243.0	230.8	222.9
62.5°	297.6	289.6	281.5	273.4	265.4	255.2	243.1	230.9	218.7	206.6	199.1
65°	260.5	252.4	244.4	236.3	228.3	218.5	207.1	195.7	184.3	172.8	165.7
67.5°	223.4	215.3	207.2	199.0	190.9	181.3	170.3	159.4	148.4	137.4	132.1
70°	199.1	191.2	183.4	175.5	167.6	158.4	148.2	137.9	127.7	117.4	112.3
72.5°	174.9	167.1	159.3	151.5	143.7	135.2	125.9	116.5	107.2	97.9	93.7
75°	137.8	130.8	123.8	116.8	109.7	102.1	94.1	86.0	78.0	69.9	68.4
77.5°	104.1	97.7	91.4	85.0	78.6	72.8	67.7	62.5	57.3	52.1	51.3
80°	82.5	76.5	70.4	64.4	58.4	53.9	50.8	47.7	44.6	41.6	41.1
82.5°	61.9	56.7	51.5	46.3	41.1	37.8	36.3	35.0	33.5	32.0	31.6
85°	35.0	31.8	28.5	25.3	22.0	20.2	19.8	19.4	18.9	18.4	18.2
87.5°	12.8	12.0	11.0	10.2	9.2	9.0	9.6	10.1	10.5	11.0	11.1
90°	0.9	2.8	4.7	6.7	8.6	10.8	13.3	15.9	18.4	20.9	21.7
92.5°	21.1	22.4	23.8	25.1	26.3	27.7	29.2	30.7	32.0	33.5	34.1
95°	51.5	52.8	54.2	55.5	56.9	58.4	59.9	61.5	63.0	64.6	65.3
97.5°	91.4	92.4	93.4	94.5	95.5	96.5	97.6	98.8	99.9	101.0	101.9
100°	118.6	119.8	121.0	122.1	123.3	124.3	125.4	126.3	127.3	128.2	128.8
102.5°	150.1	150.8	151.4	152.1	152.8	153.8	155.1	156.4	157.6	158.9	159.5
105°	196.3	196.7	197.1	197.4	197.9	198.9	200.6	202.3	204.1	205.9	205.9
107.5°	250.0	250.2	250.5	250.7	250.9	251.4	252.1	252.8	253.5	254.2	254.8
110°	283.5	283.9	284.3	284.6	285.1	285.4	285.9	286.2	286.6	287.0	287.7



TEST NUMBER: P332421-935

CATALOG NUMBER: S123RDIW-S560D1030U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	318.4	318.7	318.8	319.1	319.3	319.4	319.5	319.6	319.7	319.8	320.7
115°	370.7	371.3	371.9	372.5	373.1	373.2	372.7	372.4	372.0	371.6	371.8
117.5°	423.4	423.8	424.2	424.6	425.0	424.9	424.4	423.9	423.4	422.9	422.8
120°	456.2	457.4	458.6	459.7	460.9	461.0	459.9	459.0	458.1	457.1	456.8
122.5°	490.4	491.3	492.1	492.9	493.8	494.0	493.5	493.0	492.5	492.0	491.5
125°	542.6	543.1	543.7	544.3	544.9	545.0	544.6	544.2	543.8	543.5	542.7
127.5°	590.7	591.9	593.2	594.4	595.6	596.1	595.6	595.2	594.8	594.3	593.3
130°	622.8	624.4	625.9	627.5	629.0	629.5	629.0	628.4	627.8	627.2	626.4
132.5°	654.9	656.4	658.0	659.6	661.2	661.7	661.2	660.8	660.4	660.0	659.0
135°	704.0	705.1	706.3	707.4	708.6	709.0	708.9	708.7	708.5	708.3	707.5
137.5°	749.3	750.3	751.2	752.2	753.2	753.9	754.4	754.9	755.4	756.0	755.1
140°	780.7	781.7	782.6	783.6	784.5	785.1	785.3	785.6	785.7	785.9	785.7
142.5°	809.3	810.3	811.2	812.2	813.2	813.8	814.2	814.5	814.9	815.3	815.0
145°	853.9	854.4	854.7	855.1	855.5	856.0	856.6	857.2	857.7	858.3	858.2
147.5°	893.0	893.7	894.4	895.2	895.9	896.5	897.0	897.6	898.1	898.6	898.6
150°	920.2	920.7	921.0	921.4	921.8	922.2	922.6	923.0	923.3	923.8	923.8
152.5°	942.6	943.1	943.7	944.3	944.8	945.1	945.4	945.6	945.9	946.1	946.4
155°	977.8	977.8	977.8	977.8	977.8	977.9	978.1	978.4	978.5	978.7	979.5
157.5°	1007.9	1007.6	1007.4	1007.1	1006.9	1006.9	1007.0	1007.2	1007.4	1007.5	1008.3
160°	1026.7	1026.3	1025.9	1025.5	1025.1	1024.9	1024.9	1024.9	1024.9	1024.9	1025.9
162.5°	1043.4	1042.9	1042.3	1041.8	1041.3	1041.0	1041.2	1041.4	1041.6	1041.7	1042.7
165°	1065.1	1064.5	1063.9	1063.3	1062.7	1062.5	1062.5	1062.5	1062.5	1062.5	1063.6
167.5°	1082.4	1081.6	1080.8	1080.0	1079.3	1078.9	1079.1	1079.3	1079.4	1079.5	1080.7
170°	1092.1	1091.3	1090.5	1089.8	1089.0	1088.6	1088.6	1088.6	1088.6	1088.6	1089.9
172.5°	1099.8	1099.0	1098.2	1097.4	1096.7	1096.3	1096.3	1096.3	1096.3	1096.3	1097.5
175°	1107.8	1107.1	1106.3	1105.5	1104.7	1104.3	1104.3	1104.3	1104.3	1104.3	1105.5
177.5°	1111.1	1110.5	1109.9	1109.2	1108.6	1108.4	1108.4	1108.4	1108.4	1108.4	1109.2
180°	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4



TEST NUMBER: P332421-935

CATALOG NUMBER: S123RDIW-S560D1030U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2
2.5°	810.0	811.3	812.6	813.1	812.9	812.6	812.4	812.2
5°	804.6	806.0	807.3	807.8	807.5	807.2	806.9	806.6
7.5°	793.3	794.0	794.8	794.9	794.4	793.9	793.4	792.9
10°	783.2	783.3	783.4	783.2	782.5	781.7	781.0	780.2
12.5°	770.6	770.5	770.4	769.9	769.0	768.2	767.4	766.5
15°	748.5	747.7	747.0	746.1	745.0	744.1	743.0	742.0
17.5°	722.0	720.5	718.8	717.4	715.8	714.3	712.7	711.3
20°	703.9	702.0	700.1	698.3	696.5	694.7	692.9	691.2
22.5°	684.5	682.1	679.8	677.7	676.1	674.4	672.8	671.1
25°	652.7	649.6	646.6	644.2	642.7	641.0	639.4	637.7
27.5°	618.1	613.9	609.6	606.2	603.7	601.3	598.8	596.3
30°	593.5	588.5	583.6	579.9	577.6	575.2	572.8	570.5
32.5°	569.4	563.9	558.4	554.5	552.1	549.6	547.1	544.7
35°	533.5	527.2	520.9	516.4	513.8	511.2	508.5	505.8
37.5°	495.0	487.8	480.7	475.5	472.3	469.0	465.7	462.4
40°	468.2	460.5	453.0	447.5	444.1	440.7	437.4	433.9
42.5°	442.6	434.2	425.9	420.2	417.2	414.1	411.1	408.1
45°	404.8	396.4	388.1	382.1	378.6	375.1	371.5	368.0
47.5°	365.7	356.6	347.5	341.4	338.3	335.1	332.0	328.8
50°	339.3	330.2	321.2	314.9	311.5	308.2	304.8	301.4
52.5°	313.8	304.4	294.9	288.7	285.7	282.7	279.7	276.6
55°	275.9	267.3	258.8	253.1	250.2	247.3	244.4	241.4
57.5°	238.5	230.5	222.5	217.2	214.7	212.2	209.7	207.2
60°	215.0	207.1	199.1	194.0	191.5	189.0	186.5	184.0
62.5°	191.7	184.3	176.8	171.8	169.2	166.5	163.9	161.4
65°	158.4	151.3	144.0	139.7	138.1	136.5	134.8	133.2
67.5°	126.7	121.3	116.0	112.4	110.7	109.0	107.3	105.6
70°	107.1	102.0	96.9	93.5	91.9	90.3	88.7	87.0
72.5°	89.5	85.3	81.1	78.7	78.0	77.3	76.6	75.9
75°	67.0	65.5	64.1	63.2	62.9	62.6	62.3	62.0
77.5°	50.5	49.8	48.9	48.4	48.1	47.8	47.5	47.2
80°	40.6	40.2	39.8	39.4	39.2	38.8	38.6	38.2
82.5°	31.2	30.7	30.3	30.0	30.0	30.0	29.9	29.8
85°	17.9	17.6	17.3	17.1	17.1	17.1	17.1	17.1
87.5°	11.1	11.2	11.2	11.2	11.2	11.1	11.1	11.0
90°	22.5	23.2	24.0	24.6	25.0	25.4	25.7	26.2
92.5°	34.7	35.4	36.0	36.2	35.9	35.7	35.5	35.2
95°	66.1	66.9	67.7	68.0	68.0	68.0	68.0	68.0
97.5°	102.8	103.7	104.6	105.0	104.9	104.9	104.8	104.7
100°	129.4	130.0	130.5	131.0	131.4	131.8	132.2	132.6
102.5°	160.1	160.7	161.3	161.5	161.4	161.4	161.3	161.2
105°	205.9	205.9	205.9	206.0	206.5	206.8	207.2	207.6
107.5°	255.5	256.1	256.7	256.8	256.7	256.4	256.1	255.9
110°	288.5	289.3	290.1	290.2	289.9	289.5	289.1	288.7



TEST NUMBER: P332421-935

CATALOG NUMBER: S123RDIW-S560D1030U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	321.7	322.5	323.5	323.9	323.8	323.7	323.7	323.6
115°	372.0	372.2	372.4	372.4	372.2	372.0	371.8	371.6
117.5°	422.8	422.8	422.8	422.4	421.9	421.4	420.8	420.3
120°	456.7	456.5	456.3	456.0	455.6	455.2	454.9	454.4
122.5°	490.9	490.4	490.0	489.4	488.9	488.4	487.8	487.2
125°	541.9	541.1	540.4	539.6	538.8	538.0	537.3	536.5
127.5°	592.2	591.2	590.0	589.0	588.1	587.3	586.3	585.5
130°	625.6	624.8	624.1	623.0	621.6	620.3	619.0	617.6
132.5°	658.1	657.2	656.3	655.3	654.2	653.2	652.1	651.1
135°	706.7	705.9	705.2	704.6	704.2	703.9	703.4	703.1
137.5°	754.3	753.5	752.7	751.9	751.1	750.4	749.7	749.0
140°	785.6	785.3	785.1	784.4	783.0	781.7	780.3	778.9
142.5°	814.9	814.7	814.5	813.8	812.8	811.8	810.7	809.7
145°	858.0	857.7	857.6	857.0	856.3	855.5	854.7	853.9
147.5°	898.6	898.6	898.6	898.0	896.9	895.7	894.6	893.4
150°	923.8	923.8	923.8	923.2	922.0	920.8	919.7	918.5
152.5°	946.7	947.0	947.4	947.0	946.0	944.9	943.9	943.0
155°	980.2	981.0	981.8	981.5	980.2	978.8	977.5	976.1
157.5°	1009.1	1010.0	1010.7	1010.6	1009.5	1008.5	1007.4	1006.3
160°	1026.9	1027.9	1028.8	1028.9	1028.1	1027.3	1026.6	1025.8
162.5°	1043.6	1044.6	1045.6	1045.4	1044.2	1042.9	1041.7	1040.4
165°	1064.8	1065.9	1067.1	1067.0	1065.7	1064.3	1062.9	1061.6
167.5°	1081.9	1083.1	1084.3	1084.3	1083.1	1081.9	1080.7	1079.5
170°	1091.3	1092.7	1094.1	1094.1	1092.7	1091.3	1089.9	1088.6
172.5°	1098.7	1099.9	1101.1	1101.0	1099.7	1098.3	1096.9	1095.6
175°	1106.6	1107.8	1109.0	1108.9	1107.5	1106.1	1104.8	1103.5
177.5°	1110.2	1111.1	1112.1	1112.0	1110.9	1109.8	1108.7	1107.7
180°	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4	1110.4

(END OF REPORT)