

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332413-935

Luminaire Tested: **S123RDIW-S560D460U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332413-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S560D460U935-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 460 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3214.8 lumens
Efficiency: N/A
Efficacy: 106.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.23
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 30.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332413-935

CATALOG NUMBER: S123RDIW-S560D460U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

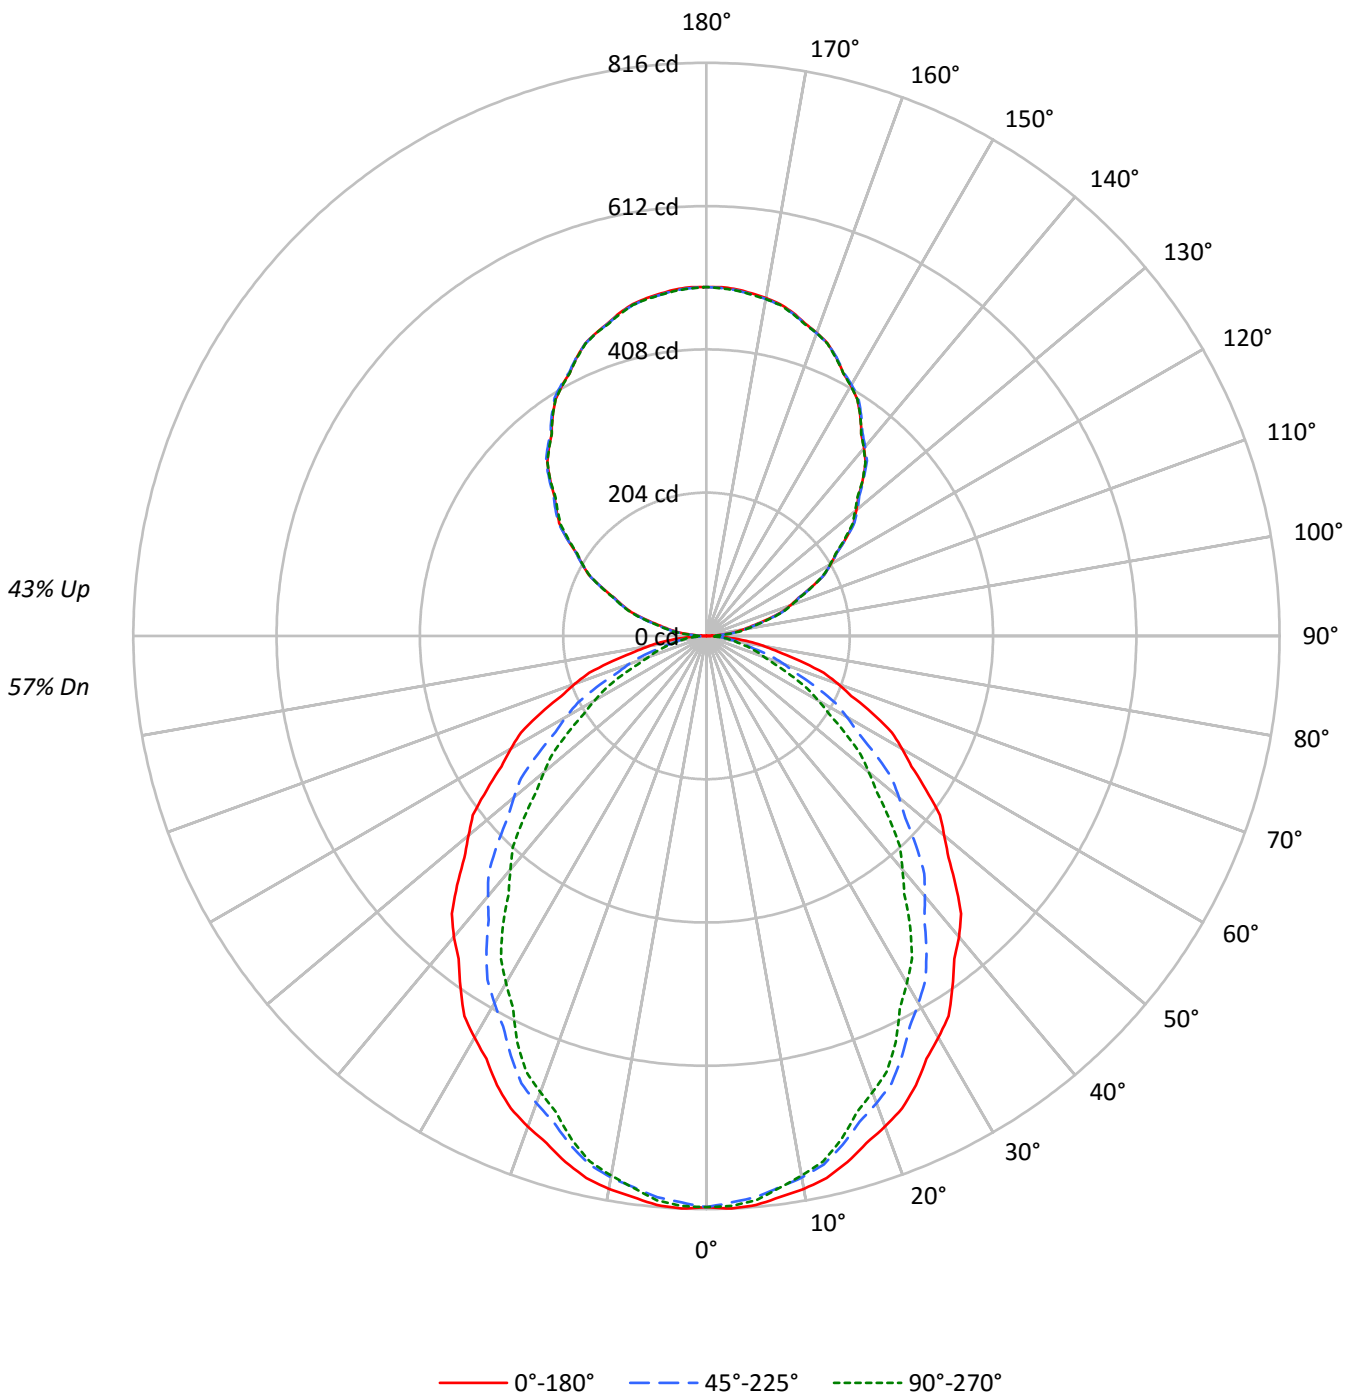



TEST NUMBER: P332413-935

CATALOG NUMBER: S123RDIW-S560D460U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	75	75	75	63	63	63	57
1	100	96	92	88	93	89	86	83	77	75	73	66	64	63	56	55	54	49
2	91	84	78	73	85	78	73	69	68	64	61	59	56	53	50	48	46	42
3	83	74	67	61	77	69	63	58	60	55	51	52	48	45	44	42	39	36
4	76	66	58	52	71	62	55	49	54	48	44	47	42	39	40	37	34	31
5	70	59	51	45	65	55	48	43	48	43	38	42	38	34	36	33	30	27
6	65	53	45	39	60	50	43	37	44	38	34	38	34	30	33	29	27	24
7	60	48	40	34	56	45	38	33	40	34	30	35	30	27	30	27	24	21
8	56	44	36	31	52	41	34	29	36	31	27	32	27	24	28	24	21	19
9	52	40	32	27	49	38	31	26	33	28	24	29	25	22	26	22	19	17
10	49	37	30	25	46	35	28	24	31	25	22	27	23	20	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8753	8753	8753
5°	8787	8666	8715
10°	8737	8557	8528
15°	8643	8357	8269
20°	8514	8107	7918
25°	8381	7826	7574
30°	8206	7501	7091
35°	8025	7176	6646
40°	7859	6794	6097
45°	7640	6416	5602
50°	7400	5987	5047
55°	7156	5495	4530
60°	6928	4969	3961
65°	6635	4401	3393
70°	6266	3695	2738
75°	5731	2907	2578
80°	5114	2579	2368
85°	4323	2272	2112



TEST NUMBER: P332413-935

CATALOG NUMBER: S123RDIW-S560D460U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.4	2.4
10°-20°	212.5	6.6
20°-30°	305.9	9.5
30°-40°	344.6	10.7
40°-50°	329.7	10.3
50°-60°	270.0	8.4
60°-70°	182.2	5.7
70°-80°	91.6	2.9
80°-90°	25.7	0.8
90°-100°	32.4	1.0
100°-110°	96.8	3.0
110°-120°	164.7	5.1
120°-130°	216.7	6.7
130°-140°	243.5	7.6
140°-150°	239.4	7.4
150°-160°	201.5	6.3
160°-170°	134.2	4.2
170°-180°	47.0	1.5
0°-30°	594.8	18.5
0°-40°	939.4	29.2
0°-60°	1539.1	47.9
0°-90°	1838.6	57.2
90°-120°	293.9	9.1
90°-150°	993.5	30.9
90°-180°	1376.0	42.8
0°-180°	3214.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	813	813	813	813	813	
5°	813	810	802	808	807	77
15°	776	768	750	747	742	218
25°	706	688	659	645	638	324
35°	611	586	546	519	506	382
45°	502	471	422	385	368	387
55°	381	348	293	256	241	342
65°	260	223	173	142	133	258
75°	138	106	70	64	62	147
85°	35	21	18	17	17	39
90°	0	4	9	11	12	3
95°	23	26	29	30	30	26
105°	88	89	92	92	93	94
115°	166	167	166	167	166	164
125°	243	244	243	242	240	216
135°	315	317	317	315	314	243
145°	382	383	384	384	382	239
155°	437	437	438	439	437	201
165°	476	475	475	477	475	134
175°	496	494	494	496	494	47
180°	497	497	497	497	497	



TEST NUMBER: P332413-935

CATALOG NUMBER: S123RDIW-S560D460U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2
2.5°	815.9	815.4	814.9	814.4	814.0	813.0	811.7	810.2	808.8	807.4	808.7
5°	813.2	812.5	811.8	811.1	810.3	809.1	807.3	805.6	803.7	802.0	803.3
7.5°	805.7	804.9	804.1	803.3	802.5	801.0	798.7	796.4	794.1	791.9	792.6
10°	799.4	798.3	797.3	796.3	795.3	793.4	790.8	788.2	785.5	782.9	783.0
12.5°	790.4	789.3	788.1	787.0	785.8	783.7	780.4	777.2	774.0	770.8	770.7
15°	775.6	774.0	772.4	770.8	769.2	766.3	762.2	758.1	754.0	749.9	749.2
17.5°	757.0	755.2	753.3	751.4	749.5	746.0	740.7	735.6	730.3	725.1	723.6
20°	743.3	741.0	738.7	736.2	733.9	730.0	724.4	718.8	713.3	707.7	705.8
22.5°	728.0	725.3	722.6	719.9	717.2	712.9	707.0	701.0	695.2	689.2	686.8
25°	705.7	702.1	698.4	694.7	691.0	685.9	679.1	672.4	665.6	658.9	655.8
27.5°	678.6	674.6	670.5	666.5	662.5	656.7	649.2	641.7	634.2	626.7	622.4
30°	660.2	655.8	651.4	647.0	642.7	636.3	628.1	619.9	611.7	603.5	598.5
32.5°	641.7	636.8	631.8	626.8	621.8	615.0	606.3	597.6	588.9	580.2	574.8
35°	610.7	605.5	600.2	595.0	589.6	582.5	573.3	564.3	555.2	546.1	539.8
37.5°	579.4	573.5	567.7	561.7	555.9	548.1	538.4	528.7	519.0	509.3	502.1
40°	559.3	552.8	546.4	539.9	533.5	525.0	514.7	504.3	493.9	483.5	475.8
42.5°	536.6	530.1	523.7	517.3	510.8	502.2	491.5	480.7	469.9	459.2	450.8
45°	501.9	495.3	488.7	482.2	475.5	466.6	455.3	444.0	432.7	421.5	413.1
47.5°	467.2	459.9	452.7	445.5	438.2	429.0	417.7	406.4	395.1	383.8	374.8
50°	441.9	435.0	428.1	421.2	414.3	404.9	393.0	381.3	369.4	357.5	348.4
52.5°	419.2	411.7	404.2	396.7	389.3	379.7	367.9	356.2	344.4	332.7	323.2
55°	381.3	374.0	366.9	359.6	352.5	342.7	330.2	317.8	305.3	292.8	284.3
57.5°	346.1	338.3	330.5	322.6	314.8	304.6	292.1	279.7	267.1	254.6	246.6
60°	321.8	313.8	305.7	297.6	289.6	279.5	267.3	255.2	243.0	230.8	222.9
62.5°	297.6	289.6	281.5	273.4	265.4	255.2	243.1	230.9	218.7	206.6	199.1
65°	260.5	252.4	244.4	236.3	228.3	218.5	207.1	195.7	184.3	172.8	165.7
67.5°	223.4	215.3	207.2	199.0	190.9	181.3	170.3	159.4	148.4	137.4	132.1
70°	199.1	191.2	183.4	175.5	167.6	158.4	148.2	137.9	127.7	117.4	112.3
72.5°	174.9	167.1	159.3	151.5	143.7	135.2	125.9	116.5	107.2	97.9	93.7
75°	137.8	130.8	123.8	116.8	109.7	102.1	94.1	86.0	78.0	69.9	68.4
77.5°	104.1	97.7	91.4	85.0	78.6	72.8	67.7	62.5	57.3	52.1	51.3
80°	82.5	76.5	70.4	64.4	58.4	53.9	50.8	47.7	44.6	41.6	41.1
82.5°	61.9	56.7	51.5	46.3	41.1	37.8	36.3	35.0	33.5	32.0	31.6
85°	35.0	31.8	28.5	25.3	22.0	20.2	19.8	19.4	18.9	18.4	18.2
87.5°	12.7	11.6	10.5	9.4	8.3	7.8	8.1	8.3	8.5	8.7	8.7
90°	0.4	1.3	2.2	3.0	3.9	4.8	5.9	7.1	8.3	9.4	9.7
92.5°	9.5	10.1	10.6	11.2	11.8	12.4	13.1	13.7	14.4	15.0	15.2
95°	23.0	23.6	24.2	24.9	25.5	26.1	26.8	27.5	28.2	28.8	29.2
97.5°	40.9	41.3	41.8	42.3	42.7	43.1	43.7	44.2	44.7	45.2	45.5
100°	53.0	53.6	54.1	54.6	55.1	55.6	56.1	56.5	56.9	57.3	57.6
102.5°	67.1	67.4	67.8	68.0	68.4	68.8	69.4	69.9	70.5	71.1	71.4
105°	87.8	88.0	88.2	88.3	88.5	88.9	89.7	90.5	91.3	92.0	92.0
107.5°	111.8	111.9	112.0	112.1	112.3	112.4	112.8	113.0	113.4	113.7	114.0
110°	126.8	127.0	127.2	127.3	127.5	127.7	127.9	128.0	128.2	128.4	128.7



TEST NUMBER: P332413-935

CATALOG NUMBER: S123RDIW-S560D460U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	142.4	142.5	142.7	142.8	142.8	142.9	142.9	143.0	143.0	143.0	143.4
115°	165.8	166.1	166.3	166.6	166.9	166.9	166.8	166.6	166.4	166.3	166.3
117.5°	189.4	189.6	189.8	189.9	190.1	190.0	189.9	189.6	189.4	189.2	189.2
120°	204.1	204.6	205.1	205.6	206.1	206.2	205.8	205.3	204.9	204.5	204.4
122.5°	219.4	219.7	220.2	220.5	220.8	220.9	220.8	220.5	220.3	220.1	219.8
125°	242.7	243.0	243.2	243.5	243.7	243.7	243.6	243.4	243.2	243.1	242.7
127.5°	264.2	264.8	265.4	265.9	266.5	266.7	266.5	266.2	266.0	265.9	265.4
130°	278.6	279.3	280.0	280.7	281.4	281.5	281.3	281.0	280.8	280.5	280.2
132.5°	292.9	293.6	294.4	295.1	295.8	296.0	295.8	295.6	295.4	295.2	294.8
135°	314.9	315.4	315.9	316.4	316.9	317.2	317.1	317.0	316.9	316.8	316.5
137.5°	335.2	335.6	336.0	336.5	336.9	337.3	337.4	337.7	337.9	338.1	337.8
140°	349.2	349.7	350.1	350.5	350.9	351.2	351.3	351.4	351.5	351.5	351.5
142.5°	362.1	362.5	362.9	363.3	363.8	364.0	364.2	364.4	364.5	364.6	364.5
145°	382.0	382.2	382.4	382.5	382.7	382.9	383.1	383.4	383.7	383.9	383.8
147.5°	399.5	399.8	400.1	400.4	400.7	401.0	401.2	401.5	401.7	402.0	402.0
150°	411.6	411.8	412.0	412.2	412.3	412.5	412.7	412.8	413.0	413.2	413.2
152.5°	421.6	421.9	422.1	422.3	422.6	422.8	422.8	423.0	423.1	423.2	423.4
155°	437.4	437.4	437.4	437.4	437.4	437.5	437.6	437.6	437.7	437.8	438.2
157.5°	450.8	450.7	450.6	450.5	450.4	450.4	450.5	450.6	450.6	450.6	451.0
160°	459.3	459.1	458.9	458.7	458.6	458.5	458.5	458.5	458.5	458.5	458.9
162.5°	466.7	466.5	466.2	466.0	465.8	465.7	465.7	465.8	465.9	466.0	466.4
165°	476.4	476.1	475.9	475.6	475.4	475.3	475.3	475.3	475.3	475.3	475.8
167.5°	484.1	483.8	483.5	483.1	482.8	482.6	482.7	482.8	482.8	482.8	483.5
170°	488.5	488.2	487.8	487.5	487.2	487.0	487.0	487.0	487.0	487.0	487.6
172.5°	492.0	491.6	491.3	490.9	490.5	490.3	490.3	490.3	490.3	490.3	490.9
175°	495.5	495.2	494.8	494.5	494.1	494.0	494.0	494.0	494.0	494.0	494.5
177.5°	497.1	496.7	496.5	496.2	495.9	495.8	495.8	495.8	495.8	495.8	496.2
180°	496.7	496.7	496.7	496.7	496.7	496.7	496.7	496.7	496.7	496.7	496.7



TEST NUMBER: P332413-935

CATALOG NUMBER: S123RDIW-S560D460U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2
2.5°	810.0	811.3	812.6	813.1	812.9	812.6	812.4	812.2
5°	804.6	806.0	807.3	807.8	807.5	807.2	806.9	806.6
7.5°	793.3	794.0	794.8	794.9	794.4	793.9	793.4	792.9
10°	783.2	783.3	783.4	783.2	782.5	781.7	781.0	780.2
12.5°	770.6	770.5	770.4	769.9	769.0	768.2	767.4	766.5
15°	748.5	747.7	747.0	746.1	745.0	744.1	743.0	742.0
17.5°	722.0	720.5	718.8	717.4	715.8	714.3	712.7	711.3
20°	703.9	702.0	700.1	698.3	696.5	694.7	692.9	691.2
22.5°	684.5	682.1	679.8	677.7	676.1	674.4	672.8	671.1
25°	652.7	649.6	646.6	644.2	642.7	641.0	639.4	637.7
27.5°	618.1	613.9	609.6	606.2	603.7	601.3	598.8	596.3
30°	593.5	588.5	583.6	579.9	577.6	575.2	572.8	570.5
32.5°	569.4	563.9	558.4	554.5	552.1	549.6	547.1	544.7
35°	533.5	527.2	520.9	516.4	513.8	511.2	508.5	505.8
37.5°	495.0	487.8	480.7	475.5	472.3	469.0	465.7	462.4
40°	468.2	460.5	453.0	447.5	444.1	440.7	437.4	433.9
42.5°	442.6	434.2	425.9	420.2	417.2	414.1	411.1	408.1
45°	404.8	396.4	388.1	382.1	378.6	375.1	371.5	368.0
47.5°	365.7	356.6	347.5	341.4	338.3	335.1	332.0	328.8
50°	339.3	330.2	321.2	314.9	311.5	308.2	304.8	301.4
52.5°	313.8	304.4	294.9	288.7	285.7	282.7	279.7	276.6
55°	275.9	267.3	258.8	253.1	250.2	247.3	244.4	241.4
57.5°	238.5	230.5	222.5	217.2	214.7	212.2	209.7	207.2
60°	215.0	207.1	199.1	194.0	191.5	189.0	186.5	184.0
62.5°	191.7	184.3	176.8	171.8	169.2	166.5	163.9	161.4
65°	158.4	151.3	144.0	139.7	138.1	136.5	134.8	133.2
67.5°	126.7	121.3	116.0	112.4	110.7	109.0	107.3	105.6
70°	107.1	102.0	96.9	93.5	91.9	90.3	88.7	87.0
72.5°	89.5	85.3	81.1	78.7	78.0	77.3	76.6	75.9
75°	67.0	65.5	64.1	63.2	62.9	62.6	62.3	62.0
77.5°	50.5	49.8	48.9	48.4	48.1	47.8	47.5	47.2
80°	40.6	40.2	39.8	39.4	39.2	38.8	38.6	38.2
82.5°	31.2	30.7	30.3	30.0	30.0	30.0	29.9	29.8
85°	17.9	17.6	17.3	17.1	17.1	17.1	17.1	17.1
87.5°	8.6	8.6	8.5	8.4	8.4	8.4	8.3	8.2
90°	10.1	10.4	10.8	11.0	11.2	11.4	11.5	11.7
92.5°	15.5	15.8	16.1	16.2	16.1	15.9	15.8	15.8
95°	29.5	29.9	30.2	30.4	30.4	30.4	30.4	30.4
97.5°	46.0	46.4	46.8	46.9	46.9	46.9	46.8	46.8
100°	57.9	58.1	58.4	58.6	58.8	59.0	59.2	59.3
102.5°	71.6	71.9	72.2	72.2	72.2	72.2	72.2	72.1
105°	92.0	92.0	92.0	92.1	92.4	92.6	92.7	92.9
107.5°	114.3	114.5	114.8	114.9	114.8	114.7	114.6	114.5
110°	129.1	129.4	129.8	129.8	129.7	129.5	129.3	129.2



TEST NUMBER: P332413-935

CATALOG NUMBER: S123RDIW-S560D460U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	143.9	144.3	144.7	144.9	144.8	144.8	144.8	144.7
115°	166.4	166.5	166.6	166.6	166.5	166.4	166.3	166.3
117.5°	189.2	189.1	189.1	189.0	188.7	188.5	188.2	188.0
120°	204.3	204.2	204.1	204.0	203.8	203.6	203.5	203.3
122.5°	219.6	219.4	219.1	219.0	218.7	218.4	218.2	217.9
125°	242.4	242.0	241.7	241.3	241.0	240.6	240.3	240.0
127.5°	264.9	264.4	263.9	263.5	263.1	262.7	262.3	261.9
130°	279.8	279.5	279.1	278.7	278.1	277.5	276.9	276.2
132.5°	294.4	293.9	293.5	293.1	292.7	292.1	291.7	291.2
135°	316.2	315.8	315.5	315.2	315.0	314.9	314.7	314.5
137.5°	337.4	337.1	336.7	336.3	336.0	335.7	335.4	335.0
140°	351.4	351.3	351.2	350.9	350.3	349.7	349.0	348.4
142.5°	364.5	364.4	364.3	364.0	363.6	363.1	362.7	362.1
145°	383.7	383.7	383.6	383.4	383.1	382.7	382.4	382.0
147.5°	402.0	402.0	402.0	401.7	401.2	400.6	400.1	399.6
150°	413.2	413.2	413.2	412.9	412.4	411.9	411.4	410.9
152.5°	423.4	423.6	423.8	423.6	423.2	422.7	422.2	421.8
155°	438.5	438.9	439.2	439.0	438.4	437.8	437.2	436.6
157.5°	451.4	451.8	452.1	452.0	451.6	451.1	450.6	450.1
160°	459.3	459.8	460.2	460.2	459.9	459.5	459.2	458.8
162.5°	466.8	467.3	467.7	467.6	467.1	466.5	466.0	465.4
165°	476.3	476.8	477.3	477.3	476.6	476.0	475.4	474.8
167.5°	484.0	484.5	485.0	485.0	484.5	484.0	483.5	482.8
170°	488.2	488.8	489.4	489.4	488.8	488.2	487.6	487.0
172.5°	491.5	492.0	492.5	492.5	491.9	491.3	490.7	490.1
175°	495.0	495.5	496.0	496.0	495.4	494.8	494.2	493.6
177.5°	496.6	497.1	497.4	497.4	496.9	496.5	495.9	495.4
180°	496.7	496.7	496.7	496.7	496.7	496.7	496.7	496.7

(END OF REPORT)