

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332214-840

Luminaire Tested: **S123DIW-S1165D460U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332214-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S1165D460U840-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 460 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6667.9 lumens  
Efficiency: N/A  
Efficacy: 127.3 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 52.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332214-840

CATALOG NUMBER: S123DIW-S1165D460U840-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

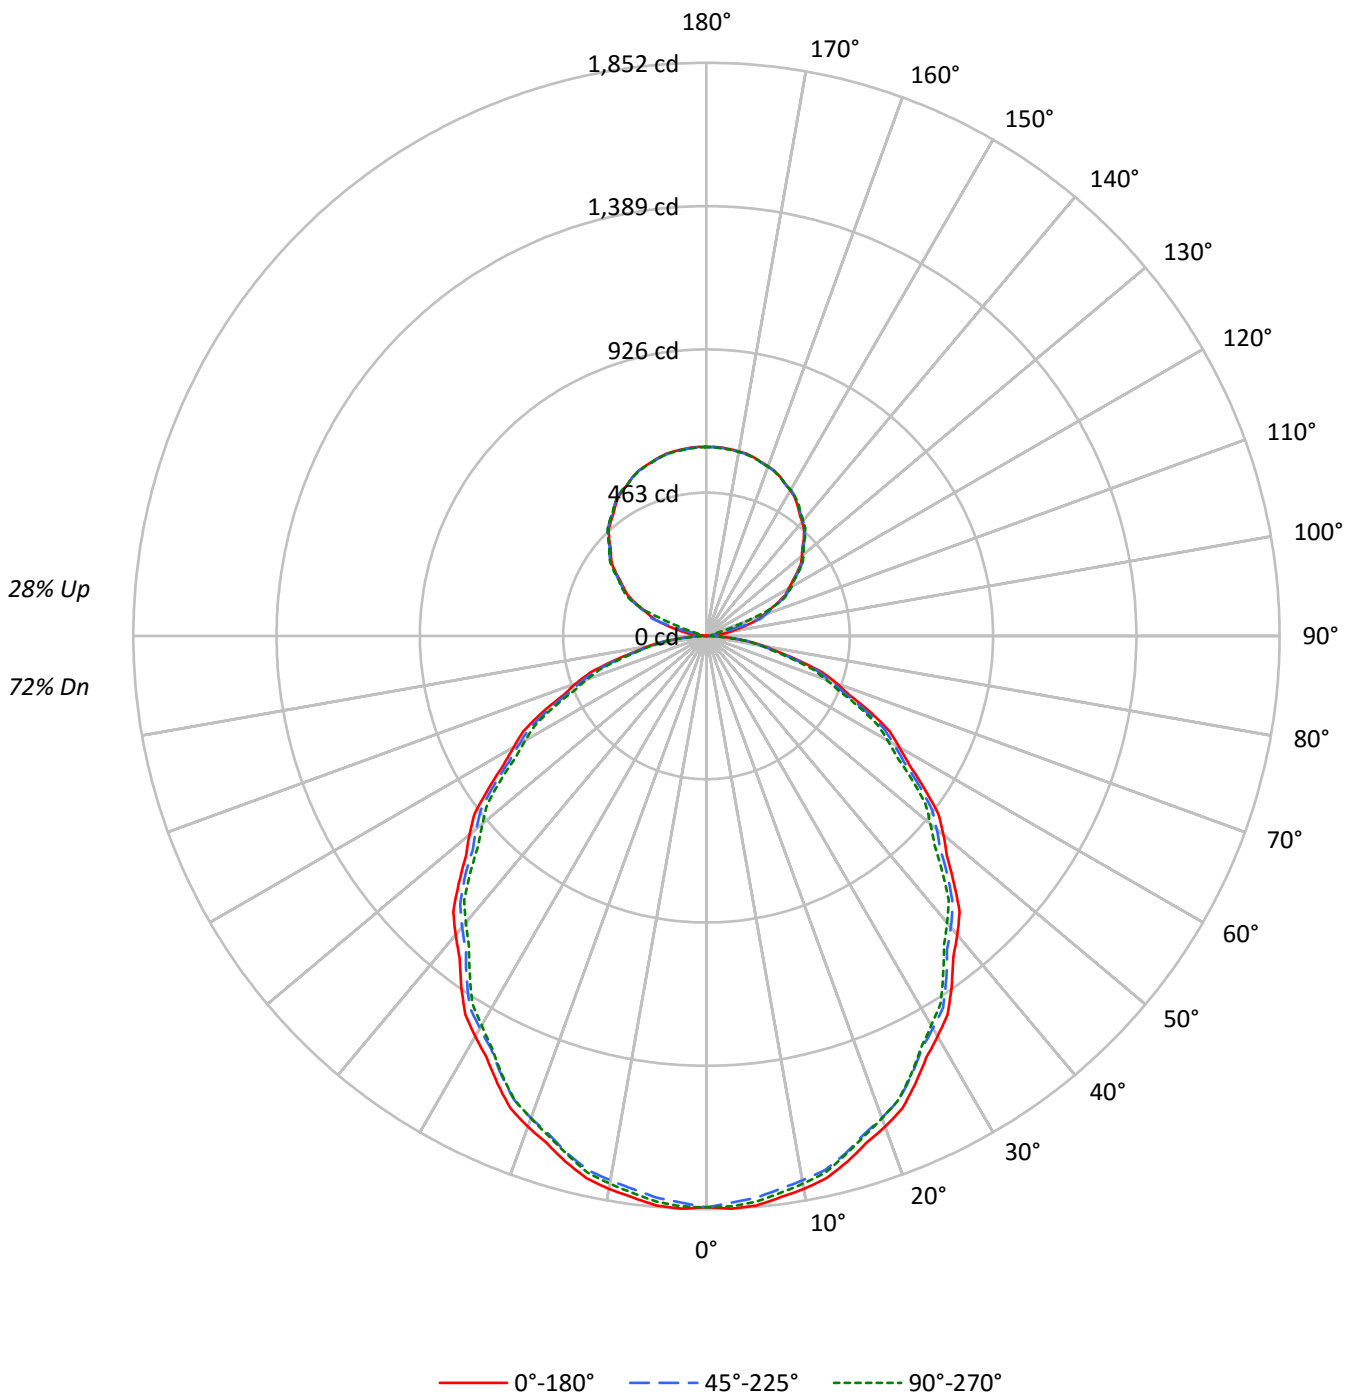



TEST NUMBER: P332214-840

CATALOG NUMBER: S123DIW-S1165D460U840-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	76	76	76	72
1	103	98	94	90	97	93	90	86	84	81	79	75	73	71	67	66	64	61
2	93	86	79	74	88	81	76	71	73	69	65	66	63	59	59	57	54	51
3	85	75	68	62	80	72	65	59	65	59	55	58	54	50	53	49	46	43
4	78	67	58	52	74	64	56	50	58	52	47	52	47	43	47	43	40	37
5	72	60	51	45	68	57	49	43	52	45	40	47	42	37	42	38	35	32
6	66	54	45	39	63	51	43	38	47	40	35	42	37	33	38	34	30	28
7	61	49	40	34	58	46	39	33	42	36	31	39	33	29	35	31	27	25
8	57	44	36	31	54	42	35	30	39	32	28	35	30	26	32	28	24	22
9	53	40	33	27	50	39	32	27	36	29	25	33	27	24	30	25	22	20
10	50	37	30	25	47	36	29	24	33	27	23	30	25	21	28	23	20	18

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	19871	19871	19871
5°	19966	19690	19827
10°	19831	19519	19641
15°	19601	19299	19334
20°	19329	18984	19001
25°	18966	18608	18570
30°	18567	18191	18053
35°	18148	17751	17521
40°	17710	17265	16996
45°	17230	16818	16407
50°	16747	16268	15816
55°	16117	15700	15221
60°	15481	15035	14557
65°	14918	14314	13868
70°	14090	13489	12891
75°	12872	12410	11882
80°	11610	11120	11021
85°	10189	9806	9411



TEST NUMBER: P332214-840

CATALOG NUMBER: S123DIW-S1165D460U840-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	173.9	2.6
10°-20°	491.0	7.4
20°-30°	725.3	10.9
30°-40°	847.3	12.7
40°-50°	851.8	12.8
50°-60°	748.3	11.2
60°-70°	557.5	8.4
70°-80°	317.6	4.8
80°-90°	92.9	1.4
90°-100°	22.2	0.3
100°-110°	105.8	1.6
110°-120°	254.2	3.8
120°-130°	323.7	4.9
130°-140°	345.8	5.2
140°-150°	323.4	4.8
150°-160°	260.8	3.9
160°-170°	168.4	2.5
170°-180°	58.0	0.9
0°-30°	1390.3	20.9
0°-40°	2237.6	33.6
0°-60°	3837.7	57.6
0°-90°	4805.6	72.1
90°-120°	382.2	5.7
90°-150°	1375.1	20.6
90°-180°	1862.0	27.9
0°-180°	6667.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1846	1846	1846	1846	1846	
5°	1848	1839	1822	1837	1835	175
15°	1759	1752	1732	1743	1735	496
25°	1597	1587	1567	1568	1564	735
35°	1381	1371	1351	1341	1333	864
45°	1132	1125	1105	1086	1078	873
55°	859	856	837	820	811	769
65°	586	577	562	550	544	578
75°	310	303	298	291	286	331
85°	82	80	79	76	76	91
90°	0	5	11	13	14	6
95°	28	10	14	17	17	34
105°	135	138	99	24	20	143
115°	254	256	260	265	267	250
125°	358	361	363	364	365	319
135°	445	448	450	451	450	343
145°	514	517	518	519	519	321
155°	566	565	565	567	565	261
165°	597	595	595	598	595	169
175°	611	608	609	612	608	58
180°	611	611	611	611	611	



TEST NUMBER: P332214-840

CATALOG NUMBER: S123DIW-S1165D460U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1846.1	1846.1	1846.1	1846.1	1846.1	1846.1	1846.1	1846.1	1846.1	1846.1	1846.1
2.5°	1852.5	1851.4	1850.3	1849.2	1848.0	1845.8	1842.8	1839.7	1836.5	1833.4	1836.2
5°	1847.8	1846.0	1844.2	1842.5	1840.7	1837.9	1834.0	1830.1	1826.2	1822.3	1825.8
7.5°	1829.7	1827.9	1826.1	1824.3	1822.6	1819.7	1815.6	1811.7	1807.7	1803.6	1806.7
10°	1814.4	1812.6	1810.9	1809.1	1807.4	1804.2	1799.6	1795.0	1790.4	1785.8	1789.0
12.5°	1794.1	1792.6	1791.1	1789.7	1788.2	1785.2	1781.0	1776.7	1772.3	1768.1	1770.4
15°	1758.9	1757.5	1756.1	1754.6	1753.2	1750.2	1745.7	1741.0	1736.5	1731.8	1734.6
17.5°	1717.9	1716.1	1714.2	1712.4	1710.5	1707.4	1702.7	1698.2	1693.5	1689.0	1691.0
20°	1687.4	1685.3	1683.1	1681.0	1679.0	1675.6	1671.0	1666.5	1661.8	1657.3	1658.7
22.5°	1653.1	1651.0	1648.9	1646.8	1644.7	1641.3	1636.7	1632.1	1627.6	1623.0	1624.1
25°	1596.9	1594.8	1592.7	1590.5	1588.5	1585.1	1580.5	1576.0	1571.3	1566.8	1567.1
27.5°	1536.9	1534.9	1532.9	1530.8	1528.7	1525.3	1520.4	1515.4	1510.5	1505.5	1505.8
30°	1493.8	1492.0	1490.3	1488.4	1486.7	1483.4	1478.4	1473.5	1468.5	1463.6	1463.6
32.5°	1450.6	1448.2	1445.9	1443.6	1441.3	1438.1	1434.4	1430.6	1426.7	1423.0	1421.0
35°	1381.1	1379.0	1376.8	1374.7	1372.6	1369.3	1364.6	1360.1	1355.4	1350.9	1348.8
37.5°	1309.9	1307.3	1304.5	1301.9	1299.2	1295.6	1290.9	1286.3	1281.6	1276.9	1274.3
40°	1260.4	1258.3	1256.2	1254.1	1251.9	1248.4	1243.4	1238.5	1233.6	1228.7	1225.9
42.5°	1210.8	1208.5	1206.1	1203.7	1201.2	1197.6	1192.7	1187.7	1182.8	1177.9	1175.1
45°	1131.9	1130.4	1129.0	1127.6	1126.2	1123.2	1118.6	1114.0	1109.4	1104.8	1100.7
47.5°	1053.4	1051.4	1049.4	1047.2	1045.2	1042.1	1037.7	1033.4	1029.2	1024.8	1020.7
50°	1000.1	998.4	996.5	994.8	993.0	989.9	985.2	980.7	976.0	971.5	967.7
52.5°	944.2	943.0	941.8	940.6	939.4	936.3	931.5	926.7	921.8	916.9	913.5
55°	858.8	858.5	858.1	857.8	857.4	855.0	850.3	845.8	841.1	836.6	832.7
57.5°	777.5	776.3	775.1	774.0	772.7	770.3	766.6	763.0	759.3	755.6	752.1
60°	719.1	718.7	718.4	718.0	717.7	715.4	711.1	706.9	702.7	698.4	695.3
62.5°	667.0	666.1	665.2	664.3	663.4	660.8	656.5	652.3	648.1	643.9	640.7
65°	585.7	584.0	582.2	580.5	578.7	576.0	572.5	569.0	565.4	562.0	559.2
67.5°	499.7	498.2	496.7	495.0	493.5	491.4	488.7	486.0	483.3	480.7	478.2
70°	447.7	445.6	443.4	441.3	439.2	437.1	434.9	432.8	430.7	428.6	426.2
72.5°	393.0	391.5	389.9	388.4	386.9	384.9	382.4	380.0	377.7	375.3	373.0
75°	309.5	308.1	306.7	305.3	303.9	302.7	301.6	300.5	299.5	298.4	296.7
77.5°	235.6	234.8	234.0	233.3	232.5	231.5	230.1	228.9	227.6	226.4	225.2
80°	187.3	186.2	185.2	184.1	183.1	182.2	181.5	180.8	180.1	179.4	179.0
82.5°	140.4	140.1	139.9	139.7	139.5	139.3	139.2	139.1	138.9	138.8	138.1
85°	82.5	81.8	81.1	80.4	79.7	79.4	79.4	79.4	79.4	79.4	78.7
87.5°	33.1	32.4	31.8	31.2	30.5	30.2	30.2	30.2	30.1	30.1	29.9
90°	0.4	1.4	2.4	3.4	4.4	5.7	7.0	8.3	9.6	10.9	11.3
92.5°	8.5	8.2	7.9	7.6	7.3	7.7	8.7	9.6	10.6	11.6	12.2
95°	27.7	23.5	19.4	15.2	11.1	9.6	10.7	11.8	12.9	14.0	14.7
97.5°	55.6	53.7	51.9	50.1	48.2	43.6	36.4	29.1	21.9	14.6	15.5
100°	76.6	78.7	80.7	82.7	84.7	77.9	62.2	46.5	30.7	14.9	15.8
102.5°	100.6	102.1	103.5	105.0	106.4	98.6	81.4	64.2	47.1	29.9	27.4
105°	135.2	136.3	137.4	138.6	139.7	135.6	126.5	117.5	108.5	99.4	81.5
107.5°	171.7	172.6	173.5	174.3	175.2	176.4	177.8	179.3	180.7	182.1	169.1
110°	196.0	196.8	197.6	198.4	199.2	200.2	201.3	202.4	203.5	204.6	201.3



TEST NUMBER: P332214-840

CATALOG NUMBER: S123DIW-S1165D460U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	219.2	219.9	220.7	221.4	222.2	223.1	224.2	225.3	226.4	227.5	227.5
115°	253.6	254.2	254.8	255.4	256.0	256.8	257.7	258.6	259.5	260.4	261.5
117.5°	286.9	287.7	288.4	289.1	289.9	290.5	290.9	291.4	292.0	292.4	293.2
120°	307.6	308.5	309.4	310.3	311.2	311.8	312.1	312.5	312.8	313.1	313.9
122.5°	328.7	329.4	330.1	330.9	331.6	332.2	332.6	333.0	333.4	333.8	334.3
125°	357.5	358.3	359.1	359.9	360.7	361.3	361.7	362.1	362.5	362.9	363.1
127.5°	385.5	386.3	387.1	387.9	388.7	389.3	389.8	390.3	390.8	391.3	391.6
130°	402.9	403.7	404.6	405.4	406.2	406.8	407.2	407.6	408.0	408.3	408.7
132.5°	419.6	420.4	421.2	422.0	422.8	423.3	423.7	424.0	424.3	424.6	425.1
135°	445.0	445.7	446.3	446.9	447.5	448.0	448.4	448.8	449.2	449.6	449.9
137.5°	466.9	467.7	468.4	469.2	469.9	470.4	470.7	470.9	471.1	471.3	471.8
140°	481.4	482.0	482.6	483.2	483.8	484.2	484.5	484.8	485.1	485.4	485.8
142.5°	494.8	495.4	496.0	496.7	497.3	497.7	498.0	498.3	498.6	498.9	499.2
145°	513.6	514.3	515.0	515.7	516.4	516.8	517.1	517.3	517.5	517.7	517.9
147.5°	531.3	531.8	532.2	532.7	533.1	533.5	533.7	533.9	534.1	534.3	534.5
150°	542.2	542.5	542.8	543.1	543.4	543.6	543.8	544.0	544.2	544.4	544.6
152.5°	552.0	552.1	552.3	552.4	552.6	552.7	552.8	552.9	553.0	553.2	553.5
155°	565.7	565.5	565.3	565.2	565.0	564.9	565.0	565.1	565.2	565.3	565.8
157.5°	576.5	576.4	576.4	576.4	576.4	576.3	576.2	576.1	576.0	575.9	576.5
160°	583.0	582.9	582.8	582.7	582.6	582.5	582.4	582.3	582.2	582.1	582.7
162.5°	589.2	589.0	588.7	588.4	588.1	587.9	587.8	587.7	587.6	587.5	588.2
165°	596.6	596.3	596.0	595.7	595.4	595.2	595.1	595.0	594.9	594.8	595.6
167.5°	602.5	602.1	601.7	601.3	600.9	600.7	600.7	600.7	600.7	600.7	601.5
170°	605.7	605.3	604.9	604.5	604.1	603.9	603.9	603.9	603.9	603.9	604.7
172.5°	607.8	607.4	606.9	606.4	605.9	605.7	605.8	605.9	606.0	606.0	606.8
175°	610.7	610.2	609.7	609.2	608.6	608.4	608.5	608.6	608.7	608.8	609.6
177.5°	611.4	611.0	610.6	610.2	609.8	609.7	609.8	609.8	609.9	610.0	610.6
180°	610.7	610.7	610.7	610.7	610.7	610.7	610.7	610.7	610.7	610.7	610.7



TEST NUMBER: P332214-840

CATALOG NUMBER: S123DIW-S1165D460U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1846.1	1846.1	1846.1	1846.1	1846.1	1846.1	1846.1	1846.1
2.5°	1839.1	1841.9	1844.7	1846.0	1845.7	1845.4	1845.1	1844.9
5°	1829.4	1832.9	1836.4	1837.9	1837.1	1836.4	1835.7	1835.0
7.5°	1810.0	1813.1	1816.3	1817.7	1817.3	1816.8	1816.4	1816.0
10°	1792.2	1795.3	1798.6	1799.8	1799.1	1798.4	1797.7	1797.0
12.5°	1772.7	1775.0	1777.4	1778.4	1777.9	1777.5	1777.1	1776.7
15°	1737.5	1740.3	1743.1	1743.5	1741.4	1739.3	1737.2	1735.0
17.5°	1692.9	1695.0	1696.9	1697.5	1696.8	1696.0	1695.2	1694.5
20°	1660.1	1661.5	1662.9	1663.0	1662.0	1660.9	1659.9	1658.8
22.5°	1625.3	1626.4	1627.5	1627.4	1626.1	1624.7	1623.4	1622.0
25°	1567.5	1567.8	1568.2	1567.8	1566.8	1565.7	1564.7	1563.6
27.5°	1506.1	1506.3	1506.6	1506.1	1504.8	1503.4	1502.1	1500.8
30°	1463.6	1463.6	1463.6	1462.4	1459.9	1457.4	1454.9	1452.5
32.5°	1419.0	1417.0	1415.0	1413.4	1412.1	1410.7	1409.4	1408.1
35°	1346.7	1344.5	1342.4	1340.5	1338.7	1337.0	1335.1	1333.4
37.5°	1271.8	1269.3	1266.8	1265.0	1263.7	1262.6	1261.5	1260.4
40°	1223.0	1220.2	1217.4	1215.3	1213.9	1212.4	1211.0	1209.6
42.5°	1172.3	1169.4	1166.6	1164.5	1163.1	1161.6	1160.2	1158.8
45°	1096.4	1092.2	1087.9	1084.9	1083.2	1081.4	1079.6	1077.8
47.5°	1016.5	1012.4	1008.1	1005.3	1003.8	1002.2	1000.7	999.2
50°	963.7	959.9	955.9	953.0	950.9	948.8	946.6	944.5
52.5°	910.3	907.0	903.6	900.9	898.8	896.7	894.5	892.4
55°	828.8	825.0	821.0	818.2	816.5	814.7	812.9	811.1
57.5°	748.7	745.3	741.7	739.0	737.0	735.0	732.9	730.8
60°	692.2	688.9	685.8	683.3	681.6	679.7	678.0	676.2
62.5°	637.5	634.3	631.2	628.9	627.7	626.5	625.4	624.2
65°	556.3	553.5	550.7	548.8	547.6	546.6	545.5	544.5
67.5°	475.7	473.2	470.8	468.8	467.4	465.9	464.3	462.9
70°	423.6	421.2	418.7	416.6	414.9	413.0	411.3	409.6
72.5°	370.9	368.7	366.5	365.0	364.1	363.1	362.2	361.3
75°	294.9	293.2	291.3	289.9	288.9	287.8	286.8	285.7
77.5°	224.0	222.8	221.6	221.0	221.0	221.0	221.0	221.0
80°	178.6	178.3	177.9	177.8	177.8	177.8	177.8	177.8
82.5°	137.4	136.8	136.2	135.7	135.4	135.2	134.9	134.6
85°	78.0	77.3	76.5	76.2	76.2	76.2	76.2	76.2
87.5°	29.7	29.5	29.3	29.2	29.3	29.3	29.4	29.4
90°	11.7	12.1	12.5	12.8	13.0	13.2	13.4	13.6
92.5°	12.9	13.5	14.2	14.5	14.7	14.8	14.9	15.0
95°	15.5	16.2	16.9	17.3	17.3	17.3	17.3	17.3
97.5°	16.3	17.1	17.9	18.3	18.4	18.5	18.6	18.7
100°	16.6	17.4	18.2	18.7	18.8	18.9	19.0	19.1
102.5°	24.8	22.3	19.9	18.7	18.9	19.1	19.2	19.4
105°	63.6	45.8	28.0	19.2	19.4	19.6	19.8	20.0
107.5°	155.9	142.9	129.8	116.5	103.0	89.6	76.1	62.7
110°	197.9	194.6	191.3	182.5	168.0	153.6	139.2	124.8





TEST NUMBER: P332214-840

CATALOG NUMBER: S123DIW-S1165D460U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	227.6	227.6	227.7	226.2	223.2	220.2	217.1	214.1
115°	262.5	263.5	264.5	265.2	265.6	266.0	266.4	266.8
117.5°	294.0	294.8	295.6	296.0	296.1	296.2	296.3	296.4
120°	314.7	315.5	316.3	316.7	316.7	316.7	316.7	316.7
122.5°	334.9	335.5	336.0	336.3	336.4	336.5	336.6	336.7
125°	363.3	363.6	363.8	364.0	364.2	364.4	364.6	364.8
127.5°	391.9	392.2	392.5	392.6	392.4	392.2	392.0	391.8
130°	409.1	409.5	409.9	410.0	409.8	409.6	409.4	409.2
132.5°	425.5	425.9	426.3	426.4	426.1	425.8	425.5	425.3
135°	450.2	450.5	450.8	450.8	450.5	450.2	449.9	449.6
137.5°	472.3	472.7	473.2	473.4	473.2	473.0	472.8	472.6
140°	486.3	486.7	487.1	487.2	487.0	486.8	486.6	486.4
142.5°	499.6	499.9	500.2	500.2	499.9	499.7	499.4	499.1
145°	518.1	518.3	518.5	518.6	518.6	518.6	518.6	518.6
147.5°	534.7	534.9	535.1	534.9	534.5	534.0	533.6	533.1
150°	544.8	545.0	545.2	545.2	544.9	544.6	544.3	544.0
152.5°	553.9	554.2	554.6	554.5	554.1	553.6	553.2	552.7
155°	566.3	566.8	567.3	567.2	566.6	566.0	565.4	564.9
157.5°	577.1	577.7	578.3	578.2	577.4	576.7	575.9	575.1
160°	583.3	583.9	584.5	584.5	583.8	583.1	582.4	581.7
162.5°	589.0	589.7	590.3	590.4	589.7	589.1	588.4	587.8
165°	596.4	597.2	598.0	598.0	597.3	596.7	596.0	595.3
167.5°	602.3	603.0	603.8	603.8	603.0	602.3	601.5	600.7
170°	605.5	606.3	607.1	607.1	606.3	605.5	604.7	603.9
172.5°	607.6	608.4	609.3	609.3	608.3	607.4	606.6	605.7
175°	610.3	611.0	611.7	611.7	610.9	610.1	609.3	608.4
177.5°	611.3	611.9	612.6	612.5	611.7	610.9	610.1	609.3
180°	610.7	610.7	610.7	610.7	610.7	610.7	610.7	610.7

(END OF REPORT)