

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332142-840

Luminaire Tested: **S123DIW-S560D1320U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332142-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S560D1320U840-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1320 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7675.9 lumens  
Efficiency: N/A  
Efficacy: 142.7 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 53.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332142-840

CATALOG NUMBER: S123DIW-S560D1320U840-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

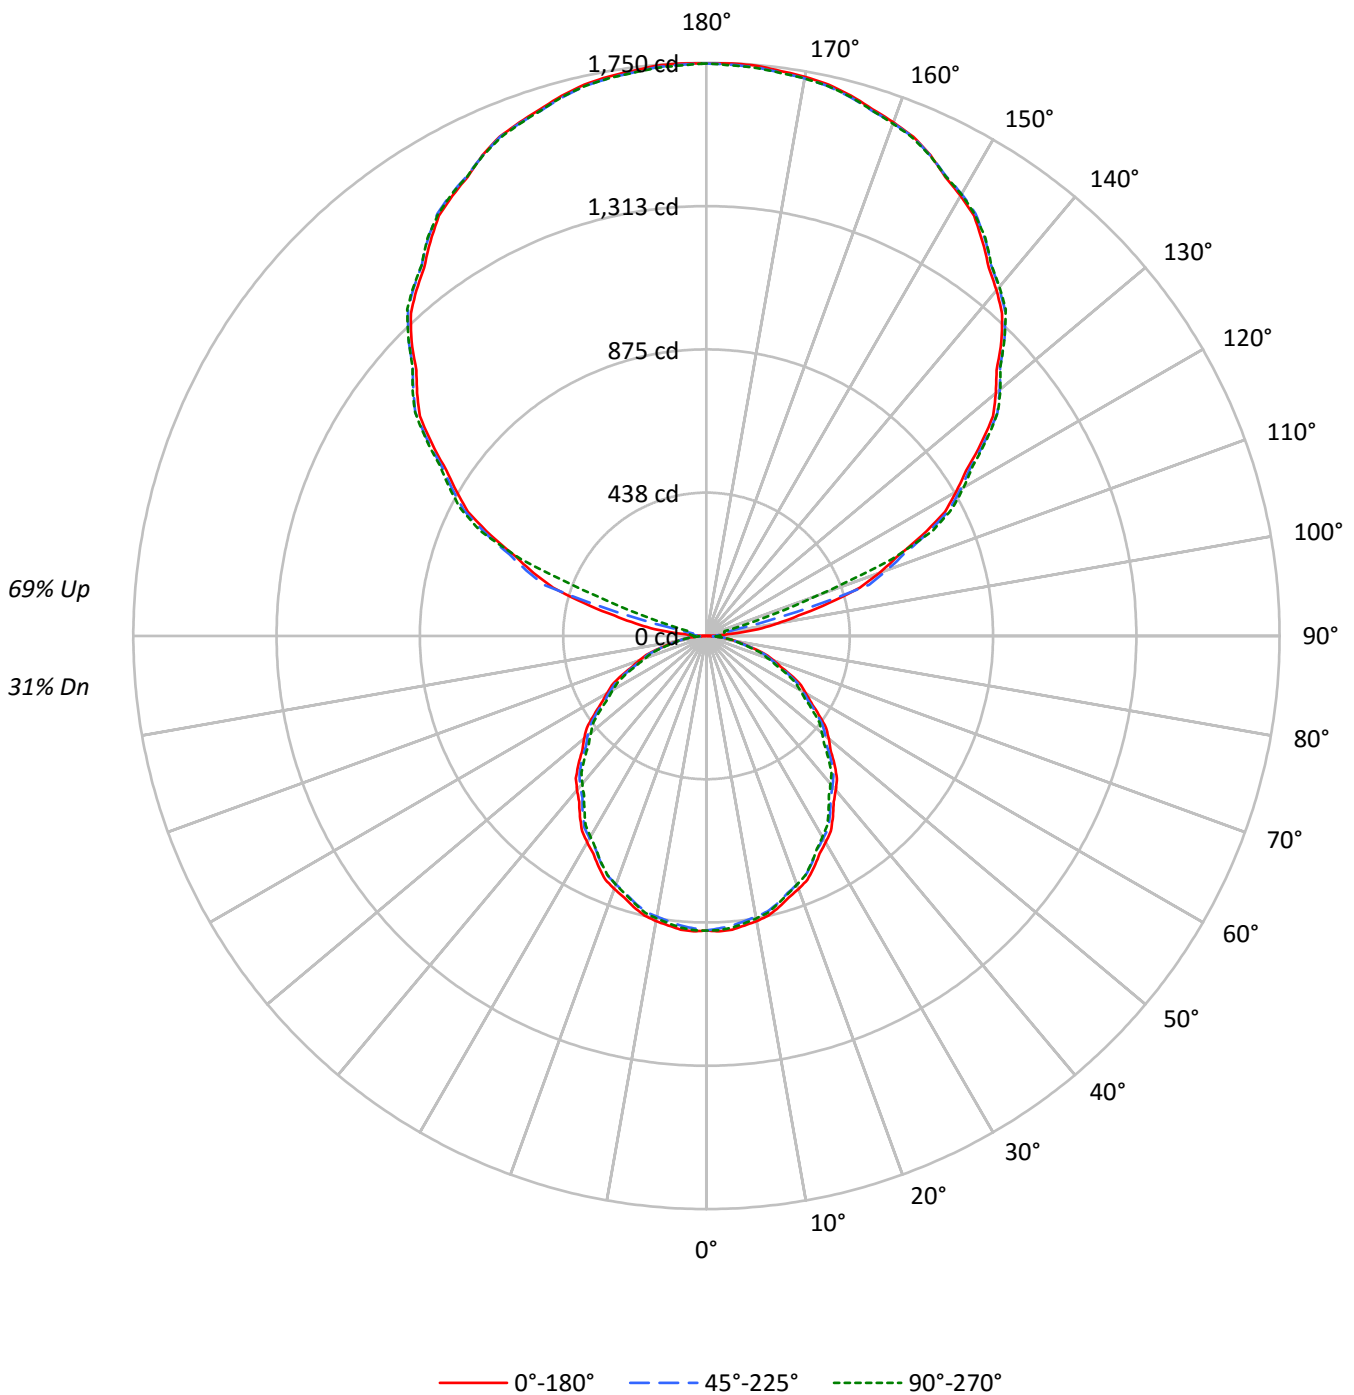



TEST NUMBER: P332142-840

CATALOG NUMBER: S123DIW-S560D1320U840-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	38	38	38	31
1	93	89	85	82	84	80	77	74	63	61	59	48	47	45	34	33	32	26
2	85	78	72	67	76	70	65	61	55	52	49	42	40	38	30	28	27	21
3	77	68	61	56	69	62	56	51	49	45	41	37	34	32	26	24	23	18
4	71	60	53	47	63	54	48	43	43	39	35	33	30	27	23	21	20	16
5	65	54	46	40	58	48	42	37	39	34	30	30	26	23	21	19	17	13
6	60	48	40	34	53	43	37	32	35	30	26	27	23	20	19	17	15	12
7	55	43	35	30	49	39	32	28	31	26	23	24	21	18	17	15	13	10
8	51	39	32	26	46	35	29	24	29	24	20	22	19	16	16	14	12	9
9	47	36	28	23	42	32	26	22	26	21	18	20	17	14	15	12	11	8
10	44	32	25	21	40	30	23	19	24	19	16	19	15	13	14	11	10	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	9684	9684	9684
5°	9729	9596	9662
10°	9664	9512	9571
15°	9551	9404	9423
20°	9419	9251	9260
25°	9242	9069	9049
30°	9047	8866	8797
35°	8843	8650	8539
40°	8630	8413	8283
45°	8397	8196	7995
50°	8162	7927	7708
55°	7854	7651	7418
60°	7543	7326	7093
65°	7272	6976	6757
70°	6864	6571	6279
75°	6276	6047	5793
80°	5659	5424	5368
85°	4965	4780	4594



TEST NUMBER: P332142-840

CATALOG NUMBER: S123DIW-S560D1320U840-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	84.7	1.1
10°-20°	239.3	3.1
20°-30°	353.5	4.6
30°-40°	412.9	5.4
40°-50°	415.1	5.4
50°-60°	364.6	4.8
60°-70°	271.7	3.5
70°-80°	154.8	2.0
80°-90°	49.3	0.6
90°-100°	63.5	0.8
100°-110°	302.9	3.9
110°-120°	727.5	9.5
120°-130°	926.3	12.1
130°-140°	989.8	12.9
140°-150°	925.5	12.1
150°-160°	746.6	9.7
160°-170°	481.8	6.3
170°-180°	166.1	2.2
0°-30°	677.5	8.8
0°-40°	1090.4	14.2
0°-60°	1870.2	24.4
0°-90°	2345.9	30.6
90°-120°	1093.9	14.3
90°-150°	3935.5	51.3
90°-180°	5330.0	69.4
0°-180°	7675.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	900	900	900	900	900	
5°	900	896	888	895	894	85
15°	857	854	844	850	846	242
25°	778	773	764	764	762	358
35°	673	668	658	654	650	421
45°	552	548	538	529	525	426
55°	418	417	408	399	395	375
65°	286	281	274	268	265	282
75°	151	148	145	142	139	161
85°	40	39	39	37	37	44
90°	1	14	31	36	39	6
95°	79	30	40	49	49	98
105°	387	394	284	67	57	410
115°	726	734	745	758	764	716
125°	1023	1033	1039	1041	1044	913
135°	1274	1282	1287	1290	1287	980
145°	1470	1479	1482	1484	1484	920
155°	1619	1617	1618	1624	1617	746
165°	1708	1704	1702	1712	1704	482
175°	1748	1742	1743	1751	1741	166
180°	1748	1748	1748	1748	1748	



TEST NUMBER: P332142-840

CATALOG NUMBER: S123DIW-S560D1320U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7
2.5°	902.7	902.2	901.7	901.1	900.6	899.5	898.0	896.5	895.0	893.5	894.8
5°	900.4	899.6	898.7	897.9	897.0	895.6	893.7	891.8	890.0	888.1	889.8
7.5°	891.6	890.8	889.9	889.1	888.2	886.8	884.8	882.8	880.9	879.0	880.5
10°	884.2	883.3	882.5	881.6	880.8	879.2	877.0	874.7	872.5	870.3	871.8
12.5°	874.3	873.5	872.8	872.1	871.4	870.0	867.9	865.8	863.7	861.6	862.7
15°	857.1	856.5	855.8	855.1	854.3	852.9	850.7	848.5	846.2	843.9	845.4
17.5°	837.2	836.3	835.4	834.5	833.5	832.0	829.8	827.6	825.4	823.0	824.0
20°	822.3	821.3	820.2	819.2	818.2	816.6	814.4	812.1	809.8	807.6	808.3
22.5°	805.6	804.6	803.5	802.5	801.4	799.8	797.6	795.4	793.1	790.9	791.4
25°	778.2	777.2	776.2	775.2	774.1	772.4	770.2	768.0	765.8	763.6	763.7
27.5°	749.0	748.0	747.0	746.0	745.0	743.3	740.8	738.5	736.1	733.7	733.8
30°	727.9	727.1	726.2	725.4	724.5	722.9	720.4	718.0	715.7	713.3	713.3
32.5°	706.9	705.8	704.6	703.5	702.4	700.8	699.0	697.1	695.3	693.5	692.5
35°	673.0	672.0	671.0	669.9	668.9	667.2	665.0	662.8	660.6	658.3	657.3
37.5°	638.3	637.0	635.7	634.4	633.1	631.4	629.0	626.8	624.5	622.3	621.1
40°	614.2	613.2	612.2	611.2	610.1	608.3	605.9	603.6	601.2	598.7	597.3
42.5°	590.1	589.0	587.7	586.5	585.4	583.6	581.2	578.9	576.4	574.0	572.6
45°	551.6	550.9	550.2	549.5	548.8	547.3	545.1	542.9	540.7	538.4	536.3
47.5°	513.3	512.3	511.4	510.4	509.4	507.8	505.7	503.6	501.5	499.4	497.4
50°	487.4	486.5	485.6	484.7	483.9	482.4	480.1	477.9	475.6	473.4	471.5
52.5°	460.1	459.5	459.0	458.4	457.8	456.3	453.9	451.6	449.2	446.9	445.2
55°	418.5	418.3	418.2	418.0	417.8	416.6	414.3	412.1	409.9	407.7	405.8
57.5°	378.9	378.3	377.7	377.2	376.6	375.4	373.5	371.8	370.0	368.2	366.6
60°	350.4	350.2	350.1	349.9	349.7	348.6	346.6	344.5	342.4	340.3	338.8
62.5°	325.1	324.6	324.2	323.8	323.3	322.0	319.9	317.9	315.8	313.8	312.3
65°	285.5	284.6	283.8	282.9	282.1	280.7	279.0	277.3	275.6	273.9	272.5
67.5°	243.5	242.8	242.0	241.3	240.4	239.4	238.1	236.8	235.5	234.3	233.1
70°	218.1	217.1	216.1	215.1	214.0	213.0	212.0	211.0	209.8	208.8	207.6
72.5°	191.6	190.8	190.1	189.2	188.5	187.5	186.4	185.2	184.0	182.9	181.8
75°	150.9	150.2	149.5	148.8	148.1	147.5	146.9	146.4	145.9	145.4	144.6
77.5°	114.8	114.4	114.0	113.7	113.3	112.8	112.2	111.6	110.9	110.3	109.8
80°	91.3	90.8	90.3	89.8	89.2	88.8	88.5	88.1	87.8	87.5	87.3
82.5°	68.4	68.3	68.2	68.1	68.0	67.9	67.9	67.8	67.7	67.7	67.3
85°	40.2	39.9	39.6	39.2	38.9	38.7	38.7	38.7	38.7	38.7	38.4
87.5°	16.4	16.6	16.7	16.9	17.0	17.4	18.0	18.6	19.2	19.9	19.9
90°	1.3	4.1	7.1	10.0	12.8	16.2	19.9	23.6	27.4	31.2	32.3
92.5°	24.1	23.3	22.5	21.7	20.9	21.9	24.7	27.6	30.4	33.2	35.0
95°	79.2	67.4	55.5	43.7	31.9	27.6	30.7	33.9	37.1	40.3	42.3
97.5°	159.2	153.9	148.6	143.3	137.9	124.9	104.1	83.4	62.6	41.8	44.1
100°	219.4	225.2	231.0	236.7	242.6	222.9	177.9	132.9	87.9	42.8	45.1
102.5°	288.0	292.2	296.3	300.4	304.7	282.2	233.0	183.8	134.6	85.4	78.3
105°	387.0	390.1	393.3	396.5	399.6	388.3	362.2	336.3	310.3	284.4	233.3
107.5°	491.4	493.9	496.4	499.0	501.5	504.8	509.0	513.0	517.2	521.2	483.7
110°	561.0	563.3	565.5	567.8	570.2	572.9	576.1	579.3	582.5	585.6	576.1



TEST NUMBER: P332142-840

CATALOG NUMBER: S123DIW-S560D1320U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	627.4	629.5	631.6	633.7	635.7	638.3	641.6	644.7	647.9	651.1	651.3
115°	725.9	727.6	729.3	731.0	732.8	735.0	737.5	740.1	742.8	745.4	748.2
117.5°	821.2	823.3	825.5	827.6	829.7	831.4	832.7	834.1	835.5	836.8	839.1
120°	880.4	883.0	885.6	888.2	890.8	892.5	893.3	894.2	895.1	896.0	898.3
122.5°	940.7	942.8	944.9	947.1	949.2	950.8	951.9	953.0	954.1	955.2	956.8
125°	1023.2	1025.5	1027.8	1030.2	1032.5	1034.2	1035.3	1036.5	1037.6	1038.8	1039.4
127.5°	1103.2	1105.5	1107.8	1110.1	1112.5	1114.3	1115.7	1117.1	1118.4	1119.8	1120.7
130°	1153.1	1155.4	1157.7	1160.0	1162.4	1164.1	1165.2	1166.4	1167.5	1168.6	1169.8
132.5°	1200.8	1203.2	1205.5	1207.8	1210.1	1211.7	1212.6	1213.6	1214.5	1215.4	1216.6
135°	1273.8	1275.6	1277.3	1279.0	1280.8	1282.2	1283.3	1284.5	1285.7	1286.9	1287.7
137.5°	1336.2	1338.4	1340.6	1342.7	1344.9	1346.4	1347.0	1347.7	1348.3	1348.9	1350.3
140°	1377.8	1379.5	1381.2	1382.9	1384.6	1385.9	1386.8	1387.7	1388.6	1389.4	1390.6
142.5°	1416.1	1417.9	1419.7	1421.4	1423.1	1424.4	1425.2	1426.1	1426.9	1427.8	1428.8
145°	1470.0	1472.0	1474.0	1476.0	1478.0	1479.3	1479.9	1480.5	1481.1	1481.6	1482.2
147.5°	1520.6	1521.9	1523.2	1524.5	1525.9	1526.8	1527.4	1527.9	1528.5	1529.1	1529.7
150°	1551.8	1552.6	1553.5	1554.3	1555.2	1555.9	1556.5	1557.0	1557.6	1558.2	1558.8
152.5°	1579.7	1580.1	1580.5	1580.9	1581.3	1581.8	1582.2	1582.5	1582.8	1583.2	1584.2
155°	1619.2	1618.7	1618.1	1617.5	1616.9	1616.8	1617.1	1617.4	1617.7	1617.9	1619.4
157.5°	1649.9	1649.8	1649.8	1649.7	1649.6	1649.5	1649.2	1648.9	1648.6	1648.3	1650.0
160°	1668.6	1668.3	1668.0	1667.7	1667.4	1667.2	1666.9	1666.6	1666.3	1666.0	1667.7
162.5°	1686.3	1685.5	1684.8	1683.9	1683.2	1682.7	1682.4	1682.1	1681.8	1681.5	1683.5
165°	1707.6	1706.7	1705.8	1705.0	1704.0	1703.5	1703.2	1702.9	1702.6	1702.3	1704.7
167.5°	1724.1	1723.0	1721.8	1720.7	1719.5	1719.0	1719.0	1719.0	1719.0	1719.0	1721.3
170°	1733.5	1732.3	1731.2	1730.1	1728.9	1728.3	1728.3	1728.3	1728.3	1728.3	1730.6
172.5°	1739.8	1738.4	1737.0	1735.6	1734.2	1733.6	1733.8	1734.1	1734.3	1734.5	1736.9
175°	1747.8	1746.4	1744.9	1743.4	1742.0	1741.4	1741.7	1742.0	1742.3	1742.6	1744.6
177.5°	1749.9	1748.7	1747.6	1746.5	1745.2	1744.8	1745.0	1745.2	1745.5	1745.8	1747.6
180°	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8



TEST NUMBER: P332142-840

CATALOG NUMBER: S123DIW-S560D1320U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7
2.5°	896.3	897.6	899.0	899.6	899.5	899.3	899.2	899.1
5°	891.5	893.2	894.9	895.6	895.2	894.9	894.6	894.2
7.5°	882.0	883.5	885.1	885.8	885.6	885.3	885.1	884.9
10°	873.3	874.9	876.5	877.1	876.8	876.4	876.1	875.7
12.5°	863.8	865.1	866.2	866.6	866.4	866.2	866.0	865.8
15°	846.8	848.1	849.5	849.6	848.6	847.6	846.6	845.6
17.5°	825.1	826.0	827.0	827.2	826.9	826.5	826.1	825.7
20°	809.0	809.7	810.3	810.4	809.9	809.4	808.9	808.4
22.5°	792.0	792.5	793.1	793.0	792.4	791.7	791.1	790.4
25°	763.9	764.1	764.2	764.1	763.6	763.1	762.4	761.9
27.5°	734.0	734.1	734.2	734.0	733.3	732.7	732.0	731.3
30°	713.3	713.3	713.3	712.7	711.4	710.2	709.0	707.8
32.5°	691.6	690.5	689.5	688.7	688.1	687.5	686.8	686.2
35°	656.2	655.2	654.2	653.3	652.4	651.6	650.7	649.8
37.5°	619.8	618.5	617.3	616.4	615.9	615.3	614.8	614.2
40°	596.0	594.6	593.3	592.2	591.5	590.9	590.2	589.5
42.5°	571.3	569.9	568.5	567.4	566.7	566.1	565.4	564.7
45°	534.3	532.2	530.2	528.7	527.9	526.9	526.1	525.2
47.5°	495.3	493.3	491.3	489.9	489.2	488.4	487.7	486.9
50°	469.7	467.8	465.9	464.4	463.3	462.3	461.3	460.3
52.5°	443.6	442.0	440.4	439.0	438.0	437.0	436.0	434.9
55°	403.8	402.0	400.1	398.7	397.9	397.0	396.2	395.3
57.5°	364.9	363.1	361.5	360.1	359.1	358.2	357.2	356.2
60°	337.3	335.8	334.2	333.0	332.1	331.2	330.4	329.5
62.5°	310.6	309.1	307.6	306.5	305.9	305.4	304.8	304.2
65°	271.0	269.7	268.3	267.4	266.9	266.4	265.9	265.3
67.5°	231.9	230.7	229.4	228.4	227.7	227.0	226.3	225.6
70°	206.4	205.3	204.1	203.0	202.2	201.3	200.5	199.5
72.5°	180.8	179.7	178.6	177.8	177.4	176.9	176.5	176.0
75°	143.7	142.9	142.0	141.3	140.8	140.3	139.8	139.3
77.5°	109.2	108.6	108.0	107.7	107.7	107.7	107.7	107.7
80°	87.1	86.8	86.7	86.6	86.6	86.6	86.6	86.6
82.5°	67.0	66.7	66.3	66.1	66.0	65.8	65.7	65.6
85°	38.0	37.7	37.3	37.2	37.2	37.2	37.2	37.2
87.5°	20.0	20.1	20.2	20.3	20.4	20.6	20.7	20.8
90°	33.4	34.6	35.7	36.7	37.3	37.8	38.4	39.0
92.5°	37.0	38.8	40.6	41.7	42.1	42.4	42.7	43.1
95°	44.3	46.4	48.4	49.4	49.4	49.4	49.4	49.4
97.5°	46.5	48.8	51.0	52.3	52.6	52.9	53.2	53.5
100°	47.5	49.8	52.1	53.4	53.6	53.9	54.2	54.5
102.5°	71.1	63.9	56.9	53.5	54.0	54.5	55.0	55.5
105°	182.2	131.2	80.1	54.8	55.4	55.9	56.6	57.2
107.5°	446.4	408.9	371.4	333.5	295.0	256.4	217.9	179.5
110°	566.5	557.0	547.5	522.1	480.9	439.6	398.4	357.1





TEST NUMBER: P332142-840

CATALOG NUMBER: S123DIW-S560D1320U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	651.5	651.6	651.8	647.5	638.7	630.1	621.4	612.7
115°	751.1	754.0	756.9	758.9	760.0	761.2	762.3	763.6
117.5°	841.4	843.6	846.0	847.3	847.5	847.7	848.0	848.2
120°	900.6	902.9	905.2	906.4	906.4	906.4	906.4	906.4
122.5°	958.5	960.1	961.7	962.6	962.8	963.0	963.3	963.5
125°	1040.0	1040.6	1041.1	1041.7	1042.3	1042.9	1043.4	1044.0
127.5°	1121.7	1122.6	1123.6	1123.7	1123.2	1122.6	1122.0	1121.4
130°	1170.9	1172.2	1173.3	1173.6	1173.0	1172.5	1171.8	1171.2
132.5°	1217.7	1218.9	1220.0	1220.2	1219.4	1218.6	1217.8	1217.0
135°	1288.6	1289.4	1290.3	1290.3	1289.4	1288.6	1287.7	1286.9
137.5°	1351.7	1353.0	1354.4	1354.8	1354.2	1353.7	1353.1	1352.5
140°	1391.7	1392.9	1394.0	1394.3	1393.7	1393.1	1392.6	1392.0
142.5°	1429.7	1430.6	1431.6	1431.6	1430.8	1430.0	1429.2	1428.4
145°	1482.8	1483.3	1483.9	1484.2	1484.2	1484.2	1484.2	1484.2
147.5°	1530.2	1530.9	1531.5	1531.1	1529.7	1528.4	1527.1	1525.7
150°	1559.3	1559.9	1560.5	1560.3	1559.5	1558.6	1557.8	1556.9
152.5°	1585.2	1586.3	1587.3	1587.2	1585.8	1584.5	1583.2	1581.9
155°	1620.8	1622.2	1623.8	1623.6	1621.8	1620.1	1618.4	1616.7
157.5°	1651.8	1653.6	1655.3	1655.0	1652.7	1650.5	1648.2	1646.0
160°	1669.4	1671.2	1672.9	1672.7	1670.7	1668.7	1666.7	1664.7
162.5°	1685.5	1687.5	1689.4	1689.5	1687.7	1686.0	1684.2	1682.3
165°	1707.0	1709.3	1711.6	1711.7	1709.7	1707.7	1705.7	1703.6
167.5°	1723.6	1725.9	1728.2	1728.2	1725.9	1723.6	1721.3	1719.0
170°	1732.9	1735.3	1737.6	1737.6	1735.3	1732.9	1730.6	1728.3
172.5°	1739.2	1741.5	1743.8	1743.6	1741.1	1738.6	1736.1	1733.5
175°	1746.7	1748.7	1750.7	1750.5	1748.3	1746.0	1743.6	1741.3
177.5°	1749.4	1751.3	1753.1	1752.9	1750.6	1748.3	1746.0	1743.6
180°	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8

(END OF REPORT)