

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332148-840

Luminaire Tested: **S123DIW-S560D1535U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332148-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S560D1535U840-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1535 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8543.7 lumens
Efficiency: N/A
Efficacy: 141.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332148-840

CATALOG NUMBER: S123DIW-S560D1535U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

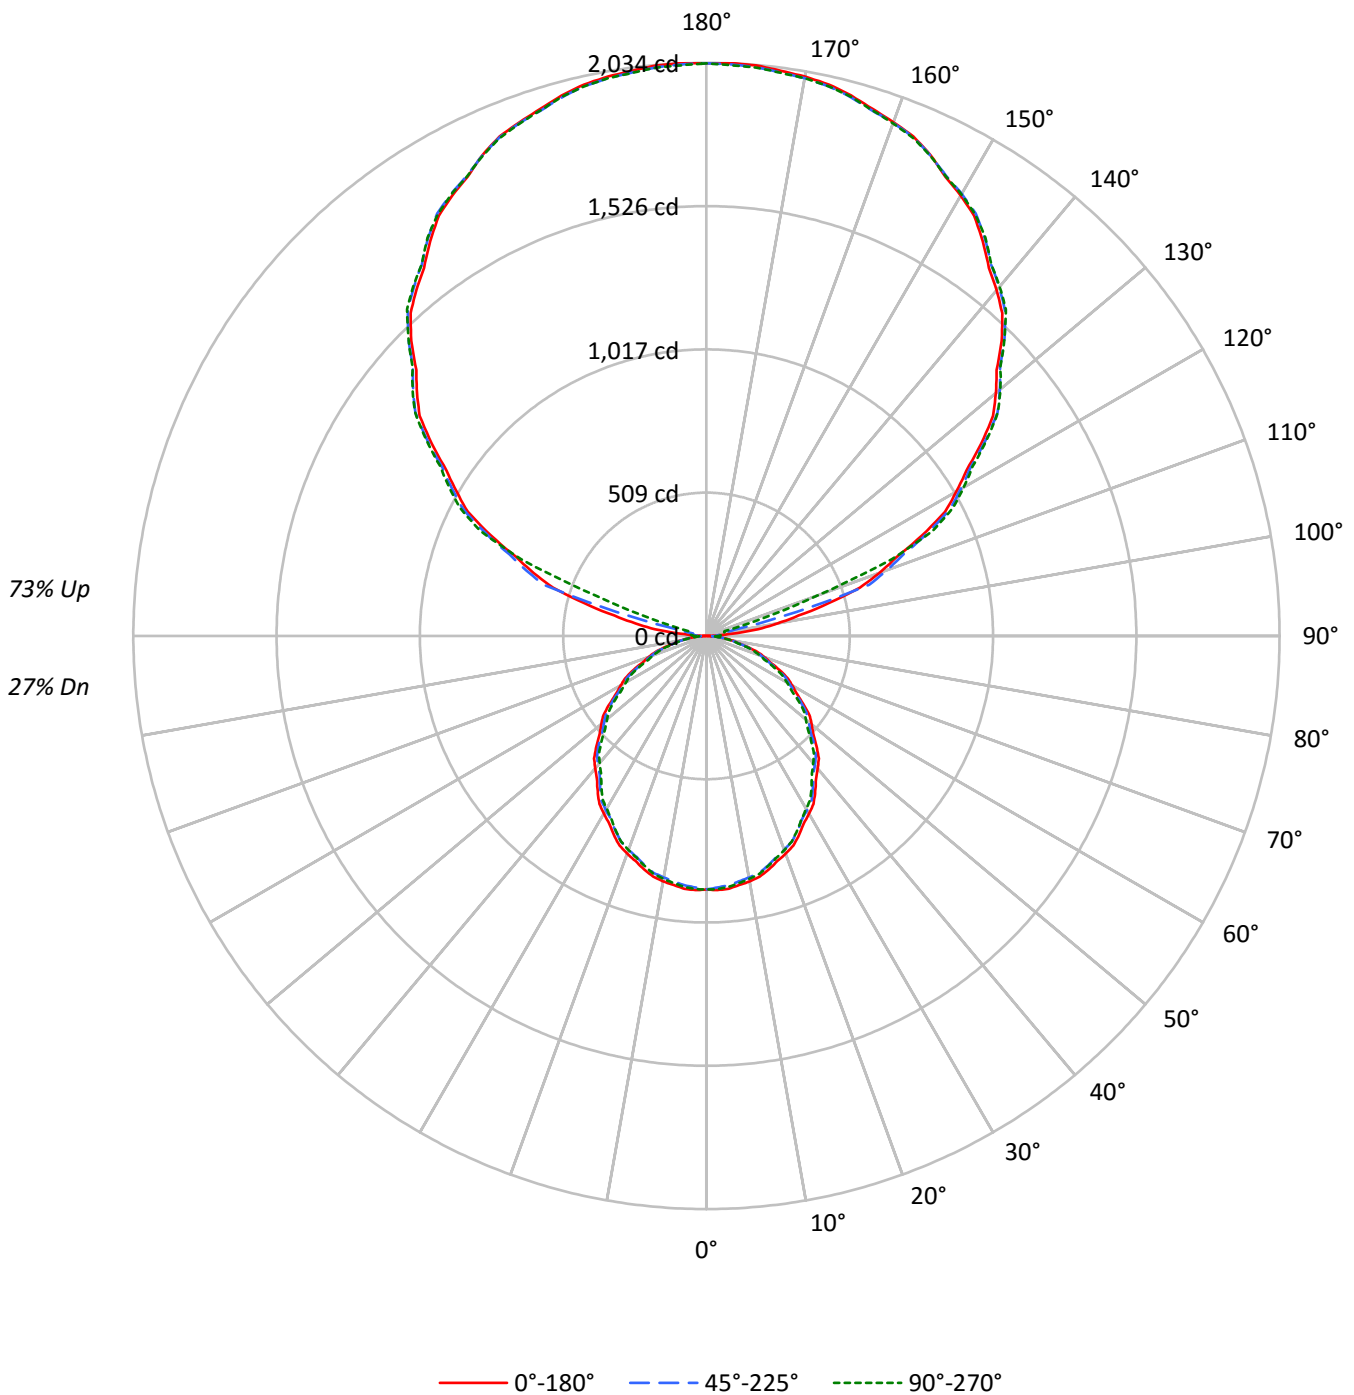



TEST NUMBER: P332148-840

CATALOG NUMBER: S123DIW-S560D1535U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	52	52	52	35	35	35	27
1	93	88	85	81	83	79	76	73	62	60	58	46	45	43	31	30	30	23
2	84	77	71	66	75	69	64	60	54	51	48	40	38	36	27	26	25	19
3	77	68	61	55	68	61	55	50	48	44	40	36	33	30	24	23	21	16
4	70	60	52	46	62	54	47	42	42	38	34	32	29	26	22	20	18	14
5	64	53	45	40	57	48	41	36	38	33	29	28	25	22	19	17	16	12
6	59	48	40	34	53	43	36	31	34	29	25	25	22	20	18	16	14	11
7	55	43	35	30	49	39	32	27	31	26	22	23	20	17	16	14	12	9
8	51	39	31	26	45	35	28	24	28	23	20	21	18	15	15	13	11	8
9	47	35	28	23	42	32	25	21	25	21	17	19	16	14	14	11	10	8
10	44	32	25	21	39	29	23	19	23	19	16	18	15	12	13	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9684	9684	9684
5°	9729	9596	9662
10°	9664	9512	9571
15°	9551	9404	9423
20°	9419	9251	9260
25°	9242	9069	9049
30°	9047	8866	8797
35°	8843	8650	8539
40°	8630	8413	8283
45°	8397	8196	7995
50°	8162	7927	7708
55°	7854	7651	7418
60°	7543	7326	7093
65°	7272	6976	6757
70°	6864	6571	6279
75°	6276	6047	5793
80°	5659	5424	5368
85°	4965	4780	4594



TEST NUMBER: P332148-840

CATALOG NUMBER: S123DIW-S560D1535U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.7	1.0
10°-20°	239.3	2.8
20°-30°	353.5	4.1
30°-40°	412.9	4.8
40°-50°	415.1	4.9
50°-60°	364.6	4.3
60°-70°	271.7	3.2
70°-80°	154.8	1.8
80°-90°	50.1	0.6
90°-100°	73.9	0.9
100°-110°	352.1	4.1
110°-120°	845.8	9.9
120°-130°	1077.0	12.6
130°-140°	1150.8	13.5
140°-150°	1076.1	12.6
150°-160°	868.0	10.2
160°-170°	560.2	6.6
170°-180°	193.1	2.3
0°-30°	677.5	7.9
0°-40°	1090.4	12.8
0°-60°	1870.2	21.9
0°-90°	2346.7	27.5
90°-120°	1271.8	14.9
90°-150°	4575.6	53.6
90°-180°	6197.0	72.5
0°-180°	8543.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	900	900	900	900	900	
5°	900	896	888	895	894	85
15°	857	854	844	850	846	242
25°	778	773	764	764	762	358
35°	673	668	658	654	650	421
45°	552	548	538	529	525	426
55°	418	417	408	399	395	375
65°	286	281	274	268	265	282
75°	151	148	145	142	139	161
85°	40	39	39	37	37	44
90°	2	17	36	42	45	7
95°	92	35	47	57	57	114
105°	450	458	331	78	66	477
115°	844	853	867	881	888	833
125°	1190	1201	1208	1211	1214	1062
135°	1481	1490	1496	1500	1496	1140
145°	1709	1719	1723	1726	1726	1069
155°	1883	1880	1881	1888	1880	867
165°	1985	1981	1979	1990	1981	561
175°	2032	2025	2026	2035	2025	193
180°	2032	2032	2032	2032	2032	



TEST NUMBER: P332148-840

CATALOG NUMBER: S123DIW-S560D1535U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7
2.5°	902.7	902.2	901.7	901.1	900.6	899.5	898.0	896.5	895.0	893.5	894.8
5°	900.4	899.6	898.7	897.9	897.0	895.6	893.7	891.8	890.0	888.1	889.8
7.5°	891.6	890.8	889.9	889.1	888.2	886.8	884.8	882.8	880.9	879.0	880.5
10°	884.2	883.3	882.5	881.6	880.8	879.2	877.0	874.7	872.5	870.3	871.8
12.5°	874.3	873.5	872.8	872.1	871.4	870.0	867.9	865.8	863.7	861.6	862.7
15°	857.1	856.5	855.8	855.1	854.3	852.9	850.7	848.5	846.2	843.9	845.4
17.5°	837.2	836.3	835.4	834.5	833.5	832.0	829.8	827.6	825.4	823.0	824.0
20°	822.3	821.3	820.2	819.2	818.2	816.6	814.4	812.1	809.8	807.6	808.3
22.5°	805.6	804.6	803.5	802.5	801.4	799.8	797.6	795.4	793.1	790.9	791.4
25°	778.2	777.2	776.2	775.2	774.1	772.4	770.2	768.0	765.8	763.6	763.7
27.5°	749.0	748.0	747.0	746.0	745.0	743.3	740.8	738.5	736.1	733.7	733.8
30°	727.9	727.1	726.2	725.4	724.5	722.9	720.4	718.0	715.7	713.3	713.3
32.5°	706.9	705.8	704.6	703.5	702.4	700.8	699.0	697.1	695.3	693.5	692.5
35°	673.0	672.0	671.0	669.9	668.9	667.2	665.0	662.8	660.6	658.3	657.3
37.5°	638.3	637.0	635.7	634.4	633.1	631.4	629.0	626.8	624.5	622.3	621.1
40°	614.2	613.2	612.2	611.2	610.1	608.3	605.9	603.6	601.2	598.7	597.3
42.5°	590.1	589.0	587.7	586.5	585.4	583.6	581.2	578.9	576.4	574.0	572.6
45°	551.6	550.9	550.2	549.5	548.8	547.3	545.1	542.9	540.7	538.4	536.3
47.5°	513.3	512.3	511.4	510.4	509.4	507.8	505.7	503.6	501.5	499.4	497.4
50°	487.4	486.5	485.6	484.7	483.9	482.4	480.1	477.9	475.6	473.4	471.5
52.5°	460.1	459.5	459.0	458.4	457.8	456.3	453.9	451.6	449.2	446.9	445.2
55°	418.5	418.3	418.2	418.0	417.8	416.6	414.3	412.1	409.9	407.7	405.8
57.5°	378.9	378.3	377.7	377.2	376.6	375.4	373.5	371.8	370.0	368.2	366.6
60°	350.4	350.2	350.1	349.9	349.7	348.6	346.6	344.5	342.4	340.3	338.8
62.5°	325.1	324.6	324.2	323.8	323.3	322.0	319.9	317.9	315.8	313.8	312.3
65°	285.5	284.6	283.8	282.9	282.1	280.7	279.0	277.3	275.6	273.9	272.5
67.5°	243.5	242.8	242.0	241.3	240.4	239.4	238.1	236.8	235.5	234.3	233.1
70°	218.1	217.1	216.1	215.1	214.0	213.0	212.0	211.0	209.8	208.8	207.6
72.5°	191.6	190.8	190.1	189.2	188.5	187.5	186.4	185.2	184.0	182.9	181.8
75°	150.9	150.2	149.5	148.8	148.1	147.5	146.9	146.4	145.9	145.4	144.6
77.5°	114.8	114.4	114.0	113.7	113.3	112.8	112.2	111.6	110.9	110.3	109.8
80°	91.3	90.8	90.3	89.8	89.2	88.8	88.5	88.1	87.8	87.5	87.3
82.5°	68.4	68.3	68.2	68.1	68.0	67.9	67.9	67.8	67.7	67.7	67.3
85°	40.2	39.9	39.6	39.2	38.9	38.7	38.7	38.7	38.7	38.7	38.4
87.5°	16.4	16.7	16.9	17.2	17.5	17.9	18.7	19.4	20.1	20.9	21.0
90°	1.5	4.8	8.2	11.6	14.9	18.8	23.1	27.5	31.9	36.3	37.6
92.5°	28.1	27.2	26.2	25.2	24.3	25.4	28.8	32.1	35.3	38.7	40.8
95°	92.1	78.4	64.6	50.8	37.1	32.0	35.7	39.4	43.1	46.8	49.2
97.5°	185.1	178.9	172.8	166.5	160.4	145.2	121.1	96.9	72.8	48.6	51.3
100°	255.2	261.9	268.5	275.3	282.0	259.1	206.8	154.5	102.2	49.8	52.5
102.5°	334.9	339.7	344.6	349.3	354.2	328.0	270.8	213.7	156.5	99.4	91.0
105°	449.9	453.6	457.3	461.0	464.6	451.4	421.2	391.0	360.8	330.6	271.2
107.5°	571.3	574.2	577.1	580.2	583.1	586.9	591.7	596.5	601.3	606.0	562.5
110°	652.2	654.9	657.5	660.2	663.0	666.1	669.8	673.5	677.2	680.9	669.8



TEST NUMBER: P332148-840

CATALOG NUMBER: S123DIW-S560D1535U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	729.5	732.0	734.4	736.8	739.1	742.3	745.9	749.6	753.3	757.0	757.2
115°	843.9	846.0	848.0	850.0	852.0	854.5	857.6	860.5	863.5	866.6	869.9
117.5°	954.7	957.3	959.7	962.2	964.7	966.7	968.3	969.8	971.3	972.9	975.5
120°	1023.6	1026.6	1029.7	1032.7	1035.7	1037.7	1038.6	1039.7	1040.7	1041.7	1044.4
122.5°	1093.7	1096.1	1098.6	1101.1	1103.6	1105.5	1106.7	1108.0	1109.2	1110.5	1112.5
125°	1189.6	1192.3	1195.1	1197.7	1200.4	1202.4	1203.8	1205.1	1206.5	1207.8	1208.5
127.5°	1282.6	1285.4	1288.1	1290.7	1293.4	1295.6	1297.2	1298.8	1300.4	1302.0	1303.0
130°	1340.6	1343.3	1346.0	1348.7	1351.4	1353.4	1354.7	1356.0	1357.5	1358.8	1360.1
132.5°	1396.2	1398.9	1401.6	1404.2	1406.9	1408.9	1409.9	1411.0	1412.0	1413.1	1414.4
135°	1481.1	1483.1	1485.1	1487.1	1489.1	1490.8	1492.1	1493.5	1494.8	1496.1	1497.1
137.5°	1553.5	1556.1	1558.6	1561.2	1563.7	1565.4	1566.1	1566.8	1567.6	1568.3	1569.9
140°	1601.8	1603.9	1605.9	1607.9	1609.9	1611.3	1612.4	1613.4	1614.4	1615.4	1616.8
142.5°	1646.5	1648.5	1650.5	1652.5	1654.6	1656.1	1657.1	1658.1	1659.1	1660.1	1661.1
145°	1709.0	1711.3	1713.7	1716.1	1718.4	1719.9	1720.6	1721.2	1721.9	1722.6	1723.2
147.5°	1767.9	1769.5	1771.0	1772.5	1774.0	1775.1	1775.8	1776.6	1777.2	1777.9	1778.6
150°	1804.1	1805.1	1806.1	1807.2	1808.2	1809.0	1809.7	1810.4	1811.0	1811.7	1812.3
152.5°	1836.7	1837.2	1837.7	1838.2	1838.7	1839.1	1839.5	1839.9	1840.3	1840.7	1841.9
155°	1882.6	1882.0	1881.3	1880.7	1880.0	1879.8	1880.2	1880.5	1880.8	1881.1	1882.8
157.5°	1918.2	1918.2	1918.1	1918.0	1918.0	1917.8	1917.4	1917.1	1916.8	1916.4	1918.4
160°	1940.1	1939.6	1939.3	1939.0	1938.6	1938.3	1938.0	1937.6	1937.3	1937.0	1939.0
162.5°	1960.6	1959.6	1958.8	1957.9	1957.0	1956.4	1956.1	1955.8	1955.4	1955.1	1957.4
165°	1985.3	1984.3	1983.3	1982.3	1981.3	1980.6	1980.2	1979.9	1979.6	1979.2	1982.0
167.5°	2004.6	2003.3	2002.0	2000.6	1999.2	1998.6	1998.6	1998.6	1998.6	1998.6	2001.2
170°	2015.5	2014.2	2012.8	2011.4	2010.1	2009.4	2009.4	2009.4	2009.4	2009.4	2012.2
172.5°	2022.8	2021.1	2019.5	2017.9	2016.3	2015.6	2015.9	2016.2	2016.4	2016.7	2019.4
175°	2032.1	2030.4	2028.7	2027.1	2025.4	2024.7	2025.1	2025.4	2025.7	2026.1	2028.4
177.5°	2034.5	2033.2	2031.8	2030.5	2029.1	2028.6	2028.9	2029.1	2029.4	2029.7	2031.8
180°	2032.1	2032.1	2032.1	2032.1	2032.1	2032.1	2032.1	2032.1	2032.1	2032.1	2032.1



TEST NUMBER: P332148-840

CATALOG NUMBER: S123DIW-S560D1535U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7
2.5°	896.3	897.6	899.0	899.6	899.5	899.3	899.2	899.1
5°	891.5	893.2	894.9	895.6	895.2	894.9	894.6	894.2
7.5°	882.0	883.5	885.1	885.8	885.6	885.3	885.1	884.9
10°	873.3	874.9	876.5	877.1	876.8	876.4	876.1	875.7
12.5°	863.8	865.1	866.2	866.6	866.4	866.2	866.0	865.8
15°	846.8	848.1	849.5	849.6	848.6	847.6	846.6	845.6
17.5°	825.1	826.0	827.0	827.2	826.9	826.5	826.1	825.7
20°	809.0	809.7	810.3	810.4	809.9	809.4	808.9	808.4
22.5°	792.0	792.5	793.1	793.0	792.4	791.7	791.1	790.4
25°	763.9	764.1	764.2	764.1	763.6	763.1	762.4	761.9
27.5°	734.0	734.1	734.2	734.0	733.3	732.7	732.0	731.3
30°	713.3	713.3	713.3	712.7	711.4	710.2	709.0	707.8
32.5°	691.6	690.5	689.5	688.7	688.1	687.5	686.8	686.2
35°	656.2	655.2	654.2	653.3	652.4	651.6	650.7	649.8
37.5°	619.8	618.5	617.3	616.4	615.9	615.3	614.8	614.2
40°	596.0	594.6	593.3	592.2	591.5	590.9	590.2	589.5
42.5°	571.3	569.9	568.5	567.4	566.7	566.1	565.4	564.7
45°	534.3	532.2	530.2	528.7	527.9	526.9	526.1	525.2
47.5°	495.3	493.3	491.3	489.9	489.2	488.4	487.7	486.9
50°	469.7	467.8	465.9	464.4	463.3	462.3	461.3	460.3
52.5°	443.6	442.0	440.4	439.0	438.0	437.0	436.0	434.9
55°	403.8	402.0	400.1	398.7	397.9	397.0	396.2	395.3
57.5°	364.9	363.1	361.5	360.1	359.1	358.2	357.2	356.2
60°	337.3	335.8	334.2	333.0	332.1	331.2	330.4	329.5
62.5°	310.6	309.1	307.6	306.5	305.9	305.4	304.8	304.2
65°	271.0	269.7	268.3	267.4	266.9	266.4	265.9	265.3
67.5°	231.9	230.7	229.4	228.4	227.7	227.0	226.3	225.6
70°	206.4	205.3	204.1	203.0	202.2	201.3	200.5	199.5
72.5°	180.8	179.7	178.6	177.8	177.4	176.9	176.5	176.0
75°	143.7	142.9	142.0	141.3	140.8	140.3	139.8	139.3
77.5°	109.2	108.6	108.0	107.7	107.7	107.7	107.7	107.7
80°	87.1	86.8	86.7	86.6	86.6	86.6	86.6	86.6
82.5°	67.0	66.7	66.3	66.1	66.0	65.8	65.7	65.6
85°	38.0	37.7	37.3	37.2	37.2	37.2	37.2	37.2
87.5°	21.1	21.2	21.4	21.5	21.6	21.8	21.9	22.0
90°	38.9	40.3	41.6	42.6	43.3	43.9	44.6	45.2
92.5°	42.9	45.1	47.3	48.5	48.9	49.3	49.7	50.1
95°	51.5	53.8	56.1	57.4	57.4	57.4	57.4	57.4
97.5°	54.0	56.7	59.4	60.9	61.2	61.5	61.9	62.2
100°	55.1	57.9	60.6	62.1	62.4	62.7	63.1	63.4
102.5°	82.7	74.4	66.0	62.2	62.8	63.4	64.0	64.6
105°	211.9	152.5	93.1	63.7	64.4	65.1	65.7	66.4
107.5°	518.9	475.3	431.8	387.7	343.0	298.1	253.4	208.6
110°	658.7	647.6	636.6	607.0	559.1	511.1	463.1	415.2



TEST NUMBER: P332148-840

CATALOG NUMBER: S123DIW-S560D1535U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	757.4	757.6	757.8	752.9	742.7	732.6	722.5	712.3
115°	873.3	876.7	880.0	882.3	883.7	885.0	886.4	887.8
117.5°	978.3	980.9	983.6	985.1	985.3	985.6	985.9	986.1
120°	1047.1	1049.8	1052.5	1053.8	1053.8	1053.8	1053.8	1053.8
122.5°	1114.3	1116.2	1118.1	1119.1	1119.4	1119.6	1119.9	1120.2
125°	1209.1	1209.8	1210.4	1211.1	1211.8	1212.4	1213.2	1213.9
127.5°	1304.1	1305.3	1306.3	1306.5	1305.9	1305.1	1304.4	1303.8
130°	1361.4	1362.8	1364.1	1364.4	1363.8	1363.1	1362.4	1361.8
132.5°	1415.8	1417.1	1418.5	1418.7	1417.7	1416.8	1415.8	1414.9
135°	1498.1	1499.1	1500.2	1500.2	1499.1	1498.1	1497.1	1496.1
137.5°	1571.6	1573.2	1574.8	1575.2	1574.6	1573.9	1573.2	1572.6
140°	1618.1	1619.4	1620.7	1621.1	1620.4	1619.8	1619.1	1618.4
142.5°	1662.2	1663.3	1664.4	1664.5	1663.6	1662.5	1661.6	1660.7
145°	1723.9	1724.6	1725.3	1725.7	1725.7	1725.7	1725.7	1725.7
147.5°	1779.2	1779.9	1780.6	1780.1	1778.6	1777.1	1775.4	1773.9
150°	1813.0	1813.7	1814.3	1814.2	1813.2	1812.2	1811.2	1810.2
152.5°	1843.1	1844.3	1845.5	1845.3	1843.8	1842.2	1840.7	1839.2
155°	1884.5	1886.1	1887.8	1887.6	1885.6	1883.6	1881.6	1879.7
157.5°	1920.5	1922.5	1924.5	1924.2	1921.6	1918.9	1916.3	1913.7
160°	1941.1	1943.0	1945.0	1944.9	1942.5	1940.2	1937.8	1935.5
162.5°	1959.6	1962.0	1964.2	1964.3	1962.3	1960.1	1958.1	1956.0
165°	1984.6	1987.3	1990.0	1990.1	1987.8	1985.5	1983.1	1980.7
167.5°	2004.0	2006.6	2009.3	2009.3	2006.6	2004.0	2001.2	1998.6
170°	2014.8	2017.5	2020.2	2020.2	2017.5	2014.8	2012.2	2009.4
172.5°	2022.1	2024.8	2027.4	2027.3	2024.4	2021.4	2018.4	2015.5
175°	2030.7	2033.1	2035.5	2035.3	2032.6	2029.9	2027.2	2024.6
177.5°	2034.0	2036.1	2038.3	2038.0	2035.3	2032.7	2029.9	2027.3
180°	2032.1	2032.1	2032.1	2032.1	2032.1	2032.1	2032.1	2032.1

(END OF REPORT)