

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332172-840

Luminaire Tested: **S123DIW-S775D1320U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332172-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S775D1320U840-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1320 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8534.8 lumens
Efficiency: N/A
Efficacy: 139.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332172-840

CATALOG NUMBER: S123DIW-S775D1320U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

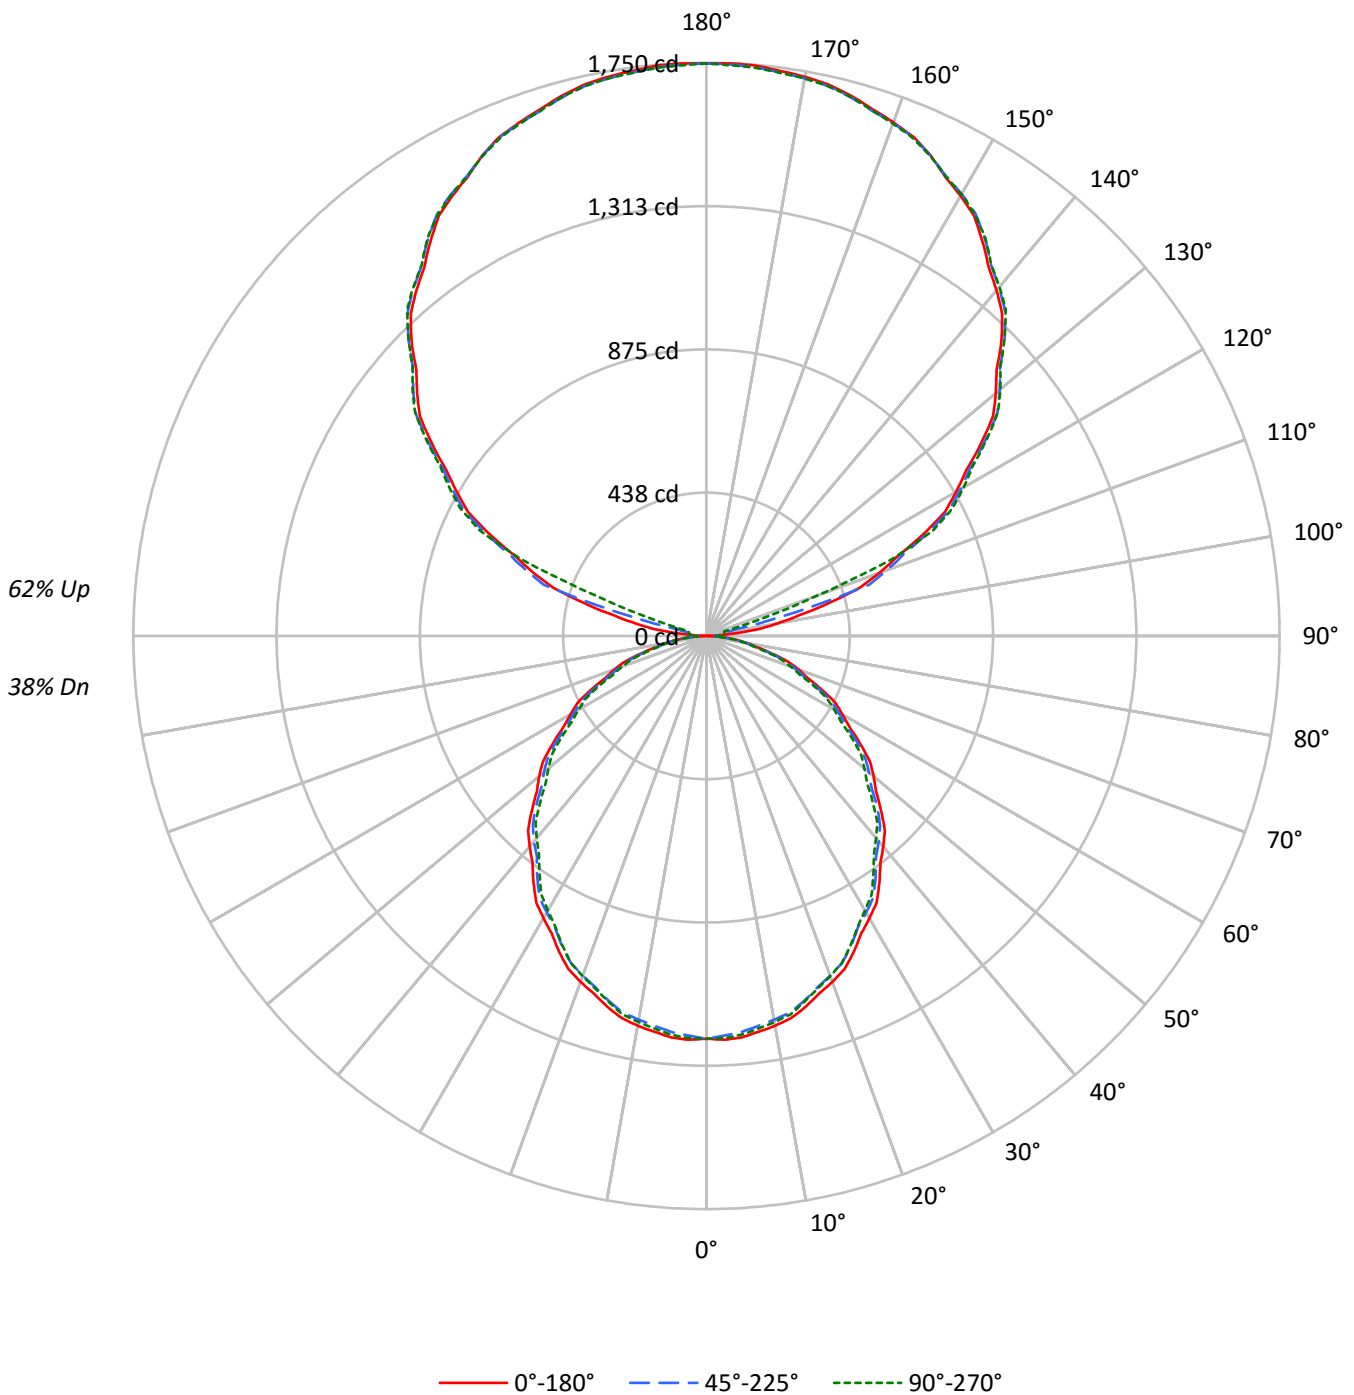



TEST NUMBER: P332172-840

CATALOG NUMBER: S123DIW-S775D1320U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45	38
1	95	91	87	83	86	82	79	76	67	65	63	53	51	50	39	38	38	32
2	86	79	73	68	78	72	67	62	58	55	52	46	44	41	35	33	32	26
3	79	69	62	57	71	63	57	52	52	47	43	41	38	35	31	29	27	22
4	72	61	54	48	65	56	49	44	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	25	22	20	17
6	61	49	41	35	55	45	38	33	37	31	28	29	25	23	22	20	18	15
7	56	44	36	31	51	40	33	29	33	28	24	27	23	20	20	18	16	13
8	52	40	32	27	47	37	30	25	30	25	21	24	20	18	19	16	14	12
9	48	36	29	24	44	33	27	22	28	23	19	22	19	16	17	15	13	10
10	45	33	26	21	41	31	24	20	25	21	17	21	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13237	13237	13237
5°	13299	13116	13207
10°	13210	13002	13083
15°	13056	12856	12880
20°	12875	12645	12657
25°	12634	12396	12371
30°	12367	12117	12026
35°	12089	11825	11671
40°	11797	11500	11323
45°	11478	11204	10930
50°	11156	10836	10535
55°	10736	10457	10141
60°	10312	10015	9698
65°	9938	9536	9235
70°	9385	8985	8585
75°	8576	8268	7918
80°	7736	7407	7345
85°	6780	6533	6274



TEST NUMBER: P332172-840

CATALOG NUMBER: S123DIW-S775D1320U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.8	1.4
10°-20°	327.1	3.8
20°-30°	483.2	5.7
30°-40°	564.4	6.6
40°-50°	567.4	6.6
50°-60°	498.4	5.8
60°-70°	371.3	4.4
70°-80°	211.6	2.5
80°-90°	65.6	0.8
90°-100°	63.5	0.7
100°-110°	302.9	3.5
110°-120°	727.5	8.5
120°-130°	926.3	10.9
130°-140°	989.8	11.6
140°-150°	925.5	10.8
150°-160°	746.6	8.7
160°-170°	481.8	5.6
170°-180°	166.1	1.9
0°-30°	926.1	10.9
0°-40°	1490.5	17.5
0°-60°	2556.3	30.0
0°-90°	3204.9	37.6
90°-120°	1093.9	12.8
90°-150°	3935.5	46.1
90°-180°	5330.0	62.5
0°-180°	8534.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1230	1230	1230	1230	1230	
5°	1231	1225	1214	1224	1222	117
15°	1172	1167	1154	1161	1156	330
25°	1064	1057	1044	1044	1042	490
35°	920	913	900	894	888	575
45°	754	749	736	724	718	582
55°	572	570	557	546	540	512
65°	390	385	374	366	363	385
75°	206	202	199	194	190	221
85°	55	53	53	51	51	60
90°	1	14	31	36	39	7
95°	79	30	40	49	49	98
105°	387	394	284	67	57	410
115°	726	734	745	758	764	716
125°	1023	1033	1039	1041	1044	913
135°	1274	1282	1287	1290	1287	980
145°	1470	1479	1482	1484	1484	920
155°	1619	1617	1618	1624	1617	746
165°	1708	1704	1702	1712	1704	482
175°	1748	1742	1743	1751	1741	166
180°	1748	1748	1748	1748	1748	



TEST NUMBER: P332172-840

CATALOG NUMBER: S123DIW-S775D1320U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1229.8	1229.8	1229.8	1229.8	1229.8	1229.8	1229.8	1229.8	1229.8	1229.8	1229.8
2.5°	1234.0	1233.2	1232.5	1231.7	1231.0	1229.6	1227.5	1225.5	1223.4	1221.3	1223.1
5°	1230.8	1229.6	1228.5	1227.3	1226.1	1224.3	1221.6	1219.1	1216.5	1213.9	1216.3
7.5°	1218.8	1217.6	1216.4	1215.3	1214.1	1212.1	1209.4	1206.8	1204.1	1201.4	1203.6
10°	1208.6	1207.4	1206.3	1205.1	1204.0	1201.8	1198.7	1195.7	1192.7	1189.6	1191.7
12.5°	1195.1	1194.1	1193.2	1192.1	1191.1	1189.2	1186.4	1183.5	1180.6	1177.7	1179.3
15°	1171.6	1170.6	1169.7	1168.8	1167.8	1165.9	1162.8	1159.7	1156.7	1153.7	1155.5
17.5°	1144.3	1143.1	1141.9	1140.6	1139.4	1137.3	1134.3	1131.1	1128.1	1125.1	1126.4
20°	1124.0	1122.6	1121.3	1119.8	1118.4	1116.1	1113.1	1110.0	1107.0	1103.9	1104.9
22.5°	1101.2	1099.7	1098.3	1096.9	1095.5	1093.3	1090.3	1087.2	1084.2	1081.1	1081.9
25°	1063.8	1062.4	1061.0	1059.6	1058.1	1055.9	1052.8	1049.8	1046.7	1043.7	1043.9
27.5°	1023.8	1022.4	1021.1	1019.7	1018.3	1016.0	1012.7	1009.5	1006.1	1002.8	1003.0
30°	995.0	993.8	992.7	991.5	990.3	988.1	984.8	981.5	978.3	974.9	974.9
32.5°	966.2	964.7	963.1	961.6	960.1	958.1	955.4	952.9	950.4	947.9	946.5
35°	920.0	918.6	917.2	915.7	914.3	912.1	909.0	905.9	902.9	899.9	898.5
37.5°	872.5	870.8	869.0	867.2	865.5	863.0	859.9	856.8	853.6	850.6	848.9
40°	839.6	838.2	836.8	835.4	833.9	831.6	828.3	825.1	821.7	818.4	816.6
42.5°	806.6	805.0	803.3	801.8	800.2	797.8	794.5	791.1	787.9	784.6	782.7
45°	754.0	753.0	752.0	751.1	750.1	748.2	745.1	742.0	739.0	736.0	733.2
47.5°	701.7	700.3	698.9	697.6	696.2	694.1	691.3	688.4	685.5	682.7	679.8
50°	666.2	665.0	663.8	662.7	661.5	659.3	656.3	653.3	650.2	647.1	644.6
52.5°	628.9	628.1	627.3	626.5	625.7	623.7	620.5	617.2	614.0	610.8	608.5
55°	572.1	571.8	571.6	571.4	571.1	569.5	566.4	563.4	560.3	557.2	554.7
57.5°	518.0	517.2	516.3	515.5	514.7	513.1	510.7	508.2	505.7	503.3	501.0
60°	479.0	478.8	478.6	478.3	478.1	476.6	473.7	470.9	468.1	465.2	463.1
62.5°	444.3	443.7	443.1	442.5	441.9	440.2	437.4	434.5	431.7	428.9	426.8
65°	390.2	389.0	387.8	386.7	385.5	383.7	381.3	379.0	376.7	374.4	372.4
67.5°	332.9	331.8	330.8	329.7	328.7	327.3	325.6	323.8	321.9	320.2	318.5
70°	298.2	296.8	295.4	294.0	292.6	291.1	289.7	288.3	286.9	285.5	283.9
72.5°	261.9	260.7	259.7	258.7	257.7	256.4	254.8	253.2	251.6	249.9	248.5
75°	206.2	205.2	204.3	203.4	202.5	201.6	200.9	200.2	199.4	198.8	197.6
77.5°	156.9	156.4	155.9	155.4	154.8	154.2	153.3	152.5	151.7	150.8	150.0
80°	124.8	124.1	123.4	122.7	122.0	121.4	120.9	120.5	120.0	119.5	119.3
82.5°	93.5	93.3	93.2	93.0	92.9	92.8	92.7	92.6	92.5	92.4	92.0
85°	54.9	54.5	54.0	53.6	53.1	52.9	52.9	52.9	52.9	52.9	52.4
87.5°	22.2	22.2	22.3	22.3	22.3	22.6	23.1	23.7	24.2	24.8	24.8
90°	1.3	4.1	7.1	10.0	12.8	16.2	19.9	23.6	27.4	31.2	32.3
92.5°	24.1	23.3	22.5	21.7	20.9	21.9	24.7	27.6	30.4	33.2	35.0
95°	79.2	67.4	55.5	43.7	31.9	27.6	30.7	33.9	37.1	40.3	42.3
97.5°	159.2	153.9	148.6	143.3	137.9	124.9	104.1	83.4	62.6	41.8	44.1
100°	219.4	225.2	231.0	236.7	242.6	222.9	177.9	132.9	87.9	42.8	45.1
102.5°	288.0	292.2	296.3	300.4	304.7	282.2	233.0	183.8	134.6	85.4	78.3
105°	387.0	390.1	393.3	396.5	399.6	388.3	362.2	336.3	310.3	284.4	233.3
107.5°	491.4	493.9	496.4	499.0	501.5	504.8	509.0	513.0	517.2	521.2	483.7
110°	561.0	563.3	565.5	567.8	570.2	572.9	576.1	579.3	582.5	585.6	576.1



TEST NUMBER: P332172-840

CATALOG NUMBER: S123DIW-S775D1320U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	627.4	629.5	631.6	633.7	635.7	638.3	641.6	644.7	647.9	651.1	651.3
115°	725.9	727.6	729.3	731.0	732.8	735.0	737.5	740.1	742.8	745.4	748.2
117.5°	821.2	823.3	825.5	827.6	829.7	831.4	832.7	834.1	835.5	836.8	839.1
120°	880.4	883.0	885.6	888.2	890.8	892.5	893.3	894.2	895.1	896.0	898.3
122.5°	940.7	942.8	944.9	947.1	949.2	950.8	951.9	953.0	954.1	955.2	956.8
125°	1023.2	1025.5	1027.8	1030.2	1032.5	1034.2	1035.3	1036.5	1037.6	1038.8	1039.4
127.5°	1103.2	1105.5	1107.8	1110.1	1112.5	1114.3	1115.7	1117.1	1118.4	1119.8	1120.7
130°	1153.1	1155.4	1157.7	1160.0	1162.4	1164.1	1165.2	1166.4	1167.5	1168.6	1169.8
132.5°	1200.8	1203.2	1205.5	1207.8	1210.1	1211.7	1212.6	1213.6	1214.5	1215.4	1216.6
135°	1273.8	1275.6	1277.3	1279.0	1280.8	1282.2	1283.3	1284.5	1285.7	1286.9	1287.7
137.5°	1336.2	1338.4	1340.6	1342.7	1344.9	1346.4	1347.0	1347.7	1348.3	1348.9	1350.3
140°	1377.8	1379.5	1381.2	1382.9	1384.6	1385.9	1386.8	1387.7	1388.6	1389.4	1390.6
142.5°	1416.1	1417.9	1419.7	1421.4	1423.1	1424.4	1425.2	1426.1	1426.9	1427.8	1428.8
145°	1470.0	1472.0	1474.0	1476.0	1478.0	1479.3	1479.9	1480.5	1481.1	1481.6	1482.2
147.5°	1520.6	1521.9	1523.2	1524.5	1525.9	1526.8	1527.4	1527.9	1528.5	1529.1	1529.7
150°	1551.8	1552.6	1553.5	1554.3	1555.2	1555.9	1556.5	1557.0	1557.6	1558.2	1558.8
152.5°	1579.7	1580.1	1580.5	1580.9	1581.3	1581.8	1582.2	1582.5	1582.8	1583.2	1584.2
155°	1619.2	1618.7	1618.1	1617.5	1616.9	1616.8	1617.1	1617.4	1617.7	1617.9	1619.4
157.5°	1649.9	1649.8	1649.8	1649.7	1649.6	1649.5	1649.2	1648.9	1648.6	1648.3	1650.0
160°	1668.6	1668.3	1668.0	1667.7	1667.4	1667.2	1666.9	1666.6	1666.3	1666.0	1667.7
162.5°	1686.3	1685.5	1684.8	1683.9	1683.2	1682.7	1682.4	1682.1	1681.8	1681.5	1683.5
165°	1707.6	1706.7	1705.8	1705.0	1704.0	1703.5	1703.2	1702.9	1702.6	1702.3	1704.7
167.5°	1724.1	1723.0	1721.8	1720.7	1719.5	1719.0	1719.0	1719.0	1719.0	1719.0	1721.3
170°	1733.5	1732.3	1731.2	1730.1	1728.9	1728.3	1728.3	1728.3	1728.3	1728.3	1730.6
172.5°	1739.8	1738.4	1737.0	1735.6	1734.2	1733.6	1733.8	1734.1	1734.3	1734.5	1736.9
175°	1747.8	1746.4	1744.9	1743.4	1742.0	1741.4	1741.7	1742.0	1742.3	1742.6	1744.6
177.5°	1749.9	1748.7	1747.6	1746.5	1745.2	1744.8	1745.0	1745.2	1745.5	1745.8	1747.6
180°	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8



TEST NUMBER: P332172-840

CATALOG NUMBER: S123DIW-S775D1320U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1229.8	1229.8	1229.8	1229.8	1229.8	1229.8	1229.8	1229.8
2.5°	1225.1	1227.0	1228.8	1229.7	1229.5	1229.3	1229.1	1228.9
5°	1218.6	1220.9	1223.4	1224.3	1223.8	1223.4	1222.8	1222.3
7.5°	1205.7	1207.8	1209.9	1210.8	1210.5	1210.2	1209.9	1209.7
10°	1193.9	1195.9	1198.0	1198.9	1198.4	1197.9	1197.5	1197.0
12.5°	1180.8	1182.3	1184.0	1184.6	1184.3	1184.0	1183.8	1183.5
15°	1157.4	1159.2	1161.1	1161.3	1159.9	1158.5	1157.2	1155.8
17.5°	1127.7	1129.0	1130.3	1130.7	1130.2	1129.7	1129.2	1128.7
20°	1105.8	1106.7	1107.7	1107.8	1107.1	1106.4	1105.7	1105.0
22.5°	1082.6	1083.4	1084.1	1084.0	1083.2	1082.3	1081.4	1080.5
25°	1044.1	1044.4	1044.6	1044.4	1043.7	1043.0	1042.3	1041.6
27.5°	1003.2	1003.4	1003.6	1003.2	1002.4	1001.5	1000.6	999.7
30°	974.9	974.9	974.9	974.1	972.5	970.8	969.2	967.6
32.5°	945.2	943.9	942.6	941.5	940.6	939.7	938.8	938.0
35°	897.1	895.6	894.2	892.9	891.7	890.6	889.4	888.2
37.5°	847.2	845.5	843.8	842.6	841.8	841.1	840.3	839.6
40°	814.7	812.8	810.9	809.5	808.6	807.6	806.7	805.8
42.5°	780.8	778.9	777.1	775.7	774.8	773.8	772.8	771.9
45°	730.3	727.5	724.7	722.7	721.5	720.3	719.1	718.0
47.5°	677.1	674.4	671.6	669.6	668.6	667.6	666.6	665.5
50°	642.0	639.3	636.8	634.8	633.4	632.0	630.6	629.1
52.5°	606.3	604.1	601.9	600.2	598.7	597.3	595.9	594.5
55°	552.1	549.5	546.9	545.0	543.8	542.7	541.5	540.4
57.5°	498.7	496.4	494.1	492.3	490.9	489.6	488.2	486.9
60°	461.0	458.9	456.8	455.1	453.9	452.8	451.6	450.5
62.5°	424.6	422.5	420.4	419.0	418.2	417.4	416.6	415.8
65°	370.5	368.7	366.8	365.5	364.8	364.1	363.3	362.6
67.5°	316.9	315.3	313.6	312.3	311.3	310.3	309.3	308.3
70°	282.3	280.5	278.9	277.5	276.3	275.2	274.0	272.8
72.5°	247.0	245.6	244.2	243.1	242.5	241.9	241.3	240.7
75°	196.4	195.3	194.1	193.2	192.5	191.8	191.1	190.4
77.5°	149.2	148.3	147.5	147.2	147.2	147.2	147.2	147.2
80°	119.1	118.8	118.6	118.5	118.5	118.5	118.5	118.5
82.5°	91.6	91.2	90.7	90.4	90.3	90.1	89.9	89.7
85°	51.9	51.5	51.0	50.8	50.8	50.8	50.8	50.8
87.5°	24.9	24.9	25.0	25.0	25.2	25.3	25.4	25.5
90°	33.4	34.6	35.7	36.7	37.3	37.8	38.4	39.0
92.5°	37.0	38.8	40.6	41.7	42.1	42.4	42.7	43.1
95°	44.3	46.4	48.4	49.4	49.4	49.4	49.4	49.4
97.5°	46.5	48.8	51.0	52.3	52.6	52.9	53.2	53.5
100°	47.5	49.8	52.1	53.4	53.6	53.9	54.2	54.5
102.5°	71.1	63.9	56.9	53.5	54.0	54.5	55.0	55.5
105°	182.2	131.2	80.1	54.8	55.4	55.9	56.6	57.2
107.5°	446.4	408.9	371.4	333.5	295.0	256.4	217.9	179.5
110°	566.5	557.0	547.5	522.1	480.9	439.6	398.4	357.1



TEST NUMBER: P332172-840

CATALOG NUMBER: S123DIW-S775D1320U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	651.5	651.6	651.8	647.5	638.7	630.1	621.4	612.7
115°	751.1	754.0	756.9	758.9	760.0	761.2	762.3	763.6
117.5°	841.4	843.6	846.0	847.3	847.5	847.7	848.0	848.2
120°	900.6	902.9	905.2	906.4	906.4	906.4	906.4	906.4
122.5°	958.5	960.1	961.7	962.6	962.8	963.0	963.3	963.5
125°	1040.0	1040.6	1041.1	1041.7	1042.3	1042.9	1043.4	1044.0
127.5°	1121.7	1122.6	1123.6	1123.7	1123.2	1122.6	1122.0	1121.4
130°	1170.9	1172.2	1173.3	1173.6	1173.0	1172.5	1171.8	1171.2
132.5°	1217.7	1218.9	1220.0	1220.2	1219.4	1218.6	1217.8	1217.0
135°	1288.6	1289.4	1290.3	1290.3	1289.4	1288.6	1287.7	1286.9
137.5°	1351.7	1353.0	1354.4	1354.8	1354.2	1353.7	1353.1	1352.5
140°	1391.7	1392.9	1394.0	1394.3	1393.7	1393.1	1392.6	1392.0
142.5°	1429.7	1430.6	1431.6	1431.6	1430.8	1430.0	1429.2	1428.4
145°	1482.8	1483.3	1483.9	1484.2	1484.2	1484.2	1484.2	1484.2
147.5°	1530.2	1530.9	1531.5	1531.1	1529.7	1528.4	1527.1	1525.7
150°	1559.3	1559.9	1560.5	1560.3	1559.5	1558.6	1557.8	1556.9
152.5°	1585.2	1586.3	1587.3	1587.2	1585.8	1584.5	1583.2	1581.9
155°	1620.8	1622.2	1623.8	1623.6	1621.8	1620.1	1618.4	1616.7
157.5°	1651.8	1653.6	1655.3	1655.0	1652.7	1650.5	1648.2	1646.0
160°	1669.4	1671.2	1672.9	1672.7	1670.7	1668.7	1666.7	1664.7
162.5°	1685.5	1687.5	1689.4	1689.5	1687.7	1686.0	1684.2	1682.3
165°	1707.0	1709.3	1711.6	1711.7	1709.7	1707.7	1705.7	1703.6
167.5°	1723.6	1725.9	1728.2	1728.2	1725.9	1723.6	1721.3	1719.0
170°	1732.9	1735.3	1737.6	1737.6	1735.3	1732.9	1730.6	1728.3
172.5°	1739.2	1741.5	1743.8	1743.6	1741.1	1738.6	1736.1	1733.5
175°	1746.7	1748.7	1750.7	1750.5	1748.3	1746.0	1743.6	1741.3
177.5°	1749.4	1751.3	1753.1	1752.9	1750.6	1748.3	1746.0	1743.6
180°	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8	1747.8

(END OF REPORT)