

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332460-840

Luminaire Tested: **S123RDIW-S1000D1030U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332460-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S1000D1030U840-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1030 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7995.8 lumens
Efficiency: N/A
Efficacy: 130.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332460-840

CATALOG NUMBER: S123RDIW-S1000D1030U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

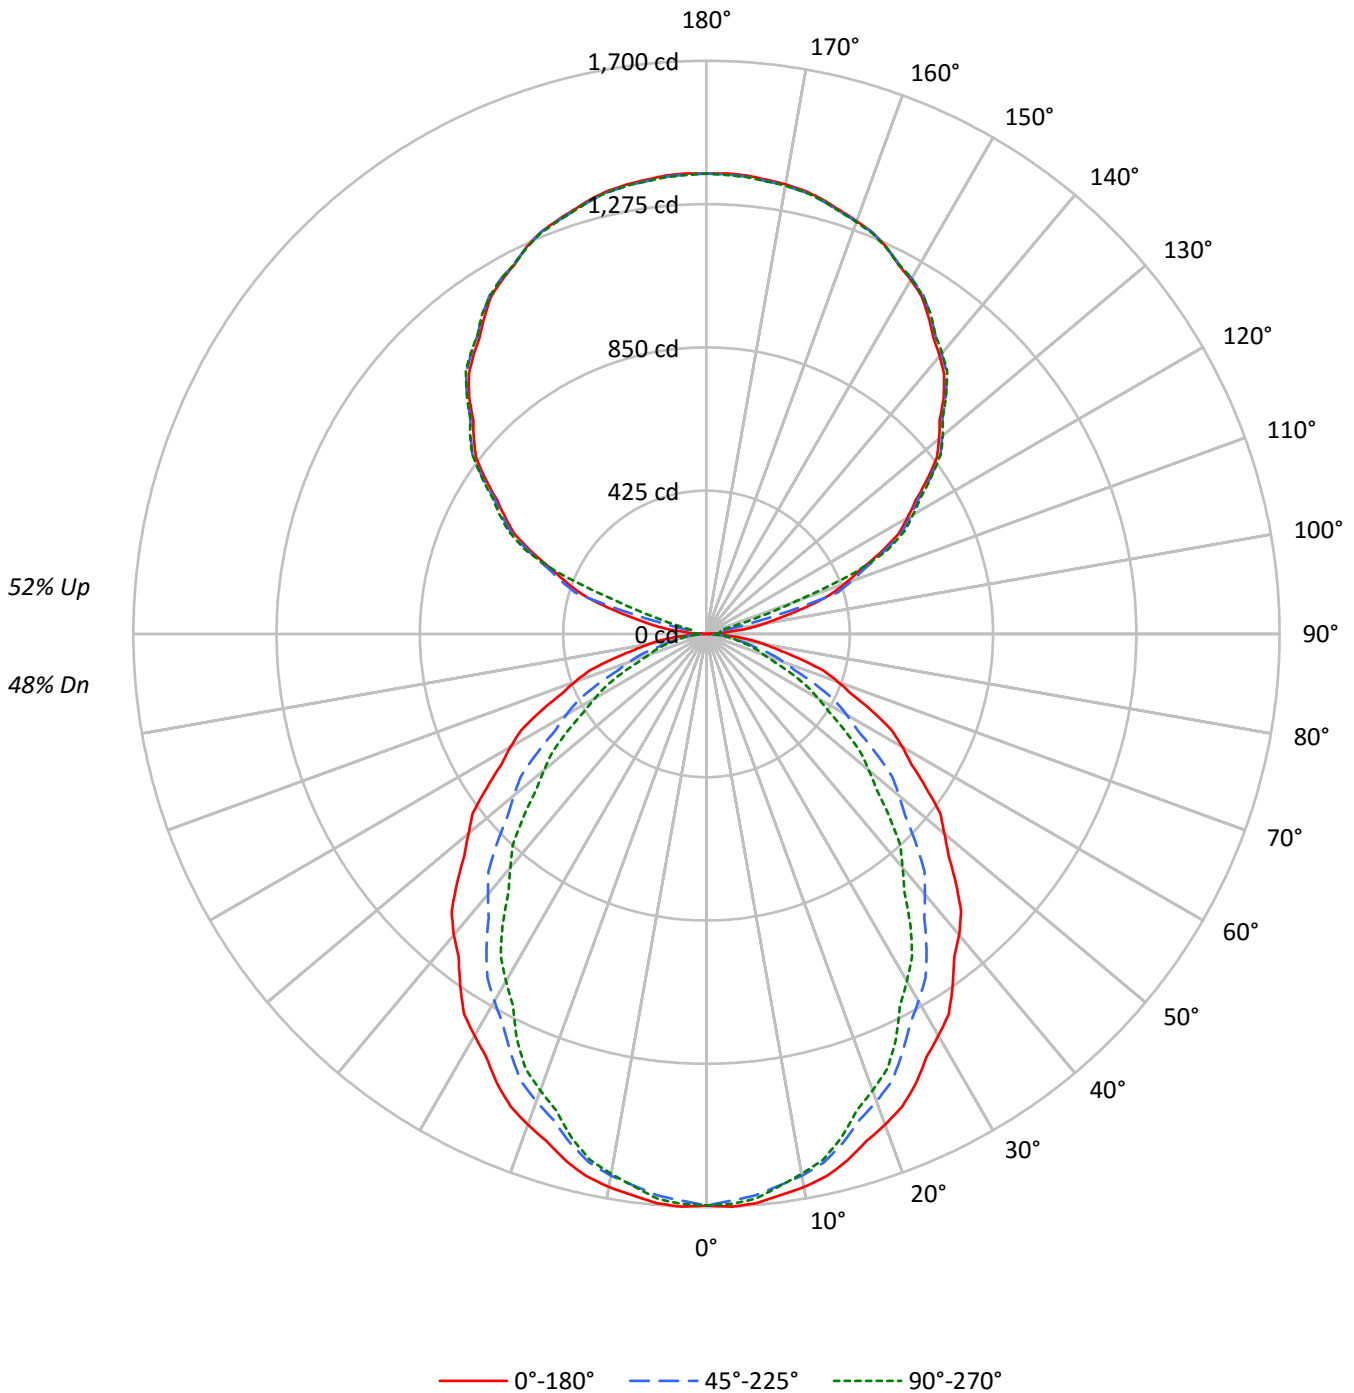



TEST NUMBER: P332460-840

CATALOG NUMBER: S123RDIW-S1000D1030U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48	48	48	48	
1	98	93	90	86	90	86	83	80	72	70	68	60	58	57	48	47	46	41	41	41	41	
2	89	82	76	71	82	76	71	66	64	60	57	53	50	48	43	41	40	35	35	35	35	
3	81	72	65	59	75	67	61	56	57	52	48	47	44	41	38	36	34	30	30	30	30	
4	75	64	56	51	68	59	53	47	50	45	41	42	38	35	34	32	30	26	26	26	26	
5	69	57	49	43	63	53	46	41	45	40	36	38	34	31	31	28	26	23	23	23	23	
6	63	51	43	38	58	48	41	36	41	35	31	34	30	27	28	25	23	20	20	20	20	
7	59	47	39	33	54	43	36	31	37	32	28	31	27	24	26	23	20	18	18	18	18	
8	54	42	35	29	50	39	33	28	34	28	25	29	25	21	24	21	18	16	16	16	16	
9	51	39	31	26	47	36	29	25	31	26	22	26	22	19	22	19	17	15	15	15	15	
10	47	35	28	24	44	33	27	22	29	24	20	24	20	18	21	17	15	13	13	13	13	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	18243	18243	18243
5°	18312	18058	18163
10°	18208	17832	17772
15°	18013	17415	17231
20°	17743	16893	16501
25°	17467	16308	15785
30°	17100	15632	14777
35°	16724	14954	13853
40°	16378	14155	12708
45°	15923	13370	11676
50°	15421	12476	10518
55°	14910	11453	9439
60°	14441	10357	8254
65°	13827	9172	7070
70°	13064	7701	5712
75°	11948	6059	5373
80°	10649	5362	4940
85°	8991	4755	4409



TEST NUMBER: P332460-840

CATALOG NUMBER: S123RDIW-S1000D1030U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	159.1	2.0
10°-20°	442.8	5.5
20°-30°	637.6	8.0
30°-40°	718.2	9.0
40°-50°	687.1	8.6
50°-60°	562.6	7.0
60°-70°	379.6	4.7
70°-80°	191.0	2.4
80°-90°	54.3	0.7
90°-100°	49.6	0.6
100°-110°	236.6	3.0
110°-120°	568.2	7.1
120°-130°	723.6	9.0
130°-140°	773.1	9.7
140°-150°	723.0	9.0
150°-160°	583.2	7.3
160°-170°	376.4	4.7
170°-180°	129.7	1.6
0°-30°	1239.5	15.5
0°-40°	1957.7	24.5
0°-60°	3207.4	40.1
0°-90°	3832.4	47.9
90°-120°	854.5	10.7
90°-150°	3074.2	38.4
90°-180°	4163.0	52.1
0°-180°	7995.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1695	1695	1695	1695	1695	
5°	1695	1687	1671	1683	1681	161
15°	1616	1600	1563	1556	1546	455
25°	1471	1435	1373	1345	1329	676
35°	1273	1221	1138	1081	1054	796
45°	1046	982	878	802	767	807
55°	794	724	610	533	503	712
65°	543	466	360	296	278	537
75°	287	221	146	133	129	306
85°	73	44	38	36	36	82
90°	1	11	24	28	30	7
95°	62	23	31	38	39	76
105°	302	308	222	53	45	320
115°	567	573	582	592	596	560
125°	799	807	811	813	816	714
135°	995	1001	1005	1008	1005	766
145°	1148	1155	1157	1159	1159	718
155°	1265	1263	1264	1268	1263	583
165°	1334	1331	1330	1337	1331	377
175°	1365	1361	1361	1368	1360	130
180°	1365	1365	1365	1365	1365	



TEST NUMBER: P332460-840

CATALOG NUMBER: S123RDIW-S1000D1030U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8
2.5°	1700.2	1699.2	1698.3	1697.3	1696.3	1694.4	1691.4	1688.5	1685.6	1682.6	1685.3
5°	1694.8	1693.1	1691.6	1690.1	1688.6	1686.0	1682.3	1678.7	1675.1	1671.3	1674.1
7.5°	1679.0	1677.4	1675.8	1674.1	1672.4	1669.2	1664.5	1659.7	1655.0	1650.2	1651.7
10°	1665.9	1663.8	1661.5	1659.4	1657.3	1653.5	1648.0	1642.4	1637.0	1631.5	1631.8
12.5°	1647.2	1644.8	1642.4	1640.0	1637.6	1633.1	1626.4	1619.6	1613.0	1606.2	1606.0
15°	1616.4	1613.1	1609.6	1606.3	1603.0	1597.0	1588.4	1579.8	1571.3	1562.8	1561.3
17.5°	1577.6	1573.7	1569.8	1565.9	1562.0	1554.6	1543.7	1532.9	1522.0	1511.1	1507.8
20°	1549.0	1544.2	1539.2	1534.4	1529.4	1521.3	1509.6	1498.0	1486.4	1474.8	1470.9
22.5°	1517.1	1511.6	1505.9	1500.3	1494.7	1485.7	1473.3	1461.0	1448.7	1436.3	1431.4
25°	1470.7	1463.1	1455.4	1447.7	1440.2	1429.3	1415.2	1401.2	1387.2	1373.1	1366.7
27.5°	1414.3	1405.9	1397.5	1389.1	1380.6	1368.6	1352.9	1337.3	1321.6	1306.1	1297.1
30°	1375.8	1366.7	1357.6	1348.4	1339.2	1326.1	1309.0	1291.8	1274.8	1257.7	1247.3
32.5°	1337.4	1327.0	1316.6	1306.2	1295.9	1281.6	1263.5	1245.5	1227.3	1209.2	1197.9
35°	1272.7	1261.7	1250.7	1239.8	1228.8	1213.8	1194.9	1175.9	1157.0	1138.0	1124.9
37.5°	1207.3	1195.1	1182.9	1170.6	1158.4	1142.3	1122.1	1101.8	1081.6	1061.4	1046.4
40°	1165.6	1152.2	1138.6	1125.2	1111.8	1094.2	1072.6	1050.9	1029.2	1007.4	991.6
42.5°	1118.2	1104.8	1091.4	1077.9	1064.5	1046.6	1024.2	1001.8	979.4	956.9	939.6
45°	1046.0	1032.2	1018.4	1004.7	991.0	972.4	948.9	925.3	901.8	878.3	860.9
47.5°	973.7	958.6	943.5	928.4	913.3	894.0	870.5	847.0	823.4	799.9	781.0
50°	920.9	906.6	892.2	877.9	863.4	843.9	819.2	794.5	769.7	745.0	726.0
52.5°	873.6	858.1	842.4	826.9	811.3	791.2	766.8	742.3	717.8	693.3	673.6
55°	794.5	779.5	764.5	749.5	734.6	714.1	688.1	662.2	636.2	610.3	592.6
57.5°	721.3	705.0	688.7	672.4	656.1	634.9	608.7	582.7	556.6	530.6	513.8
60°	670.8	654.0	637.1	620.4	603.5	582.5	557.1	531.8	506.4	481.1	464.5
62.5°	620.2	603.4	586.5	569.8	553.0	531.9	506.5	481.2	455.9	430.5	415.0
65°	542.9	526.1	509.3	492.5	475.7	455.4	431.6	407.8	384.0	360.1	345.2
67.5°	465.6	448.7	431.7	414.8	397.8	377.8	355.0	332.1	309.3	286.4	275.3
70°	415.1	398.6	382.1	365.6	349.1	330.2	308.8	287.4	266.0	244.7	234.0
72.5°	364.5	348.3	332.0	315.8	299.5	281.7	262.3	242.9	223.4	204.0	195.2
75°	287.3	272.6	257.9	243.3	228.6	212.9	196.1	179.3	162.5	145.7	142.6
77.5°	216.9	203.6	190.4	177.1	163.9	151.8	141.0	130.2	119.4	108.6	106.9
80°	171.8	159.3	146.7	134.2	121.7	112.3	105.8	99.4	93.0	86.5	85.6
82.5°	129.0	118.2	107.3	96.4	85.6	78.8	75.7	72.8	69.8	66.8	65.8
85°	72.8	66.1	59.4	52.7	45.9	42.1	41.2	40.3	39.4	38.5	37.9
87.5°	26.6	24.3	22.1	19.9	17.7	16.9	17.4	18.0	18.6	19.2	19.1
90°	1.0	3.2	5.6	7.8	10.0	12.6	15.6	18.5	21.4	24.3	25.2
92.5°	18.9	18.3	17.6	17.0	16.4	17.2	19.4	21.5	23.7	26.0	27.4
95°	61.9	52.6	43.4	34.1	24.9	21.5	24.0	26.5	29.0	31.4	33.0
97.5°	124.3	120.2	116.0	111.9	107.8	97.6	81.4	65.1	48.9	32.6	34.4
100°	171.4	175.9	180.5	184.9	189.5	174.1	139.0	103.8	68.7	33.4	35.2
102.5°	225.0	228.2	231.5	234.7	237.9	220.4	182.0	143.6	105.1	66.8	61.2
105°	302.3	304.8	307.2	309.7	312.1	303.3	283.0	262.7	242.5	222.2	182.3
107.5°	383.8	385.8	387.8	389.8	391.7	394.4	397.6	400.7	403.9	407.2	377.9
110°	438.2	440.0	441.8	443.6	445.4	447.6	450.0	452.5	454.9	457.5	450.0



TEST NUMBER: P332460-840

CATALOG NUMBER: S123RDIW-S1000D1030U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	490.1	491.7	493.3	495.0	496.7	498.7	501.1	503.6	506.1	508.6	508.7
115°	567.0	568.4	569.7	571.1	572.4	574.1	576.1	578.1	580.2	582.2	584.5
117.5°	641.5	643.1	644.8	646.4	648.1	649.4	650.6	651.6	652.6	653.6	655.4
120°	687.7	689.7	691.8	693.8	695.8	697.2	697.8	698.5	699.2	699.8	701.7
122.5°	734.8	736.4	738.1	739.7	741.4	742.7	743.6	744.4	745.3	746.1	747.4
125°	799.3	801.1	802.8	804.7	806.5	807.9	808.7	809.6	810.5	811.4	811.9
127.5°	861.7	863.5	865.4	867.2	869.0	870.4	871.5	872.6	873.6	874.7	875.5
130°	900.7	902.5	904.3	906.2	908.0	909.3	910.2	911.1	912.0	912.9	913.8
132.5°	938.1	939.9	941.6	943.4	945.2	946.5	947.3	948.0	948.7	949.4	950.3
135°	995.0	996.4	997.7	999.1	1000.5	1001.6	1002.5	1003.4	1004.3	1005.2	1005.8
137.5°	1043.7	1045.4	1047.1	1048.8	1050.6	1051.7	1052.2	1052.7	1053.2	1053.7	1054.7
140°	1076.2	1077.5	1078.9	1080.3	1081.6	1082.6	1083.3	1084.0	1084.6	1085.3	1086.2
142.5°	1106.2	1107.5	1108.9	1110.2	1111.7	1112.7	1113.3	1114.0	1114.7	1115.3	1116.1
145°	1148.2	1149.7	1151.3	1153.0	1154.5	1155.5	1156.0	1156.4	1156.9	1157.3	1157.8
147.5°	1187.8	1188.8	1189.8	1190.8	1191.9	1192.7	1193.1	1193.6	1194.0	1194.5	1194.9
150°	1212.1	1212.7	1213.5	1214.2	1214.8	1215.4	1215.8	1216.3	1216.7	1217.2	1217.6
152.5°	1234.1	1234.4	1234.7	1235.0	1235.3	1235.6	1235.9	1236.1	1236.4	1236.7	1237.5
155°	1264.9	1264.4	1263.9	1263.5	1263.0	1262.9	1263.1	1263.3	1263.6	1263.8	1265.0
157.5°	1288.8	1288.8	1288.7	1288.7	1288.6	1288.5	1288.3	1288.0	1287.8	1287.6	1288.9
160°	1303.4	1303.1	1302.9	1302.7	1302.5	1302.2	1302.0	1301.8	1301.6	1301.4	1302.7
162.5°	1317.2	1316.6	1316.1	1315.5	1314.8	1314.4	1314.2	1314.0	1313.7	1313.5	1315.0
165°	1333.8	1333.1	1332.5	1331.8	1331.1	1330.7	1330.4	1330.2	1330.0	1329.8	1331.6
167.5°	1346.8	1345.9	1345.0	1344.1	1343.2	1342.7	1342.7	1342.7	1342.7	1342.7	1344.5
170°	1354.1	1353.2	1352.3	1351.4	1350.5	1350.1	1350.1	1350.1	1350.1	1350.1	1351.8
172.5°	1359.0	1357.9	1356.9	1355.7	1354.6	1354.2	1354.3	1354.5	1354.7	1354.9	1356.8
175°	1365.2	1364.1	1363.0	1361.9	1360.8	1360.3	1360.5	1360.8	1361.0	1361.2	1362.8
177.5°	1366.9	1365.9	1365.1	1364.2	1363.3	1362.9	1363.1	1363.3	1363.4	1363.6	1365.1
180°	1365.2	1365.2	1365.2	1365.2	1365.2	1365.2	1365.2	1365.2	1365.2	1365.2	1365.2



TEST NUMBER: P332460-840

CATALOG NUMBER: S123RDIW-S1000D1030U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8
2.5°	1688.0	1690.7	1693.3	1694.5	1693.9	1693.5	1693.0	1692.5
5°	1676.9	1679.6	1682.3	1683.4	1682.8	1682.2	1681.6	1681.0
7.5°	1653.3	1654.8	1656.3	1656.6	1655.5	1654.5	1653.5	1652.3
10°	1632.1	1632.4	1632.7	1632.1	1630.5	1629.0	1627.5	1626.0
12.5°	1605.8	1605.7	1605.5	1604.5	1602.8	1600.9	1599.2	1597.4
15°	1559.7	1558.2	1556.7	1554.8	1552.7	1550.5	1548.4	1546.3
17.5°	1504.6	1501.4	1498.1	1494.9	1491.8	1488.5	1485.4	1482.2
20°	1466.8	1462.9	1459.0	1455.1	1451.5	1447.7	1444.1	1440.5
22.5°	1426.4	1421.5	1416.5	1412.3	1409.0	1405.5	1402.1	1398.7
25°	1360.3	1353.8	1347.5	1342.5	1339.2	1335.8	1332.5	1329.1
27.5°	1288.2	1279.3	1270.3	1263.3	1258.2	1253.0	1247.9	1242.8
30°	1236.9	1226.5	1216.1	1208.5	1203.6	1198.7	1193.8	1188.9
32.5°	1186.5	1175.2	1163.8	1155.6	1150.4	1145.3	1140.1	1135.0
35°	1111.8	1098.6	1085.5	1076.2	1070.8	1065.2	1059.8	1054.2
37.5°	1031.6	1016.6	1001.8	990.9	984.1	977.3	970.6	963.8
40°	975.7	959.9	943.9	932.5	925.4	918.5	911.4	904.4
42.5°	922.2	904.8	887.5	875.7	869.4	863.1	856.8	850.5
45°	843.4	826.1	808.6	796.3	788.9	781.6	774.3	767.0
47.5°	762.0	743.2	724.2	711.4	704.9	698.4	691.9	685.3
50°	707.1	688.1	669.2	656.2	649.2	642.2	635.2	628.1
52.5°	654.0	634.3	614.6	601.6	595.3	589.1	582.8	576.4
55°	574.8	557.1	539.4	527.5	521.4	515.2	509.2	503.0
57.5°	497.1	480.3	463.6	452.6	447.5	442.2	437.1	431.8
60°	448.1	431.6	415.1	404.2	399.1	393.8	388.7	383.4
62.5°	399.4	384.0	368.4	357.9	352.5	347.1	341.6	336.2
65°	330.2	315.2	300.2	291.0	287.7	284.4	281.0	277.6
67.5°	264.1	252.9	241.8	234.3	230.8	227.1	223.5	219.9
70°	223.3	212.6	201.9	194.9	191.5	188.1	184.8	181.5
72.5°	186.5	177.7	169.1	164.0	162.6	161.2	159.8	158.3
75°	139.6	136.5	133.5	131.7	131.1	130.4	129.8	129.2
77.5°	105.3	103.6	102.0	100.9	100.3	99.7	99.1	98.5
80°	84.7	83.8	82.9	82.2	81.6	81.0	80.3	79.7
82.5°	64.9	64.0	63.1	62.6	62.5	62.4	62.2	62.1
85°	37.3	36.7	36.1	35.7	35.7	35.7	35.7	35.7
87.5°	19.0	19.0	18.9	18.8	18.7	18.5	18.4	18.2
90°	26.2	27.1	28.0	28.6	29.1	29.5	30.0	30.4
92.5°	28.9	30.3	31.7	32.6	32.8	33.1	33.4	33.6
95°	34.6	36.2	37.8	38.6	38.6	38.6	38.6	38.6
97.5°	36.3	38.1	39.9	40.9	41.1	41.3	41.6	41.8
100°	37.1	38.9	40.7	41.7	41.9	42.1	42.4	42.6
102.5°	55.5	50.0	44.3	41.8	42.2	42.6	43.0	43.4
105°	142.4	102.4	62.5	42.8	43.3	43.7	44.1	44.6
107.5°	348.6	319.4	290.1	260.4	230.4	200.4	170.3	140.2
110°	442.6	435.2	427.7	407.9	375.7	343.4	311.1	278.9



TEST NUMBER: P332460-840

CATALOG NUMBER: S123RDIW-S1000D1030U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	508.9	509.0	509.1	505.7	499.0	492.2	485.3	478.6
115°	586.7	589.0	591.3	592.8	593.7	594.6	595.5	596.4
117.5°	657.2	659.0	660.9	661.9	662.0	662.2	662.4	662.6
120°	703.5	705.3	707.1	708.0	708.0	708.0	708.0	708.0
122.5°	748.6	749.9	751.1	751.9	752.0	752.2	752.5	752.7
125°	812.3	812.8	813.2	813.7	814.2	814.6	815.1	815.5
127.5°	876.2	876.9	877.7	877.8	877.3	876.9	876.5	876.0
130°	914.7	915.5	916.5	916.8	916.3	915.8	915.3	914.9
132.5°	951.2	952.1	953.0	953.1	952.5	951.9	951.3	950.6
135°	1006.5	1007.2	1007.8	1007.8	1007.2	1006.5	1005.8	1005.2
137.5°	1055.8	1056.9	1058.0	1058.3	1057.8	1057.4	1056.9	1056.5
140°	1087.1	1088.0	1088.9	1089.1	1088.7	1088.2	1087.8	1087.3
142.5°	1116.8	1117.5	1118.2	1118.2	1117.6	1117.0	1116.4	1115.7
145°	1158.2	1158.7	1159.1	1159.3	1159.3	1159.3	1159.3	1159.3
147.5°	1195.4	1195.8	1196.3	1196.0	1195.0	1193.9	1192.9	1191.8
150°	1218.1	1218.5	1219.0	1218.9	1218.2	1217.5	1216.9	1216.2
152.5°	1238.3	1239.1	1239.9	1239.8	1238.7	1237.7	1236.7	1235.7
155°	1266.1	1267.2	1268.4	1268.2	1266.9	1265.6	1264.1	1262.8
157.5°	1290.3	1291.6	1292.9	1292.7	1291.0	1289.3	1287.5	1285.8
160°	1304.0	1305.5	1306.8	1306.7	1305.0	1303.5	1301.9	1300.3
162.5°	1316.6	1318.2	1319.7	1319.7	1318.4	1317.0	1315.6	1314.1
165°	1333.3	1335.1	1337.0	1337.1	1335.5	1333.9	1332.3	1330.8
167.5°	1346.4	1348.2	1350.0	1350.0	1348.2	1346.4	1344.5	1342.7
170°	1353.6	1355.4	1357.3	1357.3	1355.4	1353.6	1351.8	1350.1
172.5°	1358.6	1360.3	1362.1	1362.0	1360.1	1358.1	1356.0	1354.1
175°	1364.3	1365.9	1367.6	1367.5	1365.6	1363.8	1362.0	1360.2
177.5°	1366.5	1368.0	1369.4	1369.3	1367.5	1365.6	1363.8	1362.0
180°	1365.2	1365.2	1365.2	1365.2	1365.2	1365.2	1365.2	1365.2

(END OF REPORT)