

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332401-840

Luminaire Tested: **S123RDIW-S340D1030U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332401-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIW-S340D1030U840-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1030 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4923.1 lumens  
Efficiency: N/A  
Efficacy: 129.6 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 38  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332401-840

CATALOG NUMBER: S123RDIW-S340D1030U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

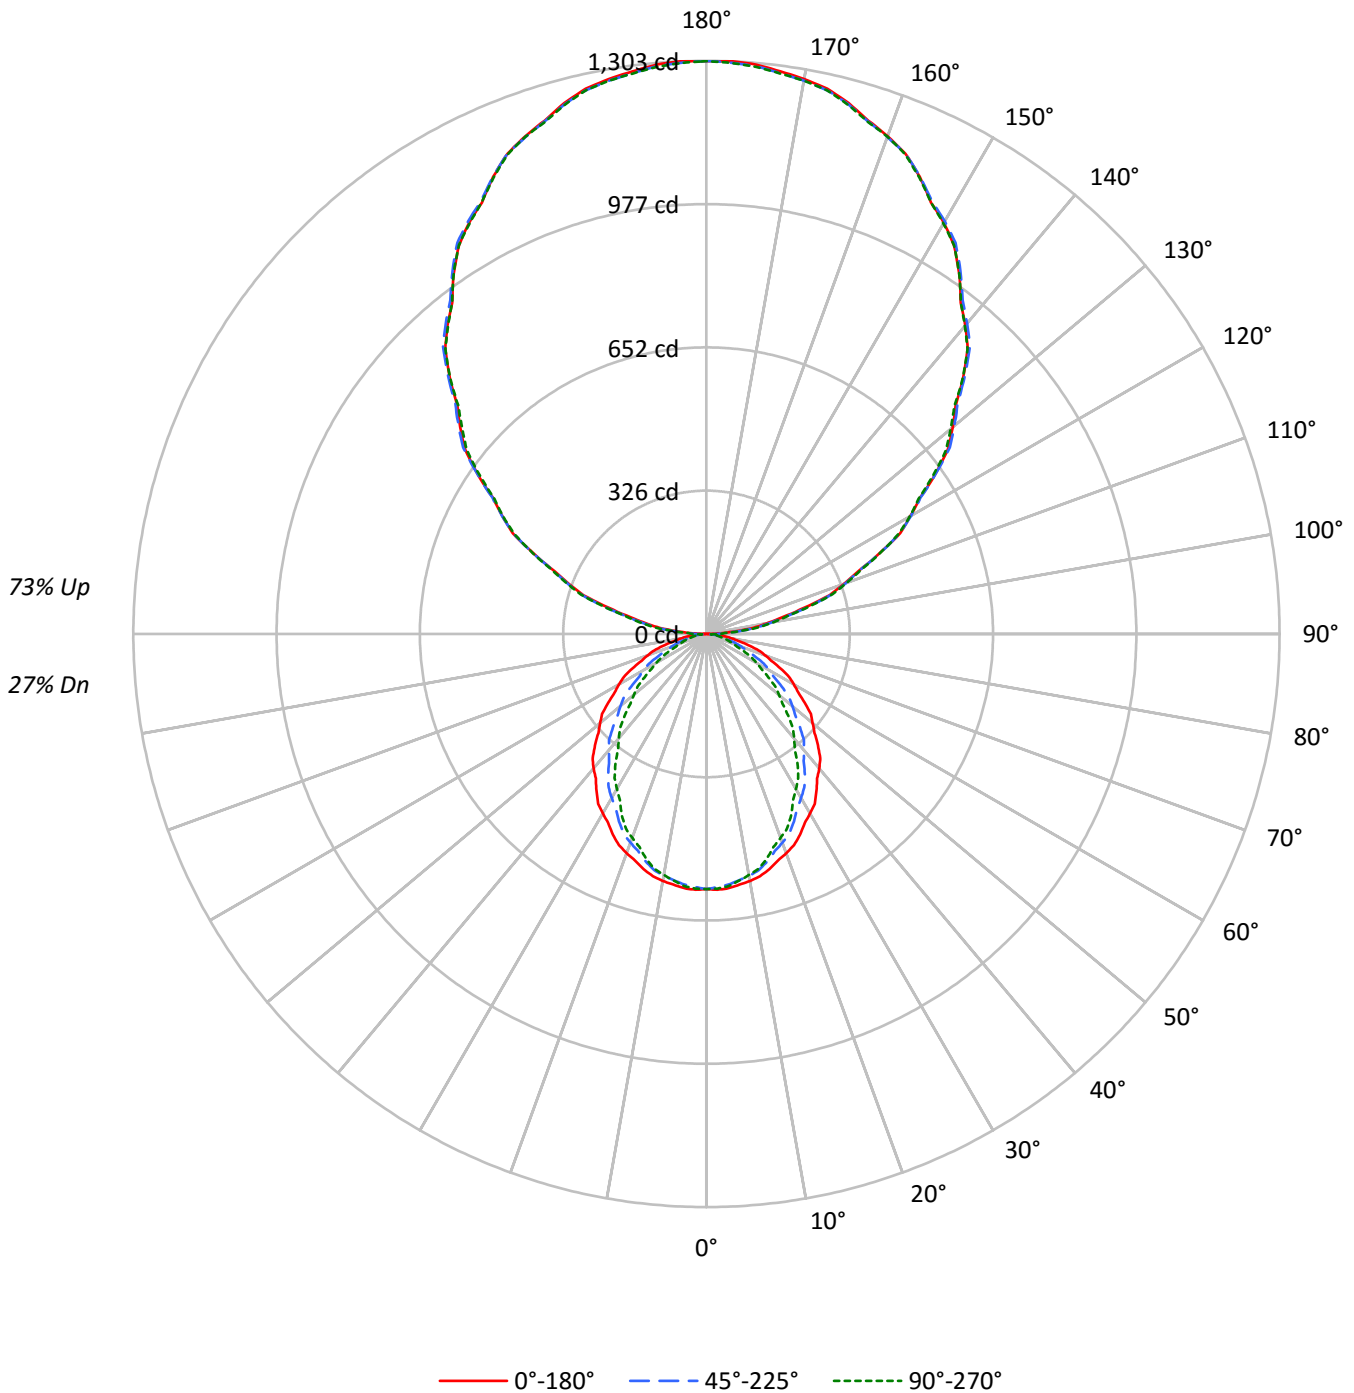



TEST NUMBER: P332401-840

CATALOG NUMBER: S123RDIW-S340D1030U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	70	70	70	52	52	52	35	35	35	27
1	93	89	85	82	83	79	76	73	62	60	58	46	44	43	31	30	30	23
2	85	78	72	67	75	69	65	60	54	51	48	40	38	36	27	26	25	19
3	77	68	61	56	69	61	55	51	48	44	41	36	33	31	24	23	22	17
4	71	60	53	47	63	54	48	43	43	38	35	32	29	27	22	20	19	14
5	65	54	46	40	58	48	42	37	38	33	30	29	25	23	20	18	16	13
6	60	48	40	35	53	43	37	32	34	29	26	26	23	20	18	16	14	11
7	55	43	36	30	49	39	32	28	31	26	23	23	20	18	16	14	13	10
8	51	39	32	27	45	35	29	24	28	23	20	21	18	16	15	13	11	9
9	47	36	28	24	42	32	26	22	26	21	18	20	16	14	14	12	10	8
10	44	33	26	21	39	30	23	19	24	19	16	18	15	13	13	11	9	7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6245	6245	6245
5°	6269	6183	6218
10°	6233	6105	6084
15°	6167	5962	5899
20°	6074	5783	5648
25°	5980	5583	5404
30°	5854	5351	5059
35°	5727	5119	4742
40°	5606	4846	4350
45°	5451	4576	3997
50°	5280	4270	3600
55°	5104	3920	3232
60°	4943	3546	2827
65°	4735	3140	2420
70°	4472	2634	1954
75°	4092	2075	1838
80°	3645	1841	1692
85°	3075	1618	1507



TEST NUMBER: P332401-840

CATALOG NUMBER: S123RDIW-S340D1030U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	54.5	1.1
10°-20°	151.6	3.1
20°-30°	218.3	4.4
30°-40°	245.9	5.0
40°-50°	235.2	4.8
50°-60°	192.6	3.9
60°-70°	130.0	2.6
70°-80°	65.4	1.3
80°-90°	21.1	0.4
90°-100°	84.9	1.7
100°-110°	254.0	5.2
110°-120°	431.9	8.8
120°-130°	568.1	11.5
130°-140°	638.6	13.0
140°-150°	627.7	12.8
150°-160°	528.4	10.7
160°-170°	351.8	7.1
170°-180°	123.2	2.5
0°-30°	424.3	8.6
0°-40°	670.2	13.6
0°-60°	1098.1	22.3
0°-90°	1314.5	26.7
90°-120°	770.8	15.7
90°-150°	2605.2	52.9
90°-180°	3609.0	73.3
0°-180°	4923.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	580	580	580	580	580	
5°	580	578	572	576	576	55
15°	553	548	535	533	529	156
25°	504	491	470	460	455	231
35°	436	418	390	370	361	273
45°	358	336	301	275	263	276
55°	272	248	209	183	172	244
65°	186	159	123	101	95	184
75°	98	76	50	45	44	105
85°	25	15	13	12	12	28
90°	1	11	24	29	31	5
95°	60	68	76	80	80	68
105°	230	233	242	242	244	247
115°	435	438	436	437	436	430
125°	636	639	637	633	629	567
135°	826	831	831	827	825	636
145°	1002	1004	1007	1006	1002	625
155°	1147	1147	1148	1151	1145	528
165°	1249	1246	1246	1252	1245	352
175°	1299	1296	1295	1301	1294	123
180°	1302	1302	1302	1302	1302	



TEST NUMBER: P332401-840

CATALOG NUMBER: S123RDIW-S340D1030U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2
2.5°	582.1	581.7	581.4	581.1	580.8	580.1	579.1	578.0	577.0	576.0	576.9
5°	580.2	579.7	579.2	578.7	578.0	577.2	575.9	574.7	573.4	572.2	573.1
7.5°	574.8	574.2	573.7	573.1	572.6	571.5	569.9	568.3	566.5	564.9	565.4
10°	570.3	569.6	568.9	568.2	567.3	566.0	564.2	562.3	560.4	558.6	558.7
12.5°	563.9	563.1	562.3	561.5	560.7	559.1	556.7	554.5	552.2	549.9	549.8
15°	553.4	552.2	551.1	549.9	548.8	546.7	543.8	540.9	538.0	535.0	534.5
17.5°	540.1	538.8	537.5	536.0	534.7	532.2	528.5	524.7	521.1	517.4	516.2
20°	530.3	528.7	526.9	525.3	523.6	520.8	516.8	512.8	508.9	504.9	503.5
22.5°	519.4	517.5	515.5	513.6	511.7	508.7	504.4	500.2	495.9	491.7	490.0
25°	503.5	500.9	498.3	495.6	493.0	489.3	484.5	479.7	474.8	470.1	467.9
27.5°	484.2	481.3	478.4	475.5	472.6	468.6	463.2	457.8	452.4	447.1	444.0
30°	471.0	467.9	464.7	461.6	458.5	453.9	448.1	442.2	436.4	430.5	427.0
32.5°	457.9	454.2	450.7	447.2	443.6	438.8	432.5	426.4	420.2	413.9	410.1
35°	435.8	431.9	428.2	424.4	420.7	415.6	409.1	402.5	396.1	389.6	385.2
37.5°	413.3	409.1	405.0	400.8	396.6	391.0	384.2	377.2	370.3	363.3	358.3
40°	399.0	394.5	389.8	385.3	380.6	374.6	367.2	359.7	352.3	344.9	339.5
42.5°	382.8	378.2	373.7	369.0	364.5	358.3	350.6	343.0	335.3	327.6	321.6
45°	358.1	353.4	348.7	344.0	339.2	332.9	324.9	316.8	308.7	300.6	294.7
47.5°	333.4	328.2	323.0	317.8	312.7	306.1	298.0	289.9	282.0	273.9	267.4
50°	315.3	310.3	305.5	300.5	295.6	288.9	280.4	272.0	263.5	255.0	248.5
52.5°	299.1	293.8	288.4	283.1	277.7	270.8	262.5	254.1	245.7	237.3	230.7
55°	272.0	266.8	261.8	256.6	251.5	244.5	235.6	226.7	217.8	208.9	202.9
57.5°	246.9	241.4	235.8	230.1	224.6	217.3	208.4	199.4	190.6	181.7	175.9
60°	229.6	223.9	218.1	212.4	206.6	199.4	190.8	182.1	173.4	164.7	159.1
62.5°	212.3	206.5	200.8	195.1	189.3	182.1	173.4	164.7	156.0	147.3	142.1
65°	185.9	180.2	174.4	168.6	162.9	155.9	147.7	139.6	131.5	123.3	118.2
67.5°	159.5	153.6	147.7	142.0	136.1	129.4	121.5	113.7	105.8	98.1	94.2
70°	142.1	136.4	130.8	125.1	119.6	113.0	105.7	98.4	91.1	83.7	80.1
72.5°	124.8	119.3	113.7	108.1	102.5	96.4	89.8	83.1	76.4	69.8	66.9
75°	98.4	93.3	88.3	83.3	78.3	72.9	67.2	61.4	55.6	49.9	48.9
77.5°	74.2	69.7	65.1	60.6	56.1	52.0	48.3	44.5	40.9	37.2	36.7
80°	58.8	54.5	50.3	45.9	41.7	38.5	36.3	34.0	31.8	29.7	29.3
82.5°	44.1	40.4	36.8	33.0	29.3	27.0	26.0	24.9	23.9	22.8	22.5
85°	24.9	22.6	20.3	18.1	15.8	14.4	14.1	13.8	13.5	13.1	12.9
87.5°	9.2	8.8	8.3	7.9	7.4	7.5	8.1	8.6	9.2	9.8	9.9
90°	1.0	3.3	5.6	7.9	10.1	12.7	15.7	18.7	21.6	24.5	25.4
92.5°	24.7	26.3	27.9	29.4	30.9	32.5	34.2	36.0	37.6	39.3	40.0
95°	60.4	61.9	63.5	65.1	66.8	68.5	70.3	72.1	73.9	75.7	76.6
97.5°	107.2	108.4	109.6	110.8	112.0	113.2	114.5	115.8	117.1	118.5	119.6
100°	139.2	140.5	141.9	143.2	144.6	145.8	147.0	148.1	149.3	150.4	151.1
102.5°	176.0	176.8	177.6	178.4	179.3	180.4	181.9	183.4	184.9	186.4	187.1
105°	230.2	230.7	231.2	231.6	232.1	233.3	235.3	237.3	239.4	241.5	241.5
107.5°	293.3	293.5	293.8	294.1	294.3	294.9	295.7	296.5	297.3	298.1	298.8
110°	332.5	333.0	333.5	333.9	334.4	334.8	335.3	335.7	336.2	336.6	337.5



TEST NUMBER: P332401-840

CATALOG NUMBER: S123RDIW-S340D1030U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	373.4	373.8	374.0	374.3	374.6	374.7	374.8	374.9	375.0	375.1	376.2
115°	434.8	435.5	436.2	436.9	437.6	437.7	437.2	436.8	436.3	435.9	436.1
117.5°	496.7	497.1	497.6	498.0	498.5	498.4	497.8	497.2	496.6	496.0	495.9
120°	535.1	536.4	537.9	539.2	540.6	540.7	539.5	538.4	537.2	536.1	535.8
122.5°	575.2	576.2	577.2	578.1	579.2	579.4	578.9	578.2	577.6	577.0	576.4
125°	636.4	637.0	637.7	638.4	639.1	639.2	638.7	638.3	637.8	637.4	636.5
127.5°	692.9	694.3	695.8	697.2	698.6	699.1	698.6	698.1	697.6	697.1	695.9
130°	730.5	732.4	734.2	736.0	737.8	738.3	737.7	737.0	736.3	735.6	734.7
132.5°	768.1	769.9	771.7	773.7	775.5	776.1	775.6	775.1	774.6	774.1	773.0
135°	825.7	827.0	828.4	829.7	831.1	831.6	831.4	831.2	831.0	830.7	829.8
137.5°	878.9	880.0	881.1	882.2	883.4	884.2	884.8	885.4	886.1	886.7	885.7
140°	915.6	916.9	918.0	919.1	920.2	920.9	921.1	921.4	921.6	921.8	921.6
142.5°	949.3	950.4	951.5	952.6	953.8	954.5	954.9	955.3	955.8	956.2	955.9
145°	1001.6	1002.1	1002.5	1003.0	1003.4	1004.0	1004.7	1005.4	1006.0	1006.7	1006.5
147.5°	1047.4	1048.2	1049.0	1050.0	1050.8	1051.5	1052.1	1052.8	1053.4	1054.0	1054.0
150°	1079.3	1079.8	1080.3	1080.8	1081.2	1081.7	1082.1	1082.6	1083.0	1083.5	1083.5
152.5°	1105.6	1106.2	1106.8	1107.5	1108.1	1108.5	1108.8	1109.1	1109.4	1109.6	1110.0
155°	1146.9	1146.9	1146.9	1146.9	1146.9	1147.0	1147.2	1147.5	1147.7	1147.9	1148.8
157.5°	1182.1	1181.8	1181.5	1181.2	1181.0	1180.9	1181.1	1181.3	1181.5	1181.6	1182.7
160°	1204.2	1203.8	1203.3	1202.9	1202.3	1202.1	1202.1	1202.1	1202.1	1202.1	1203.3
162.5°	1223.9	1223.2	1222.5	1221.9	1221.3	1221.0	1221.2	1221.4	1221.6	1221.8	1222.9
165°	1249.2	1248.5	1247.9	1247.2	1246.5	1246.2	1246.2	1246.2	1246.2	1246.2	1247.5
167.5°	1269.5	1268.6	1267.7	1266.8	1265.9	1265.5	1265.7	1265.9	1266.1	1266.2	1267.6
170°	1280.9	1280.0	1279.1	1278.2	1277.3	1276.9	1276.9	1276.9	1276.9	1276.9	1278.4
172.5°	1289.9	1289.0	1288.1	1287.2	1286.3	1285.9	1285.9	1285.9	1285.9	1285.9	1287.3
175°	1299.4	1298.5	1297.6	1296.7	1295.8	1295.3	1295.3	1295.3	1295.3	1295.3	1296.7
177.5°	1303.2	1302.5	1301.8	1301.0	1300.3	1300.0	1300.0	1300.0	1300.0	1300.0	1301.0
180°	1302.4	1302.4	1302.4	1302.4	1302.4	1302.4	1302.4	1302.4	1302.4	1302.4	1302.4



TEST NUMBER: P332401-840

CATALOG NUMBER: S123RDIW-S340D1030U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2
2.5°	577.8	578.8	579.8	580.1	580.0	579.8	579.6	579.5
5°	574.1	575.0	575.9	576.3	576.1	575.9	575.7	575.5
7.5°	566.0	566.5	567.0	567.1	566.7	566.4	566.0	565.7
10°	558.8	558.9	559.0	558.8	558.3	557.7	557.1	556.6
12.5°	549.8	549.7	549.7	549.3	548.7	548.1	547.4	546.8
15°	533.9	533.4	532.9	532.3	531.6	530.8	530.1	529.4
17.5°	515.1	514.0	512.9	511.8	510.7	509.6	508.6	507.5
20°	502.2	500.8	499.5	498.2	496.9	495.6	494.4	493.1
22.5°	488.4	486.7	484.9	483.5	482.3	481.2	480.0	478.9
25°	465.6	463.5	461.3	459.6	458.5	457.4	456.2	455.0
27.5°	441.0	438.0	434.9	432.5	430.7	429.0	427.3	425.5
30°	423.4	419.9	416.4	413.7	412.0	410.4	408.7	407.0
32.5°	406.2	402.3	398.4	395.6	393.8	392.1	390.3	388.6
35°	380.6	376.1	371.6	368.4	366.6	364.7	362.7	360.9
37.5°	353.1	348.0	343.0	339.2	336.9	334.6	332.2	329.9
40°	334.1	328.6	323.2	319.2	316.8	314.5	312.0	309.6
42.5°	315.7	309.8	303.9	299.8	297.6	295.5	293.4	291.1
45°	288.7	282.8	276.8	272.6	270.1	267.6	265.1	262.6
47.5°	260.8	254.4	247.9	243.6	241.4	239.1	236.8	234.6
50°	242.1	235.6	229.1	224.7	222.3	219.8	217.4	215.0
52.5°	223.9	217.1	210.5	206.0	203.8	201.7	199.5	197.3
55°	196.8	190.8	184.7	180.6	178.5	176.4	174.3	172.2
57.5°	170.2	164.4	158.8	154.9	153.2	151.4	149.7	147.8
60°	153.4	147.7	142.1	138.4	136.6	134.8	133.1	131.3
62.5°	136.7	131.5	126.1	122.5	120.7	118.9	116.9	115.1
65°	113.0	108.0	102.8	99.7	98.5	97.4	96.2	95.0
67.5°	90.4	86.5	82.7	80.2	79.0	77.8	76.5	75.3
70°	76.4	72.8	69.1	66.8	65.5	64.4	63.2	62.1
72.5°	63.8	60.9	57.9	56.1	55.6	55.1	54.7	54.2
75°	47.8	46.8	45.6	45.0	44.8	44.6	44.4	44.2
77.5°	36.1	35.4	34.9	34.5	34.3	34.1	33.9	33.7
80°	29.0	28.7	28.4	28.2	27.9	27.7	27.5	27.3
82.5°	22.2	21.9	21.6	21.4	21.4	21.3	21.3	21.3
85°	12.7	12.5	12.3	12.2	12.2	12.2	12.2	12.2
87.5°	10.0	10.1	10.2	10.3	10.3	10.3	10.3	10.3
90°	26.4	27.3	28.2	28.9	29.3	29.8	30.2	30.7
92.5°	40.7	41.5	42.2	42.4	42.1	41.9	41.6	41.3
95°	77.6	78.5	79.4	79.8	79.8	79.8	79.8	79.8
97.5°	120.6	121.6	122.7	123.1	123.0	123.0	122.9	122.8
100°	151.8	152.5	153.1	153.7	154.1	154.6	155.0	155.5
102.5°	187.7	188.4	189.1	189.5	189.3	189.2	189.1	189.0
105°	241.5	241.5	241.5	241.7	242.2	242.6	243.1	243.5
107.5°	299.6	300.3	301.0	301.2	301.0	300.7	300.4	300.1
110°	338.4	339.3	340.2	340.4	340.0	339.5	339.1	338.6





TEST NUMBER: P332401-840

CATALOG NUMBER: S123RDIW-S340D1030U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	377.3	378.3	379.4	379.9	379.8	379.7	379.7	379.6
115°	436.3	436.6	436.8	436.8	436.6	436.3	436.1	435.9
117.5°	495.9	495.8	495.8	495.4	494.8	494.2	493.5	492.9
120°	535.6	535.4	535.2	534.8	534.4	533.9	533.5	533.0
122.5°	575.8	575.2	574.7	574.0	573.4	572.8	572.2	571.5
125°	635.6	634.7	633.8	632.9	632.0	631.1	630.2	629.2
127.5°	694.6	693.4	692.1	690.8	689.8	688.8	687.7	686.7
130°	733.8	732.9	732.0	730.7	729.1	727.5	726.0	724.4
132.5°	771.9	770.8	769.7	768.6	767.3	766.1	764.9	763.7
135°	828.9	828.0	827.1	826.5	826.0	825.6	825.1	824.7
137.5°	884.7	883.7	882.8	881.9	881.0	880.2	879.3	878.5
140°	921.4	921.1	920.9	920.0	918.4	916.9	915.2	913.6
142.5°	955.7	955.5	955.3	954.5	953.3	952.1	950.9	949.7
145°	1006.3	1006.0	1005.8	1005.2	1004.3	1003.4	1002.5	1001.6
147.5°	1054.0	1054.0	1054.0	1053.3	1052.0	1050.6	1049.2	1047.8
150°	1083.5	1083.5	1083.5	1082.8	1081.5	1080.1	1078.7	1077.3
152.5°	1110.3	1110.8	1111.2	1110.8	1109.5	1108.3	1107.1	1106.0
155°	1149.7	1150.6	1151.5	1151.2	1149.6	1148.0	1146.5	1144.9
157.5°	1183.6	1184.6	1185.5	1185.4	1184.1	1182.9	1181.5	1180.2
160°	1204.5	1205.6	1206.7	1206.8	1205.9	1205.0	1204.1	1203.2
162.5°	1224.1	1225.2	1226.4	1226.2	1224.8	1223.2	1221.8	1220.3
165°	1248.9	1250.2	1251.6	1251.5	1249.9	1248.3	1246.7	1245.2
167.5°	1269.0	1270.4	1271.8	1271.8	1270.4	1269.0	1267.6	1266.2
170°	1280.0	1281.6	1283.2	1283.2	1281.6	1280.0	1278.4	1276.9
172.5°	1288.7	1290.1	1291.5	1291.4	1289.8	1288.2	1286.6	1285.1
175°	1298.0	1299.4	1300.7	1300.6	1299.0	1297.4	1295.9	1294.2
177.5°	1302.1	1303.2	1304.3	1304.2	1302.9	1301.7	1300.4	1299.2
180°	1302.4	1302.4	1302.4	1302.4	1302.4	1302.4	1302.4	1302.4

(END OF REPORT)