

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332409-840

Luminaire Tested: **S123RDIW-S340D1535U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332409-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIW-S340D1535U840-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1535 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6687.5 lumens  
Efficiency: N/A  
Efficacy: 125.2 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 53.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332409-840

CATALOG NUMBER: S123RDIW-S340D1535U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

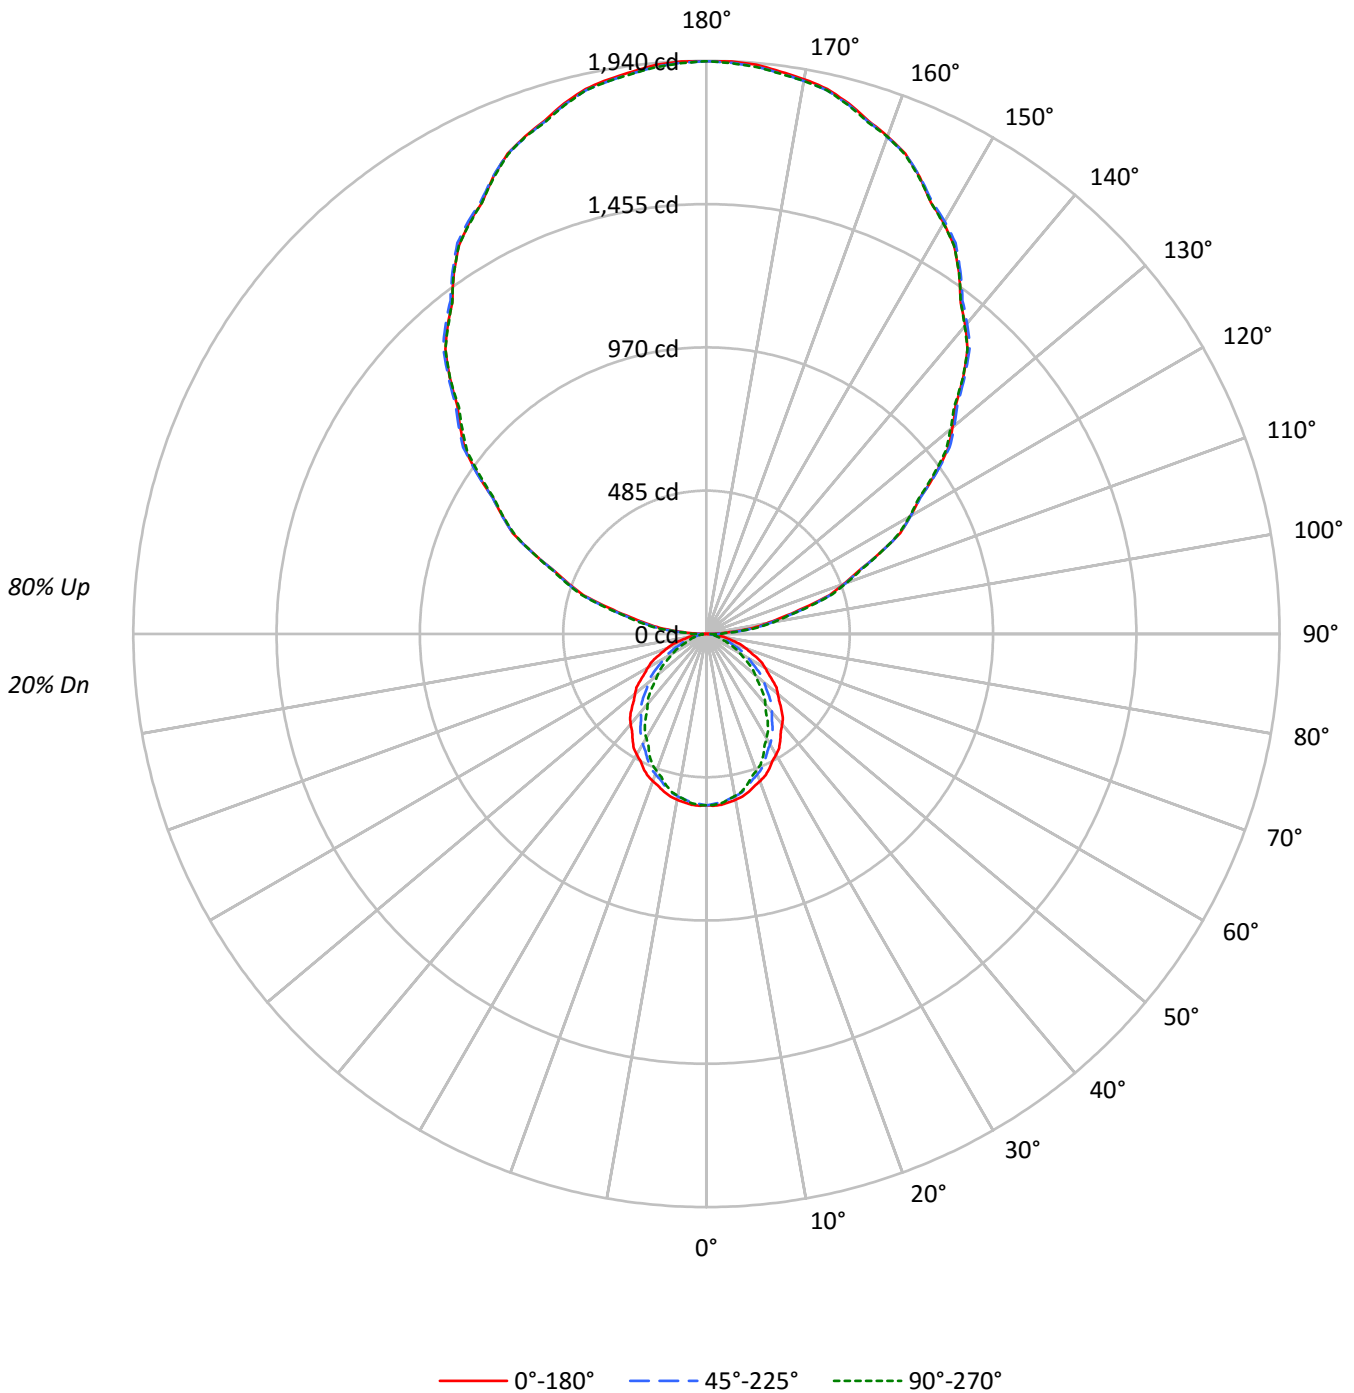



TEST NUMBER: P332409-840

CATALOG NUMBER: S123RDIW-S340D1535U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	88	88	88	88	66	66	66	47	47	47	28	28	28	20
1	91	87	83	80	80	77	74	71	58	56	55	41	40	39	25	25	24	17
2	83	76	70	65	73	67	63	59	51	48	45	36	34	33	22	21	20	14
3	76	67	60	55	67	59	54	49	45	41	38	32	30	28	20	19	17	12
4	69	59	52	46	61	52	46	41	40	36	32	28	26	24	18	16	15	11
5	63	52	45	39	56	47	40	35	36	31	28	26	23	20	16	14	13	9
6	58	47	39	34	51	42	35	31	32	28	24	23	20	18	14	13	12	8
7	54	42	35	29	47	38	31	27	29	24	21	21	18	16	13	12	10	7
8	50	38	31	26	44	34	28	23	26	22	19	19	16	14	12	10	9	7
9	46	35	28	23	41	31	25	21	24	20	17	17	14	12	11	10	8	6
10	43	32	25	20	38	28	22	18	22	18	15	16	13	11	10	9	8	5

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6245	6245	6245
5°	6269	6183	6218
10°	6233	6105	6084
15°	6167	5962	5899
20°	6074	5783	5648
25°	5980	5583	5404
30°	5854	5351	5059
35°	5727	5119	4742
40°	5606	4846	4350
45°	5451	4576	3997
50°	5280	4270	3600
55°	5104	3920	3232
60°	4943	3546	2827
65°	4735	3140	2420
70°	4472	2634	1954
75°	4092	2075	1838
80°	3645	1841	1692
85°	3075	1618	1507



TEST NUMBER: P332409-840

CATALOG NUMBER: S123RDIW-S340D1535U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	54.5	0.8
10°-20°	151.6	2.3
20°-30°	218.3	3.3
30°-40°	245.9	3.7
40°-50°	235.2	3.5
50°-60°	192.6	2.9
60°-70°	130.0	1.9
70°-80°	65.4	1.0
80°-90°	23.0	0.3
90°-100°	126.3	1.9
100°-110°	378.0	5.7
110°-120°	642.9	9.6
120°-130°	845.6	12.6
130°-140°	950.5	14.2
140°-150°	934.3	14.0
150°-160°	786.5	11.8
160°-170°	523.6	7.8
170°-180°	183.3	2.7
0°-30°	424.3	6.3
0°-40°	670.2	10.0
0°-60°	1098.1	16.4
0°-90°	1316.4	19.7
90°-120°	1147.2	17.2
90°-150°	3877.6	58.0
90°-180°	5371.0	80.3
0°-180°	6687.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	580	580	580	580	580	
5°	580	578	572	576	576	55
15°	553	548	535	533	529	156
25°	504	491	470	460	455	231
35°	436	418	390	370	361	273
45°	358	336	301	275	263	276
55°	272	248	209	183	172	244
65°	186	159	123	101	95	184
75°	98	76	50	45	44	105
85°	25	15	13	12	12	28
90°	2	17	37	42	46	7
95°	90	101	113	118	119	101
105°	343	346	359	360	362	367
115°	647	651	649	650	649	640
125°	947	951	949	943	936	844
135°	1229	1238	1237	1231	1227	947
145°	1491	1494	1498	1497	1491	931
155°	1707	1707	1709	1714	1704	785
165°	1859	1855	1855	1863	1853	524
175°	1934	1928	1928	1936	1926	184
180°	1938	1938	1938	1938	1938	



TEST NUMBER: P332409-840

CATALOG NUMBER: S123RDIW-S340D1535U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2
2.5°	582.1	581.7	581.4	581.1	580.8	580.1	579.1	578.0	577.0	576.0	576.9
5°	580.2	579.7	579.2	578.7	578.0	577.2	575.9	574.7	573.4	572.2	573.1
7.5°	574.8	574.2	573.7	573.1	572.6	571.5	569.9	568.3	566.5	564.9	565.4
10°	570.3	569.6	568.9	568.2	567.3	566.0	564.2	562.3	560.4	558.6	558.7
12.5°	563.9	563.1	562.3	561.5	560.7	559.1	556.7	554.5	552.2	549.9	549.8
15°	553.4	552.2	551.1	549.9	548.8	546.7	543.8	540.9	538.0	535.0	534.5
17.5°	540.1	538.8	537.5	536.0	534.7	532.2	528.5	524.7	521.1	517.4	516.2
20°	530.3	528.7	526.9	525.3	523.6	520.8	516.8	512.8	508.9	504.9	503.5
22.5°	519.4	517.5	515.5	513.6	511.7	508.7	504.4	500.2	495.9	491.7	490.0
25°	503.5	500.9	498.3	495.6	493.0	489.3	484.5	479.7	474.8	470.1	467.9
27.5°	484.2	481.3	478.4	475.5	472.6	468.6	463.2	457.8	452.4	447.1	444.0
30°	471.0	467.9	464.7	461.6	458.5	453.9	448.1	442.2	436.4	430.5	427.0
32.5°	457.9	454.2	450.7	447.2	443.6	438.8	432.5	426.4	420.2	413.9	410.1
35°	435.8	431.9	428.2	424.4	420.7	415.6	409.1	402.5	396.1	389.6	385.2
37.5°	413.3	409.1	405.0	400.8	396.6	391.0	384.2	377.2	370.3	363.3	358.3
40°	399.0	394.5	389.8	385.3	380.6	374.6	367.2	359.7	352.3	344.9	339.5
42.5°	382.8	378.2	373.7	369.0	364.5	358.3	350.6	343.0	335.3	327.6	321.6
45°	358.1	353.4	348.7	344.0	339.2	332.9	324.9	316.8	308.7	300.6	294.7
47.5°	333.4	328.2	323.0	317.8	312.7	306.1	298.0	289.9	282.0	273.9	267.4
50°	315.3	310.3	305.5	300.5	295.6	288.9	280.4	272.0	263.5	255.0	248.5
52.5°	299.1	293.8	288.4	283.1	277.7	270.8	262.5	254.1	245.7	237.3	230.7
55°	272.0	266.8	261.8	256.6	251.5	244.5	235.6	226.7	217.8	208.9	202.9
57.5°	246.9	241.4	235.8	230.1	224.6	217.3	208.4	199.4	190.6	181.7	175.9
60°	229.6	223.9	218.1	212.4	206.6	199.4	190.8	182.1	173.4	164.7	159.1
62.5°	212.3	206.5	200.8	195.1	189.3	182.1	173.4	164.7	156.0	147.3	142.1
65°	185.9	180.2	174.4	168.6	162.9	155.9	147.7	139.6	131.5	123.3	118.2
67.5°	159.5	153.6	147.7	142.0	136.1	129.4	121.5	113.7	105.8	98.1	94.2
70°	142.1	136.4	130.8	125.1	119.6	113.0	105.7	98.4	91.1	83.7	80.1
72.5°	124.8	119.3	113.7	108.1	102.5	96.4	89.8	83.1	76.4	69.8	66.9
75°	98.4	93.3	88.3	83.3	78.3	72.9	67.2	61.4	55.6	49.9	48.9
77.5°	74.2	69.7	65.1	60.6	56.1	52.0	48.3	44.5	40.9	37.2	36.7
80°	58.8	54.5	50.3	45.9	41.7	38.5	36.3	34.0	31.8	29.7	29.3
82.5°	44.1	40.4	36.8	33.0	29.3	27.0	26.0	24.9	23.9	22.8	22.5
85°	24.9	22.6	20.3	18.1	15.8	14.4	14.1	13.8	13.5	13.1	12.9
87.5°	9.3	9.1	8.9	8.6	8.4	8.7	9.6	10.4	11.3	12.2	12.4
90°	1.5	4.9	8.3	11.7	15.0	19.0	23.3	27.8	32.1	36.6	37.9
92.5°	36.9	39.2	41.4	43.7	46.0	48.5	51.0	53.4	55.9	58.5	59.6
95°	89.9	92.2	94.6	96.9	99.4	101.9	104.5	107.2	110.0	112.7	114.0
97.5°	159.6	161.4	163.1	164.9	166.6	168.4	170.5	172.4	174.4	176.3	177.9
100°	207.1	209.1	211.2	213.2	215.2	217.1	218.7	220.5	222.2	223.9	224.9
102.5°	262.0	263.2	264.4	265.6	266.8	268.5	270.7	273.0	275.2	277.4	278.5
105°	342.6	343.4	344.0	344.7	345.4	347.2	350.2	353.3	356.4	359.4	359.4
107.5°	436.5	436.9	437.3	437.7	438.1	438.9	440.1	441.3	442.5	443.7	444.8
110°	494.9	495.6	496.2	497.0	497.7	498.3	499.0	499.7	500.3	501.0	502.4



TEST NUMBER: P332409-840

CATALOG NUMBER: S123RDIW-S340D1535U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	555.8	556.2	556.6	557.0	557.4	557.7	557.8	558.0	558.2	558.3	559.9
115°	647.2	648.2	649.2	650.3	651.3	651.5	650.8	650.1	649.4	648.7	649.0
117.5°	739.2	739.8	740.5	741.2	741.8	741.7	740.9	740.0	739.1	738.3	738.2
120°	796.5	798.5	800.5	802.5	804.6	804.8	803.0	801.3	799.6	798.0	797.6
122.5°	856.2	857.6	859.1	860.6	862.1	862.4	861.5	860.6	859.8	858.9	858.0
125°	947.2	948.2	949.3	950.3	951.3	951.4	950.8	950.1	949.4	948.8	947.4
127.5°	1031.3	1033.4	1035.6	1037.7	1040.0	1040.7	1039.9	1039.2	1038.4	1037.6	1035.7
130°	1087.3	1090.0	1092.7	1095.4	1098.1	1098.9	1097.9	1096.9	1095.9	1094.9	1093.6
132.5°	1143.4	1146.0	1148.7	1151.4	1154.2	1155.2	1154.4	1153.7	1152.9	1152.2	1150.5
135°	1228.9	1230.9	1232.9	1235.0	1237.1	1237.9	1237.6	1237.2	1236.9	1236.6	1235.2
137.5°	1308.1	1309.8	1311.5	1313.2	1314.8	1316.2	1317.1	1317.9	1318.8	1319.7	1318.3
140°	1362.9	1364.6	1366.3	1368.0	1369.7	1370.7	1371.1	1371.4	1371.7	1372.1	1371.7
142.5°	1412.9	1414.5	1416.2	1418.0	1419.7	1420.8	1421.4	1422.0	1422.6	1423.2	1422.9
145°	1490.9	1491.6	1492.2	1492.9	1493.6	1494.4	1495.4	1496.4	1497.4	1498.4	1498.1
147.5°	1559.0	1560.2	1561.5	1562.8	1564.0	1565.0	1566.0	1566.9	1567.8	1568.8	1568.8
150°	1606.6	1607.3	1607.9	1608.6	1609.3	1609.9	1610.6	1611.3	1611.9	1612.7	1612.7
152.5°	1645.6	1646.5	1647.5	1648.4	1649.3	1650.0	1650.4	1650.8	1651.2	1651.6	1652.2
155°	1707.1	1707.1	1707.1	1707.1	1707.1	1707.3	1707.6	1707.9	1708.3	1708.6	1710.0
157.5°	1759.5	1759.1	1758.7	1758.3	1757.9	1757.8	1758.1	1758.3	1758.6	1758.9	1760.3
160°	1792.4	1791.7	1791.0	1790.3	1789.7	1789.3	1789.3	1789.3	1789.3	1789.3	1791.0
162.5°	1821.6	1820.7	1819.7	1818.8	1817.9	1817.5	1817.8	1818.1	1818.3	1818.6	1820.3
165°	1859.4	1858.4	1857.3	1856.3	1855.3	1854.8	1854.8	1854.8	1854.8	1854.8	1856.8
167.5°	1889.6	1888.1	1886.8	1885.4	1884.1	1883.6	1883.8	1884.1	1884.4	1884.6	1886.7
170°	1906.5	1905.2	1903.9	1902.5	1901.2	1900.5	1900.5	1900.5	1900.5	1900.5	1902.9
172.5°	1920.0	1918.6	1917.2	1915.9	1914.6	1913.9	1913.9	1913.9	1913.9	1913.9	1916.0
175°	1934.0	1932.7	1931.3	1930.0	1928.5	1927.9	1927.9	1927.9	1927.9	1927.9	1930.0
177.5°	1939.7	1938.7	1937.6	1936.5	1935.4	1934.9	1934.9	1934.9	1934.9	1934.9	1936.5
180°	1938.5	1938.5	1938.5	1938.5	1938.5	1938.5	1938.5	1938.5	1938.5	1938.5	1938.5



TEST NUMBER: P332409-840

CATALOG NUMBER: S123RDIW-S340D1535U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2
2.5°	577.8	578.8	579.8	580.1	580.0	579.8	579.6	579.5
5°	574.1	575.0	575.9	576.3	576.1	575.9	575.7	575.5
7.5°	566.0	566.5	567.0	567.1	566.7	566.4	566.0	565.7
10°	558.8	558.9	559.0	558.8	558.3	557.7	557.1	556.6
12.5°	549.8	549.7	549.7	549.3	548.7	548.1	547.4	546.8
15°	533.9	533.4	532.9	532.3	531.6	530.8	530.1	529.4
17.5°	515.1	514.0	512.9	511.8	510.7	509.6	508.6	507.5
20°	502.2	500.8	499.5	498.2	496.9	495.6	494.4	493.1
22.5°	488.4	486.7	484.9	483.5	482.3	481.2	480.0	478.9
25°	465.6	463.5	461.3	459.6	458.5	457.4	456.2	455.0
27.5°	441.0	438.0	434.9	432.5	430.7	429.0	427.3	425.5
30°	423.4	419.9	416.4	413.7	412.0	410.4	408.7	407.0
32.5°	406.2	402.3	398.4	395.6	393.8	392.1	390.3	388.6
35°	380.6	376.1	371.6	368.4	366.6	364.7	362.7	360.9
37.5°	353.1	348.0	343.0	339.2	336.9	334.6	332.2	329.9
40°	334.1	328.6	323.2	319.2	316.8	314.5	312.0	309.6
42.5°	315.7	309.8	303.9	299.8	297.6	295.5	293.4	291.1
45°	288.7	282.8	276.8	272.6	270.1	267.6	265.1	262.6
47.5°	260.8	254.4	247.9	243.6	241.4	239.1	236.8	234.6
50°	242.1	235.6	229.1	224.7	222.3	219.8	217.4	215.0
52.5°	223.9	217.1	210.5	206.0	203.8	201.7	199.5	197.3
55°	196.8	190.8	184.7	180.6	178.5	176.4	174.3	172.2
57.5°	170.2	164.4	158.8	154.9	153.2	151.4	149.7	147.8
60°	153.4	147.7	142.1	138.4	136.6	134.8	133.1	131.3
62.5°	136.7	131.5	126.1	122.5	120.7	118.9	116.9	115.1
65°	113.0	108.0	102.8	99.7	98.5	97.4	96.2	95.0
67.5°	90.4	86.5	82.7	80.2	79.0	77.8	76.5	75.3
70°	76.4	72.8	69.1	66.8	65.5	64.4	63.2	62.1
72.5°	63.8	60.9	57.9	56.1	55.6	55.1	54.7	54.2
75°	47.8	46.8	45.6	45.0	44.8	44.6	44.4	44.2
77.5°	36.1	35.4	34.9	34.5	34.3	34.1	33.9	33.7
80°	29.0	28.7	28.4	28.2	27.9	27.7	27.5	27.3
82.5°	22.2	21.9	21.6	21.4	21.4	21.3	21.3	21.3
85°	12.7	12.5	12.3	12.2	12.2	12.2	12.2	12.2
87.5°	12.6	12.7	12.9	13.0	13.1	13.1	13.2	13.2
90°	39.3	40.6	42.0	43.0	43.6	44.3	45.0	45.6
92.5°	60.6	61.7	62.8	63.1	62.7	62.3	61.9	61.5
95°	115.4	116.7	118.1	118.8	118.8	118.8	118.8	118.8
97.5°	179.5	181.0	182.6	183.3	183.2	183.0	182.9	182.8
100°	225.9	226.9	227.9	228.7	229.4	230.1	230.8	231.5
102.5°	279.5	280.5	281.6	282.0	281.9	281.7	281.6	281.4
105°	359.4	359.4	359.4	359.7	360.4	361.1	361.7	362.4
107.5°	446.0	447.0	448.1	448.4	448.0	447.6	447.2	446.8
110°	503.7	505.0	506.4	506.8	506.0	505.4	504.7	504.0





TEST NUMBER: P332409-840

CATALOG NUMBER: S123RDIW-S340D1535U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	561.5	563.1	564.7	565.5	565.4	565.2	565.1	564.9
115°	649.4	649.7	650.1	650.1	649.7	649.4	649.0	648.7
117.5°	738.1	738.1	738.0	737.5	736.5	735.6	734.7	733.7
120°	797.3	797.0	796.6	796.1	795.5	794.8	794.1	793.3
122.5°	857.1	856.3	855.4	854.4	853.5	852.5	851.6	850.6
125°	946.0	944.6	943.3	941.9	940.6	939.3	937.9	936.5
127.5°	1033.9	1032.0	1030.1	1028.3	1026.8	1025.2	1023.7	1022.1
130°	1092.2	1090.9	1089.5	1087.6	1085.3	1082.9	1080.6	1078.1
132.5°	1148.9	1147.3	1145.7	1144.0	1142.2	1140.3	1138.4	1136.6
135°	1233.9	1232.4	1231.1	1230.1	1229.4	1228.7	1228.1	1227.4
137.5°	1316.9	1315.5	1314.0	1312.6	1311.3	1310.1	1308.8	1307.5
140°	1371.4	1371.1	1370.7	1369.4	1367.0	1364.6	1362.2	1359.9
142.5°	1422.6	1422.2	1421.9	1420.8	1419.0	1417.1	1415.3	1413.5
145°	1497.7	1497.4	1497.1	1496.2	1494.9	1493.6	1492.2	1490.9
147.5°	1568.8	1568.8	1568.8	1567.8	1565.8	1563.8	1561.7	1559.6
150°	1612.7	1612.7	1612.7	1611.6	1609.6	1607.6	1605.6	1603.6
152.5°	1652.7	1653.3	1653.9	1653.3	1651.4	1649.7	1647.9	1646.2
155°	1711.3	1712.6	1714.0	1713.5	1711.1	1708.8	1706.4	1704.0
157.5°	1761.7	1763.1	1764.5	1764.3	1762.4	1760.5	1758.6	1756.8
160°	1792.7	1794.4	1796.0	1796.2	1794.9	1793.5	1792.2	1790.8
162.5°	1821.9	1823.6	1825.3	1825.1	1822.9	1820.8	1818.6	1816.4
165°	1858.9	1860.9	1862.9	1862.8	1860.4	1858.1	1855.6	1853.3
167.5°	1888.9	1891.0	1893.0	1893.0	1891.0	1888.9	1886.7	1884.6
170°	1905.2	1907.6	1910.0	1910.0	1907.6	1905.2	1902.9	1900.5
172.5°	1918.0	1920.2	1922.3	1922.2	1919.8	1917.4	1915.0	1912.7
175°	1932.0	1934.0	1936.0	1935.8	1933.5	1931.1	1928.7	1926.4
177.5°	1938.1	1939.7	1941.4	1941.3	1939.3	1937.4	1935.6	1933.7
180°	1938.5	1938.5	1938.5	1938.5	1938.5	1938.5	1938.5	1938.5

(END OF REPORT)