

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332393-840

Luminaire Tested: **S123RDIW-S340D460U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332393-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S340D460U840-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 460 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2926.5 lumens
Efficiency: N/A
Efficacy: 127.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 23
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332393-840

CATALOG NUMBER: S123RDIW-S340D460U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

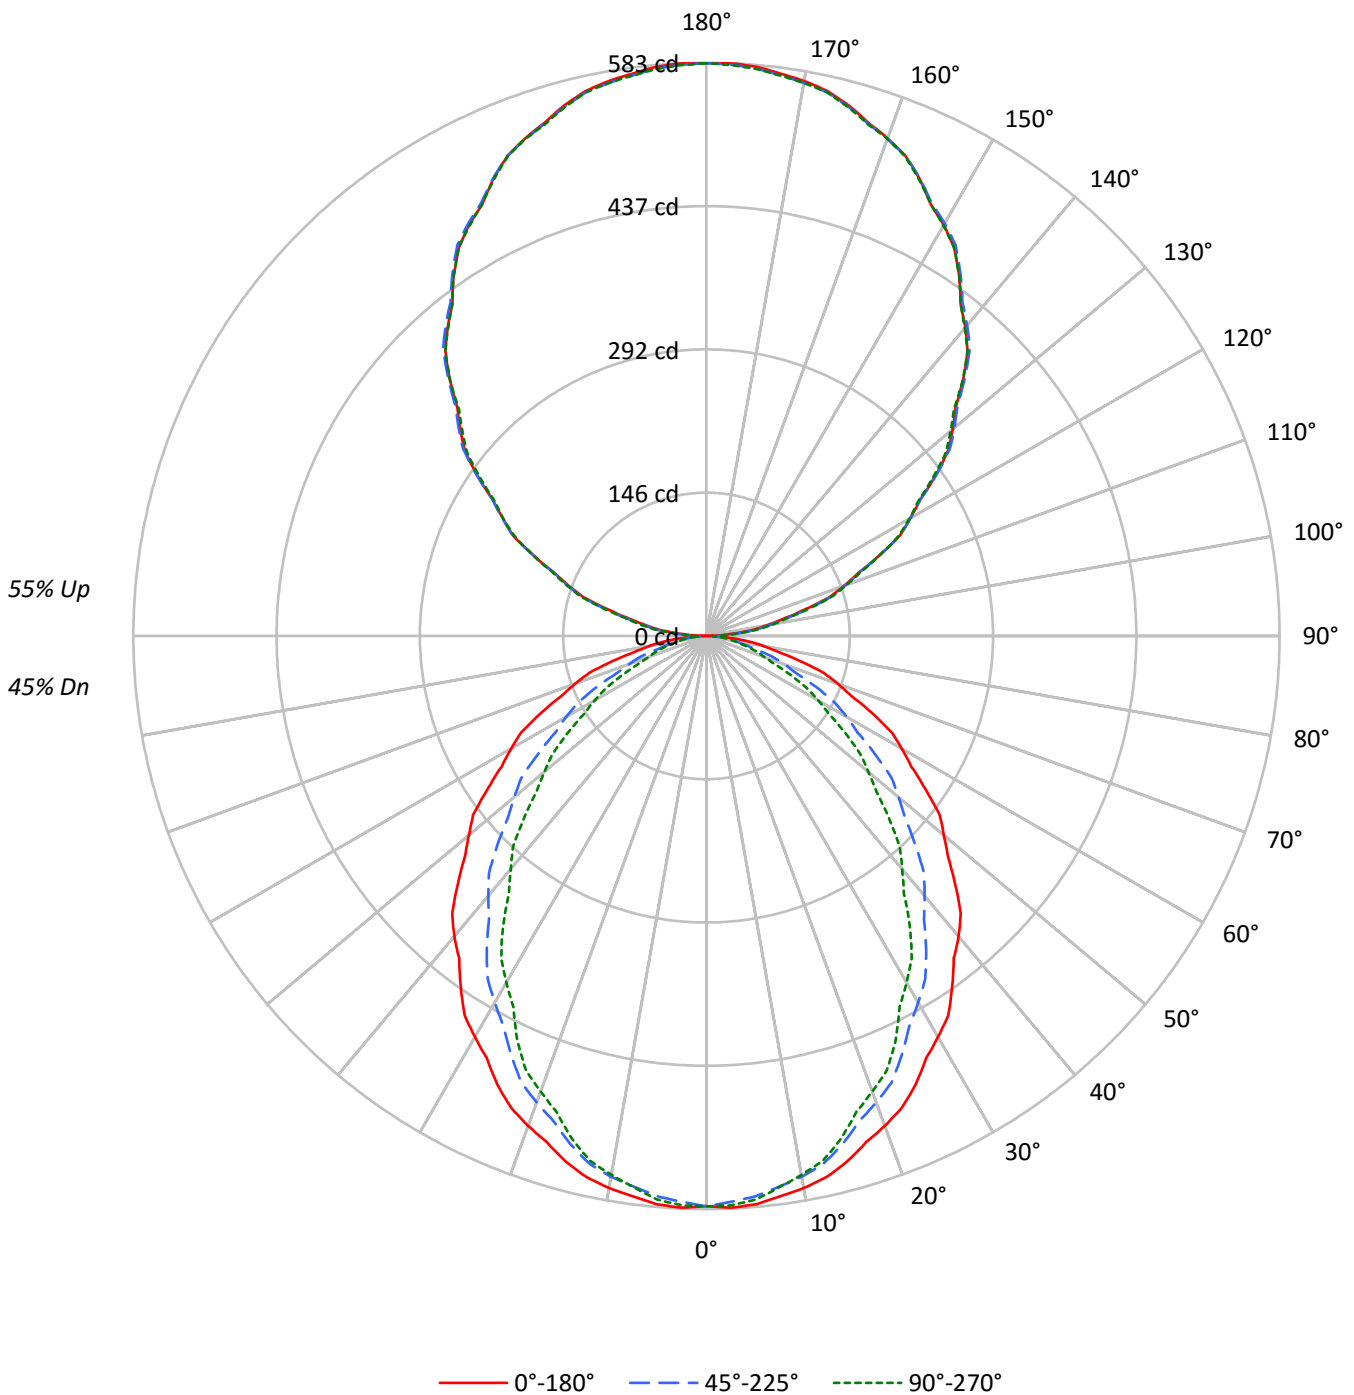



TEST NUMBER: P332393-840

CATALOG NUMBER: S123RDIW-S340D460U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45
1	97	93	89	86	89	85	82	79	71	69	67	58	56	55	46	45	44	38
2	88	81	75	70	81	75	70	65	62	59	56	51	49	46	41	39	37	33
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	34	32	28
4	74	64	56	50	68	59	52	47	49	44	40	41	37	34	33	30	28	24
5	68	57	49	43	62	52	45	40	44	39	35	37	33	30	29	27	24	21
6	63	51	43	37	57	47	40	35	40	35	31	33	29	26	27	24	22	19
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	25	22	19	17
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	17	15
9	50	38	31	26	46	35	29	24	30	25	21	25	21	19	21	18	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6245	6245	6245
5°	6269	6183	6218
10°	6233	6105	6084
15°	6167	5962	5899
20°	6074	5783	5648
25°	5980	5583	5404
30°	5854	5351	5059
35°	5727	5119	4742
40°	5606	4846	4350
45°	5451	4576	3997
50°	5280	4270	3600
55°	5104	3920	3232
60°	4943	3546	2827
65°	4735	3140	2420
70°	4472	2634	1954
75°	4092	2075	1838
80°	3645	1841	1692
85°	3075	1618	1507



TEST NUMBER: P332393-840

CATALOG NUMBER: S123RDIW-S340D460U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.5	1.9
10°-20°	151.6	5.2
20°-30°	218.3	7.5
30°-40°	245.9	8.4
40°-50°	235.2	8.0
50°-60°	192.6	6.6
60°-70°	130.0	4.4
70°-80°	65.4	2.2
80°-90°	19.0	0.6
90°-100°	37.9	1.3
100°-110°	113.6	3.9
110°-120°	193.2	6.6
120°-130°	254.1	8.7
130°-140°	285.6	9.8
140°-150°	280.8	9.6
150°-160°	236.4	8.1
160°-170°	157.3	5.4
170°-180°	55.1	1.9
0°-30°	424.3	14.5
0°-40°	670.2	22.9
0°-60°	1098.1	37.5
0°-90°	1312.4	44.8
90°-120°	344.8	11.8
90°-150°	1165.3	39.8
90°-180°	1614.0	55.2
0°-180°	2926.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	580	580	580	580	580	
5°	580	578	572	576	576	55
15°	553	548	535	533	529	156
25°	504	491	470	460	455	231
35°	436	418	390	370	361	273
45°	358	336	301	275	263	276
55°	272	248	209	183	172	244
65°	186	159	123	101	95	184
75°	98	76	50	45	44	105
85°	25	15	13	12	12	28
90°	0	5	11	13	14	3
95°	27	30	34	36	36	30
105°	103	104	108	108	109	110
115°	194	196	195	195	195	192
125°	285	286	285	283	281	254
135°	369	372	372	370	369	284
145°	448	449	450	450	448	280
155°	513	513	514	515	512	236
165°	559	557	557	560	557	157
175°	581	580	579	582	579	55
180°	583	583	583	583	583	



TEST NUMBER: P332393-840

CATALOG NUMBER: S123RDIW-S340D460U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2
2.5°	582.1	581.7	581.4	581.1	580.8	580.1	579.1	578.0	577.0	576.0	576.9
5°	580.2	579.7	579.2	578.7	578.0	577.2	575.9	574.7	573.4	572.2	573.1
7.5°	574.8	574.2	573.7	573.1	572.6	571.5	569.9	568.3	566.5	564.9	565.4
10°	570.3	569.6	568.9	568.2	567.3	566.0	564.2	562.3	560.4	558.6	558.7
12.5°	563.9	563.1	562.3	561.5	560.7	559.1	556.7	554.5	552.2	549.9	549.8
15°	553.4	552.2	551.1	549.9	548.8	546.7	543.8	540.9	538.0	535.0	534.5
17.5°	540.1	538.8	537.5	536.0	534.7	532.2	528.5	524.7	521.1	517.4	516.2
20°	530.3	528.7	526.9	525.3	523.6	520.8	516.8	512.8	508.9	504.9	503.5
22.5°	519.4	517.5	515.5	513.6	511.7	508.7	504.4	500.2	495.9	491.7	490.0
25°	503.5	500.9	498.3	495.6	493.0	489.3	484.5	479.7	474.8	470.1	467.9
27.5°	484.2	481.3	478.4	475.5	472.6	468.6	463.2	457.8	452.4	447.1	444.0
30°	471.0	467.9	464.7	461.6	458.5	453.9	448.1	442.2	436.4	430.5	427.0
32.5°	457.9	454.2	450.7	447.2	443.6	438.8	432.5	426.4	420.2	413.9	410.1
35°	435.8	431.9	428.2	424.4	420.7	415.6	409.1	402.5	396.1	389.6	385.2
37.5°	413.3	409.1	405.0	400.8	396.6	391.0	384.2	377.2	370.3	363.3	358.3
40°	399.0	394.5	389.8	385.3	380.6	374.6	367.2	359.7	352.3	344.9	339.5
42.5°	382.8	378.2	373.7	369.0	364.5	358.3	350.6	343.0	335.3	327.6	321.6
45°	358.1	353.4	348.7	344.0	339.2	332.9	324.9	316.8	308.7	300.6	294.7
47.5°	333.4	328.2	323.0	317.8	312.7	306.1	298.0	289.9	282.0	273.9	267.4
50°	315.3	310.3	305.5	300.5	295.6	288.9	280.4	272.0	263.5	255.0	248.5
52.5°	299.1	293.8	288.4	283.1	277.7	270.8	262.5	254.1	245.7	237.3	230.7
55°	272.0	266.8	261.8	256.6	251.5	244.5	235.6	226.7	217.8	208.9	202.9
57.5°	246.9	241.4	235.8	230.1	224.6	217.3	208.4	199.4	190.6	181.7	175.9
60°	229.6	223.9	218.1	212.4	206.6	199.4	190.8	182.1	173.4	164.7	159.1
62.5°	212.3	206.5	200.8	195.1	189.3	182.1	173.4	164.7	156.0	147.3	142.1
65°	185.9	180.2	174.4	168.6	162.9	155.9	147.7	139.6	131.5	123.3	118.2
67.5°	159.5	153.6	147.7	142.0	136.1	129.4	121.5	113.7	105.8	98.1	94.2
70°	142.1	136.4	130.8	125.1	119.6	113.0	105.7	98.4	91.1	83.7	80.1
72.5°	124.8	119.3	113.7	108.1	102.5	96.4	89.8	83.1	76.4	69.8	66.9
75°	98.4	93.3	88.3	83.3	78.3	72.9	67.2	61.4	55.6	49.9	48.9
77.5°	74.2	69.7	65.1	60.6	56.1	52.0	48.3	44.5	40.9	37.2	36.7
80°	58.8	54.5	50.3	45.9	41.7	38.5	36.3	34.0	31.8	29.7	29.3
82.5°	44.1	40.4	36.8	33.0	29.3	27.0	26.0	24.9	23.9	22.8	22.5
85°	24.9	22.6	20.3	18.1	15.8	14.4	14.1	13.8	13.5	13.1	12.9
87.5°	9.1	8.4	7.7	7.0	6.3	6.1	6.3	6.6	6.9	7.1	7.1
90°	0.5	1.5	2.5	3.5	4.5	5.7	7.0	8.4	9.7	11.0	11.4
92.5°	11.1	11.8	12.4	13.1	13.8	14.5	15.3	16.1	16.9	17.6	17.9
95°	27.0	27.7	28.4	29.2	29.9	30.6	31.4	32.2	33.0	33.8	34.2
97.5°	48.0	48.5	49.0	49.6	50.1	50.6	51.2	51.8	52.4	53.0	53.4
100°	62.2	62.8	63.4	64.0	64.6	65.2	65.7	66.2	66.8	67.3	67.6
102.5°	78.7	79.1	79.5	79.8	80.2	80.7	81.4	82.0	82.7	83.4	83.7
105°	103.0	103.2	103.4	103.6	103.8	104.3	105.2	106.1	107.0	108.0	108.0
107.5°	131.2	131.3	131.4	131.5	131.7	131.9	132.3	132.6	133.0	133.4	133.7
110°	148.8	149.0	149.2	149.4	149.6	149.8	150.0	150.2	150.4	150.6	151.0



TEST NUMBER: P332393-840

CATALOG NUMBER: S123RDIW-S340D460U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	167.0	167.1	167.3	167.4	167.5	167.6	167.6	167.7	167.7	167.7	168.2
115°	194.5	194.8	195.1	195.4	195.7	195.8	195.6	195.4	195.2	195.0	195.1
117.5°	222.2	222.4	222.6	222.8	223.0	222.9	222.7	222.4	222.2	221.9	221.9
120°	239.3	239.9	240.5	241.2	241.8	241.9	241.4	240.9	240.3	239.8	239.7
122.5°	257.3	257.7	258.2	258.6	259.0	259.1	258.9	258.6	258.4	258.1	257.8
125°	284.7	285.0	285.3	285.6	285.9	285.9	285.7	285.5	285.3	285.1	284.7
127.5°	309.9	310.5	311.2	311.8	312.6	312.8	312.6	312.3	312.0	311.8	311.2
130°	326.8	327.6	328.4	329.2	330.0	330.2	329.9	329.6	329.3	329.0	328.6
132.5°	343.6	344.4	345.3	346.1	346.9	347.2	346.9	346.7	346.5	346.3	345.8
135°	369.3	369.9	370.5	371.1	371.7	372.0	371.9	371.8	371.7	371.6	371.2
137.5°	393.1	393.6	394.2	394.7	395.2	395.6	395.8	396.1	396.4	396.6	396.2
140°	409.6	410.1	410.6	411.1	411.6	411.9	412.0	412.1	412.2	412.3	412.2
142.5°	424.6	425.2	425.7	426.2	426.7	427.0	427.2	427.4	427.6	427.7	427.6
145°	448.1	448.3	448.5	448.7	448.9	449.1	449.4	449.7	450.0	450.3	450.2
147.5°	468.6	468.9	469.3	469.6	470.0	470.3	470.6	470.9	471.2	471.5	471.5
150°	482.8	483.0	483.2	483.4	483.6	483.8	484.0	484.2	484.4	484.6	484.6
152.5°	494.5	494.8	495.1	495.3	495.6	495.8	495.9	496.1	496.2	496.3	496.6
155°	513.0	513.0	513.0	513.0	513.0	513.1	513.2	513.3	513.4	513.5	513.9
157.5°	528.8	528.7	528.6	528.4	528.3	528.3	528.4	528.5	528.5	528.6	529.0
160°	538.7	538.5	538.3	538.1	537.9	537.8	537.8	537.8	537.8	537.8	538.3
162.5°	547.4	547.1	546.8	546.5	546.3	546.2	546.2	546.3	546.4	546.5	547.0
165°	558.8	558.5	558.2	557.8	557.5	557.4	557.4	557.4	557.4	557.4	558.1
167.5°	567.8	567.4	567.0	566.6	566.2	566.0	566.1	566.2	566.3	566.3	567.0
170°	573.0	572.6	572.2	571.8	571.4	571.2	571.2	571.2	571.2	571.2	571.9
172.5°	577.0	576.6	576.2	575.8	575.3	575.1	575.1	575.1	575.1	575.1	575.8
175°	581.2	580.8	580.4	580.0	579.6	579.4	579.4	579.4	579.4	579.4	580.0
177.5°	583.0	582.6	582.3	582.0	581.7	581.5	581.5	581.5	581.5	581.5	582.0
180°	582.6	582.6	582.6	582.6	582.6	582.6	582.6	582.6	582.6	582.6	582.6



TEST NUMBER: P332393-840

CATALOG NUMBER: S123RDIW-S340D460U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2
2.5°	577.8	578.8	579.8	580.1	580.0	579.8	579.6	579.5
5°	574.1	575.0	575.9	576.3	576.1	575.9	575.7	575.5
7.5°	566.0	566.5	567.0	567.1	566.7	566.4	566.0	565.7
10°	558.8	558.9	559.0	558.8	558.3	557.7	557.1	556.6
12.5°	549.8	549.7	549.7	549.3	548.7	548.1	547.4	546.8
15°	533.9	533.4	532.9	532.3	531.6	530.8	530.1	529.4
17.5°	515.1	514.0	512.9	511.8	510.7	509.6	508.6	507.5
20°	502.2	500.8	499.5	498.2	496.9	495.6	494.4	493.1
22.5°	488.4	486.7	484.9	483.5	482.3	481.2	480.0	478.9
25°	465.6	463.5	461.3	459.6	458.5	457.4	456.2	455.0
27.5°	441.0	438.0	434.9	432.5	430.7	429.0	427.3	425.5
30°	423.4	419.9	416.4	413.7	412.0	410.4	408.7	407.0
32.5°	406.2	402.3	398.4	395.6	393.8	392.1	390.3	388.6
35°	380.6	376.1	371.6	368.4	366.6	364.7	362.7	360.9
37.5°	353.1	348.0	343.0	339.2	336.9	334.6	332.2	329.9
40°	334.1	328.6	323.2	319.2	316.8	314.5	312.0	309.6
42.5°	315.7	309.8	303.9	299.8	297.6	295.5	293.4	291.1
45°	288.7	282.8	276.8	272.6	270.1	267.6	265.1	262.6
47.5°	260.8	254.4	247.9	243.6	241.4	239.1	236.8	234.6
50°	242.1	235.6	229.1	224.7	222.3	219.8	217.4	215.0
52.5°	223.9	217.1	210.5	206.0	203.8	201.7	199.5	197.3
55°	196.8	190.8	184.7	180.6	178.5	176.4	174.3	172.2
57.5°	170.2	164.4	158.8	154.9	153.2	151.4	149.7	147.8
60°	153.4	147.7	142.1	138.4	136.6	134.8	133.1	131.3
62.5°	136.7	131.5	126.1	122.5	120.7	118.9	116.9	115.1
65°	113.0	108.0	102.8	99.7	98.5	97.4	96.2	95.0
67.5°	90.4	86.5	82.7	80.2	79.0	77.8	76.5	75.3
70°	76.4	72.8	69.1	66.8	65.5	64.4	63.2	62.1
72.5°	63.8	60.9	57.9	56.1	55.6	55.1	54.7	54.2
75°	47.8	46.8	45.6	45.0	44.8	44.6	44.4	44.2
77.5°	36.1	35.4	34.9	34.5	34.3	34.1	33.9	33.7
80°	29.0	28.7	28.4	28.2	27.9	27.7	27.5	27.3
82.5°	22.2	21.9	21.6	21.4	21.4	21.3	21.3	21.3
85°	12.7	12.5	12.3	12.2	12.2	12.2	12.2	12.2
87.5°	7.1	7.1	7.1	7.1	7.0	7.0	7.0	6.9
90°	11.8	12.2	12.6	12.9	13.1	13.3	13.5	13.7
92.5°	18.2	18.6	18.9	19.0	18.9	18.7	18.6	18.5
95°	34.6	35.0	35.4	35.6	35.6	35.6	35.6	35.6
97.5°	53.9	54.4	54.8	55.0	55.0	55.0	54.9	54.9
100°	67.9	68.2	68.5	68.8	69.0	69.2	69.4	69.6
102.5°	84.0	84.3	84.6	84.7	84.7	84.6	84.6	84.5
105°	108.0	108.0	108.0	108.1	108.4	108.6	108.8	109.0
107.5°	134.0	134.3	134.6	134.7	134.6	134.5	134.4	134.3
110°	151.4	151.8	152.2	152.3	152.1	151.9	151.7	151.5



TEST NUMBER: P332393-840

CATALOG NUMBER: S123RDIW-S340D460U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	168.7	169.3	169.8	170.0	169.9	169.9	169.9	169.8
115°	195.2	195.3	195.4	195.4	195.3	195.2	195.1	195.0
117.5°	221.9	221.8	221.8	221.7	221.4	221.1	220.8	220.5
120°	239.6	239.5	239.4	239.2	239.0	238.8	238.6	238.4
122.5°	257.6	257.3	257.0	256.8	256.5	256.2	255.9	255.6
125°	284.3	283.9	283.5	283.1	282.7	282.3	281.9	281.4
127.5°	310.7	310.1	309.5	309.0	308.6	308.1	307.6	307.2
130°	328.2	327.8	327.4	326.9	326.2	325.5	324.8	324.0
132.5°	345.3	344.8	344.3	343.8	343.3	342.6	342.1	341.5
135°	370.8	370.4	370.0	369.7	369.5	369.3	369.1	368.9
137.5°	395.8	395.4	394.9	394.5	394.0	393.7	393.3	392.9
140°	412.1	412.0	411.9	411.5	410.8	410.1	409.4	408.7
142.5°	427.5	427.4	427.3	427.0	426.5	425.9	425.4	424.7
145°	450.1	450.0	449.9	449.7	449.3	448.9	448.5	448.1
147.5°	471.5	471.5	471.5	471.2	470.6	469.9	469.3	468.7
150°	484.6	484.6	484.6	484.3	483.7	483.1	482.5	481.9
152.5°	496.7	496.9	497.1	496.9	496.3	495.7	495.2	494.7
155°	514.3	514.7	515.1	514.9	514.2	513.5	512.8	512.1
157.5°	529.5	529.9	530.3	530.2	529.7	529.1	528.5	528.0
160°	538.8	539.3	539.8	539.8	539.4	539.0	538.6	538.2
162.5°	547.5	548.1	548.6	548.5	547.9	547.1	546.5	545.8
165°	558.7	559.3	559.9	559.8	559.1	558.4	557.6	556.9
167.5°	567.6	568.3	568.9	568.9	568.3	567.6	567.0	566.3
170°	572.6	573.3	574.0	574.0	573.3	572.6	571.9	571.2
172.5°	576.4	577.0	577.6	577.6	576.9	576.2	575.5	574.8
175°	580.6	581.2	581.8	581.8	581.1	580.4	579.7	579.0
177.5°	582.5	583.0	583.4	583.4	582.8	582.3	581.7	581.1
180°	582.6	582.6	582.6	582.6	582.6	582.6	582.6	582.6

(END OF REPORT)