

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332397-840

Luminaire Tested: **S123RDIW-S340D755U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332397-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S340D755U840-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 755 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3957.2 lumens
Efficiency: N/A
Efficacy: 130.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 30.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332397-840

CATALOG NUMBER: S123RDIW-S340D755U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

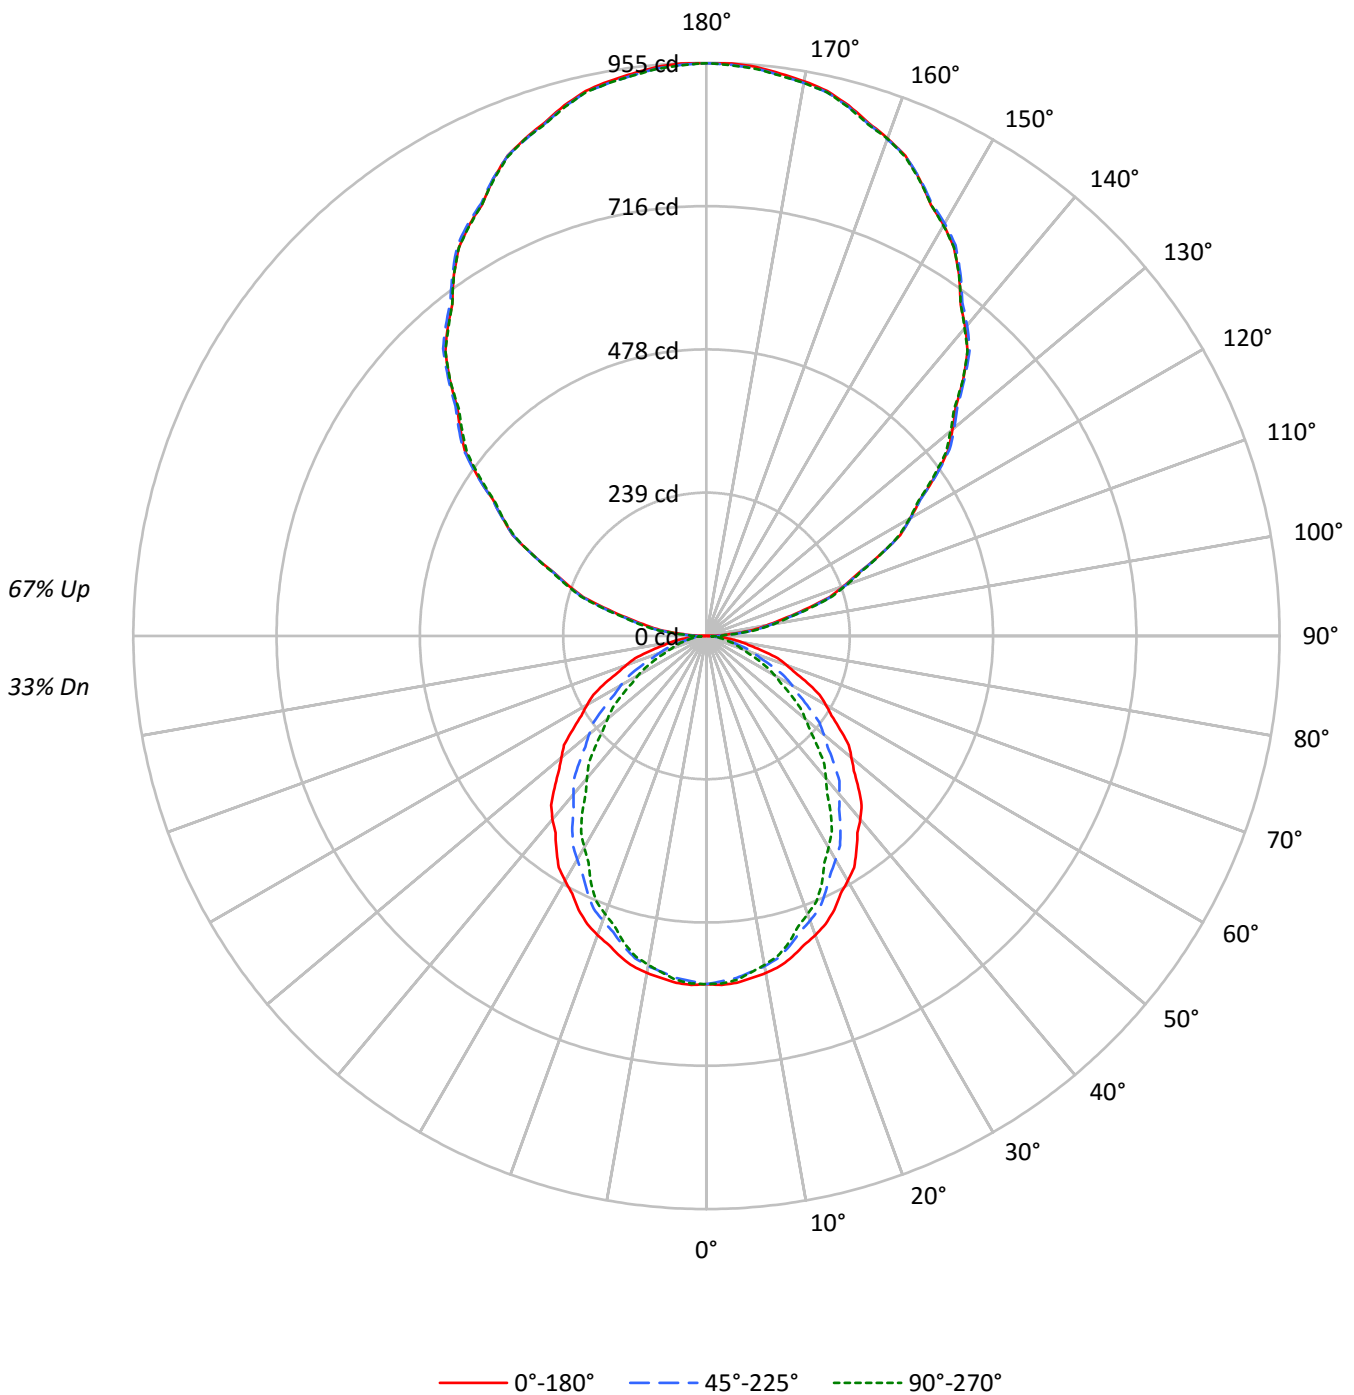



TEST NUMBER: P332397-840

CATALOG NUMBER: S123RDIW-S340D755U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33
1	94	90	86	83	85	81	78	75	65	63	61	50	49	47	36	35	35	28
2	86	79	73	68	77	71	66	62	57	54	51	44	42	40	32	31	30	24
3	78	69	62	57	71	63	57	52	51	46	43	39	36	34	29	27	25	21
4	72	61	54	48	65	56	49	44	45	40	37	35	32	29	26	24	22	18
5	66	55	47	41	59	50	43	38	40	35	32	31	28	25	23	21	19	16
6	61	49	41	36	55	45	38	33	36	31	28	28	25	22	21	19	17	14
7	56	44	37	31	50	40	34	29	33	28	24	26	22	20	19	17	15	12
8	52	40	33	28	47	37	30	26	30	25	21	24	20	18	18	15	14	11
9	48	37	29	24	44	33	27	23	27	23	19	22	18	16	16	14	12	10
10	45	33	26	22	41	31	24	20	25	20	17	20	17	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6245	6245	6245
5°	6269	6183	6218
10°	6233	6105	6084
15°	6167	5962	5899
20°	6074	5783	5648
25°	5980	5583	5404
30°	5854	5351	5059
35°	5727	5119	4742
40°	5606	4846	4350
45°	5451	4576	3997
50°	5280	4270	3600
55°	5104	3920	3232
60°	4943	3546	2827
65°	4735	3140	2420
70°	4472	2634	1954
75°	4092	2075	1838
80°	3645	1841	1692
85°	3075	1618	1507



TEST NUMBER: P332397-840

CATALOG NUMBER: S123RDIW-S340D755U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.5	1.4
10°-20°	151.6	3.8
20°-30°	218.3	5.5
30°-40°	245.9	6.2
40°-50°	235.2	5.9
50°-60°	192.6	4.9
60°-70°	130.0	3.3
70°-80°	65.4	1.7
80°-90°	20.1	0.5
90°-100°	62.2	1.6
100°-110°	186.1	4.7
110°-120°	316.4	8.0
120°-130°	416.2	10.5
130°-140°	467.8	11.8
140°-150°	459.9	11.6
150°-160°	387.1	9.8
160°-170°	257.7	6.5
170°-180°	90.2	2.3
0°-30°	424.3	10.7
0°-40°	670.2	16.9
0°-60°	1098.1	27.7
0°-90°	1313.5	33.2
90°-120°	564.7	14.3
90°-150°	1908.6	48.2
90°-180°	2644.0	66.8
0°-180°	3957.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	580	580	580	580	580	
5°	580	578	572	576	576	55
15°	553	548	535	533	529	156
25°	504	491	470	460	455	231
35°	436	418	390	370	361	273
45°	358	336	301	275	263	276
55°	272	248	209	183	172	244
65°	186	159	123	101	95	184
75°	98	76	50	45	44	105
85°	25	15	13	12	12	28
90°	1	8	18	21	22	4
95°	44	50	55	58	58	50
105°	169	170	177	177	178	181
115°	319	321	319	320	319	315
125°	466	468	467	464	461	416
135°	605	609	609	606	604	466
145°	734	735	738	737	734	458
155°	840	840	841	844	839	387
165°	915	913	913	917	912	258
175°	952	949	949	953	948	90
180°	954	954	954	954	954	



TEST NUMBER: P332397-840

CATALOG NUMBER: S123RDIW-S340D755U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2
2.5°	582.1	581.7	581.4	581.1	580.8	580.1	579.1	578.0	577.0	576.0	576.9
5°	580.2	579.7	579.2	578.7	578.0	577.2	575.9	574.7	573.4	572.2	573.1
7.5°	574.8	574.2	573.7	573.1	572.6	571.5	569.9	568.3	566.5	564.9	565.4
10°	570.3	569.6	568.9	568.2	567.3	566.0	564.2	562.3	560.4	558.6	558.7
12.5°	563.9	563.1	562.3	561.5	560.7	559.1	556.7	554.5	552.2	549.9	549.8
15°	553.4	552.2	551.1	549.9	548.8	546.7	543.8	540.9	538.0	535.0	534.5
17.5°	540.1	538.8	537.5	536.0	534.7	532.2	528.5	524.7	521.1	517.4	516.2
20°	530.3	528.7	526.9	525.3	523.6	520.8	516.8	512.8	508.9	504.9	503.5
22.5°	519.4	517.5	515.5	513.6	511.7	508.7	504.4	500.2	495.9	491.7	490.0
25°	503.5	500.9	498.3	495.6	493.0	489.3	484.5	479.7	474.8	470.1	467.9
27.5°	484.2	481.3	478.4	475.5	472.6	468.6	463.2	457.8	452.4	447.1	444.0
30°	471.0	467.9	464.7	461.6	458.5	453.9	448.1	442.2	436.4	430.5	427.0
32.5°	457.9	454.2	450.7	447.2	443.6	438.8	432.5	426.4	420.2	413.9	410.1
35°	435.8	431.9	428.2	424.4	420.7	415.6	409.1	402.5	396.1	389.6	385.2
37.5°	413.3	409.1	405.0	400.8	396.6	391.0	384.2	377.2	370.3	363.3	358.3
40°	399.0	394.5	389.8	385.3	380.6	374.6	367.2	359.7	352.3	344.9	339.5
42.5°	382.8	378.2	373.7	369.0	364.5	358.3	350.6	343.0	335.3	327.6	321.6
45°	358.1	353.4	348.7	344.0	339.2	332.9	324.9	316.8	308.7	300.6	294.7
47.5°	333.4	328.2	323.0	317.8	312.7	306.1	298.0	289.9	282.0	273.9	267.4
50°	315.3	310.3	305.5	300.5	295.6	288.9	280.4	272.0	263.5	255.0	248.5
52.5°	299.1	293.8	288.4	283.1	277.7	270.8	262.5	254.1	245.7	237.3	230.7
55°	272.0	266.8	261.8	256.6	251.5	244.5	235.6	226.7	217.8	208.9	202.9
57.5°	246.9	241.4	235.8	230.1	224.6	217.3	208.4	199.4	190.6	181.7	175.9
60°	229.6	223.9	218.1	212.4	206.6	199.4	190.8	182.1	173.4	164.7	159.1
62.5°	212.3	206.5	200.8	195.1	189.3	182.1	173.4	164.7	156.0	147.3	142.1
65°	185.9	180.2	174.4	168.6	162.9	155.9	147.7	139.6	131.5	123.3	118.2
67.5°	159.5	153.6	147.7	142.0	136.1	129.4	121.5	113.7	105.8	98.1	94.2
70°	142.1	136.4	130.8	125.1	119.6	113.0	105.7	98.4	91.1	83.7	80.1
72.5°	124.8	119.3	113.7	108.1	102.5	96.4	89.8	83.1	76.4	69.8	66.9
75°	98.4	93.3	88.3	83.3	78.3	72.9	67.2	61.4	55.6	49.9	48.9
77.5°	74.2	69.7	65.1	60.6	56.1	52.0	48.3	44.5	40.9	37.2	36.7
80°	58.8	54.5	50.3	45.9	41.7	38.5	36.3	34.0	31.8	29.7	29.3
82.5°	44.1	40.4	36.8	33.0	29.3	27.0	26.0	24.9	23.9	22.8	22.5
85°	24.9	22.6	20.3	18.1	15.8	14.4	14.1	13.8	13.5	13.1	12.9
87.5°	9.2	8.6	8.0	7.5	6.9	6.8	7.2	7.7	8.1	8.5	8.6
90°	0.7	2.4	4.0	5.8	7.4	9.3	11.5	13.6	15.9	18.0	18.7
92.5°	18.2	19.3	20.4	21.5	22.6	23.8	25.0	26.4	27.6	28.8	29.3
95°	44.2	45.3	46.6	47.8	48.9	50.1	51.5	52.8	54.1	55.4	56.1
97.5°	78.6	79.4	80.3	81.2	82.0	82.9	83.9	84.8	85.8	86.8	87.6
100°	101.9	102.9	103.9	104.9	105.9	106.8	107.7	108.6	109.4	110.2	110.7
102.5°	129.0	129.6	130.2	130.7	131.3	132.2	133.3	134.4	135.4	136.5	137.0
105°	168.6	169.0	169.4	169.7	170.0	170.9	172.4	173.9	175.4	176.9	176.9
107.5°	214.8	215.0	215.2	215.4	215.6	216.0	216.6	217.2	217.8	218.4	218.9
110°	243.6	244.0	244.3	244.6	244.9	245.3	245.6	245.9	246.3	246.6	247.3



TEST NUMBER: P332397-840

CATALOG NUMBER: S123RDIW-S340D755U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	273.6	273.8	274.0	274.2	274.4	274.5	274.6	274.7	274.7	274.8	275.6
115°	318.6	319.0	319.5	320.0	320.5	320.6	320.3	320.0	319.6	319.3	319.5
117.5°	363.9	364.2	364.5	364.9	365.2	365.2	364.7	364.3	363.9	363.3	363.3
120°	392.0	393.0	394.0	395.1	396.1	396.1	395.3	394.5	393.6	392.7	392.6
122.5°	421.4	422.1	422.8	423.6	424.3	424.4	424.0	423.6	423.2	422.7	422.3
125°	466.3	466.8	467.3	467.8	468.3	468.3	468.0	467.7	467.3	467.0	466.4
127.5°	507.6	508.7	509.8	510.8	511.9	512.2	511.9	511.5	511.1	510.8	509.8
130°	535.2	536.5	537.9	539.2	540.5	541.0	540.5	540.0	539.5	539.0	538.3
132.5°	562.8	564.1	565.4	566.7	568.2	568.6	568.3	567.8	567.4	567.1	566.3
135°	604.9	605.9	606.9	607.9	608.8	609.4	609.2	608.9	608.8	608.6	607.9
137.5°	643.9	644.7	645.5	646.4	647.2	647.8	648.2	648.7	649.1	649.5	648.8
140°	670.9	671.7	672.6	673.4	674.2	674.7	674.9	675.0	675.2	675.4	675.2
142.5°	695.5	696.3	697.1	697.9	698.7	699.3	699.6	699.9	700.2	700.5	700.3
145°	733.9	734.2	734.5	734.8	735.2	735.6	736.1	736.6	737.1	737.6	737.4
147.5°	767.4	768.0	768.6	769.2	769.8	770.3	770.8	771.2	771.7	772.2	772.2
150°	790.8	791.1	791.4	791.8	792.1	792.4	792.7	793.1	793.5	793.8	793.8
152.5°	810.0	810.4	810.9	811.4	811.8	812.1	812.3	812.5	812.7	812.9	813.2
155°	840.3	840.3	840.3	840.3	840.3	840.3	840.5	840.7	840.8	841.0	841.7
157.5°	866.1	865.9	865.7	865.5	865.3	865.3	865.4	865.5	865.7	865.8	866.5
160°	882.2	881.9	881.6	881.2	880.9	880.7	880.7	880.7	880.7	880.7	881.6
162.5°	896.7	896.2	895.6	895.2	894.7	894.6	894.7	894.8	895.0	895.1	896.0
165°	915.2	914.7	914.2	913.7	913.2	912.9	912.9	912.9	912.9	912.9	913.9
167.5°	930.1	929.4	928.8	928.1	927.4	927.2	927.3	927.4	927.6	927.7	928.7
170°	938.5	937.8	937.2	936.4	935.7	935.4	935.4	935.4	935.4	935.4	936.6
172.5°	945.0	944.4	943.7	943.0	942.4	942.0	942.0	942.0	942.0	942.0	943.1
175°	951.9	951.3	950.6	950.0	949.3	949.0	949.0	949.0	949.0	949.0	950.0
177.5°	954.8	954.2	953.7	953.2	952.7	952.4	952.4	952.4	952.4	952.4	953.2
180°	954.2	954.2	954.2	954.2	954.2	954.2	954.2	954.2	954.2	954.2	954.2



TEST NUMBER: P332397-840

CATALOG NUMBER: S123RDIW-S340D755U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	580.2	580.2	580.2	580.2	580.2	580.2	580.2	580.2
2.5°	577.8	578.8	579.8	580.1	580.0	579.8	579.6	579.5
5°	574.1	575.0	575.9	576.3	576.1	575.9	575.7	575.5
7.5°	566.0	566.5	567.0	567.1	566.7	566.4	566.0	565.7
10°	558.8	558.9	559.0	558.8	558.3	557.7	557.1	556.6
12.5°	549.8	549.7	549.7	549.3	548.7	548.1	547.4	546.8
15°	533.9	533.4	532.9	532.3	531.6	530.8	530.1	529.4
17.5°	515.1	514.0	512.9	511.8	510.7	509.6	508.6	507.5
20°	502.2	500.8	499.5	498.2	496.9	495.6	494.4	493.1
22.5°	488.4	486.7	484.9	483.5	482.3	481.2	480.0	478.9
25°	465.6	463.5	461.3	459.6	458.5	457.4	456.2	455.0
27.5°	441.0	438.0	434.9	432.5	430.7	429.0	427.3	425.5
30°	423.4	419.9	416.4	413.7	412.0	410.4	408.7	407.0
32.5°	406.2	402.3	398.4	395.6	393.8	392.1	390.3	388.6
35°	380.6	376.1	371.6	368.4	366.6	364.7	362.7	360.9
37.5°	353.1	348.0	343.0	339.2	336.9	334.6	332.2	329.9
40°	334.1	328.6	323.2	319.2	316.8	314.5	312.0	309.6
42.5°	315.7	309.8	303.9	299.8	297.6	295.5	293.4	291.1
45°	288.7	282.8	276.8	272.6	270.1	267.6	265.1	262.6
47.5°	260.8	254.4	247.9	243.6	241.4	239.1	236.8	234.6
50°	242.1	235.6	229.1	224.7	222.3	219.8	217.4	215.0
52.5°	223.9	217.1	210.5	206.0	203.8	201.7	199.5	197.3
55°	196.8	190.8	184.7	180.6	178.5	176.4	174.3	172.2
57.5°	170.2	164.4	158.8	154.9	153.2	151.4	149.7	147.8
60°	153.4	147.7	142.1	138.4	136.6	134.8	133.1	131.3
62.5°	136.7	131.5	126.1	122.5	120.7	118.9	116.9	115.1
65°	113.0	108.0	102.8	99.7	98.5	97.4	96.2	95.0
67.5°	90.4	86.5	82.7	80.2	79.0	77.8	76.5	75.3
70°	76.4	72.8	69.1	66.8	65.5	64.4	63.2	62.1
72.5°	63.8	60.9	57.9	56.1	55.6	55.1	54.7	54.2
75°	47.8	46.8	45.6	45.0	44.8	44.6	44.4	44.2
77.5°	36.1	35.4	34.9	34.5	34.3	34.1	33.9	33.7
80°	29.0	28.7	28.4	28.2	27.9	27.7	27.5	27.3
82.5°	22.2	21.9	21.6	21.4	21.4	21.3	21.3	21.3
85°	12.7	12.5	12.3	12.2	12.2	12.2	12.2	12.2
87.5°	8.6	8.7	8.7	8.7	8.7	8.7	8.7	8.7
90°	19.3	20.0	20.7	21.1	21.5	21.8	22.1	22.5
92.5°	29.9	30.4	30.9	31.1	30.9	30.7	30.5	30.3
95°	56.8	57.5	58.2	58.5	58.5	58.5	58.5	58.5
97.5°	88.4	89.1	89.9	90.2	90.2	90.1	90.0	90.0
100°	111.2	111.7	112.2	112.6	112.9	113.3	113.6	113.9
102.5°	137.5	138.0	138.6	138.8	138.8	138.7	138.6	138.6
105°	176.9	176.9	176.9	177.0	177.4	177.7	178.0	178.4
107.5°	219.4	220.0	220.6	220.8	220.6	220.4	220.2	219.9
110°	247.9	248.6	249.2	249.4	249.1	248.7	248.4	248.1



TEST NUMBER: P332397-840

CATALOG NUMBER: S123RDIW-S340D755U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	276.4	277.2	278.0	278.3	278.3	278.2	278.1	278.1
115°	319.6	319.8	320.0	320.0	319.8	319.6	319.5	319.3
117.5°	363.3	363.2	363.2	363.0	362.5	362.0	361.6	361.1
120°	392.4	392.2	392.1	391.8	391.5	391.2	390.8	390.5
122.5°	421.9	421.4	421.0	420.6	420.1	419.6	419.2	418.7
125°	465.6	464.9	464.3	463.6	463.0	462.3	461.6	461.0
127.5°	508.9	508.0	507.1	506.1	505.4	504.6	503.9	503.1
130°	537.7	536.9	536.2	535.3	534.2	533.0	531.9	530.7
132.5°	565.5	564.7	563.9	563.1	562.2	561.3	560.4	559.5
135°	607.3	606.6	606.0	605.5	605.1	604.8	604.5	604.1
137.5°	648.1	647.4	646.8	646.1	645.5	644.8	644.2	643.6
140°	675.0	674.9	674.7	674.0	672.9	671.7	670.6	669.3
142.5°	700.2	700.0	699.8	699.3	698.4	697.5	696.6	695.7
145°	737.2	737.1	736.9	736.5	735.8	735.2	734.5	733.9
147.5°	772.2	772.2	772.2	771.7	770.7	769.7	768.7	767.7
150°	793.8	793.8	793.8	793.2	792.2	791.3	790.3	789.3
152.5°	813.5	813.7	814.1	813.7	812.8	812.0	811.1	810.3
155°	842.3	843.0	843.6	843.4	842.2	841.1	839.9	838.8
157.5°	867.2	867.9	868.6	868.4	867.5	866.6	865.7	864.6
160°	882.4	883.2	884.0	884.1	883.5	882.8	882.1	881.5
162.5°	896.8	897.7	898.5	898.4	897.3	896.3	895.1	894.0
165°	914.9	915.9	917.0	916.9	915.7	914.5	913.4	912.2
167.5°	929.7	930.8	931.8	931.8	930.8	929.7	928.7	927.7
170°	937.8	939.0	940.1	940.1	939.0	937.8	936.6	935.4
172.5°	944.1	945.1	946.1	946.1	944.9	943.8	942.6	941.5
175°	951.0	951.9	952.9	952.9	951.7	950.5	949.4	948.2
177.5°	954.0	954.8	955.6	955.5	954.6	953.6	952.7	951.8
180°	954.2	954.2	954.2	954.2	954.2	954.2	954.2	954.2

(END OF REPORT)