

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332416-840

Luminaire Tested: **S123RDIW-S560D755U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332416-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S560D755U840-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 755 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5207.8 lumens
Efficiency: N/A
Efficacy: 138.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 37.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332416-840

CATALOG NUMBER: S123RDIW-S560D755U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

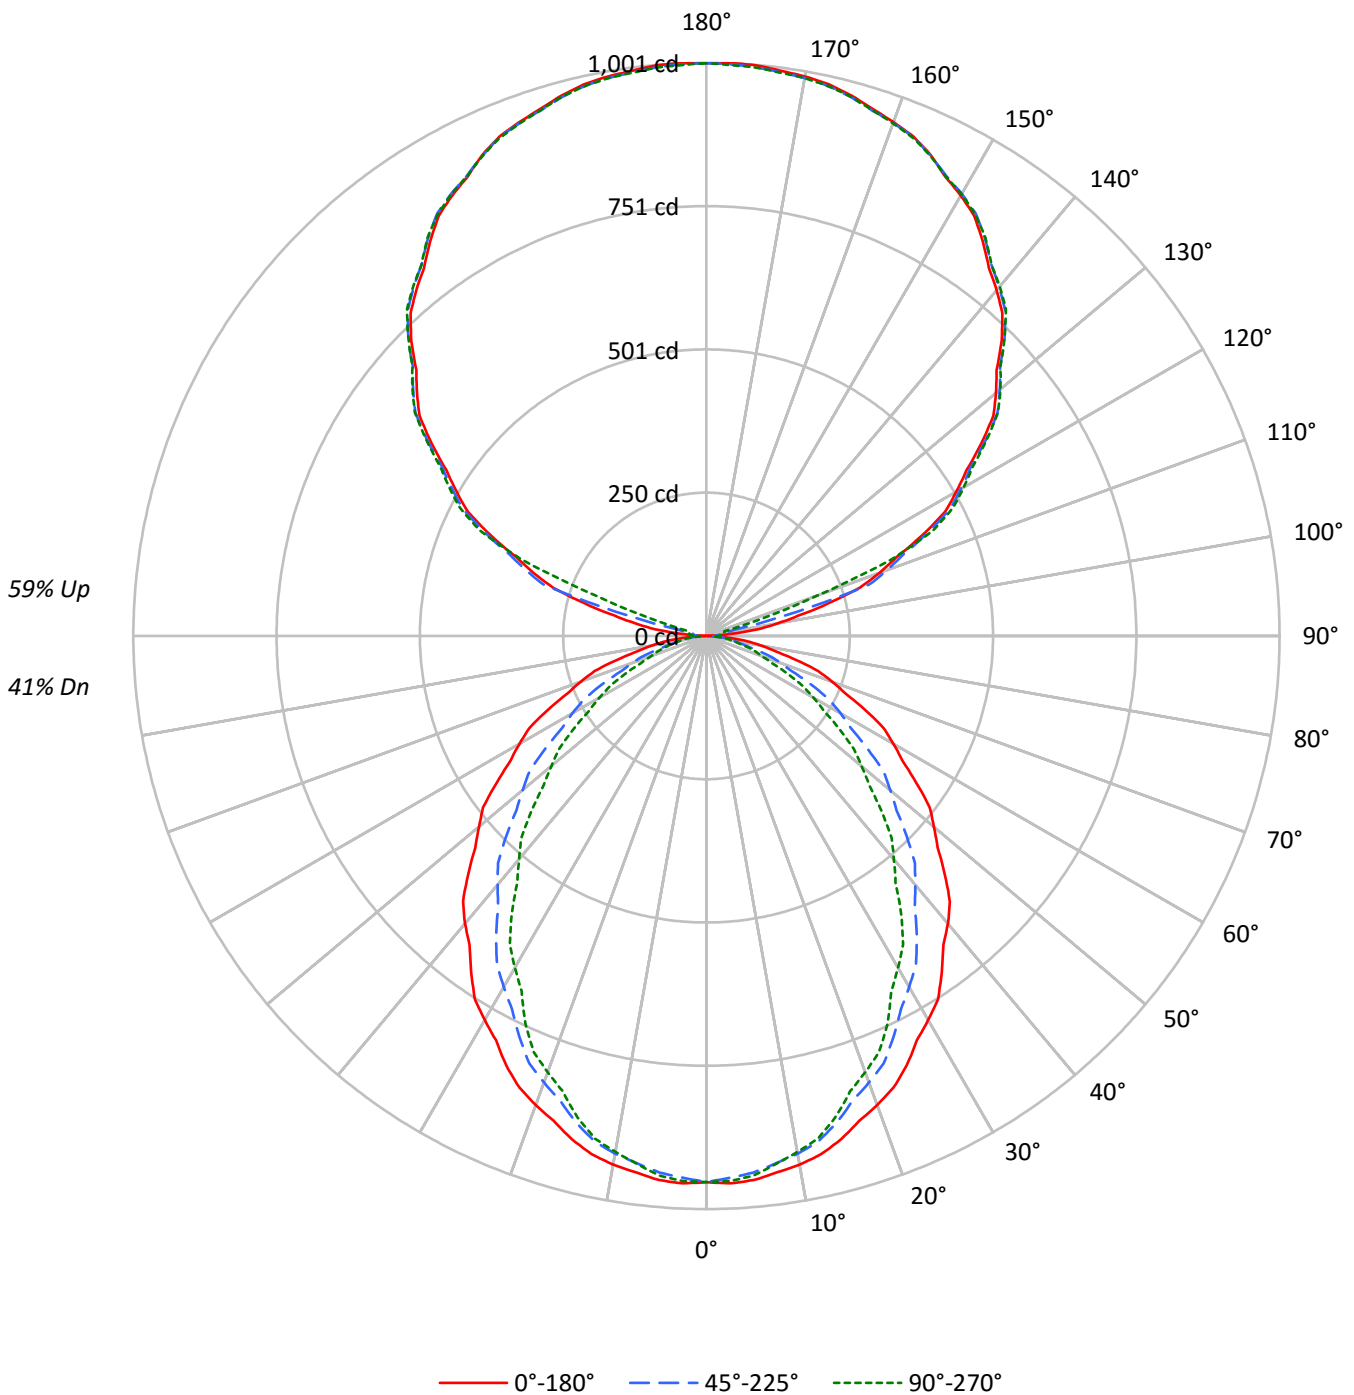



TEST NUMBER: P332416-840

CATALOG NUMBER: S123RDIW-S560D755U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	48	48	48	41																												
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	41	35																												
2	88	81	75	70	80	74	69	64	61	57	54	49	47	44	38	37	35	30																												
3	80	71	64	58	73	65	59	54	54	49	46	44	40	38	34	32	30	26																												
4	73	63	55	49	67	58	51	46	48	43	39	39	35	33	31	28	26	22																												
5	67	56	48	42	61	52	45	40	43	38	34	35	31	28	28	25	23	20																												
6	62	50	43	37	57	46	39	34	39	34	30	32	28	25	25	22	20	17																												
7	57	46	38	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15																												
8	53	41	34	29	49	38	31	27	32	27	23	26	23	20	21	18	16	14																												
9	50	38	30	25	45	35	28	24	29	24	21	24	21	18	20	17	15	13																												
10	46	35	28	23	42	32	26	21	27	22	19	23	19	16	18	15	13	11																												

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10267	10267	10267
5°	10306	10164	10222
10°	10248	10037	10002
15°	10137	9802	9698
20°	9986	9507	9286
25°	9830	9178	8884
30°	9625	8797	8316
35°	9412	8418	7796
40°	9218	7967	7152
45°	8961	7524	6570
50°	8679	7021	5921
55°	8392	6446	5315
60°	8127	5828	4646
65°	7784	5163	3978
70°	7352	4334	3213
75°	6725	3410	3023
80°	5994	3025	2777
85°	5064	2668	2482



TEST NUMBER: P332416-840

CATALOG NUMBER: S123RDIW-S560D755U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.6	1.7
10°-20°	249.2	4.8
20°-30°	358.8	6.9
30°-40°	404.2	7.8
40°-50°	386.7	7.4
50°-60°	316.7	6.1
60°-70°	213.7	4.1
70°-80°	107.5	2.1
80°-90°	31.2	0.6
90°-100°	36.4	0.7
100°-110°	173.3	3.3
110°-120°	416.3	8.0
120°-130°	530.1	10.2
130°-140°	566.4	10.9
140°-150°	529.7	10.2
150°-160°	427.3	8.2
160°-170°	275.7	5.3
170°-180°	95.0	1.8
0°-30°	697.6	13.4
0°-40°	1101.8	21.2
0°-60°	1805.2	34.7
0°-90°	2157.6	41.4
90°-120°	626.0	12.0
90°-150°	2252.2	43.2
90°-180°	3050.0	58.6
0°-180°	5207.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	954	954	954	954	954	
5°	954	950	941	947	946	90
15°	910	900	880	876	870	256
25°	828	808	773	757	748	381
35°	716	687	641	608	593	448
45°	589	552	494	452	432	454
55°	447	408	344	300	283	401
65°	306	262	203	166	156	302
75°	162	124	82	75	73	172
85°	41	25	22	20	20	46
90°	1	8	18	21	22	4
95°	45	17	23	28	28	56
105°	222	225	163	39	33	235
115°	415	420	427	434	437	410
125°	586	591	594	596	597	523
135°	729	733	736	738	736	561
145°	841	846	848	849	849	526
155°	927	925	926	929	925	427
165°	977	975	974	980	975	276
175°	1000	997	997	1002	996	95
180°	1000	1000	1000	1000	1000	



TEST NUMBER: P332416-840

CATALOG NUMBER: S123RDIW-S560D755U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	953.8	953.8	953.8	953.8	953.8	953.8	953.8	953.8	953.8	953.8	953.8
2.5°	956.9	956.3	955.8	955.2	954.7	953.6	952.0	950.3	948.7	947.1	948.6
5°	953.8	953.0	952.1	951.3	950.4	949.0	946.8	944.8	942.7	940.7	942.2
7.5°	945.0	944.1	943.1	942.2	941.3	939.5	936.9	934.1	931.4	928.8	929.6
10°	937.6	936.3	935.1	933.9	932.8	930.6	927.6	924.4	921.3	918.3	918.4
12.5°	927.1	925.7	924.3	923.0	921.7	919.2	915.3	911.6	907.8	904.0	903.9
15°	909.7	907.9	905.9	904.0	902.2	898.8	894.0	889.2	884.3	879.6	878.7
17.5°	887.9	885.8	883.5	881.3	879.1	874.9	868.8	862.7	856.6	850.5	848.7
20°	871.8	869.1	866.4	863.5	860.8	856.2	849.6	843.1	836.6	830.0	827.8
22.5°	853.8	850.7	847.6	844.3	841.2	836.2	829.2	822.2	815.4	808.4	805.6
25°	827.7	823.4	819.1	814.9	810.5	804.5	796.5	788.6	780.7	772.8	769.2
27.5°	796.0	791.2	786.5	781.7	777.0	770.2	761.4	752.7	743.9	735.1	730.0
30°	774.4	769.2	764.1	758.9	753.8	746.3	736.7	727.1	717.4	707.8	702.0
32.5°	752.7	746.9	741.0	735.2	729.3	721.3	711.1	700.9	690.7	680.5	674.2
35°	716.3	710.1	704.0	697.8	691.6	683.2	672.5	661.9	651.2	640.6	633.1
37.5°	679.5	672.7	665.8	658.8	652.0	642.9	631.5	620.2	608.7	597.3	589.0
40°	656.0	648.4	640.9	633.3	625.7	615.8	603.7	591.5	579.3	567.0	558.1
42.5°	629.3	621.8	614.3	606.7	599.2	589.1	576.4	563.8	551.2	538.6	528.8
45°	588.7	581.0	573.2	565.5	557.7	547.2	534.0	520.8	507.6	494.3	484.5
47.5°	548.0	539.5	531.0	522.5	514.0	503.2	489.9	476.7	463.4	450.2	439.6
50°	518.3	510.2	502.1	494.0	485.9	474.9	461.0	447.2	433.2	419.3	408.6
52.5°	491.7	482.9	474.1	465.3	456.7	445.4	431.5	417.8	403.9	390.2	379.1
55°	447.2	438.7	430.3	421.8	413.4	401.9	387.3	372.7	358.1	343.5	333.5
57.5°	406.0	396.8	387.6	378.4	369.2	357.3	342.6	328.0	313.3	298.6	289.2
60°	377.5	368.1	358.6	349.1	339.7	327.8	313.6	299.3	285.0	270.7	261.5
62.5°	349.0	339.6	330.1	320.6	311.2	299.3	285.1	270.8	256.5	242.3	233.6
65°	305.6	296.1	286.7	277.2	267.7	256.3	242.9	229.5	216.1	202.7	194.3
67.5°	262.1	252.6	243.0	233.4	223.9	212.7	199.8	186.9	174.1	161.2	154.9
70°	233.6	224.3	215.1	205.8	196.5	185.8	173.8	161.8	149.8	137.7	131.7
72.5°	205.1	196.0	186.8	177.7	168.5	158.5	147.6	136.6	125.7	114.8	109.9
75°	161.7	153.4	145.2	136.9	128.7	119.8	110.4	100.9	91.5	82.0	80.3
77.5°	122.1	114.6	107.1	99.7	92.2	85.4	79.4	73.3	67.2	61.1	60.2
80°	96.7	89.7	82.6	75.5	68.5	63.2	59.6	55.9	52.3	48.8	48.2
82.5°	72.6	66.4	60.4	54.3	48.2	44.3	42.6	41.0	39.3	37.6	37.1
85°	41.0	37.3	33.4	29.7	25.9	23.7	23.2	22.7	22.2	21.6	21.3
87.5°	15.0	13.8	12.6	11.4	10.3	9.9	10.3	10.7	11.2	11.6	11.6
90°	0.7	2.4	4.0	5.7	7.4	9.3	11.4	13.5	15.7	17.9	18.5
92.5°	13.8	13.3	12.9	12.4	12.0	12.5	14.1	15.8	17.4	19.0	20.1
95°	45.3	38.6	31.8	25.0	18.3	15.8	17.6	19.4	21.2	23.0	24.2
97.5°	91.1	88.1	85.0	82.0	79.0	71.5	59.6	47.7	35.9	23.9	25.2
100°	125.6	128.9	132.2	135.5	138.8	127.5	101.8	76.0	50.3	24.5	25.9
102.5°	164.8	167.2	169.6	172.0	174.3	161.5	133.3	105.1	77.1	48.9	44.8
105°	221.5	223.3	225.1	226.9	228.7	222.2	207.3	192.5	177.6	162.8	133.5
107.5°	281.1	282.7	284.1	285.6	287.0	288.9	291.2	293.6	296.0	298.3	276.8
110°	321.0	322.3	323.7	325.0	326.3	327.9	329.7	331.5	333.4	335.2	329.7



TEST NUMBER: P332416-840

CATALOG NUMBER: S123RDIW-S560D755U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	359.1	360.2	361.4	362.6	363.9	365.4	367.2	369.0	370.8	372.6	372.7
115°	415.4	416.4	417.4	418.4	419.4	420.6	422.1	423.5	425.1	426.6	428.2
117.5°	470.0	471.2	472.4	473.6	474.8	475.8	476.6	477.4	478.1	478.9	480.2
120°	503.8	505.3	506.9	508.3	509.8	510.8	511.3	511.8	512.3	512.7	514.1
122.5°	538.4	539.6	540.8	542.0	543.2	544.1	544.7	545.4	546.0	546.6	547.5
125°	585.6	586.9	588.2	589.6	590.9	591.9	592.5	593.2	593.8	594.5	594.8
127.5°	631.4	632.7	634.0	635.3	636.6	637.7	638.5	639.2	640.1	640.9	641.4
130°	659.8	661.3	662.6	663.9	665.2	666.2	666.8	667.5	668.1	668.8	669.4
132.5°	687.2	688.5	689.8	691.2	692.6	693.5	694.0	694.5	695.0	695.6	696.2
135°	729.0	730.0	730.9	732.0	733.0	733.8	734.5	735.1	735.8	736.4	736.9
137.5°	764.7	765.9	767.2	768.4	769.7	770.5	770.8	771.2	771.6	771.9	772.7
140°	788.4	789.4	790.4	791.4	792.4	793.1	793.7	794.2	794.7	795.2	795.8
142.5°	810.4	811.4	812.4	813.4	814.5	815.2	815.7	816.2	816.7	817.2	817.7
145°	841.2	842.3	843.5	844.7	845.9	846.6	846.9	847.3	847.6	847.9	848.2
147.5°	870.2	870.9	871.7	872.4	873.2	873.7	874.1	874.4	874.7	875.0	875.5
150°	888.1	888.5	889.0	889.5	890.0	890.4	890.8	891.1	891.4	891.7	892.1
152.5°	904.0	904.3	904.5	904.7	905.0	905.2	905.4	905.6	905.8	906.1	906.6
155°	926.7	926.3	926.0	925.6	925.3	925.2	925.4	925.6	925.7	925.9	926.8
157.5°	944.2	944.2	944.1	944.1	944.1	944.0	943.8	943.6	943.5	943.3	944.3
160°	954.9	954.7	954.6	954.4	954.2	954.1	953.9	953.7	953.6	953.4	954.4
162.5°	965.0	964.6	964.1	963.7	963.3	963.0	962.8	962.7	962.5	962.3	963.5
165°	977.2	976.7	976.2	975.7	975.2	974.9	974.7	974.5	974.4	974.2	975.5
167.5°	986.7	986.0	985.4	984.7	984.1	983.7	983.7	983.7	983.7	983.7	985.0
170°	992.1	991.4	990.8	990.1	989.5	989.1	989.1	989.1	989.1	989.1	990.4
172.5°	995.6	994.8	994.0	993.3	992.5	992.1	992.3	992.4	992.5	992.7	994.0
175°	1000.3	999.4	998.6	997.7	996.9	996.6	996.7	996.9	997.1	997.2	998.5
177.5°	1001.4	1000.8	1000.1	999.5	998.8	998.6	998.7	998.8	999.0	999.1	1000.1
180°	1000.3	1000.3	1000.3	1000.3	1000.3	1000.3	1000.3	1000.3	1000.3	1000.3	1000.3



TEST NUMBER: P332416-840

CATALOG NUMBER: S123RDIW-S560D755U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	953.8	953.8	953.8	953.8	953.8	953.8	953.8	953.8
2.5°	950.1	951.6	953.1	953.7	953.4	953.1	952.9	952.6
5°	943.7	945.3	946.8	947.5	947.2	946.7	946.4	946.0
7.5°	930.5	931.3	932.2	932.3	931.7	931.2	930.6	930.0
10°	918.6	918.8	918.9	918.6	917.8	916.9	916.0	915.1
12.5°	903.8	903.7	903.6	903.0	902.0	901.0	900.1	899.1
15°	877.9	877.0	876.2	875.0	873.8	872.7	871.5	870.3
17.5°	846.9	845.1	843.1	841.4	839.6	837.8	836.0	834.2
20°	825.6	823.3	821.1	819.0	816.9	814.9	812.7	810.7
22.5°	802.8	800.0	797.3	794.9	792.9	791.0	789.1	787.2
25°	765.6	761.9	758.4	755.6	753.8	751.8	749.9	748.0
27.5°	725.0	720.0	715.0	711.0	708.1	705.3	702.4	699.4
30°	696.1	690.2	684.5	680.1	677.4	674.7	671.9	669.1
32.5°	667.8	661.4	655.0	650.4	647.5	644.6	641.7	638.8
35°	625.7	618.3	611.0	605.7	602.6	599.6	596.4	593.3
37.5°	580.6	572.2	563.8	557.7	553.9	550.1	546.2	542.4
40°	549.2	540.2	531.3	524.8	520.9	516.9	513.0	509.0
42.5°	519.1	509.3	499.5	492.8	489.3	485.7	482.2	478.7
45°	474.7	464.9	455.1	448.2	444.0	439.9	435.8	431.6
47.5°	428.9	418.3	407.6	400.4	396.8	393.0	389.4	385.7
50°	398.0	387.3	376.7	369.3	365.4	361.4	357.5	353.6
52.5°	368.1	357.0	345.9	338.6	335.1	331.5	328.0	324.5
55°	323.6	313.6	303.6	296.9	293.5	290.0	286.6	283.2
57.5°	279.7	270.3	260.9	254.8	251.9	248.9	246.0	243.1
60°	252.2	242.9	233.6	227.5	224.6	221.7	218.7	215.8
62.5°	224.8	216.1	207.3	201.5	198.4	195.3	192.3	189.2
65°	185.8	177.4	169.0	163.8	162.0	160.1	158.1	156.2
67.5°	148.7	142.3	136.0	131.9	129.9	127.8	125.8	123.8
70°	125.6	119.7	113.6	109.7	107.8	105.9	104.0	102.1
72.5°	104.9	100.1	95.1	92.3	91.5	90.7	89.9	89.1
75°	78.6	76.9	75.1	74.1	73.7	73.4	73.0	72.7
77.5°	59.3	58.4	57.4	56.8	56.5	56.0	55.7	55.3
80°	47.7	47.2	46.7	46.3	45.9	45.5	45.2	44.8
82.5°	36.6	36.1	35.5	35.2	35.1	35.1	35.0	34.9
85°	21.0	20.6	20.3	20.1	20.1	20.1	20.1	20.1
87.5°	11.6	11.6	11.6	11.5	11.5	11.4	11.3	11.3
90°	19.2	19.8	20.5	21.0	21.3	21.6	21.9	22.3
92.5°	21.1	22.2	23.2	23.8	24.0	24.2	24.4	24.6
95°	25.3	26.5	27.7	28.3	28.3	28.3	28.3	28.3
97.5°	26.6	27.9	29.2	30.0	30.1	30.3	30.5	30.6
100°	27.2	28.5	29.8	30.6	30.7	30.9	31.0	31.2
102.5°	40.7	36.7	32.5	30.6	30.9	31.2	31.5	31.8
105°	104.3	75.0	45.8	31.4	31.7	32.0	32.4	32.7
107.5°	255.4	234.0	212.6	190.9	168.7	146.7	124.7	102.7
110°	324.3	318.8	313.4	298.8	275.2	251.6	227.9	204.4



TEST NUMBER: P332416-840

CATALOG NUMBER: S123RDIW-S560D755U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	372.8	372.9	373.0	370.5	365.6	360.6	355.6	350.6
115°	429.9	431.5	433.1	434.3	434.9	435.7	436.3	437.0
117.5°	481.5	482.8	484.1	484.8	485.0	485.1	485.2	485.4
120°	515.4	516.7	518.1	518.7	518.7	518.7	518.7	518.7
122.5°	548.5	549.4	550.4	550.9	551.0	551.1	551.3	551.4
125°	595.1	595.5	595.8	596.1	596.5	596.8	597.1	597.4
127.5°	642.0	642.5	643.0	643.1	642.8	642.4	642.1	641.8
130°	670.1	670.8	671.5	671.7	671.3	671.0	670.7	670.2
132.5°	696.9	697.5	698.2	698.3	697.8	697.4	696.9	696.4
135°	737.4	737.9	738.4	738.4	737.9	737.4	736.9	736.4
137.5°	773.6	774.4	775.2	775.4	775.1	774.7	774.4	774.1
140°	796.5	797.1	797.8	798.0	797.6	797.3	797.0	796.6
142.5°	818.2	818.7	819.2	819.3	818.8	818.4	817.9	817.4
145°	848.6	848.9	849.2	849.4	849.4	849.4	849.4	849.4
147.5°	875.8	876.1	876.5	876.2	875.5	874.6	873.9	873.1
150°	892.4	892.7	893.0	893.0	892.5	892.0	891.5	891.0
152.5°	907.2	907.8	908.4	908.3	907.6	906.8	906.1	905.2
155°	927.6	928.4	929.3	929.2	928.2	927.2	926.1	925.1
157.5°	945.3	946.2	947.3	947.2	945.8	944.5	943.3	942.0
160°	955.4	956.4	957.4	957.4	956.1	955.0	953.8	952.7
162.5°	964.6	965.7	966.8	966.8	965.8	964.8	963.8	962.8
165°	976.8	978.2	979.5	979.6	978.5	977.2	976.1	974.9
167.5°	986.3	987.7	989.1	989.1	987.7	986.3	985.0	983.7
170°	991.7	993.1	994.4	994.4	993.1	991.7	990.4	989.1
172.5°	995.3	996.6	997.9	997.8	996.4	995.0	993.5	992.1
175°	999.6	1000.8	1001.9	1001.8	1000.5	999.2	997.8	996.5
177.5°	1001.2	1002.2	1003.3	1003.1	1001.8	1000.5	999.2	997.8
180°	1000.3	1000.3	1000.3	1000.3	1000.3	1000.3	1000.3	1000.3

(END OF REPORT)