

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332100-940

Luminaire Tested: **S123DIW-S340D755U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332100-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S340D755U940-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 755 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3953.2 lumens  
Efficiency: N/A  
Efficacy: 130.0 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 30.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332100-940

CATALOG NUMBER: S123DIW-S340D755U940-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

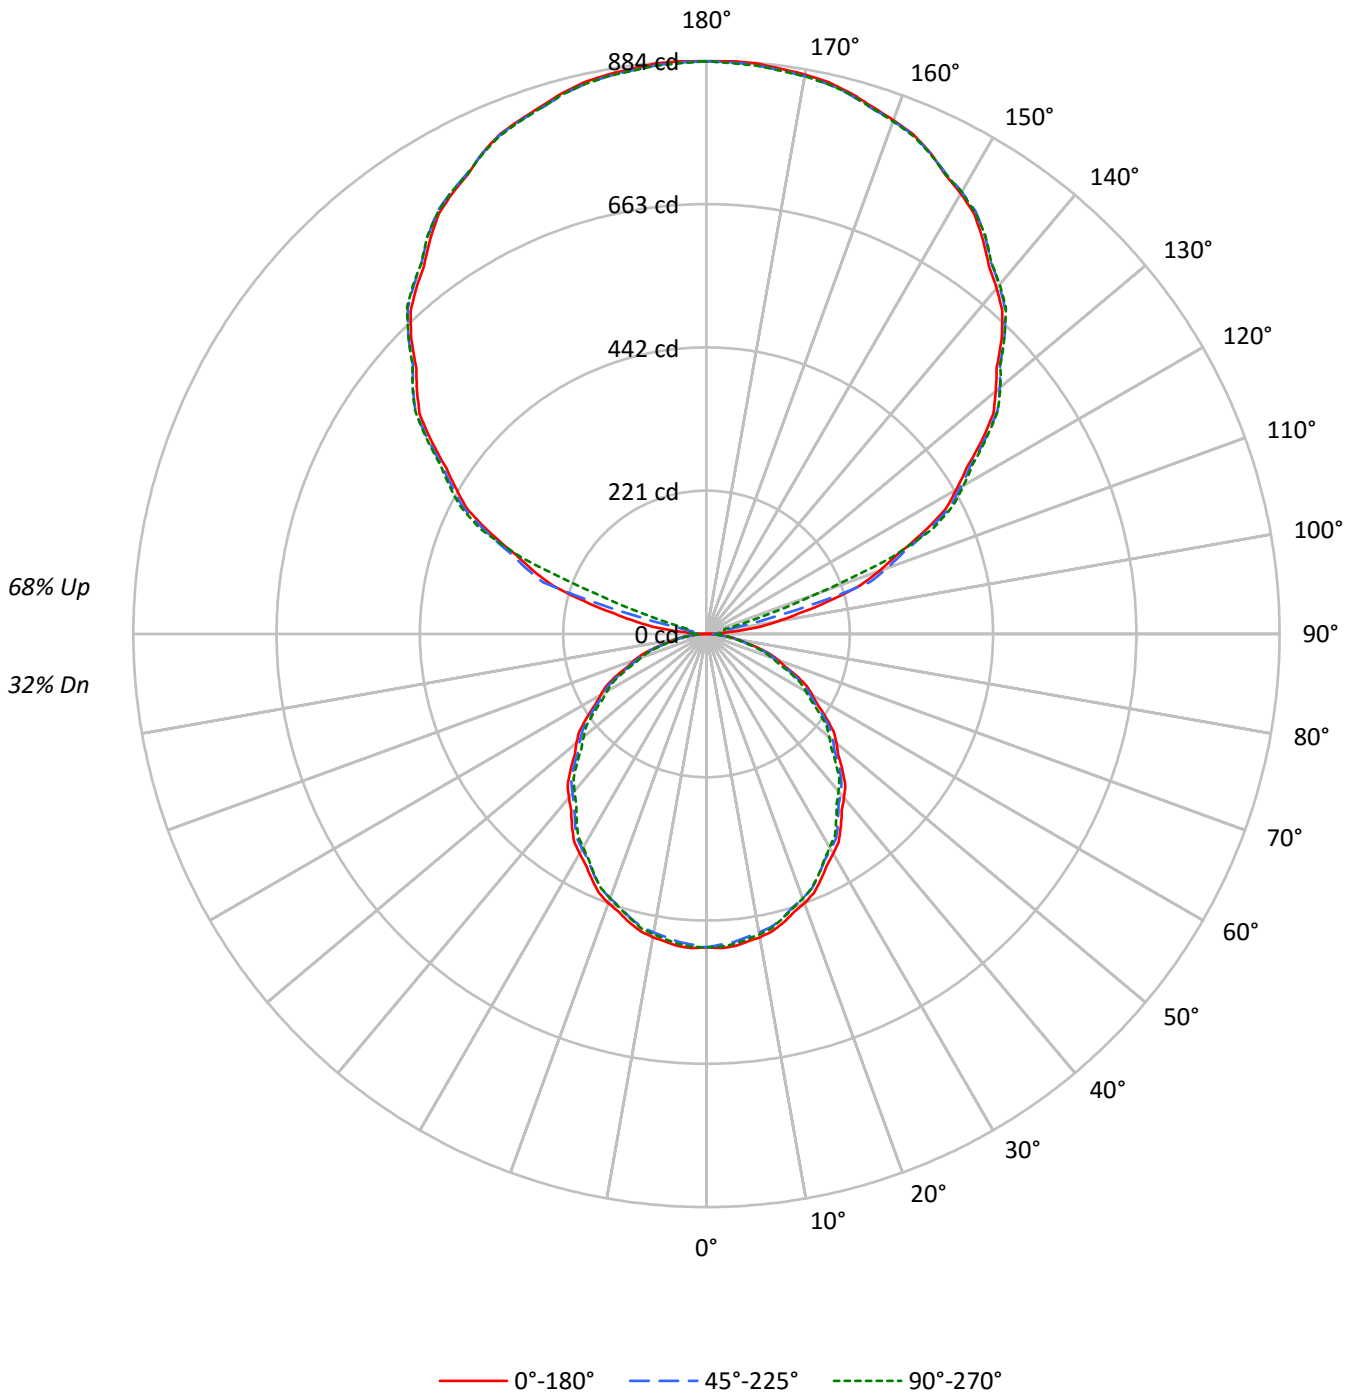



TEST NUMBER: P332100-940

CATALOG NUMBER: S123DIW-S340D755U940-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	73	73	73	56	56	56	39	39	39	32
1	94	89	86	82	84	81	77	75	64	62	60	49	47	46	35	34	33	27
2	85	78	72	67	76	70	65	61	56	53	49	43	40	38	31	29	28	22
3	78	69	61	56	70	62	56	51	49	45	42	38	35	32	27	25	24	19
4	71	61	53	47	64	55	48	43	44	39	35	34	30	28	24	22	20	16
5	65	54	46	40	58	49	42	37	39	34	30	30	27	24	22	19	18	14
6	60	48	40	35	54	44	37	32	35	30	26	27	24	21	20	17	16	12
7	55	43	36	30	50	39	33	28	32	27	23	25	21	18	18	16	14	11
8	51	39	32	27	46	36	29	24	29	24	20	22	19	16	16	14	12	10
9	48	36	28	24	43	32	26	22	26	22	18	21	17	15	15	13	11	9
10	44	33	26	21	40	30	24	19	24	19	16	19	16	13	14	12	10	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5201	5201	5201
5°	5226	5154	5190
10°	5191	5109	5141
15°	5131	5051	5060
20°	5060	4969	4974
25°	4963	4871	4861
30°	4860	4762	4724
35°	4750	4646	4586
40°	4636	4519	4449
45°	4509	4402	4294
50°	4382	4258	4140
55°	4219	4110	3984
60°	4052	3935	3810
65°	3904	3744	3629
70°	3688	3531	3374
75°	3373	3248	3111
80°	3037	2913	2882
85°	2668	2569	2470



TEST NUMBER: P332100-940

CATALOG NUMBER: S123DIW-S340D755U940-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	45.5	1.2
10°-20°	128.5	3.3
20°-30°	189.9	4.8
30°-40°	221.8	5.6
40°-50°	223.0	5.6
50°-60°	195.8	5.0
60°-70°	145.9	3.7
70°-80°	83.1	2.1
80°-90°	26.3	0.7
90°-100°	32.1	0.8
100°-110°	153.0	3.9
110°-120°	367.6	9.3
120°-130°	468.1	11.8
130°-140°	500.2	12.7
140°-150°	467.7	11.8
150°-160°	377.3	9.5
160°-170°	243.5	6.2
170°-180°	83.9	2.1
0°-30°	363.9	9.2
0°-40°	585.7	14.8
0°-60°	1004.5	25.4
0°-90°	1259.8	31.9
90°-120°	552.8	14.0
90°-150°	1988.7	50.3
90°-180°	2693.0	68.1
0°-180°	3953.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	483	483	483	483	483	
5°	484	481	477	481	480	46
15°	460	458	453	456	454	130
25°	418	415	410	410	409	192
35°	362	359	354	351	349	226
45°	296	294	289	284	282	229
55°	225	224	219	215	212	201
65°	153	151	147	144	142	151
75°	81	79	78	76	75	87
85°	22	21	21	20	20	24
90°	1	7	16	18	20	3
95°	40	15	20	25	25	49
105°	196	199	144	34	29	207
115°	367	371	377	383	386	362
125°	517	522	525	526	528	462
135°	644	648	650	652	650	495
145°	743	747	749	750	750	465
155°	818	817	818	821	817	377
165°	863	861	860	865	861	244
175°	883	880	881	885	880	84
180°	883	883	883	883	883	



TEST NUMBER: P332100-940

CATALOG NUMBER: S123DIW-S340D755U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	483.2	483.2	483.2	483.2	483.2	483.2	483.2	483.2	483.2	483.2	483.2
2.5°	484.9	484.6	484.3	484.0	483.7	483.1	482.3	481.5	480.7	479.9	480.6
5°	483.7	483.1	482.7	482.2	481.8	481.1	480.0	479.0	478.0	477.0	477.9
7.5°	478.9	478.4	478.0	477.5	477.1	476.3	475.3	474.2	473.1	472.1	472.9
10°	474.9	474.5	473.9	473.5	473.1	472.3	471.0	469.8	468.6	467.4	468.2
12.5°	469.6	469.2	468.8	468.4	468.1	467.3	466.2	465.0	463.9	462.8	463.4
15°	460.4	460.0	459.6	459.2	458.9	458.1	456.9	455.7	454.5	453.3	454.1
17.5°	449.6	449.2	448.7	448.2	447.7	446.9	445.7	444.5	443.3	442.1	442.6
20°	441.7	441.1	440.6	440.0	439.4	438.5	437.4	436.1	435.0	433.8	434.2
22.5°	432.7	432.1	431.6	431.1	430.5	429.6	428.4	427.2	426.0	424.8	425.1
25°	417.9	417.4	416.9	416.3	415.8	414.9	413.7	412.5	411.3	410.1	410.2
27.5°	402.3	401.7	401.2	400.6	400.1	399.2	398.0	396.6	395.4	394.0	394.1
30°	391.0	390.5	390.0	389.6	389.1	388.3	387.0	385.7	384.4	383.1	383.1
32.5°	379.7	379.1	378.4	377.8	377.3	376.4	375.4	374.4	373.4	372.5	371.9
35°	361.5	361.0	360.3	359.8	359.3	358.4	357.2	356.0	354.8	353.6	353.0
37.5°	342.9	342.1	341.4	340.7	340.1	339.1	337.9	336.6	335.5	334.2	333.6
40°	329.9	329.3	328.8	328.2	327.7	326.7	325.5	324.1	322.9	321.6	320.8
42.5°	316.9	316.3	315.7	315.0	314.4	313.4	312.2	310.9	309.6	308.3	307.6
45°	296.2	295.9	295.5	295.2	294.8	294.0	292.7	291.6	290.3	289.2	288.1
47.5°	275.7	275.2	274.6	274.1	273.6	272.8	271.6	270.5	269.4	268.2	267.2
50°	261.7	261.3	260.8	260.4	259.9	259.0	257.9	256.7	255.5	254.3	253.2
52.5°	247.1	246.8	246.5	246.2	245.8	245.0	243.8	242.5	241.3	240.0	239.2
55°	224.8	224.7	224.6	224.5	224.4	223.7	222.6	221.3	220.2	219.0	217.9
57.5°	203.5	203.2	202.9	202.6	202.2	201.6	200.6	199.7	198.8	197.8	196.9
60°	188.2	188.2	188.1	188.0	187.9	187.3	186.1	185.0	184.0	182.8	182.0
62.5°	174.6	174.3	174.2	173.9	173.6	173.0	171.8	170.8	169.6	168.5	167.7
65°	153.3	152.8	152.4	151.9	151.5	150.8	149.9	148.9	148.0	147.0	146.3
67.5°	130.8	130.4	130.0	129.6	129.2	128.6	128.0	127.2	126.5	125.8	125.2
70°	117.2	116.6	116.1	115.5	114.9	114.4	113.9	113.2	112.7	112.2	111.6
72.5°	102.9	102.5	102.1	101.7	101.2	100.8	100.1	99.5	98.9	98.3	97.6
75°	81.1	80.6	80.3	79.9	79.5	79.2	78.9	78.6	78.4	78.1	77.7
77.5°	61.6	61.4	61.3	61.1	60.8	60.5	60.3	59.9	59.6	59.2	58.9
80°	49.0	48.8	48.5	48.2	47.9	47.7	47.5	47.3	47.2	47.0	46.8
82.5°	36.7	36.6	36.6	36.6	36.5	36.5	36.4	36.4	36.4	36.3	36.1
85°	21.6	21.4	21.2	21.0	20.9	20.8	20.8	20.8	20.8	20.8	20.6
87.5°	8.7	8.8	8.9	9.0	9.1	9.3	9.5	9.8	10.2	10.4	10.5
90°	0.6	2.1	3.6	5.0	6.5	8.2	10.1	11.9	13.8	15.8	16.3
92.5°	12.2	11.8	11.4	11.0	10.6	11.1	12.5	13.9	15.3	16.8	17.7
95°	40.0	34.1	28.1	22.1	16.1	13.9	15.5	17.1	18.7	20.3	21.4
97.5°	80.4	77.8	75.1	72.4	69.7	63.1	52.6	42.1	31.7	21.1	22.3
100°	110.9	113.8	116.7	119.7	122.5	112.6	89.9	67.1	44.4	21.7	22.8
102.5°	145.5	147.7	149.7	151.9	153.9	142.6	117.7	92.8	68.0	43.2	39.6
105°	195.6	197.2	198.8	200.4	202.0	196.2	183.1	170.0	156.9	143.7	117.9
107.5°	248.3	249.6	250.8	252.2	253.4	255.1	257.2	259.2	261.4	263.4	244.4
110°	283.5	284.6	285.8	287.0	288.1	289.5	291.1	292.7	294.4	296.0	291.1



TEST NUMBER: P332100-940

CATALOG NUMBER: S123DIW-S340D755U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	317.1	318.1	319.1	320.2	321.3	322.6	324.2	325.8	327.4	329.0	329.1
115°	366.8	367.7	368.5	369.4	370.3	371.4	372.7	374.0	375.3	376.7	378.1
117.5°	415.0	416.1	417.1	418.2	419.3	420.2	420.8	421.5	422.1	422.8	424.0
120°	444.9	446.2	447.5	448.8	450.1	451.0	451.5	451.9	452.4	452.7	454.0
122.5°	475.4	476.4	477.5	478.6	479.7	480.5	481.0	481.6	482.1	482.7	483.5
125°	517.1	518.3	519.4	520.6	521.7	522.6	523.2	523.8	524.3	525.0	525.2
127.5°	557.5	558.7	559.8	561.0	562.1	563.1	563.8	564.5	565.2	565.9	566.3
130°	582.6	583.9	585.1	586.2	587.4	588.3	588.8	589.4	590.0	590.6	591.1
132.5°	606.8	608.0	609.1	610.3	611.5	612.3	612.8	613.2	613.7	614.2	614.7
135°	643.7	644.6	645.4	646.3	647.2	647.9	648.5	649.1	649.7	650.2	650.7
137.5°	675.2	676.3	677.4	678.5	679.7	680.4	680.6	681.0	681.4	681.6	682.3
140°	696.2	697.1	697.9	698.8	699.7	700.3	700.8	701.2	701.7	702.1	702.7
142.5°	715.6	716.5	717.4	718.3	719.2	719.8	720.2	720.7	721.1	721.6	722.0
145°	742.8	743.8	744.8	745.8	746.9	747.5	747.8	748.1	748.4	748.7	748.9
147.5°	768.4	769.0	769.7	770.3	771.1	771.5	771.9	772.1	772.4	772.7	773.0
150°	784.2	784.5	785.0	785.4	785.9	786.2	786.6	786.8	787.1	787.4	787.7
152.5°	798.3	798.5	798.7	798.9	799.2	799.3	799.5	799.7	799.9	800.0	800.5
155°	818.2	818.0	817.7	817.3	817.1	817.0	817.2	817.3	817.4	817.6	818.3
157.5°	833.7	833.7	833.7	833.7	833.7	833.6	833.4	833.2	833.1	832.9	833.8
160°	843.2	843.0	842.9	842.8	842.6	842.5	842.3	842.1	842.0	841.9	842.8
162.5°	852.1	851.8	851.3	851.0	850.6	850.3	850.2	850.1	849.9	849.7	850.8
165°	862.9	862.5	862.0	861.6	861.1	860.9	860.7	860.5	860.4	860.2	861.4
167.5°	871.3	870.7	870.1	869.5	869.0	868.6	868.6	868.6	868.6	868.6	869.8
170°	876.0	875.4	874.9	874.2	873.7	873.3	873.3	873.3	873.3	873.3	874.5
172.5°	879.1	878.4	877.7	877.1	876.4	876.0	876.2	876.3	876.4	876.6	877.7
175°	883.2	882.4	881.7	881.0	880.3	880.0	880.1	880.3	880.5	880.6	881.6
177.5°	884.2	883.7	883.1	882.5	881.9	881.7	881.8	881.9	882.1	882.2	883.1
180°	883.2	883.2	883.2	883.2	883.2	883.2	883.2	883.2	883.2	883.2	883.2



TEST NUMBER: P332100-940

CATALOG NUMBER: S123DIW-S340D755U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	483.2	483.2	483.2	483.2	483.2	483.2	483.2	483.2
2.5°	481.3	482.1	482.9	483.2	483.1	483.0	483.0	482.9
5°	478.8	479.7	480.7	481.1	480.9	480.7	480.5	480.3
7.5°	473.8	474.6	475.4	475.7	475.6	475.5	475.5	475.3
10°	469.1	469.9	470.7	471.1	470.9	470.7	470.6	470.4
12.5°	464.0	464.6	465.2	465.5	465.4	465.2	465.1	465.0
15°	454.8	455.5	456.3	456.4	455.8	455.2	454.7	454.1
17.5°	443.1	443.6	444.2	444.3	444.1	443.9	443.7	443.5
20°	434.5	434.9	435.2	435.3	435.0	434.7	434.4	434.2
22.5°	425.3	425.7	426.0	426.0	425.6	425.3	424.9	424.5
25°	410.3	410.4	410.5	410.4	410.1	409.8	409.6	409.3
27.5°	394.2	394.3	394.3	394.2	393.9	393.5	393.2	392.8
30°	383.1	383.1	383.1	382.7	382.1	381.5	380.8	380.1
32.5°	371.4	370.9	370.4	370.0	369.6	369.3	368.9	368.5
35°	352.5	352.0	351.3	350.9	350.4	349.9	349.5	349.0
37.5°	332.9	332.3	331.5	331.1	330.8	330.5	330.2	329.9
40°	320.1	319.4	318.6	318.1	317.7	317.4	317.0	316.6
42.5°	306.8	306.0	305.3	304.8	304.4	304.1	303.7	303.3
45°	287.0	285.9	284.7	284.0	283.5	283.0	282.6	282.1
47.5°	266.1	265.0	263.9	263.1	262.7	262.3	261.9	261.5
50°	252.3	251.2	250.2	249.4	248.9	248.3	247.8	247.2
52.5°	238.3	237.4	236.5	235.8	235.2	234.7	234.2	233.6
55°	217.0	215.9	214.9	214.2	213.7	213.2	212.8	212.3
57.5°	196.0	195.0	194.1	193.4	192.9	192.3	191.8	191.3
60°	181.2	180.3	179.5	178.9	178.3	177.9	177.5	177.0
62.5°	166.8	166.0	165.2	164.6	164.3	164.0	163.7	163.4
65°	145.6	144.9	144.1	143.7	143.4	143.0	142.8	142.5
67.5°	124.5	123.9	123.2	122.7	122.3	121.9	121.5	121.2
70°	110.9	110.2	109.6	109.1	108.6	108.2	107.6	107.2
72.5°	97.1	96.5	95.9	95.5	95.3	95.1	94.8	94.5
75°	77.2	76.7	76.2	75.9	75.6	75.3	75.1	74.8
77.5°	58.6	58.3	58.0	57.9	57.9	57.9	57.9	57.9
80°	46.7	46.6	46.5	46.5	46.5	46.5	46.5	46.5
82.5°	36.0	35.8	35.7	35.5	35.5	35.4	35.3	35.2
85°	20.4	20.2	20.1	20.0	20.0	20.0	20.0	20.0
87.5°	10.5	10.6	10.6	10.7	10.7	10.8	10.9	10.9
90°	16.9	17.5	18.1	18.5	18.8	19.1	19.4	19.7
92.5°	18.6	19.6	20.5	21.0	21.2	21.4	21.6	21.8
95°	22.4	23.4	24.4	25.0	25.0	25.0	25.0	25.0
97.5°	23.5	24.6	25.8	26.5	26.6	26.8	26.9	27.0
100°	24.0	25.1	26.3	27.0	27.1	27.3	27.4	27.6
102.5°	35.9	32.4	28.7	27.0	27.3	27.6	27.8	28.1
105°	92.1	66.3	40.5	27.7	28.0	28.3	28.6	28.9
107.5°	225.5	206.6	187.7	168.5	149.0	129.6	110.1	90.7
110°	286.3	281.5	276.7	263.9	243.0	222.1	201.3	180.5





TEST NUMBER: P332100-940

CATALOG NUMBER: S123DIW-S340D755U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	329.2	329.3	329.4	327.2	322.8	318.4	314.0	309.6
115°	379.6	381.0	382.5	383.5	384.1	384.7	385.2	385.8
117.5°	425.2	426.3	427.5	428.1	428.3	428.4	428.5	428.6
120°	455.1	456.3	457.4	458.0	458.0	458.0	458.0	458.0
122.5°	484.3	485.1	486.0	486.4	486.5	486.6	486.8	486.9
125°	525.5	525.8	526.1	526.4	526.7	527.0	527.3	527.5
127.5°	566.9	567.3	567.8	567.8	567.6	567.2	566.9	566.7
130°	591.7	592.3	592.9	593.1	592.7	592.5	592.2	591.8
132.5°	615.4	615.9	616.5	616.6	616.2	615.8	615.4	614.9
135°	651.1	651.6	652.0	652.0	651.6	651.1	650.7	650.2
137.5°	683.1	683.8	684.5	684.7	684.4	684.0	683.8	683.5
140°	703.3	703.8	704.5	704.6	704.3	704.0	703.7	703.4
142.5°	722.5	722.9	723.4	723.4	723.0	722.6	722.2	721.8
145°	749.3	749.6	749.8	750.0	750.0	750.0	750.0	750.0
147.5°	773.3	773.6	773.9	773.6	773.0	772.3	771.7	771.0
150°	788.0	788.3	788.5	788.5	788.1	787.6	787.2	786.8
152.5°	801.0	801.6	802.1	802.0	801.4	800.7	800.0	799.3
155°	819.0	819.7	820.6	820.5	819.6	818.7	817.8	816.9
157.5°	834.7	835.5	836.4	836.3	835.2	834.0	832.9	831.8
160°	843.6	844.5	845.3	845.3	844.3	843.3	842.2	841.2
162.5°	851.8	852.7	853.7	853.7	852.8	851.9	851.0	850.2
165°	862.6	863.7	864.9	865.0	864.0	862.9	861.9	860.9
167.5°	870.9	872.2	873.3	873.3	872.2	870.9	869.8	868.6
170°	875.7	876.9	878.1	878.1	876.9	875.7	874.5	873.3
172.5°	878.9	880.0	881.2	881.1	879.9	878.6	877.3	876.0
175°	882.6	883.7	884.7	884.6	883.4	882.3	881.1	879.9
177.5°	884.0	884.9	885.9	885.7	884.6	883.4	882.3	881.1
180°	883.2	883.2	883.2	883.2	883.2	883.2	883.2	883.2

(END OF REPORT)