

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332132-940

Luminaire Tested: **S123DIW-S560D1030U940-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332132-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S560D1030U940-4F0-1E-UDD-A  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1030 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5807.2 lumens  
Efficiency: N/A  
Efficacy: 128.5 lumens/watt  
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 45.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

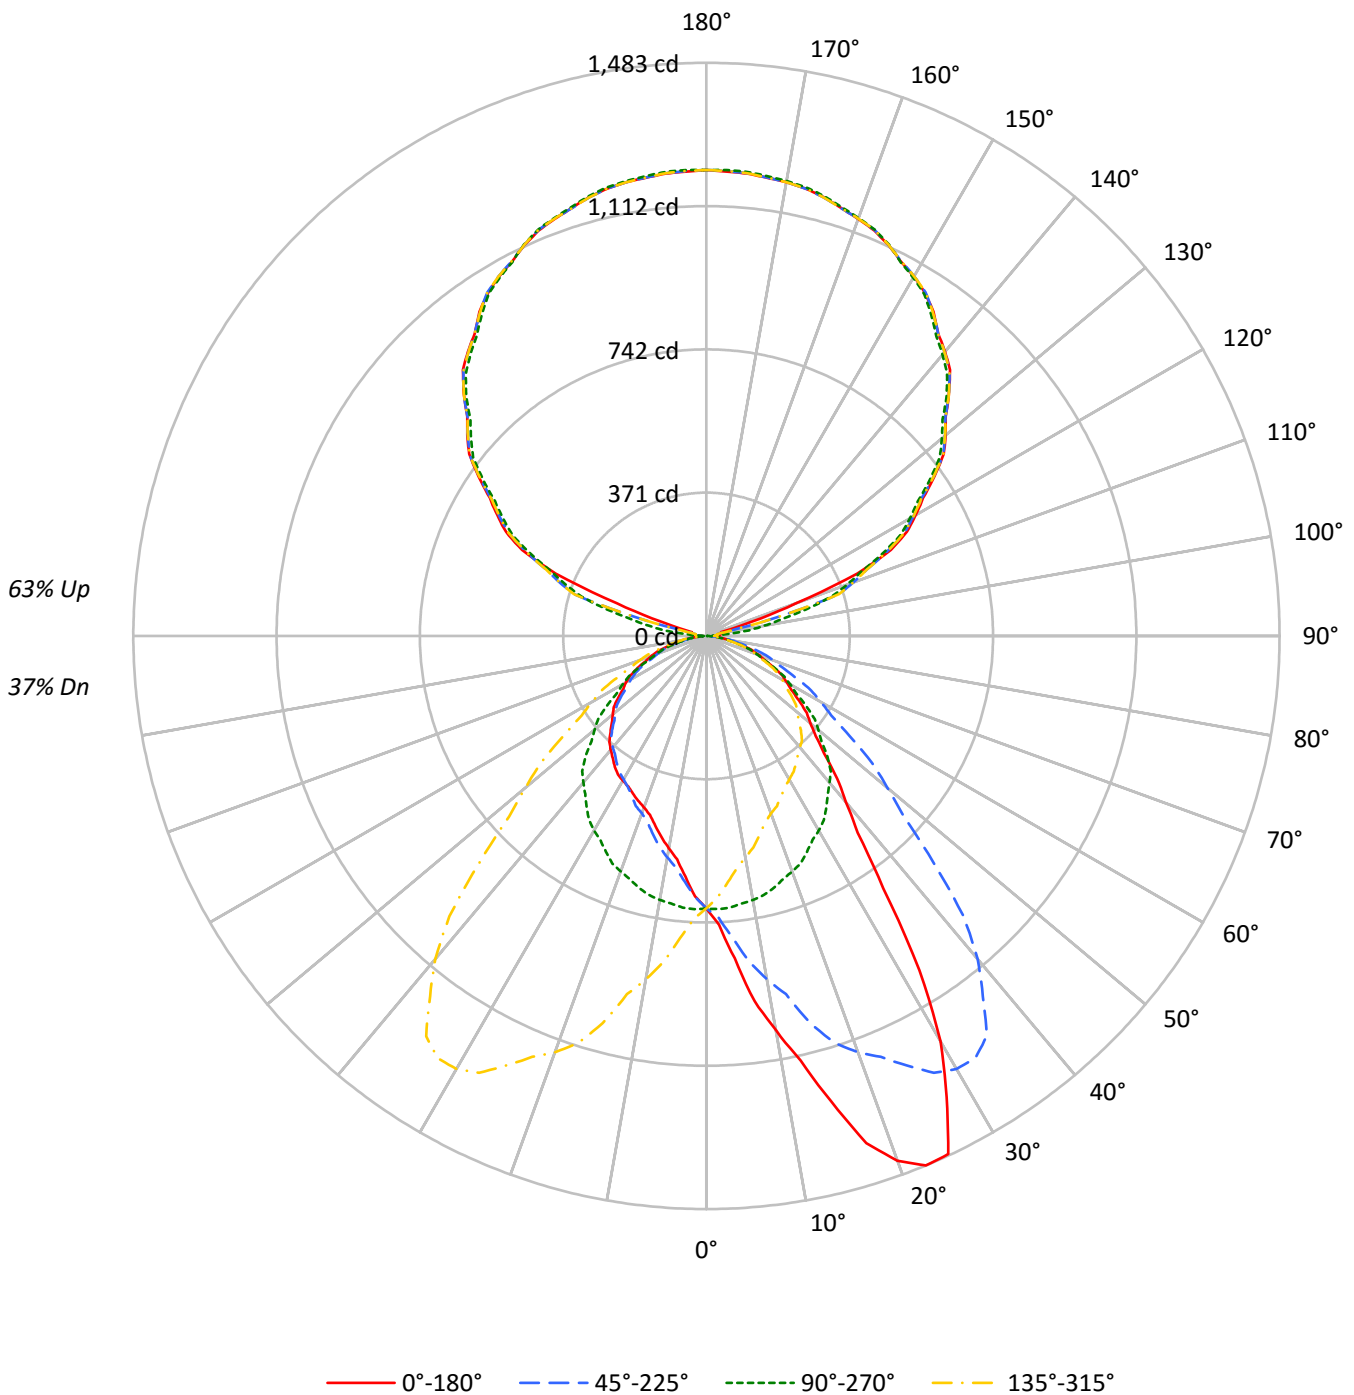

63% Up

37% Dn



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	37				
1	95	91	87	84	86	82	79	76	67	65	63	52	51	50	39	38	37	31				
2	87	80	74	69	78	72	67	63	59	55	52	46	44	42	35	33	32	27				
3	79	70	63	57	71	64	58	53	52	48	44	41	38	35	31	29	27	23				
4	72	62	54	49	65	56	50	45	46	41	38	37	33	30	28	25	24	20				
5	66	55	47	42	60	50	44	38	41	36	32	33	29	26	25	23	21	17				
6	61	49	42	36	55	45	38	33	37	32	28	30	26	23	23	20	18	15				
7	56	45	37	31	51	41	34	29	34	29	25	27	23	20	21	18	16	13				
8	52	40	33	28	47	37	30	26	31	26	22	25	21	18	19	16	14	12				
9	49	37	29	25	44	34	27	23	28	23	20	23	19	16	17	15	13	11				
10	45	34	27	22	41	31	25	20	26	21	18	21	17	15	16	14	12	10				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	7587	7587	7587	7587
5°	9048	7621	6753	7621
10°	11326	7582	6099	7582
15°	13891	7520	5678	7520
20°	16549	7425	5407	7425
25°	17570	7310	5346	7310
30°	15060	7225	5374	7225
35°	10474	7104	5430	7104
40°	7888	6962	5413	6962
45°	6550	6753	5345	6753
50°	5868	6325	5297	6325
55°	5485	5864	5230	5864
60°	5147	5382	5175	5382
65°	4834	4905	5010	4905
70°	4535	4365	4771	4365
75°	4059	3818	4375	3818
80°	3552	3137	3769	3137
85°	2791	2285	2532	2285



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	69.4	1.2
10°-20°	222.7	3.8
20°-30°	373.7	6.4
30°-40°	423.1	7.3
40°-50°	379.5	6.5
50°-60°	306.2	5.3
60°-70°	213.4	3.7
70°-80°	112.2	1.9
80°-90°	30.8	0.5
90°-100°	43.8	0.8
100°-110°	208.9	3.6
110°-120°	501.7	8.6
120°-130°	638.9	11.0
130°-140°	682.7	11.8
140°-150°	638.4	11.0
150°-160°	514.9	8.9
160°-170°	332.3	5.7
170°-180°	114.5	2.0
0°-30°	665.8	11.5
0°-40°	1088.9	18.8
0°-60°	1774.6	30.6
0°-90°	2130.9	36.7
90°-120°	754.5	13.0
90°-150°	2714.5	46.7
90°-180°	3676.0	63.3
0°-180°	5807.2	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	705	705	705	705	705	
5°	837	705	625	705	837	87
15°	1246	675	510	675	1246	360
25°	1479	616	450	616	1479	649
35°	797	541	413	541	797	518
45°	430	444	351	444	430	340
55°	292	312	279	312	292	262
65°	190	193	197	193	190	189
75°	98	92	105	92	98	105
85°	23	18	20	18	23	27
90°	27	1	27	1	27	13
95°	34	55	34	55	34	28
105°	39	267	39	267	39	90
115°	527	501	527	501	527	487
125°	720	706	720	706	720	643
135°	888	879	888	879	888	684
145°	1024	1014	1024	1014	1024	639
155°	1115	1117	1115	1117	1115	514
165°	1175	1178	1175	1178	1175	332
175°	1201	1206	1201	1206	1201	114
180°	1206	1206	1206	1206	1206	



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9
2.5°	748.1	747.5	746.2	747.3	745.0	742.1	741.8	739.0	731.1	730.6	728.4
5°	837.4	834.6	834.4	834.0	829.2	822.7	810.4	809.4	793.0	784.8	774.9
7.5°	953.1	954.6	949.6	945.2	930.6	921.0	907.8	890.9	870.8	850.3	836.7
10°	1036.2	1047.4	1033.4	1023.9	1015.0	998.3	978.8	954.6	930.3	902.0	880.5
12.5°	1125.2	1130.8	1128.0	1118.9	1105.2	1079.7	1045.2	1018.5	996.1	949.0	929.9
15°	1246.5	1267.4	1254.1	1223.3	1224.1	1199.8	1154.7	1105.2	1078.9	1037.5	981.1
17.5°	1375.8	1378.4	1372.7	1347.1	1330.0	1296.7	1255.1	1207.6	1154.3	1104.4	1044.6
20°	1444.7	1442.6	1430.7	1417.3	1387.9	1362.0	1316.5	1263.6	1195.3	1146.1	1080.9
22.5°	1482.9	1479.4	1473.8	1462.7	1438.2	1410.3	1369.6	1311.7	1246.7	1178.9	1103.6
25°	1479.4	1483.9	1484.6	1481.5	1473.0	1456.3	1424.2	1378.0	1313.1	1226.1	1147.5
27.5°	1345.6	1351.8	1370.1	1386.3	1404.4	1422.8	1420.4	1397.5	1349.5	1274.3	1178.2
30°	1211.7	1198.0	1231.9	1274.5	1303.6	1354.8	1383.5	1385.2	1358.3	1293.7	1200.1
32.5°	1025.9	1041.0	1055.9	1108.4	1171.9	1229.4	1286.5	1332.5	1337.7	1294.8	1212.9
35°	797.1	815.9	843.2	870.6	938.9	997.6	1098.0	1185.4	1255.1	1264.3	1214.1
37.5°	642.3	651.7	668.9	696.2	740.9	810.7	888.3	998.8	1099.7	1174.8	1178.1
40°	561.4	564.2	583.6	604.5	640.7	698.0	768.1	865.8	986.7	1091.5	1135.2
42.5°	500.8	506.8	515.1	535.1	563.9	607.1	672.2	753.0	863.7	984.4	1069.9
45°	430.3	437.1	442.3	455.6	476.1	505.1	550.5	624.3	708.6	833.3	948.4
47.5°	383.7	384.2	388.1	398.1	412.1	433.9	466.0	513.4	590.8	691.9	810.1
50°	350.4	355.9	357.2	365.1	376.0	392.1	418.7	459.0	522.5	611.4	720.0
52.5°	326.9	328.5	332.3	338.0	347.6	360.1	383.2	414.7	464.6	540.3	640.2
55°	292.3	292.3	296.1	300.5	306.0	317.3	332.6	355.9	393.8	452.5	535.2
57.5°	260.4	262.1	264.7	266.1	270.7	278.2	291.1	308.7	337.0	382.2	447.9
60°	239.1	242.1	241.8	244.5	248.6	254.4	265.4	279.7	305.0	341.2	396.5
62.5°	220.5	220.3	220.3	223.5	227.6	233.1	240.2	252.6	274.1	306.2	353.3
65°	189.8	189.2	191.6	193.7	195.0	199.1	204.6	215.5	229.9	253.8	290.3
67.5°	162.7	160.7	162.0	162.7	165.1	168.3	173.3	180.1	191.5	210.7	238.3
70°	144.1	142.4	142.0	142.8	144.8	147.2	151.0	157.5	168.0	183.4	203.6
72.5°	125.0	123.9	123.8	125.3	126.3	127.8	130.5	136.4	144.8	156.3	175.1
75°	97.6	97.6	97.6	98.0	99.1	100.4	102.5	105.5	112.0	120.2	132.9
77.5°	73.2	73.1	72.8	72.7	74.2	74.8	75.3	78.1	81.8	87.3	96.5
80°	57.3	55.6	56.4	57.3	58.1	58.4	59.4	60.1	63.2	66.3	72.8
82.5°	42.6	41.2	41.3	42.9	43.1	43.3	44.4	45.4	46.5	49.3	52.8
85°	22.6	22.6	22.9	22.9	23.2	22.9	23.9	24.3	24.3	25.9	28.0
87.5°	13.6	12.9	13.1	13.4	13.0	13.1	13.3	13.4	13.5	13.6	13.4
90°	26.8	26.5	26.0	25.7	25.2	24.7	23.9	23.1	22.3	21.5	18.9
92.5°	29.7	29.5	29.2	29.0	28.8	28.0	26.8	25.5	24.2	22.9	21.0
95°	34.1	34.1	34.1	34.1	34.1	33.3	31.9	30.6	29.2	27.7	25.6
97.5°	36.9	36.7	36.5	36.3	36.1	35.2	33.6	32.0	30.4	28.8	43.2
100°	37.6	37.5	37.2	37.0	36.8	35.9	34.3	32.7	31.1	29.5	60.6
102.5°	38.3	38.0	37.6	37.3	36.9	39.1	44.1	49.0	54.0	58.9	92.8
105°	39.4	39.0	38.6	38.3	37.8	55.2	90.4	125.7	161.0	196.2	214.1
107.5°	123.8	150.3	176.9	203.4	230.0	256.2	282.0	307.8	333.7	359.5	356.7
110°	246.3	274.7	303.2	331.7	360.2	377.6	384.2	390.8	397.3	403.9	401.7



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	422.6	428.6	434.6	440.6	446.6	449.5	449.4	449.3	449.2	449.1	446.9
115°	526.6	525.8	525.0	524.2	523.4	522.1	520.0	518.1	516.1	514.1	512.3
117.5°	585.1	584.9	584.7	584.5	584.4	583.5	581.9	580.3	578.7	577.1	576.2
120°	625.2	625.2	625.2	625.2	625.2	624.4	622.8	621.2	619.6	618.0	617.4
122.5°	664.6	664.4	664.2	664.1	664.0	663.3	662.2	661.0	660.0	658.8	658.1
125°	720.1	719.7	719.3	718.9	718.5	718.1	717.7	717.3	716.9	716.5	715.7
127.5°	773.5	773.9	774.3	774.6	775.1	775.0	774.3	773.6	773.0	772.4	771.4
130°	807.9	808.2	808.7	809.0	809.5	809.2	808.4	807.7	806.9	806.1	805.3
132.5°	839.4	840.0	840.5	841.1	841.6	841.5	840.7	839.9	839.1	838.3	837.7
135°	887.6	888.1	888.8	889.4	889.9	889.9	889.4	888.8	888.1	887.6	886.8
137.5°	932.9	933.3	933.7	934.1	934.5	934.2	933.3	932.3	931.3	930.4	930.0
140°	960.1	960.6	960.9	961.4	961.7	961.5	960.7	959.9	959.1	958.3	957.7
142.5°	985.2	985.8	986.3	986.9	987.4	987.4	986.8	986.1	985.5	984.8	984.3
145°	1023.7	1023.7	1023.7	1023.7	1023.7	1023.5	1023.1	1022.7	1022.3	1021.9	1021.5
147.5°	1052.4	1053.3	1054.2	1055.2	1056.1	1056.3	1055.9	1055.5	1055.1	1054.7	1054.3
150°	1073.9	1074.5	1075.0	1075.7	1076.3	1076.4	1075.9	1075.6	1075.1	1074.8	1074.3
152.5°	1091.1	1092.0	1092.9	1093.8	1094.8	1094.8	1094.1	1093.4	1092.7	1092.0	1091.7
155°	1115.1	1116.2	1117.5	1118.7	1119.8	1120.0	1118.9	1117.9	1117.0	1116.0	1115.8
157.5°	1135.3	1136.8	1138.4	1140.0	1141.5	1141.7	1140.5	1139.3	1138.1	1136.9	1137.1
160°	1148.2	1149.6	1151.0	1152.4	1153.8	1153.9	1152.7	1151.5	1150.3	1149.1	1149.3
162.5°	1160.4	1161.6	1162.9	1164.1	1165.3	1165.3	1164.0	1162.5	1161.2	1159.8	1160.0
165°	1175.1	1176.4	1177.9	1179.3	1180.6	1180.5	1178.9	1177.3	1175.8	1174.2	1174.4
167.5°	1185.6	1187.2	1188.8	1190.4	1192.0	1192.0	1190.4	1188.8	1187.2	1185.6	1185.6
170°	1192.1	1193.6	1195.2	1196.9	1198.5	1198.5	1196.9	1195.2	1193.6	1192.1	1192.1
172.5°	1195.7	1197.4	1199.2	1201.0	1202.7	1202.7	1201.1	1199.6	1198.0	1196.4	1196.2
175°	1201.0	1202.7	1204.3	1205.9	1207.5	1207.6	1206.1	1204.7	1203.4	1201.9	1201.8
177.5°	1202.7	1204.3	1205.9	1207.5	1209.1	1209.2	1207.9	1206.7	1205.4	1204.1	1203.9
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9
2.5°	726.7	724.6	722.4	718.5	715.2	710.6	709.3	707.7	702.8	698.3	695.1
5°	771.2	762.9	751.0	740.0	731.2	719.3	712.4	705.3	695.0	685.8	678.2
7.5°	817.6	801.5	782.9	762.9	744.1	726.0	711.5	698.6	684.2	670.6	660.0
10°	854.5	831.3	805.3	777.3	753.4	730.1	710.7	693.7	675.2	659.2	645.8
12.5°	896.5	862.1	826.3	792.3	764.0	731.8	708.3	686.5	665.7	646.3	631.3
15°	946.4	902.7	860.3	813.5	770.4	730.1	702.1	674.8	650.6	630.8	611.6
17.5°	991.7	942.2	886.4	829.5	777.6	729.8	690.5	659.7	629.4	605.1	586.0
20°	1017.4	961.0	897.9	838.7	781.4	728.1	685.1	648.2	615.5	589.8	568.3
22.5°	1039.6	973.6	908.2	845.1	781.1	723.7	675.0	637.0	601.5	576.4	553.6
25°	1062.5	983.6	918.0	843.9	772.5	713.1	658.4	615.5	579.9	550.5	527.0
27.5°	1082.2	982.9	905.1	825.4	759.0	699.5	641.1	594.9	557.2	525.3	501.4
30°	1095.3	984.3	891.7	812.8	745.9	684.4	627.7	581.3	541.6	509.2	486.7
32.5°	1103.5	983.5	879.4	795.3	725.1	670.7	613.2	565.2	524.4	492.6	470.8
35°	1108.2	977.4	858.3	759.2	691.6	638.6	590.5	540.6	497.9	468.2	443.6
37.5°	1098.7	964.8	833.7	724.3	650.3	598.2	557.7	515.2	474.4	441.7	420.4
40°	1083.6	956.6	814.5	699.8	621.9	571.7	537.3	495.5	455.2	424.2	404.4
42.5°	1055.0	940.0	793.5	672.4	592.4	542.2	510.4	475.6	437.5	408.3	388.5
45°	985.0	903.7	762.0	631.5	548.8	497.0	469.0	443.6	409.1	380.8	363.7
47.5°	887.8	849.1	716.3	588.3	503.4	453.4	424.3	403.9	378.7	355.9	339.5
50°	820.4	804.3	685.5	558.7	473.0	424.2	396.2	377.7	359.6	336.7	321.7
52.5°	742.4	752.3	649.3	528.2	442.1	394.1	367.7	353.1	336.7	317.9	304.8
55°	632.8	668.7	587.1	476.8	396.2	350.4	325.5	312.5	302.9	288.9	277.7
57.5°	530.2	575.8	519.7	423.8	351.0	311.6	287.7	273.5	267.3	260.0	251.2
60°	469.2	514.3	471.6	388.3	320.7	283.1	262.0	250.0	243.9	238.7	231.2
62.5°	414.9	460.5	424.6	352.2	290.9	256.1	237.6	226.0	221.1	218.5	212.0
65°	340.2	379.4	355.5	296.1	248.3	217.6	200.8	192.6	188.2	187.2	183.1
67.5°	276.9	306.7	289.4	245.6	207.9	181.4	167.2	160.2	156.9	156.5	153.4
70°	235.3	263.3	250.0	210.4	177.9	157.1	144.8	138.7	136.6	136.3	134.6
72.5°	203.0	222.6	212.0	179.0	153.9	135.0	125.9	119.5	117.2	117.7	116.5
75°	150.3	165.0	158.8	135.9	115.7	103.4	95.9	91.8	89.8	90.9	89.4
77.5°	108.2	117.4	111.9	96.0	83.6	74.7	69.2	66.7	64.8	64.7	64.1
80°	81.6	87.1	84.0	74.5	64.2	56.7	52.3	50.6	49.5	49.2	48.9
82.5°	58.1	62.8	59.1	52.6	45.7	41.1	38.6	36.4	35.6	35.8	35.5
85°	29.3	31.1	29.7	25.6	22.9	20.9	19.4	18.5	17.7	18.1	17.4
87.5°	13.4	13.1	11.8	10.3	9.3	8.1	7.7	6.8	6.6	7.0	7.1
90°	16.3	13.7	11.1	8.8	6.9	4.9	2.9	0.9	2.9	4.9	6.9
92.5°	19.0	17.1	15.2	14.4	15.0	15.5	16.1	16.7	16.1	15.5	15.0
95°	23.4	21.2	19.0	22.0	30.1	38.3	46.5	54.7	46.5	38.3	30.1
97.5°	57.5	71.9	86.1	95.1	98.8	102.5	106.1	109.8	106.1	102.5	98.8
100°	91.7	122.7	153.7	167.3	163.3	159.3	155.3	151.3	155.3	159.3	163.3
102.5°	126.8	160.7	194.6	210.1	207.2	204.4	201.5	198.7	201.5	204.4	207.2
105°	231.9	249.9	267.8	275.6	273.5	271.3	269.1	266.9	269.1	271.3	273.5
107.5°	353.8	351.1	348.2	345.9	344.2	342.4	340.6	338.9	340.6	342.4	344.2
110°	399.6	397.3	395.2	393.2	391.7	390.1	388.5	386.9	388.5	390.1	391.7





TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	444.7	442.5	440.3	438.5	437.1	435.6	434.2	432.7	434.2	435.6	437.1
115°	510.5	508.7	506.9	505.4	504.3	503.0	501.9	500.7	501.9	503.0	504.3
117.5°	575.3	574.4	573.5	572.3	570.8	569.4	567.8	566.4	567.8	569.4	570.8
120°	616.8	616.2	615.6	614.4	612.6	610.8	609.0	607.3	609.0	610.8	612.6
122.5°	657.3	656.6	655.8	654.7	653.2	651.8	650.2	648.8	650.2	651.8	653.2
125°	714.9	714.1	713.4	712.1	710.5	708.9	707.4	705.8	707.4	708.9	710.5
127.5°	770.5	769.5	768.6	767.3	765.7	764.1	762.5	760.9	762.5	764.1	765.7
130°	804.5	803.7	802.9	801.7	800.1	798.5	796.9	795.3	796.9	798.5	800.1
132.5°	837.0	836.4	835.8	834.6	833.0	831.4	829.9	828.3	829.9	831.4	833.0
135°	886.0	885.2	884.4	883.4	882.2	881.0	879.9	878.6	879.9	881.0	882.2
137.5°	929.5	929.1	928.6	927.6	926.1	924.6	923.1	921.6	923.1	924.6	926.1
140°	957.2	956.5	955.9	955.0	953.9	952.7	951.5	950.3	951.5	952.7	953.9
142.5°	983.6	983.0	982.5	981.6	980.3	979.2	977.9	976.8	977.9	979.2	980.3
145°	1021.1	1020.7	1020.3	1019.4	1018.1	1016.6	1015.2	1013.9	1015.2	1016.6	1018.1
147.5°	1053.9	1053.5	1053.1	1052.5	1051.5	1050.6	1049.7	1048.8	1049.7	1050.6	1051.5
150°	1074.0	1073.5	1073.2	1072.6	1072.1	1071.5	1070.9	1070.3	1070.9	1071.5	1072.1
152.5°	1091.5	1091.3	1091.0	1090.7	1090.5	1090.2	1089.9	1089.7	1089.9	1090.2	1090.5
155°	1115.5	1115.4	1115.2	1115.3	1115.7	1116.1	1116.4	1116.9	1116.4	1116.1	1115.7
157.5°	1137.3	1137.6	1137.7	1137.8	1137.9	1137.9	1138.0	1138.0	1138.0	1137.9	1137.9
160°	1149.5	1149.7	1149.9	1150.1	1150.3	1150.5	1150.7	1150.9	1150.7	1150.5	1150.3
162.5°	1160.3	1160.5	1160.7	1161.0	1161.5	1162.1	1162.5	1163.1	1162.5	1162.1	1161.5
165°	1174.6	1174.7	1175.0	1175.4	1176.0	1176.6	1177.1	1177.8	1177.1	1176.6	1176.0
167.5°	1185.6	1185.6	1185.6	1186.1	1186.9	1187.7	1188.5	1189.2	1188.5	1187.7	1186.9
170°	1192.1	1192.1	1192.1	1192.5	1193.3	1194.1	1194.9	1195.7	1194.9	1194.1	1193.3
172.5°	1196.1	1195.9	1195.8	1196.1	1197.1	1198.1	1199.0	1200.0	1199.0	1198.1	1197.1
175°	1201.6	1201.3	1201.1	1201.6	1202.6	1203.5	1204.5	1205.5	1204.5	1203.5	1202.6
177.5°	1203.8	1203.6	1203.5	1203.8	1204.6	1205.4	1206.1	1206.9	1206.1	1205.4	1204.6
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9
2.5°	693.1	691.3	688.5	684.4	681.1	675.9	675.9	676.7	676.7	676.5	675.9
5°	672.1	667.0	660.8	653.7	646.1	638.6	637.3	634.5	632.5	631.2	629.5
7.5°	649.9	640.9	631.9	621.9	612.7	605.1	599.9	595.5	592.6	589.7	587.5
10°	634.9	623.6	613.1	602.4	590.8	581.6	575.8	571.7	568.6	565.9	564.5
12.5°	617.2	604.2	592.5	582.5	569.8	560.3	554.7	552.9	549.2	543.5	540.5
15°	591.2	579.3	565.3	549.8	543.7	532.1	525.6	522.5	520.5	516.0	514.7
17.5°	569.0	553.3	537.6	526.1	514.7	505.3	501.7	497.8	495.2	491.5	490.4
20°	551.3	537.3	522.9	510.6	498.6	488.4	485.3	482.6	479.8	478.1	476.8
22.5°	533.2	519.2	507.3	495.8	483.0	476.4	473.0	470.0	468.1	466.9	465.6
25°	507.8	495.5	482.2	472.0	461.7	457.3	455.2	453.5	452.2	450.5	450.1
27.5°	485.2	471.8	461.0	451.4	444.1	440.3	438.4	437.6	437.8	438.5	438.8
30°	468.2	455.9	447.0	438.8	432.0	428.6	428.3	428.3	429.6	430.0	430.7
32.5°	452.6	442.6	433.6	425.7	420.5	418.2	419.5	419.5	420.6	421.5	422.8
35°	430.0	421.1	414.3	407.4	403.0	404.0	404.7	405.4	407.1	409.1	410.5
37.5°	408.3	400.6	393.5	388.2	386.1	388.0	389.6	391.0	393.1	394.6	395.9
40°	392.7	386.9	380.1	375.3	376.0	377.0	378.4	380.1	381.8	382.8	384.2
42.5°	378.3	372.2	367.0	363.0	364.0	365.3	366.1	367.0	369.0	370.9	371.7
45°	356.2	351.4	346.6	344.3	344.9	345.6	346.3	347.3	349.0	350.4	350.7
47.5°	331.4	328.1	324.9	322.5	323.6	323.3	324.2	326.5	327.0	327.8	329.7
50°	315.6	312.5	308.7	308.1	308.1	308.1	308.4	311.1	311.1	312.5	313.9
52.5°	298.1	296.1	293.7	292.5	291.9	291.9	293.4	294.7	295.2	297.2	298.5
55°	272.2	270.1	268.1	267.1	266.4	267.1	269.8	270.5	272.2	273.2	274.2
57.5°	245.2	243.6	242.0	241.5	241.3	242.2	243.7	245.8	246.2	249.3	250.8
60°	227.5	225.1	223.7	223.7	223.0	226.0	225.4	228.8	229.5	231.6	234.0
62.5°	209.1	205.9	205.4	205.4	206.3	207.2	208.2	209.7	211.5	214.1	215.9
65°	179.7	177.9	180.3	179.9	179.3	181.4	181.4	183.1	185.1	187.5	191.3
67.5°	151.7	150.8	151.1	151.1	152.0	153.2	154.2	155.7	158.1	160.7	163.1
70°	132.9	133.8	132.2	133.6	134.6	134.9	135.5	137.6	140.4	142.0	144.8
72.5°	114.6	114.5	114.7	115.2	116.3	116.9	117.5	119.8	122.9	124.3	126.5
75°	88.1	87.7	88.8	88.8	90.5	91.2	91.8	92.9	95.6	97.6	99.4
77.5°	64.4	64.7	64.6	65.7	65.3	65.4	67.5	68.5	68.8	72.9	73.7
80°	48.5	49.2	49.5	49.8	50.2	49.5	51.9	53.0	53.0	55.3	57.1
82.5°	34.9	35.2	36.1	36.5	36.6	37.2	37.5	38.2	39.0	40.0	42.3
85°	17.4	18.5	18.8	18.5	18.8	18.1	19.1	19.4	19.8	19.8	19.8
87.5°	7.2	7.9	8.2	9.0	9.3	10.1	10.2	9.8	10.0	11.0	10.0
90°	8.8	11.1	13.7	16.3	18.9	21.5	22.3	23.1	23.9	24.7	25.2
92.5°	14.4	15.2	17.1	19.0	21.0	22.9	24.2	25.5	26.8	28.0	28.8
95°	22.0	19.0	21.2	23.4	25.6	27.7	29.2	30.6	31.9	33.3	34.1
97.5°	95.1	86.1	71.9	57.5	43.2	28.8	30.4	32.0	33.6	35.2	36.1
100°	167.3	153.7	122.7	91.7	60.6	29.5	31.1	32.7	34.3	35.9	36.8
102.5°	210.1	194.6	160.7	126.8	92.8	58.9	54.0	49.0	44.1	39.1	36.9
105°	275.6	267.8	249.9	231.9	214.1	196.2	161.0	125.7	90.4	55.2	37.8
107.5°	345.9	348.2	351.1	353.8	356.7	359.5	333.7	307.8	282.0	256.2	230.0
110°	393.2	395.2	397.3	399.6	401.7	403.9	397.3	390.8	384.2	377.6	360.2



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	438.5	440.3	442.5	444.7	446.9	449.1	449.2	449.3	449.4	449.5	446.6
115°	505.4	506.9	508.7	510.5	512.3	514.1	516.1	518.1	520.0	522.1	523.4
117.5°	572.3	573.5	574.4	575.3	576.2	577.1	578.7	580.3	581.9	583.5	584.4
120°	614.4	615.6	616.2	616.8	617.4	618.0	619.6	621.2	622.8	624.4	625.2
122.5°	654.7	655.8	656.6	657.3	658.1	658.8	660.0	661.0	662.2	663.3	664.0
125°	712.1	713.4	714.1	714.9	715.7	716.5	716.9	717.3	717.7	718.1	718.5
127.5°	767.3	768.6	769.5	770.5	771.4	772.4	773.0	773.6	774.3	775.0	775.1
130°	801.7	802.9	803.7	804.5	805.3	806.1	806.9	807.7	808.4	809.2	809.5
132.5°	834.6	835.8	836.4	837.0	837.7	838.3	839.1	839.9	840.7	841.5	841.6
135°	883.4	884.4	885.2	886.0	886.8	887.6	888.1	888.8	889.4	889.9	889.9
137.5°	927.6	928.6	929.1	929.5	930.0	930.4	931.3	932.3	933.3	934.2	934.5
140°	955.0	955.9	956.5	957.2	957.7	958.3	959.1	959.9	960.7	961.5	961.7
142.5°	981.6	982.5	983.0	983.6	984.3	984.8	985.5	986.1	986.8	987.4	987.4
145°	1019.4	1020.3	1020.7	1021.1	1021.5	1021.9	1022.3	1022.7	1023.1	1023.5	1023.7
147.5°	1052.5	1053.1	1053.5	1053.9	1054.3	1054.7	1055.1	1055.5	1055.9	1056.3	1056.1
150°	1072.6	1073.2	1073.5	1074.0	1074.3	1074.8	1075.1	1075.6	1075.9	1076.4	1076.3
152.5°	1090.7	1091.0	1091.3	1091.5	1091.7	1092.0	1092.7	1093.4	1094.1	1094.8	1094.8
155°	1115.3	1115.2	1115.4	1115.5	1115.8	1116.0	1117.0	1117.9	1118.9	1120.0	1119.8
157.5°	1137.8	1137.7	1137.6	1137.3	1137.1	1136.9	1138.1	1139.3	1140.5	1141.7	1141.5
160°	1150.1	1149.9	1149.7	1149.5	1149.3	1149.1	1150.3	1151.5	1152.7	1153.9	1153.8
162.5°	1161.0	1160.7	1160.5	1160.3	1160.0	1159.8	1161.2	1162.5	1164.0	1165.3	1165.3
165°	1175.4	1175.0	1174.7	1174.6	1174.4	1174.2	1175.8	1177.3	1178.9	1180.5	1180.6
167.5°	1186.1	1185.6	1185.6	1185.6	1185.6	1185.6	1187.2	1188.8	1190.4	1192.0	1192.0
170°	1192.5	1192.1	1192.1	1192.1	1192.1	1192.1	1193.6	1195.2	1196.9	1198.5	1198.5
172.5°	1196.1	1195.8	1195.9	1196.1	1196.2	1196.4	1198.0	1199.6	1201.1	1202.7	1202.7
175°	1201.6	1201.1	1201.3	1201.6	1201.8	1201.9	1203.4	1204.7	1206.1	1207.6	1207.5
177.5°	1203.8	1203.5	1203.6	1203.8	1203.9	1204.1	1205.4	1206.7	1207.9	1209.2	1209.1
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9
2.5°	674.0	673.8	675.6	674.3	675.6	673.8	674.0	675.9	676.5	676.7	676.7
5°	627.4	628.4	625.0	625.0	625.0	628.4	627.4	629.5	631.2	632.5	634.5
7.5°	585.9	584.3	584.5	582.6	584.5	584.3	585.9	587.5	589.7	592.6	595.5
10°	560.4	558.4	557.7	558.0	557.7	558.4	560.4	564.5	565.9	568.6	571.7
12.5°	539.4	539.0	534.5	534.6	534.5	539.0	539.4	540.5	543.5	549.2	552.9
15°	514.7	508.2	507.5	509.5	507.5	508.2	514.7	514.7	516.0	520.5	522.5
17.5°	489.9	486.4	486.7	485.6	486.7	486.4	489.9	490.4	491.5	495.2	497.8
20°	476.8	474.7	474.4	472.0	474.4	474.7	476.8	476.8	478.1	479.8	482.6
22.5°	464.8	464.0	464.2	461.6	464.2	464.0	464.8	465.6	466.9	468.1	470.0
25°	449.8	451.5	450.1	450.1	450.1	451.5	449.8	450.1	450.5	452.2	453.5
27.5°	439.7	439.6	438.9	438.9	438.9	439.6	439.7	438.8	438.5	437.8	437.6
30°	432.0	431.7	432.4	432.4	432.4	431.7	432.0	430.7	430.0	429.6	428.3
32.5°	424.4	424.8	425.0	425.3	425.0	424.8	424.4	422.8	421.5	420.6	419.5
35°	412.6	412.9	413.9	413.2	413.9	412.9	412.6	410.5	409.1	407.1	405.4
37.5°	396.5	398.1	397.8	398.3	397.8	398.1	396.5	395.9	394.6	393.1	391.0
40°	384.6	385.6	385.2	385.2	385.2	385.6	384.6	384.2	382.8	381.8	380.1
42.5°	372.3	373.0	372.1	371.6	372.1	373.0	372.3	371.7	370.9	369.0	367.0
45°	352.1	351.4	352.5	351.1	352.5	351.4	352.1	350.7	350.4	349.0	347.3
47.5°	329.6	330.3	330.6	331.5	330.6	330.3	329.6	329.7	327.8	327.0	326.5
50°	314.5	316.6	316.6	316.3	316.6	316.6	314.5	313.9	312.5	311.1	311.1
52.5°	299.8	300.8	302.1	302.0	302.1	300.8	299.8	298.5	297.2	295.2	294.7
55°	277.0	277.7	278.3	278.7	278.3	277.7	277.0	274.2	273.2	272.2	270.5
57.5°	253.3	253.1	254.7	255.2	254.7	253.1	253.3	250.8	249.3	246.2	245.8
60°	236.7	236.7	239.4	240.4	239.4	236.7	236.7	234.0	231.6	229.5	228.8
62.5°	218.9	220.0	222.7	221.3	222.7	220.0	218.9	215.9	214.1	211.5	209.7
65°	193.0	195.7	195.4	196.7	195.4	195.7	193.0	191.3	187.5	185.1	183.1
67.5°	165.9	167.6	170.0	170.2	170.0	167.6	165.9	163.1	160.7	158.1	155.7
70°	147.6	149.3	150.6	151.6	150.6	149.3	147.6	144.8	142.0	140.4	137.6
72.5°	129.7	130.6	133.9	132.5	133.9	130.6	129.7	126.5	124.3	122.9	119.8
75°	101.7	104.2	106.2	105.2	106.2	104.2	101.7	99.4	97.6	95.6	92.9
77.5°	75.3	77.7	78.6	77.8	78.6	77.7	75.3	73.7	72.9	68.8	68.5
80°	59.4	59.1	61.2	60.8	61.2	59.1	59.4	57.1	55.3	53.0	53.0
82.5°	43.6	43.2	44.2	44.4	44.2	43.2	43.6	42.3	40.0	39.0	38.2
85°	21.1	22.2	20.9	20.5	20.9	22.2	21.1	19.8	19.8	19.8	19.4
87.5°	10.1	10.2	9.9	9.7	9.9	10.2	10.1	10.0	11.0	10.0	9.8
90°	25.7	26.0	26.5	26.8	26.5	26.0	25.7	25.2	24.7	23.9	23.1
92.5°	29.0	29.2	29.5	29.7	29.5	29.2	29.0	28.8	28.0	26.8	25.5
95°	34.1	34.1	34.1	34.1	34.1	34.1	34.1	34.1	33.3	31.9	30.6
97.5°	36.3	36.5	36.7	36.9	36.7	36.5	36.3	36.1	35.2	33.6	32.0
100°	37.0	37.2	37.5	37.6	37.5	37.2	37.0	36.8	35.9	34.3	32.7
102.5°	37.3	37.6	38.0	38.3	38.0	37.6	37.3	36.9	39.1	44.1	49.0
105°	38.3	38.6	39.0	39.4	39.0	38.6	38.3	37.8	55.2	90.4	125.7
107.5°	203.4	176.9	150.3	123.8	150.3	176.9	203.4	230.0	256.2	282.0	307.8
110°	331.7	303.2	274.7	246.3	274.7	303.2	331.7	360.2	377.6	384.2	390.8



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	440.6	434.6	428.6	422.6	428.6	434.6	440.6	446.6	449.5	449.4	449.3
115°	524.2	525.0	525.8	526.6	525.8	525.0	524.2	523.4	522.1	520.0	518.1
117.5°	584.5	584.7	584.9	585.1	584.9	584.7	584.5	584.4	583.5	581.9	580.3
120°	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	624.4	622.8	621.2
122.5°	664.1	664.2	664.4	664.6	664.4	664.2	664.1	664.0	663.3	662.2	661.0
125°	718.9	719.3	719.7	720.1	719.7	719.3	718.9	718.5	718.1	717.7	717.3
127.5°	774.6	774.3	773.9	773.5	773.9	774.3	774.6	775.1	775.0	774.3	773.6
130°	809.0	808.7	808.2	807.9	808.2	808.7	809.0	809.5	809.2	808.4	807.7
132.5°	841.1	840.5	840.0	839.4	840.0	840.5	841.1	841.6	841.5	840.7	839.9
135°	889.4	888.8	888.1	887.6	888.1	888.8	889.4	889.9	889.9	889.4	888.8
137.5°	934.1	933.7	933.3	932.9	933.3	933.7	934.1	934.5	934.2	933.3	932.3
140°	961.4	960.9	960.6	960.1	960.6	960.9	961.4	961.7	961.5	960.7	959.9
142.5°	986.9	986.3	985.8	985.2	985.8	986.3	986.9	987.4	987.4	986.8	986.1
145°	1023.7	1023.7	1023.7	1023.7	1023.7	1023.7	1023.7	1023.7	1023.5	1023.1	1022.7
147.5°	1055.2	1054.2	1053.3	1052.4	1053.3	1054.2	1055.2	1056.1	1056.3	1055.9	1055.5
150°	1075.7	1075.0	1074.5	1073.9	1074.5	1075.0	1075.7	1076.3	1076.4	1075.9	1075.6
152.5°	1093.8	1092.9	1092.0	1091.1	1092.0	1092.9	1093.8	1094.8	1094.8	1094.1	1093.4
155°	1118.7	1117.5	1116.2	1115.1	1116.2	1117.5	1118.7	1119.8	1120.0	1118.9	1117.9
157.5°	1140.0	1138.4	1136.8	1135.3	1136.8	1138.4	1140.0	1141.5	1141.7	1140.5	1139.3
160°	1152.4	1151.0	1149.6	1148.2	1149.6	1151.0	1152.4	1153.8	1153.9	1152.7	1151.5
162.5°	1164.1	1162.9	1161.6	1160.4	1161.6	1162.9	1164.1	1165.3	1165.3	1164.0	1162.5
165°	1179.3	1177.9	1176.4	1175.1	1176.4	1177.9	1179.3	1180.6	1180.5	1178.9	1177.3
167.5°	1190.4	1188.8	1187.2	1185.6	1187.2	1188.8	1190.4	1192.0	1192.0	1190.4	1188.8
170°	1196.9	1195.2	1193.6	1192.1	1193.6	1195.2	1196.9	1198.5	1198.5	1196.9	1195.2
172.5°	1201.0	1199.2	1197.4	1195.7	1197.4	1199.2	1201.0	1202.7	1202.7	1201.1	1199.6
175°	1205.9	1204.3	1202.7	1201.0	1202.7	1204.3	1205.9	1207.5	1207.6	1206.1	1204.7
177.5°	1207.5	1205.9	1204.3	1202.7	1204.3	1205.9	1207.5	1209.1	1209.2	1207.9	1206.7
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9
2.5°	675.9	675.9	681.1	684.4	688.5	691.3	693.1	695.1	698.3	702.8	707.7
5°	637.3	638.6	646.1	653.7	660.8	667.0	672.1	678.2	685.8	695.0	705.3
7.5°	599.9	605.1	612.7	621.9	631.9	640.9	649.9	660.0	670.6	684.2	698.6
10°	575.8	581.6	590.8	602.4	613.1	623.6	634.9	645.8	659.2	675.2	693.7
12.5°	554.7	560.3	569.8	582.5	592.5	604.2	617.2	631.3	646.3	665.7	686.5
15°	525.6	532.1	543.7	549.8	565.3	579.3	591.2	611.6	630.8	650.6	674.8
17.5°	501.7	505.3	514.7	526.1	537.6	553.3	569.0	586.0	605.1	629.4	659.7
20°	485.3	488.4	498.6	510.6	522.9	537.3	551.3	568.3	589.8	615.5	648.2
22.5°	473.0	476.4	483.0	495.8	507.3	519.2	533.2	553.6	576.4	601.5	637.0
25°	455.2	457.3	461.7	472.0	482.2	495.5	507.8	527.0	550.5	579.9	615.5
27.5°	438.4	440.3	444.1	451.4	461.0	471.8	485.2	501.4	525.3	557.2	594.9
30°	428.3	428.6	432.0	438.8	447.0	455.9	468.2	486.7	509.2	541.6	581.3
32.5°	419.5	418.2	420.5	425.7	433.6	442.6	452.6	470.8	492.6	524.4	565.2
35°	404.7	404.0	403.0	407.4	414.3	421.1	430.0	443.6	468.2	497.9	540.6
37.5°	389.6	388.0	386.1	388.2	393.5	400.6	408.3	420.4	441.7	474.4	515.2
40°	378.4	377.0	376.0	375.3	380.1	386.9	392.7	404.4	424.2	455.2	495.5
42.5°	366.1	365.3	364.0	363.0	367.0	372.2	378.3	388.5	408.3	437.5	475.6
45°	346.3	345.6	344.9	344.3	346.6	351.4	356.2	363.7	380.8	409.1	443.6
47.5°	324.2	323.3	323.6	322.5	324.9	328.1	331.4	339.5	355.9	378.7	403.9
50°	308.4	308.1	308.1	308.1	308.7	312.5	315.6	321.7	336.7	359.6	377.7
52.5°	293.4	291.9	291.9	292.5	293.7	296.1	298.1	304.8	317.9	336.7	353.1
55°	269.8	267.1	266.4	267.1	268.1	270.1	272.2	277.7	288.9	302.9	312.5
57.5°	243.7	242.2	241.3	241.5	242.0	243.6	245.2	251.2	260.0	267.3	273.5
60°	225.4	226.0	223.0	223.7	223.7	225.1	227.5	231.2	238.7	243.9	250.0
62.5°	208.2	207.2	206.3	205.4	205.4	205.9	209.1	212.0	218.5	221.1	226.0
65°	181.4	181.4	179.3	179.9	180.3	177.9	179.7	183.1	187.2	188.2	192.6
67.5°	154.2	153.2	152.0	151.1	151.1	150.8	151.7	153.4	156.5	156.9	160.2
70°	135.5	134.9	134.6	133.6	132.2	133.8	132.9	134.6	136.3	136.6	138.7
72.5°	117.5	116.9	116.3	115.2	114.7	114.5	114.6	116.5	117.7	117.2	119.5
75°	91.8	91.2	90.5	88.8	88.8	87.7	88.1	89.4	90.9	89.8	91.8
77.5°	67.5	65.4	65.3	65.7	64.6	64.7	64.4	64.1	64.7	64.8	66.7
80°	51.9	49.5	50.2	49.8	49.5	49.2	48.5	48.9	49.2	49.5	50.6
82.5°	37.5	37.2	36.6	36.5	36.1	35.2	34.9	35.5	35.8	35.6	36.4
85°	19.1	18.1	18.8	18.5	18.8	18.5	17.4	17.4	18.1	17.7	18.5
87.5°	10.2	10.1	9.3	9.0	8.2	7.9	7.2	7.1	7.0	6.6	6.8
90°	22.3	21.5	18.9	16.3	13.7	11.1	8.8	6.9	4.9	2.9	0.9
92.5°	24.2	22.9	21.0	19.0	17.1	15.2	14.4	15.0	15.5	16.1	16.7
95°	29.2	27.7	25.6	23.4	21.2	19.0	22.0	30.1	38.3	46.5	54.7
97.5°	30.4	28.8	43.2	57.5	71.9	86.1	95.1	98.8	102.5	106.1	109.8
100°	31.1	29.5	60.6	91.7	122.7	153.7	167.3	163.3	159.3	155.3	151.3
102.5°	54.0	58.9	92.8	126.8	160.7	194.6	210.1	207.2	204.4	201.5	198.7
105°	161.0	196.2	214.1	231.9	249.9	267.8	275.6	273.5	271.3	269.1	266.9
107.5°	333.7	359.5	356.7	353.8	351.1	348.2	345.9	344.2	342.4	340.6	338.9
110°	397.3	403.9	401.7	399.6	397.3	395.2	393.2	391.7	390.1	388.5	386.9



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	449.2	449.1	446.9	444.7	442.5	440.3	438.5	437.1	435.6	434.2	432.7
115°	516.1	514.1	512.3	510.5	508.7	506.9	505.4	504.3	503.0	501.9	500.7
117.5°	578.7	577.1	576.2	575.3	574.4	573.5	572.3	570.8	569.4	567.8	566.4
120°	619.6	618.0	617.4	616.8	616.2	615.6	614.4	612.6	610.8	609.0	607.3
122.5°	660.0	658.8	658.1	657.3	656.6	655.8	654.7	653.2	651.8	650.2	648.8
125°	716.9	716.5	715.7	714.9	714.1	713.4	712.1	710.5	708.9	707.4	705.8
127.5°	773.0	772.4	771.4	770.5	769.5	768.6	767.3	765.7	764.1	762.5	760.9
130°	806.9	806.1	805.3	804.5	803.7	802.9	801.7	800.1	798.5	796.9	795.3
132.5°	839.1	838.3	837.7	837.0	836.4	835.8	834.6	833.0	831.4	829.9	828.3
135°	888.1	887.6	886.8	886.0	885.2	884.4	883.4	882.2	881.0	879.9	878.6
137.5°	931.3	930.4	930.0	929.5	929.1	928.6	927.6	926.1	924.6	923.1	921.6
140°	959.1	958.3	957.7	957.2	956.5	955.9	955.0	953.9	952.7	951.5	950.3
142.5°	985.5	984.8	984.3	983.6	983.0	982.5	981.6	980.3	979.2	977.9	976.8
145°	1022.3	1021.9	1021.5	1021.1	1020.7	1020.3	1019.4	1018.1	1016.6	1015.2	1013.9
147.5°	1055.1	1054.7	1054.3	1053.9	1053.5	1053.1	1052.5	1051.5	1050.6	1049.7	1048.8
150°	1075.1	1074.8	1074.3	1074.0	1073.5	1073.2	1072.6	1072.1	1071.5	1070.9	1070.3
152.5°	1092.7	1092.0	1091.7	1091.5	1091.3	1091.0	1090.7	1090.5	1090.2	1089.9	1089.7
155°	1117.0	1116.0	1115.8	1115.5	1115.4	1115.2	1115.3	1115.7	1116.1	1116.4	1116.9
157.5°	1138.1	1136.9	1137.1	1137.3	1137.6	1137.7	1137.8	1137.9	1137.9	1138.0	1138.0
160°	1150.3	1149.1	1149.3	1149.5	1149.7	1149.9	1150.1	1150.3	1150.5	1150.7	1150.9
162.5°	1161.2	1159.8	1160.0	1160.3	1160.5	1160.7	1161.0	1161.5	1162.1	1162.5	1163.1
165°	1175.8	1174.2	1174.4	1174.6	1174.7	1175.0	1175.4	1176.0	1176.6	1177.1	1177.8
167.5°	1187.2	1185.6	1185.6	1185.6	1185.6	1185.6	1186.1	1186.9	1187.7	1188.5	1189.2
170°	1193.6	1192.1	1192.1	1192.1	1192.1	1192.1	1192.5	1193.3	1194.1	1194.9	1195.7
172.5°	1198.0	1196.4	1196.2	1196.1	1195.9	1195.8	1196.1	1197.1	1198.1	1199.0	1200.0
175°	1203.4	1201.9	1201.8	1201.6	1201.3	1201.1	1201.6	1202.6	1203.5	1204.5	1205.5
177.5°	1205.4	1204.1	1203.9	1203.8	1203.6	1203.5	1203.8	1204.6	1205.4	1206.1	1206.9
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9	704.9
2.5°	709.3	710.6	715.2	718.5	722.4	724.6	726.7	728.4	730.6	731.1	739.0
5°	712.4	719.3	731.2	740.0	751.0	762.9	771.2	774.9	784.8	793.0	809.4
7.5°	711.5	726.0	744.1	762.9	782.9	801.5	817.6	836.7	850.3	870.8	890.9
10°	710.7	730.1	753.4	777.3	805.3	831.3	854.5	880.5	902.0	930.3	954.6
12.5°	708.3	731.8	764.0	792.3	826.3	862.1	896.5	929.9	949.0	996.1	1018.5
15°	702.1	730.1	770.4	813.5	860.3	902.7	946.4	981.1	1037.5	1078.9	1105.2
17.5°	690.5	729.8	777.6	829.5	886.4	942.2	991.7	1044.6	1104.4	1154.3	1207.6
20°	685.1	728.1	781.4	838.7	897.9	961.0	1017.4	1080.9	1146.1	1195.3	1263.6
22.5°	675.0	723.7	781.1	845.1	908.2	973.6	1039.6	1103.6	1178.9	1246.7	1311.7
25°	658.4	713.1	772.5	843.9	918.0	983.6	1062.5	1147.5	1226.1	1313.1	1378.0
27.5°	641.1	699.5	759.0	825.4	905.1	982.9	1082.2	1178.2	1274.3	1349.5	1397.5
30°	627.7	684.4	745.9	812.8	891.7	984.3	1095.3	1200.1	1293.7	1358.3	1385.2
32.5°	613.2	670.7	725.1	795.3	879.4	983.5	1103.5	1212.9	1294.8	1337.7	1332.5
35°	590.5	638.6	691.6	759.2	858.3	977.4	1108.2	1214.1	1264.3	1255.1	1185.4
37.5°	557.7	598.2	650.3	724.3	833.7	964.8	1098.7	1178.1	1174.8	1099.7	998.8
40°	537.3	571.7	621.9	699.8	814.5	956.6	1083.6	1135.2	1091.5	986.7	865.8
42.5°	510.4	542.2	592.4	672.4	793.5	940.0	1055.0	1069.9	984.4	863.7	753.0
45°	469.0	497.0	548.8	631.5	762.0	903.7	985.0	948.4	833.3	708.6	624.3
47.5°	424.3	453.4	503.4	588.3	716.3	849.1	887.8	810.1	691.9	590.8	513.4
50°	396.2	424.2	473.0	558.7	685.5	804.3	820.4	720.0	611.4	522.5	459.0
52.5°	367.7	394.1	442.1	528.2	649.3	752.3	742.4	640.2	540.3	464.6	414.7
55°	325.5	350.4	396.2	476.8	587.1	668.7	632.8	535.2	452.5	393.8	355.9
57.5°	287.7	311.6	351.0	423.8	519.7	575.8	530.2	447.9	382.2	337.0	308.7
60°	262.0	283.1	320.7	388.3	471.6	514.3	469.2	396.5	341.2	305.0	279.7
62.5°	237.6	256.1	290.9	352.2	424.6	460.5	414.9	353.3	306.2	274.1	252.6
65°	200.8	217.6	248.3	296.1	355.5	379.4	340.2	290.3	253.8	229.9	215.5
67.5°	167.2	181.4	207.9	245.6	289.4	306.7	276.9	238.3	210.7	191.5	180.1
70°	144.8	157.1	177.9	210.4	250.0	263.3	235.3	203.6	183.4	168.0	157.5
72.5°	125.9	135.0	153.9	179.0	212.0	222.6	203.0	175.1	156.3	144.8	136.4
75°	95.9	103.4	115.7	135.9	158.8	165.0	150.3	132.9	120.2	112.0	105.5
77.5°	69.2	74.7	83.6	96.0	111.9	117.4	108.2	96.5	87.3	81.8	78.1
80°	52.3	56.7	64.2	74.5	84.0	87.1	81.6	72.8	66.3	63.2	60.1
82.5°	38.6	41.1	45.7	52.6	59.1	62.8	58.1	52.8	49.3	46.5	45.4
85°	19.4	20.9	22.9	25.6	29.7	31.1	29.3	28.0	25.9	24.3	24.3
87.5°	7.7	8.1	9.3	10.3	11.8	13.1	13.4	13.4	13.6	13.5	13.4
90°	2.9	4.9	6.9	8.8	11.1	13.7	16.3	18.9	21.5	22.3	23.1
92.5°	16.1	15.5	15.0	14.4	15.2	17.1	19.0	21.0	22.9	24.2	25.5
95°	46.5	38.3	30.1	22.0	19.0	21.2	23.4	25.6	27.7	29.2	30.6
97.5°	106.1	102.5	98.8	95.1	86.1	71.9	57.5	43.2	28.8	30.4	32.0
100°	155.3	159.3	163.3	167.3	153.7	122.7	91.7	60.6	29.5	31.1	32.7
102.5°	201.5	204.4	207.2	210.1	194.6	160.7	126.8	92.8	58.9	54.0	49.0
105°	269.1	271.3	273.5	275.6	267.8	249.9	231.9	214.1	196.2	161.0	125.7
107.5°	340.6	342.4	344.2	345.9	348.2	351.1	353.8	356.7	359.5	333.7	307.8
110°	388.5	390.1	391.7	393.2	395.2	397.3	399.6	401.7	403.9	397.3	390.8





TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	434.2	435.6	437.1	438.5	440.3	442.5	444.7	446.9	449.1	449.2	449.3
115°	501.9	503.0	504.3	505.4	506.9	508.7	510.5	512.3	514.1	516.1	518.1
117.5°	567.8	569.4	570.8	572.3	573.5	574.4	575.3	576.2	577.1	578.7	580.3
120°	609.0	610.8	612.6	614.4	615.6	616.2	616.8	617.4	618.0	619.6	621.2
122.5°	650.2	651.8	653.2	654.7	655.8	656.6	657.3	658.1	658.8	660.0	661.0
125°	707.4	708.9	710.5	712.1	713.4	714.1	714.9	715.7	716.5	716.9	717.3
127.5°	762.5	764.1	765.7	767.3	768.6	769.5	770.5	771.4	772.4	773.0	773.6
130°	796.9	798.5	800.1	801.7	802.9	803.7	804.5	805.3	806.1	806.9	807.7
132.5°	829.9	831.4	833.0	834.6	835.8	836.4	837.0	837.7	838.3	839.1	839.9
135°	879.9	881.0	882.2	883.4	884.4	885.2	886.0	886.8	887.6	888.1	888.8
137.5°	923.1	924.6	926.1	927.6	928.6	929.1	929.5	930.0	930.4	931.3	932.3
140°	951.5	952.7	953.9	955.0	955.9	956.5	957.2	957.7	958.3	959.1	959.9
142.5°	977.9	979.2	980.3	981.6	982.5	983.0	983.6	984.3	984.8	985.5	986.1
145°	1015.2	1016.6	1018.1	1019.4	1020.3	1020.7	1021.1	1021.5	1021.9	1022.3	1022.7
147.5°	1049.7	1050.6	1051.5	1052.5	1053.1	1053.5	1053.9	1054.3	1054.7	1055.1	1055.5
150°	1070.9	1071.5	1072.1	1072.6	1073.2	1073.5	1074.0	1074.3	1074.8	1075.1	1075.6
152.5°	1089.9	1090.2	1090.5	1090.7	1091.0	1091.3	1091.5	1091.7	1092.0	1092.7	1093.4
155°	1116.4	1116.1	1115.7	1115.3	1115.2	1115.4	1115.5	1115.8	1116.0	1117.0	1117.9
157.5°	1138.0	1137.9	1137.9	1137.8	1137.7	1137.6	1137.3	1137.1	1136.9	1138.1	1139.3
160°	1150.7	1150.5	1150.3	1150.1	1149.9	1149.7	1149.5	1149.3	1149.1	1150.3	1151.5
162.5°	1162.5	1162.1	1161.5	1161.0	1160.7	1160.5	1160.3	1160.0	1159.8	1161.2	1162.5
165°	1177.1	1176.6	1176.0	1175.4	1175.0	1174.7	1174.6	1174.4	1174.2	1175.8	1177.3
167.5°	1188.5	1187.7	1186.9	1186.1	1185.6	1185.6	1185.6	1185.6	1185.6	1187.2	1188.8
170°	1194.9	1194.1	1193.3	1192.5	1192.1	1192.1	1192.1	1192.1	1192.1	1193.6	1195.2
172.5°	1199.0	1198.1	1197.1	1196.1	1195.8	1195.9	1196.1	1196.2	1196.4	1198.0	1199.6
175°	1204.5	1203.5	1202.6	1201.6	1201.1	1201.3	1201.6	1201.8	1201.9	1203.4	1204.7
177.5°	1206.1	1205.4	1204.6	1203.8	1203.5	1203.6	1203.8	1203.9	1204.1	1205.4	1206.7
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	704.9	704.9	704.9	704.9	704.9	704.9	704.9
2.5°	741.8	742.1	745.0	747.3	746.2	747.5	748.1
5°	810.4	822.7	829.2	834.0	834.4	834.6	837.4
7.5°	907.8	921.0	930.6	945.2	949.6	954.6	953.1
10°	978.8	998.3	1015.0	1023.9	1033.4	1047.4	1036.2
12.5°	1045.2	1079.7	1105.2	1118.9	1128.0	1130.8	1125.2
15°	1154.7	1199.8	1224.1	1223.3	1254.1	1267.4	1246.5
17.5°	1255.1	1296.7	1330.0	1347.1	1372.7	1378.4	1375.8
20°	1316.5	1362.0	1387.9	1417.3	1430.7	1442.6	1444.7
22.5°	1369.6	1410.3	1438.2	1462.7	1473.8	1479.4	1482.9
25°	1424.2	1456.3	1473.0	1481.5	1484.6	1483.9	1479.4
27.5°	1420.4	1422.8	1404.4	1386.3	1370.1	1351.8	1345.6
30°	1383.5	1354.8	1303.6	1274.5	1231.9	1198.0	1211.7
32.5°	1286.5	1229.4	1171.9	1108.4	1055.9	1041.0	1025.9
35°	1098.0	997.6	938.9	870.6	843.2	815.9	797.1
37.5°	888.3	810.7	740.9	696.2	668.9	651.7	642.3
40°	768.1	698.0	640.7	604.5	583.6	564.2	561.4
42.5°	672.2	607.1	563.9	535.1	515.1	506.8	500.8
45°	550.5	505.1	476.1	455.6	442.3	437.1	430.3
47.5°	466.0	433.9	412.1	398.1	388.1	384.2	383.7
50°	418.7	392.1	376.0	365.1	357.2	355.9	350.4
52.5°	383.2	360.1	347.6	338.0	332.3	328.5	326.9
55°	332.6	317.3	306.0	300.5	296.1	292.3	292.3
57.5°	291.1	278.2	270.7	266.1	264.7	262.1	260.4
60°	265.4	254.4	248.6	244.5	241.8	242.1	239.1
62.5°	240.2	233.1	227.6	223.5	220.3	220.3	220.5
65°	204.6	199.1	195.0	193.7	191.6	189.2	189.8
67.5°	173.3	168.3	165.1	162.7	162.0	160.7	162.7
70°	151.0	147.2	144.8	142.8	142.0	142.4	144.1
72.5°	130.5	127.8	126.3	125.3	123.8	123.9	125.0
75°	102.5	100.4	99.1	98.0	97.6	97.6	97.6
77.5°	75.3	74.8	74.2	72.7	72.8	73.1	73.2
80°	59.4	58.4	58.1	57.3	56.4	55.6	57.3
82.5°	44.4	43.3	43.1	42.9	41.3	41.2	42.6
85°	23.9	22.9	23.2	22.9	22.9	22.6	22.6
87.5°	13.3	13.1	13.0	13.4	13.1	12.9	13.6
90°	23.9	24.7	25.2	25.7	26.0	26.5	26.8
92.5°	26.8	28.0	28.8	29.0	29.2	29.5	29.7
95°	31.9	33.3	34.1	34.1	34.1	34.1	34.1
97.5°	33.6	35.2	36.1	36.3	36.5	36.7	36.9
100°	34.3	35.9	36.8	37.0	37.2	37.5	37.6
102.5°	44.1	39.1	36.9	37.3	37.6	38.0	38.3
105°	90.4	55.2	37.8	38.3	38.6	39.0	39.4
107.5°	282.0	256.2	230.0	203.4	176.9	150.3	123.8
110°	384.2	377.6	360.2	331.7	303.2	274.7	246.3



TEST NUMBER: P332132-940

CATALOG NUMBER: S123DIW-S560D1030U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	449.4	449.5	446.6	440.6	434.6	428.6	422.6
115°	520.0	522.1	523.4	524.2	525.0	525.8	526.6
117.5°	581.9	583.5	584.4	584.5	584.7	584.9	585.1
120°	622.8	624.4	625.2	625.2	625.2	625.2	625.2
122.5°	662.2	663.3	664.0	664.1	664.2	664.4	664.6
125°	717.7	718.1	718.5	718.9	719.3	719.7	720.1
127.5°	774.3	775.0	775.1	774.6	774.3	773.9	773.5
130°	808.4	809.2	809.5	809.0	808.7	808.2	807.9
132.5°	840.7	841.5	841.6	841.1	840.5	840.0	839.4
135°	889.4	889.9	889.9	889.4	888.8	888.1	887.6
137.5°	933.3	934.2	934.5	934.1	933.7	933.3	932.9
140°	960.7	961.5	961.7	961.4	960.9	960.6	960.1
142.5°	986.8	987.4	987.4	986.9	986.3	985.8	985.2
145°	1023.1	1023.5	1023.7	1023.7	1023.7	1023.7	1023.7
147.5°	1055.9	1056.3	1056.1	1055.2	1054.2	1053.3	1052.4
150°	1075.9	1076.4	1076.3	1075.7	1075.0	1074.5	1073.9
152.5°	1094.1	1094.8	1094.8	1093.8	1092.9	1092.0	1091.1
155°	1118.9	1120.0	1119.8	1118.7	1117.5	1116.2	1115.1
157.5°	1140.5	1141.7	1141.5	1140.0	1138.4	1136.8	1135.3
160°	1152.7	1153.9	1153.8	1152.4	1151.0	1149.6	1148.2
162.5°	1164.0	1165.3	1165.3	1164.1	1162.9	1161.6	1160.4
165°	1178.9	1180.5	1180.6	1179.3	1177.9	1176.4	1175.1
167.5°	1190.4	1192.0	1192.0	1190.4	1188.8	1187.2	1185.6
170°	1196.9	1198.5	1198.5	1196.9	1195.2	1193.6	1192.1
172.5°	1201.1	1202.7	1202.7	1201.0	1199.2	1197.4	1195.7
175°	1206.1	1207.6	1207.5	1205.9	1204.3	1202.7	1201.0
177.5°	1207.9	1209.2	1209.1	1207.5	1205.9	1204.3	1202.7
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5

(END OF REPORT)