

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332124-940

Luminaire Tested: **S123DIW-S560D460U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332124-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S560D460U940-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 460 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3713.0 lumens  
Efficiency: N/A  
Efficacy: 122.9 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 30.2  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332124-940

CATALOG NUMBER: S123DIW-S560D460U940-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

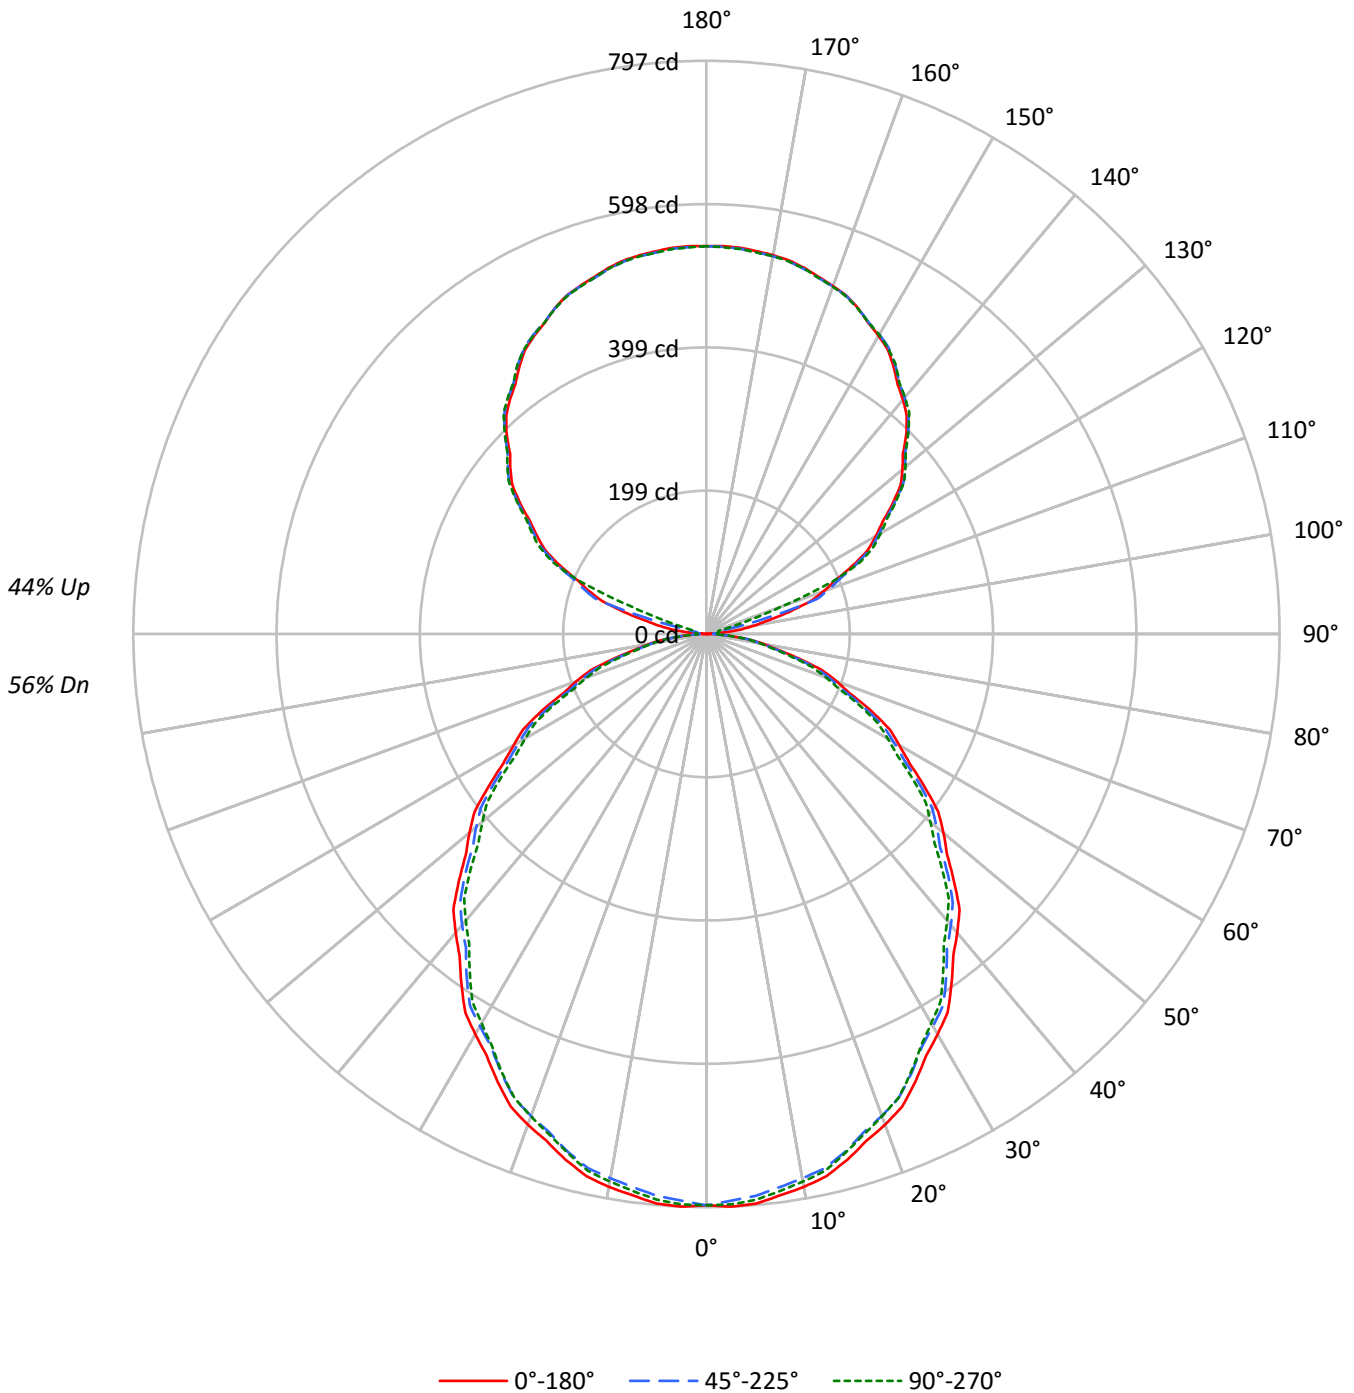



TEST NUMBER: P332124-940

CATALOG NUMBER: S123DIW-S560D460U940-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	73	73	73	61	61	61	56
1	99	95	91	87	92	88	85	82	76	73	71	65	63	61	54	53	52	47
2	90	83	76	71	83	77	71	67	66	62	59	57	54	51	48	45	43	39
3	82	73	65	59	76	68	61	56	59	53	49	50	46	43	42	39	37	33
4	75	64	56	50	70	60	53	47	52	46	42	45	40	37	38	34	32	28
5	69	57	49	43	64	54	46	41	47	41	36	40	35	32	34	30	28	25
6	64	51	43	37	59	48	41	35	42	36	32	36	32	28	31	27	24	22
7	59	46	38	33	55	44	36	31	38	32	28	33	28	25	28	24	22	19
8	55	42	34	29	51	40	32	28	35	29	25	30	25	22	26	22	19	17
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18	15
10	48	35	28	23	44	33	27	22	29	24	20	26	21	18	22	19	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8551	8551	8551
5°	8590	8473	8532
10°	8534	8400	8451
15°	8433	8304	8320
20°	8317	8168	8176
25°	8162	8007	7991
30°	7988	7828	7768
35°	7808	7638	7540
40°	7620	7429	7314
45°	7415	7237	7060
50°	7206	7000	6805
55°	6934	6756	6549
60°	6661	6469	6265
65°	6421	6159	5968
70°	6061	5803	5545
75°	5540	5340	5115
80°	4996	4785	4742
85°	4384	4224	4051



TEST NUMBER: P332124-940

CATALOG NUMBER: S123DIW-S560D460U940-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	74.8	2.0
10°-20°	211.3	5.7
20°-30°	312.1	8.4
30°-40°	364.6	9.8
40°-50°	366.5	9.9
50°-60°	322.0	8.7
60°-70°	239.9	6.5
70°-80°	136.7	3.7
80°-90°	40.7	1.1
90°-100°	19.6	0.5
100°-110°	93.4	2.5
110°-120°	224.4	6.0
120°-130°	285.8	7.7
130°-140°	305.4	8.2
140°-150°	285.5	7.7
150°-160°	230.3	6.2
160°-170°	148.7	4.0
170°-180°	51.2	1.4
0°-30°	598.2	16.1
0°-40°	962.8	25.9
0°-60°	1651.3	44.5
0°-90°	2068.6	55.7
90°-120°	337.5	9.1
90°-150°	1214.2	32.7
90°-180°	1644.0	44.3
0°-180°	3713.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	794	794	794	794	794	
5°	795	791	784	791	790	75
15°	757	754	745	750	747	213
25°	687	683	674	675	673	316
35°	594	590	581	577	574	372
45°	487	484	475	467	464	376
55°	370	368	360	353	349	331
65°	252	248	242	236	234	249
75°	133	131	128	125	123	142
85°	36	34	34	33	33	39
90°	0	4	10	11	12	3
95°	24	9	12	15	15	30
105°	119	122	88	21	18	127
115°	224	226	230	234	236	221
125°	316	319	320	321	322	282
135°	393	395	397	398	397	302
145°	454	456	457	458	458	284
155°	500	499	499	501	499	230
165°	527	526	525	528	526	149
175°	539	537	538	540	537	51
180°	539	539	539	539	539	



TEST NUMBER: P332124-940

CATALOG NUMBER: S123DIW-S560D460U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4
2.5°	797.1	796.7	796.2	795.7	795.2	794.2	792.9	791.6	790.3	789.0	790.1
5°	795.0	794.3	793.5	792.8	792.0	790.9	789.2	787.5	785.9	784.2	785.7
7.5°	787.3	786.6	785.8	785.1	784.3	783.0	781.3	779.5	777.8	776.1	777.5
10°	780.8	780.0	779.3	778.5	777.8	776.3	774.4	772.4	770.4	768.5	769.8
12.5°	772.0	771.3	770.7	770.1	769.5	768.2	766.3	764.5	762.7	760.8	761.8
15°	756.8	756.3	755.6	755.0	754.4	753.1	751.2	749.2	747.2	745.2	746.5
17.5°	739.2	738.4	737.6	736.8	736.0	734.7	732.7	730.8	728.8	726.7	727.6
20°	726.1	725.2	724.2	723.4	722.5	721.0	719.1	717.1	715.1	713.1	713.7
22.5°	711.3	710.4	709.5	708.6	707.7	706.2	704.3	702.3	700.3	698.4	698.8
25°	687.2	686.3	685.4	684.5	683.5	682.1	680.1	678.1	676.2	674.2	674.3
27.5°	661.4	660.5	659.6	658.7	657.8	656.3	654.2	652.1	650.0	647.8	647.9
30°	642.7	642.0	641.2	640.5	639.7	638.3	636.1	634.0	632.0	629.8	629.8
32.5°	624.2	623.2	622.1	621.2	620.2	618.8	617.2	615.5	613.9	612.3	611.4
35°	594.2	593.3	592.5	591.6	590.7	589.2	587.2	585.2	583.3	581.3	580.4
37.5°	563.7	562.5	561.3	560.2	559.0	557.5	555.4	553.5	551.4	549.5	548.4
40°	542.3	541.4	540.6	539.7	538.7	537.2	535.0	533.0	530.8	528.7	527.4
42.5°	521.0	520.0	519.0	517.9	516.9	515.3	513.2	511.1	509.0	506.8	505.6
45°	487.1	486.4	485.8	485.2	484.6	483.3	481.3	479.4	477.4	475.4	473.6
47.5°	453.3	452.4	451.6	450.7	449.8	448.4	446.6	444.7	442.8	441.0	439.2
50°	430.3	429.5	428.8	428.0	427.3	426.0	423.9	422.0	420.0	418.0	416.3
52.5°	406.3	405.7	405.3	404.7	404.2	402.9	400.8	398.8	396.6	394.6	393.2
55°	369.5	369.3	369.3	369.1	368.9	367.8	365.9	363.9	361.9	360.0	358.3
57.5°	334.6	334.0	333.5	333.1	332.5	331.4	329.8	328.3	326.7	325.1	323.7
60°	309.4	309.2	309.2	309.0	308.8	307.8	306.0	304.2	302.4	300.5	299.2
62.5°	287.0	286.6	286.2	285.9	285.4	284.4	282.5	280.7	278.8	277.1	275.7
65°	252.1	251.3	250.6	249.8	249.1	247.9	246.4	244.9	243.3	241.8	240.6
67.5°	215.0	214.4	213.7	213.0	212.3	211.4	210.3	209.1	207.9	206.9	205.8
70°	192.6	191.7	190.8	189.9	189.0	188.1	187.2	186.3	185.3	184.4	183.3
72.5°	169.2	168.4	167.8	167.1	166.5	165.6	164.6	163.5	162.5	161.5	160.5
75°	133.2	132.6	132.0	131.3	130.8	130.3	129.7	129.3	128.9	128.4	127.7
77.5°	101.4	101.0	100.7	100.4	100.0	99.6	99.1	98.5	97.9	97.4	96.9
80°	80.6	80.2	79.7	79.3	78.7	78.4	78.1	77.8	77.5	77.2	77.0
82.5°	60.4	60.3	60.2	60.1	60.0	59.9	59.9	59.8	59.7	59.7	59.4
85°	35.5	35.2	35.0	34.6	34.3	34.2	34.2	34.2	34.2	34.2	33.9
87.5°	14.3	14.1	13.9	13.7	13.6	13.5	13.6	13.7	13.8	13.9	13.9
90°	0.4	1.2	2.1	3.0	3.9	5.0	6.2	7.3	8.5	9.6	10.0
92.5°	7.5	7.2	7.0	6.7	6.4	6.8	7.7	8.5	9.4	10.3	10.8
95°	24.4	20.8	17.1	13.5	9.8	8.5	9.5	10.4	11.4	12.4	13.0
97.5°	49.1	47.4	45.8	44.2	42.5	38.5	32.1	25.7	19.4	12.9	13.6
100°	67.7	69.5	71.2	73.0	74.8	68.8	54.9	41.0	27.1	13.2	13.9
102.5°	88.8	90.2	91.4	92.7	94.0	87.0	71.9	56.7	41.6	26.4	24.2
105°	119.4	120.4	121.4	122.3	123.3	119.8	111.7	103.8	95.8	87.7	72.0
107.5°	151.6	152.4	153.2	153.9	154.7	155.8	157.0	158.3	159.5	160.8	149.3
110°	173.1	173.8	174.5	175.2	175.9	176.7	177.7	178.7	179.7	180.7	177.7



TEST NUMBER: P332124-940

CATALOG NUMBER: S123DIW-S560D460U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	193.6	194.2	194.8	195.5	196.2	197.0	198.0	198.9	199.9	200.9	200.9
115°	223.9	224.4	225.0	225.5	226.0	226.8	227.6	228.4	229.2	230.0	230.9
117.5°	253.3	254.0	254.7	255.3	256.0	256.5	256.9	257.3	257.8	258.2	258.9
120°	271.6	272.4	273.2	274.0	274.8	275.4	275.6	275.9	276.2	276.4	277.1
122.5°	290.3	290.9	291.5	292.2	292.8	293.4	293.7	294.0	294.4	294.7	295.2
125°	315.7	316.4	317.1	317.8	318.5	319.1	319.4	319.8	320.1	320.5	320.7
127.5°	340.4	341.1	341.8	342.5	343.2	343.8	344.2	344.6	345.1	345.5	345.8
130°	355.8	356.5	357.2	357.9	358.6	359.2	359.5	359.9	360.3	360.5	360.9
132.5°	370.5	371.2	371.9	372.6	373.4	373.8	374.2	374.4	374.7	375.0	375.3
135°	393.0	393.5	394.0	394.6	395.1	395.6	395.9	396.3	396.6	397.0	397.3
137.5°	412.2	413.0	413.6	414.3	414.9	415.4	415.6	415.8	416.0	416.2	416.6
140°	425.1	425.6	426.1	426.7	427.2	427.6	427.8	428.1	428.4	428.6	429.0
142.5°	436.9	437.5	438.0	438.5	439.1	439.4	439.7	440.0	440.2	440.5	440.8
145°	453.5	454.1	454.8	455.4	456.0	456.4	456.6	456.7	456.9	457.1	457.3
147.5°	469.1	469.6	469.9	470.4	470.7	471.1	471.3	471.4	471.6	471.8	472.0
150°	478.8	479.0	479.3	479.6	479.8	480.0	480.2	480.4	480.5	480.7	480.9
152.5°	487.4	487.5	487.7	487.8	487.9	488.0	488.1	488.2	488.3	488.5	488.7
155°	499.5	499.4	499.2	499.1	498.9	498.8	498.9	499.0	499.1	499.2	499.6
157.5°	509.1	509.0	509.0	509.0	509.0	508.9	508.8	508.7	508.6	508.5	509.1
160°	514.8	514.7	514.6	514.5	514.4	514.3	514.2	514.2	514.1	514.0	514.5
162.5°	520.2	520.0	519.8	519.6	519.3	519.2	519.1	519.0	518.9	518.8	519.4
165°	526.8	526.6	526.3	526.0	525.8	525.6	525.5	525.4	525.3	525.2	525.9
167.5°	532.0	531.6	531.3	530.9	530.6	530.4	530.4	530.4	530.4	530.4	531.1
170°	534.8	534.5	534.1	533.8	533.4	533.2	533.2	533.2	533.2	533.2	534.0
172.5°	536.7	536.4	535.9	535.5	535.0	534.8	534.9	535.0	535.1	535.1	535.8
175°	539.2	538.8	538.3	537.9	537.4	537.3	537.3	537.4	537.5	537.6	538.2
177.5°	539.8	539.5	539.1	538.8	538.4	538.3	538.4	538.4	538.5	538.6	539.1
180°	539.2	539.2	539.2	539.2	539.2	539.2	539.2	539.2	539.2	539.2	539.2



TEST NUMBER: P332124-940

CATALOG NUMBER: S123DIW-S560D460U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4
2.5°	791.4	792.6	793.8	794.3	794.2	794.1	794.0	793.9
5°	787.2	788.7	790.2	790.9	790.5	790.2	790.0	789.6
7.5°	778.8	780.2	781.6	782.1	781.9	781.8	781.6	781.4
10°	771.2	772.6	773.9	774.5	774.2	773.8	773.6	773.2
12.5°	762.8	763.8	764.8	765.2	765.0	764.8	764.6	764.5
15°	747.7	748.9	750.1	750.2	749.3	748.4	747.5	746.6
17.5°	728.5	729.3	730.2	730.4	730.1	729.8	729.4	729.1
20°	714.3	715.0	715.5	715.6	715.2	714.7	714.3	713.8
22.5°	699.4	699.8	700.3	700.3	699.7	699.1	698.6	697.9
25°	674.5	674.7	674.8	674.7	674.2	673.8	673.2	672.8
27.5°	648.1	648.2	648.3	648.1	647.5	646.9	646.3	645.8
30°	629.8	629.8	629.8	629.3	628.2	627.1	626.1	625.0
32.5°	610.6	609.8	608.9	608.1	607.6	607.1	606.5	605.9
35°	579.4	578.5	577.7	576.8	576.0	575.3	574.5	573.8
37.5°	547.2	546.2	545.1	544.3	543.9	543.3	542.9	542.3
40°	526.3	525.0	523.9	522.9	522.3	521.7	521.1	520.5
42.5°	504.4	503.2	501.9	501.1	500.4	499.9	499.3	498.6
45°	471.8	469.9	468.1	466.8	466.1	465.3	464.6	463.8
47.5°	437.4	435.6	433.8	432.6	431.9	431.2	430.6	429.9
50°	414.7	413.0	411.3	410.1	409.1	408.2	407.3	406.4
52.5°	391.7	390.3	388.9	387.6	386.7	385.8	385.0	384.1
55°	356.6	355.0	353.3	352.0	351.3	350.5	349.8	349.0
57.5°	322.2	320.7	319.2	318.0	317.1	316.3	315.4	314.5
60°	297.8	296.5	295.1	294.0	293.3	292.5	291.8	291.0
62.5°	274.3	273.0	271.6	270.6	270.1	269.7	269.1	268.6
65°	239.3	238.2	236.9	236.1	235.7	235.2	234.8	234.3
67.5°	204.7	203.7	202.6	201.7	201.1	200.5	199.8	199.2
70°	182.3	181.3	180.2	179.2	178.5	177.7	177.0	176.2
72.5°	159.6	158.6	157.7	157.0	156.7	156.2	155.9	155.4
75°	126.9	126.2	125.4	124.8	124.3	123.9	123.4	123.0
77.5°	96.4	95.9	95.3	95.1	95.1	95.1	95.1	95.1
80°	76.9	76.7	76.6	76.5	76.5	76.5	76.5	76.5
82.5°	59.1	58.9	58.6	58.4	58.3	58.1	58.1	58.0
85°	33.5	33.3	32.9	32.8	32.8	32.8	32.8	32.8
87.5°	13.8	13.8	13.7	13.7	13.7	13.8	13.8	13.9
90°	10.3	10.7	11.1	11.3	11.5	11.7	11.9	12.0
92.5°	11.4	11.9	12.6	12.8	13.0	13.1	13.2	13.3
95°	13.6	14.3	14.9	15.2	15.2	15.2	15.2	15.2
97.5°	14.4	15.1	15.8	16.1	16.2	16.3	16.4	16.5
100°	14.6	15.3	16.1	16.5	16.6	16.7	16.8	16.9
102.5°	21.9	19.7	17.6	16.5	16.7	16.9	16.9	17.1
105°	56.2	40.5	24.7	16.9	17.1	17.3	17.5	17.7
107.5°	137.7	126.2	114.6	102.9	91.0	79.1	67.2	55.4
110°	174.8	171.8	168.9	161.1	148.4	135.6	122.9	110.2





TEST NUMBER: P332124-940

CATALOG NUMBER: S123DIW-S560D460U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	201.0	201.0	201.1	199.7	197.1	194.4	191.7	189.0
115°	231.8	232.6	233.5	234.2	234.5	234.9	235.2	235.6
117.5°	259.6	260.3	261.0	261.4	261.4	261.5	261.6	261.7
120°	277.9	278.6	279.3	279.6	279.6	279.6	279.6	279.6
122.5°	295.7	296.2	296.7	296.9	297.0	297.1	297.2	297.3
125°	320.8	321.0	321.2	321.4	321.6	321.7	321.9	322.1
127.5°	346.1	346.3	346.6	346.7	346.5	346.3	346.2	346.0
130°	361.2	361.6	361.9	362.0	361.9	361.7	361.5	361.3
132.5°	375.7	376.0	376.4	376.5	376.2	375.9	375.7	375.5
135°	397.5	397.8	398.1	398.1	397.8	397.5	397.3	397.0
137.5°	417.1	417.4	417.9	418.0	417.9	417.7	417.5	417.3
140°	429.4	429.7	430.1	430.2	430.0	429.8	429.6	429.4
142.5°	441.1	441.4	441.7	441.7	441.4	441.2	441.0	440.7
145°	457.4	457.6	457.8	457.9	457.9	457.9	457.9	457.9
147.5°	472.2	472.3	472.5	472.3	472.0	471.5	471.2	470.7
150°	481.1	481.3	481.4	481.4	481.2	480.9	480.6	480.4
152.5°	489.1	489.4	489.7	489.6	489.3	488.8	488.5	488.0
155°	500.1	500.5	501.0	500.9	500.3	499.8	499.3	498.8
157.5°	509.6	510.1	510.7	510.6	509.9	509.3	508.5	507.8
160°	515.1	515.6	516.1	516.1	515.5	514.9	514.2	513.6
162.5°	520.0	520.7	521.2	521.3	520.7	520.1	519.6	519.1
165°	526.6	527.4	528.1	528.1	527.4	526.9	526.3	525.7
167.5°	531.8	532.4	533.2	533.2	532.4	531.8	531.1	530.4
170°	534.7	535.4	536.1	536.1	535.4	534.7	534.0	533.2
172.5°	536.5	537.3	538.0	538.0	537.2	536.4	535.7	534.8
175°	538.9	539.5	540.1	540.1	539.4	538.7	538.0	537.3
177.5°	539.8	540.3	540.9	540.8	540.1	539.4	538.7	538.0
180°	539.2	539.2	539.2	539.2	539.2	539.2	539.2	539.2

(END OF REPORT)