

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332131-940

Luminaire Tested: **S123DIW-S560D755U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332131-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S560D755U940-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 755 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4404.0 lumens
Efficiency: N/A
Efficacy: 117.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 37.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332131-940

CATALOG NUMBER: S123DIW-S560D755U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

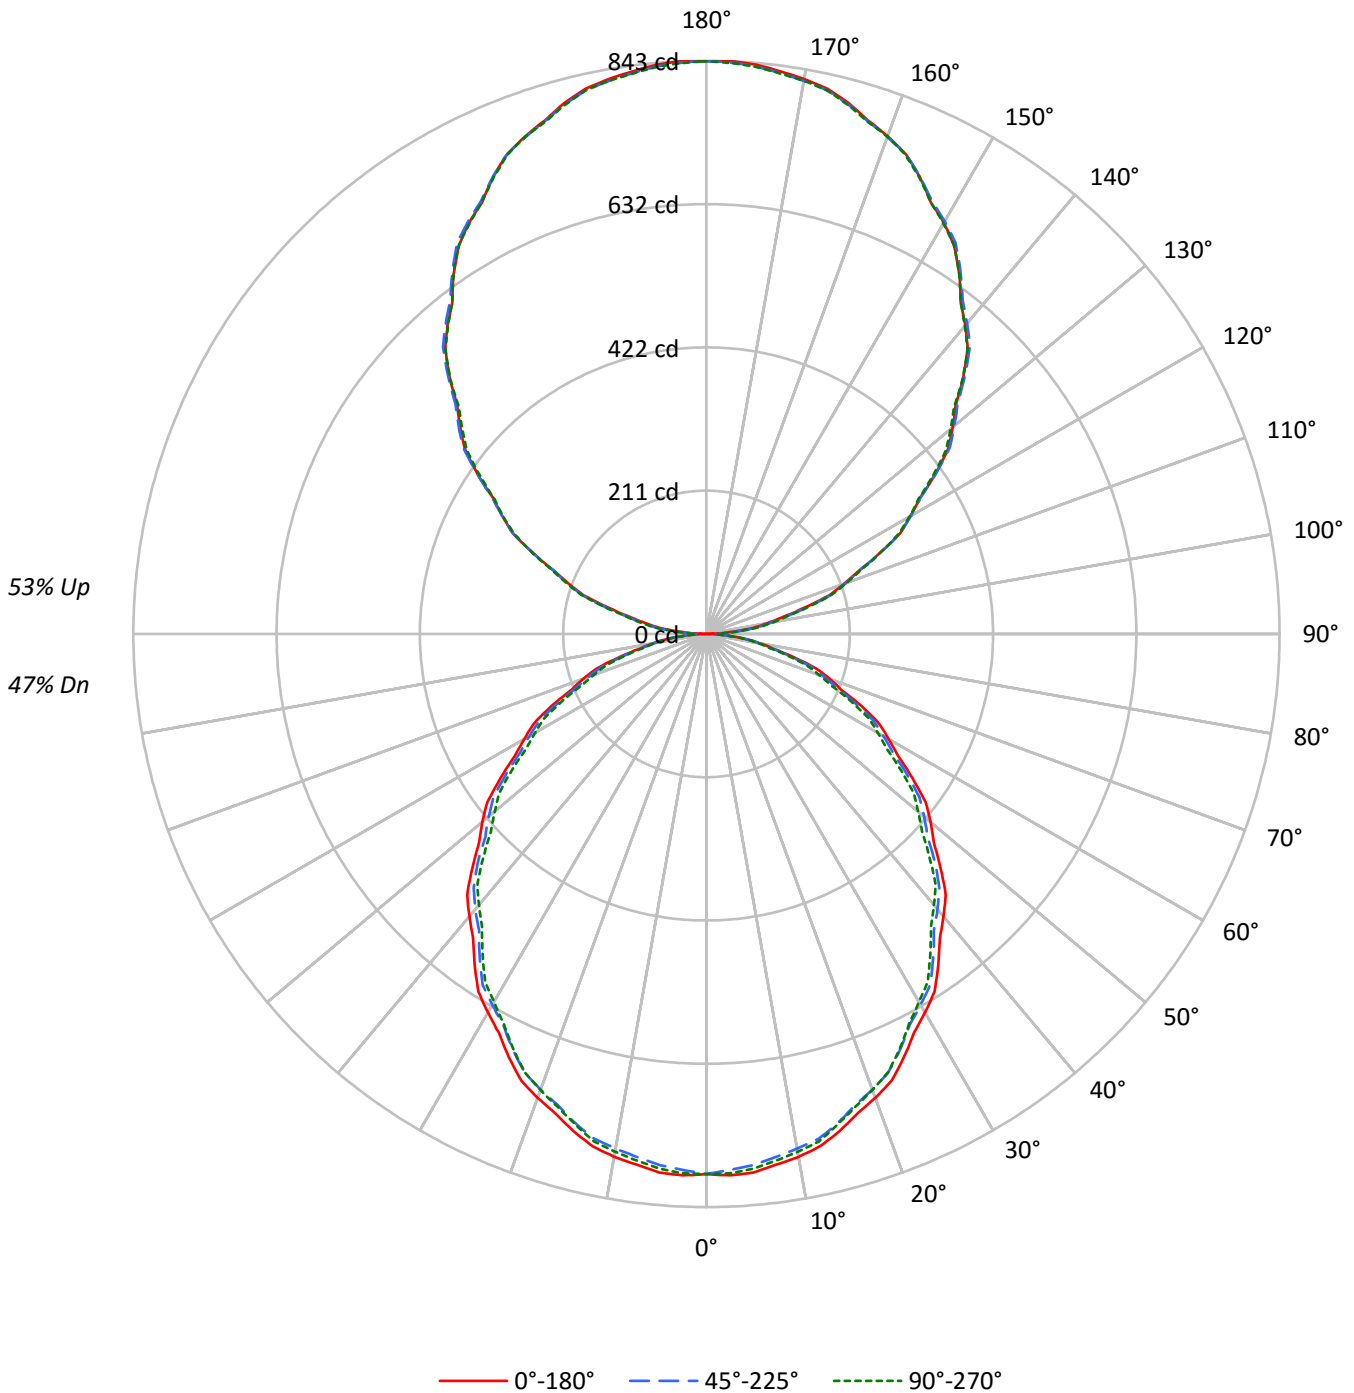



TEST NUMBER: P332131-940

CATALOG NUMBER: S123DIW-S560D755U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	53	53	53	47
1	97	93	89	85	89	85	82	79	71	69	67	59	57	56	47	46	45	39
2	88	81	75	70	81	75	69	65	63	59	55	52	49	46	41	39	38	33
3	81	71	64	58	74	66	59	54	55	50	46	46	42	39	37	34	32	28
4	74	63	55	49	67	58	51	46	49	44	40	41	37	34	33	30	28	24
5	68	56	48	42	62	52	45	39	44	38	34	36	32	29	29	26	24	21
6	62	50	42	36	57	46	39	34	39	34	30	33	29	25	27	24	21	18
7	58	45	37	32	53	42	35	30	36	30	26	30	26	22	24	21	19	16
8	53	41	33	28	49	38	31	26	33	27	23	27	23	20	22	19	17	14
9	50	37	30	25	46	35	28	24	30	24	21	25	21	18	21	18	15	13
10	46	34	27	22	43	32	25	21	27	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8551	8551	8551
5°	8590	8473	8532
10°	8534	8400	8451
15°	8433	8304	8320
20°	8317	8168	8176
25°	8162	8007	7991
30°	7988	7828	7768
35°	7808	7638	7540
40°	7620	7429	7314
45°	7415	7237	7060
50°	7206	7000	6805
55°	6934	6756	6549
60°	6661	6469	6265
65°	6421	6159	5968
70°	6061	5803	5545
75°	5540	5340	5115
80°	4996	4785	4742
85°	4384	4224	4051



TEST NUMBER: P332131-940

CATALOG NUMBER: S123DIW-S560D755U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	74.8	1.7
10°-20°	211.3	4.8
20°-30°	312.1	7.1
30°-40°	364.6	8.3
40°-50°	366.5	8.3
50°-60°	322.0	7.3
60°-70°	239.9	5.4
70°-80°	136.7	3.1
80°-90°	41.7	0.9
90°-100°	54.9	1.2
100°-110°	164.3	3.7
110°-120°	279.4	6.3
120°-130°	367.5	8.3
130°-140°	413.1	9.4
140°-150°	406.1	9.2
150°-160°	341.9	7.8
160°-170°	227.6	5.2
170°-180°	79.7	1.8
0°-30°	598.2	13.6
0°-40°	962.8	21.9
0°-60°	1651.3	37.5
0°-90°	2069.6	47.0
90°-120°	498.6	11.3
90°-150°	1685.3	38.3
90°-180°	2334.0	53.0
0°-180°	4404.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	794	794	794	794	794	
5°	795	791	784	791	790	75
15°	757	754	745	750	747	213
25°	687	683	674	675	673	316
35°	594	590	581	577	574	372
45°	487	484	475	467	464	376
55°	370	368	360	353	349	331
65°	252	248	242	236	234	249
75°	133	131	128	125	123	142
85°	36	34	34	33	33	39
90°	1	7	16	18	20	4
95°	39	44	49	52	52	44
105°	149	150	156	156	158	159
115°	281	283	282	283	282	278
125°	412	414	412	410	407	367
135°	534	538	537	535	533	411
145°	648	649	651	650	648	405
155°	742	742	743	745	741	341
165°	808	806	806	810	806	228
175°	840	838	838	841	837	80
180°	843	843	843	843	843	



TEST NUMBER: P332131-940

CATALOG NUMBER: S123DIW-S560D755U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4
2.5°	797.1	796.7	796.2	795.7	795.2	794.2	792.9	791.6	790.3	789.0	790.1
5°	795.0	794.3	793.5	792.8	792.0	790.9	789.2	787.5	785.9	784.2	785.7
7.5°	787.3	786.6	785.8	785.1	784.3	783.0	781.3	779.5	777.8	776.1	777.5
10°	780.8	780.0	779.3	778.5	777.8	776.3	774.4	772.4	770.4	768.5	769.8
12.5°	772.0	771.3	770.7	770.1	769.5	768.2	766.3	764.5	762.7	760.8	761.8
15°	756.8	756.3	755.6	755.0	754.4	753.1	751.2	749.2	747.2	745.2	746.5
17.5°	739.2	738.4	737.6	736.8	736.0	734.7	732.7	730.8	728.8	726.7	727.6
20°	726.1	725.2	724.2	723.4	722.5	721.0	719.1	717.1	715.1	713.1	713.7
22.5°	711.3	710.4	709.5	708.6	707.7	706.2	704.3	702.3	700.3	698.4	698.8
25°	687.2	686.3	685.4	684.5	683.5	682.1	680.1	678.1	676.2	674.2	674.3
27.5°	661.4	660.5	659.6	658.7	657.8	656.3	654.2	652.1	650.0	647.8	647.9
30°	642.7	642.0	641.2	640.5	639.7	638.3	636.1	634.0	632.0	629.8	629.8
32.5°	624.2	623.2	622.1	621.2	620.2	618.8	617.2	615.5	613.9	612.3	611.4
35°	594.2	593.3	592.5	591.6	590.7	589.2	587.2	585.2	583.3	581.3	580.4
37.5°	563.7	562.5	561.3	560.2	559.0	557.5	555.4	553.5	551.4	549.5	548.4
40°	542.3	541.4	540.6	539.7	538.7	537.2	535.0	533.0	530.8	528.7	527.4
42.5°	521.0	520.0	519.0	517.9	516.9	515.3	513.2	511.1	509.0	506.8	505.6
45°	487.1	486.4	485.8	485.2	484.6	483.3	481.3	479.4	477.4	475.4	473.6
47.5°	453.3	452.4	451.6	450.7	449.8	448.4	446.6	444.7	442.8	441.0	439.2
50°	430.3	429.5	428.8	428.0	427.3	426.0	423.9	422.0	420.0	418.0	416.3
52.5°	406.3	405.7	405.3	404.7	404.2	402.9	400.8	398.8	396.6	394.6	393.2
55°	369.5	369.3	369.3	369.1	368.9	367.8	365.9	363.9	361.9	360.0	358.3
57.5°	334.6	334.0	333.5	333.1	332.5	331.4	329.8	328.3	326.7	325.1	323.7
60°	309.4	309.2	309.2	309.0	308.8	307.8	306.0	304.2	302.4	300.5	299.2
62.5°	287.0	286.6	286.2	285.9	285.4	284.4	282.5	280.7	278.8	277.1	275.7
65°	252.1	251.3	250.6	249.8	249.1	247.9	246.4	244.9	243.3	241.8	240.6
67.5°	215.0	214.4	213.7	213.0	212.3	211.4	210.3	209.1	207.9	206.9	205.8
70°	192.6	191.7	190.8	189.9	189.0	188.1	187.2	186.3	185.3	184.4	183.3
72.5°	169.2	168.4	167.8	167.1	166.5	165.6	164.6	163.5	162.5	161.5	160.5
75°	133.2	132.6	132.0	131.3	130.8	130.3	129.7	129.3	128.9	128.4	127.7
77.5°	101.4	101.0	100.7	100.4	100.0	99.6	99.1	98.5	97.9	97.4	96.9
80°	80.6	80.2	79.7	79.3	78.7	78.4	78.1	77.8	77.5	77.2	77.0
82.5°	60.4	60.3	60.2	60.1	60.0	59.9	59.9	59.8	59.7	59.7	59.4
85°	35.5	35.2	35.0	34.6	34.3	34.2	34.2	34.2	34.2	34.2	33.9
87.5°	14.4	14.3	14.2	14.1	14.1	14.2	14.4	14.7	15.0	15.2	15.2
90°	0.6	2.1	3.6	5.1	6.5	8.2	10.2	12.0	14.0	15.9	16.5
92.5°	16.1	17.0	18.0	19.0	20.0	21.0	22.1	23.3	24.3	25.4	25.9
95°	39.1	40.0	41.1	42.2	43.2	44.2	45.5	46.6	47.8	49.0	49.6
97.5°	69.4	70.1	70.9	71.7	72.4	73.2	74.1	74.9	75.8	76.7	77.3
100°	90.0	90.9	91.8	92.6	93.5	94.3	95.1	95.9	96.6	97.3	97.7
102.5°	113.9	114.4	114.9	115.4	115.9	116.7	117.7	118.7	119.6	120.6	121.0
105°	148.9	149.2	149.5	149.8	150.1	150.9	152.2	153.6	154.9	156.2	156.2
107.5°	189.7	189.8	190.0	190.2	190.4	190.7	191.3	191.8	192.3	192.9	193.3
110°	215.1	215.4	215.7	216.0	216.2	216.6	216.9	217.1	217.5	217.8	218.4



TEST NUMBER: P332131-940

CATALOG NUMBER: S123DIW-S560D755U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	241.6	241.7	241.9	242.1	242.3	242.4	242.5	242.5	242.5	242.6	243.3
115°	281.3	281.7	282.1	282.6	283.0	283.1	282.9	282.6	282.2	282.0	282.1
117.5°	321.3	321.6	321.8	322.2	322.4	322.4	322.0	321.6	321.3	320.8	320.8
120°	346.2	347.1	347.9	348.8	349.7	349.7	349.0	348.3	347.6	346.8	346.7
122.5°	372.1	372.7	373.4	374.1	374.7	374.8	374.4	374.1	373.7	373.3	372.9
125°	411.7	412.1	412.6	413.0	413.5	413.5	413.2	413.0	412.6	412.3	411.8
127.5°	448.2	449.2	450.1	451.0	452.0	452.3	452.0	451.7	451.3	451.0	450.1
130°	472.6	473.8	474.9	476.1	477.2	477.7	477.2	476.8	476.4	475.9	475.3
132.5°	497.0	498.1	499.3	500.4	501.7	502.0	501.8	501.4	501.1	500.8	500.1
135°	534.1	535.0	535.9	536.8	537.6	538.1	537.9	537.7	537.6	537.4	536.8
137.5°	568.6	569.3	570.0	570.8	571.5	572.0	572.4	572.8	573.2	573.5	572.9
140°	592.4	593.1	593.9	594.6	595.3	595.8	595.9	596.0	596.2	596.4	596.2
142.5°	614.1	614.8	615.5	616.3	617.0	617.5	617.8	618.0	618.3	618.6	618.4
145°	648.0	648.3	648.5	648.8	649.2	649.5	650.0	650.4	650.9	651.3	651.1
147.5°	677.6	678.1	678.7	679.2	679.8	680.2	680.6	681.0	681.4	681.9	681.9
150°	698.3	698.6	698.8	699.2	699.5	699.7	700.0	700.3	700.6	700.9	700.9
152.5°	715.2	715.6	716.0	716.5	716.8	717.1	717.3	717.5	717.6	717.8	718.1
155°	742.0	742.0	742.0	742.0	742.0	742.0	742.2	742.3	742.4	742.6	743.2
157.5°	764.7	764.6	764.4	764.2	764.0	764.0	764.1	764.2	764.4	764.5	765.1
160°	779.0	778.7	778.5	778.1	777.8	777.7	777.7	777.7	777.7	777.7	778.5
162.5°	791.8	791.3	790.9	790.5	790.1	790.0	790.1	790.1	790.3	790.4	791.1
165°	808.2	807.7	807.3	806.8	806.4	806.1	806.1	806.1	806.1	806.1	807.0
167.5°	821.3	820.6	820.1	819.5	818.9	818.7	818.8	818.9	819.0	819.1	820.0
170°	828.7	828.0	827.5	826.9	826.3	826.0	826.0	826.0	826.0	826.0	827.1
172.5°	834.5	833.9	833.3	832.7	832.1	831.8	831.8	831.8	831.8	831.8	832.8
175°	840.5	840.0	839.4	838.8	838.2	837.9	837.9	837.9	837.9	837.9	838.8
177.5°	843.1	842.6	842.1	841.7	841.2	841.0	841.0	841.0	841.0	841.0	841.7
180°	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6



TEST NUMBER: P332131-940

CATALOG NUMBER: S123DIW-S560D755U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4
2.5°	791.4	792.6	793.8	794.3	794.2	794.1	794.0	793.9
5°	787.2	788.7	790.2	790.9	790.5	790.2	790.0	789.6
7.5°	778.8	780.2	781.6	782.1	781.9	781.8	781.6	781.4
10°	771.2	772.6	773.9	774.5	774.2	773.8	773.6	773.2
12.5°	762.8	763.8	764.8	765.2	765.0	764.8	764.6	764.5
15°	747.7	748.9	750.1	750.2	749.3	748.4	747.5	746.6
17.5°	728.5	729.3	730.2	730.4	730.1	729.8	729.4	729.1
20°	714.3	715.0	715.5	715.6	715.2	714.7	714.3	713.8
22.5°	699.4	699.8	700.3	700.3	699.7	699.1	698.6	697.9
25°	674.5	674.7	674.8	674.7	674.2	673.8	673.2	672.8
27.5°	648.1	648.2	648.3	648.1	647.5	646.9	646.3	645.8
30°	629.8	629.8	629.8	629.3	628.2	627.1	626.1	625.0
32.5°	610.6	609.8	608.9	608.1	607.6	607.1	606.5	605.9
35°	579.4	578.5	577.7	576.8	576.0	575.3	574.5	573.8
37.5°	547.2	546.2	545.1	544.3	543.9	543.3	542.9	542.3
40°	526.3	525.0	523.9	522.9	522.3	521.7	521.1	520.5
42.5°	504.4	503.2	501.9	501.1	500.4	499.9	499.3	498.6
45°	471.8	469.9	468.1	466.8	466.1	465.3	464.6	463.8
47.5°	437.4	435.6	433.8	432.6	431.9	431.2	430.6	429.9
50°	414.7	413.0	411.3	410.1	409.1	408.2	407.3	406.4
52.5°	391.7	390.3	388.9	387.6	386.7	385.8	385.0	384.1
55°	356.6	355.0	353.3	352.0	351.3	350.5	349.8	349.0
57.5°	322.2	320.7	319.2	318.0	317.1	316.3	315.4	314.5
60°	297.8	296.5	295.1	294.0	293.3	292.5	291.8	291.0
62.5°	274.3	273.0	271.6	270.6	270.1	269.7	269.1	268.6
65°	239.3	238.2	236.9	236.1	235.7	235.2	234.8	234.3
67.5°	204.7	203.7	202.6	201.7	201.1	200.5	199.8	199.2
70°	182.3	181.3	180.2	179.2	178.5	177.7	177.0	176.2
72.5°	159.6	158.6	157.7	157.0	156.7	156.2	155.9	155.4
75°	126.9	126.2	125.4	124.8	124.3	123.9	123.4	123.0
77.5°	96.4	95.9	95.3	95.1	95.1	95.1	95.1	95.1
80°	76.9	76.7	76.6	76.5	76.5	76.5	76.5	76.5
82.5°	59.1	58.9	58.6	58.4	58.3	58.1	58.1	58.0
85°	33.5	33.3	32.9	32.8	32.8	32.8	32.8	32.8
87.5°	15.2	15.2	15.2	15.2	15.2	15.3	15.4	15.4
90°	17.0	17.7	18.3	18.6	19.0	19.3	19.5	19.9
92.5°	26.4	26.8	27.3	27.5	27.3	27.1	26.9	26.8
95°	50.1	50.7	51.4	51.6	51.6	51.6	51.6	51.6
97.5°	78.0	78.6	79.4	79.6	79.6	79.5	79.5	79.5
100°	98.2	98.6	99.1	99.4	99.7	100.0	100.3	100.6
102.5°	121.5	121.9	122.3	122.5	122.5	122.4	122.3	122.3
105°	156.2	156.2	156.2	156.3	156.7	156.9	157.2	157.6
107.5°	193.8	194.3	194.7	194.9	194.7	194.6	194.4	194.2
110°	218.9	219.5	220.1	220.3	220.0	219.6	219.4	219.1



TEST NUMBER: P332131-940

CATALOG NUMBER: S123DIW-S560D755U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	244.1	244.8	245.5	245.8	245.8	245.7	245.6	245.6
115°	282.2	282.4	282.6	282.6	282.4	282.2	282.1	282.0
117.5°	320.8	320.7	320.7	320.6	320.1	319.7	319.3	318.9
120°	346.5	346.3	346.3	346.0	345.7	345.4	345.1	344.8
122.5°	372.6	372.1	371.8	371.4	371.0	370.5	370.1	369.7
125°	411.2	410.5	410.0	409.4	408.8	408.2	407.6	407.1
127.5°	449.3	448.5	447.7	446.9	446.3	445.6	445.0	444.3
130°	474.7	474.1	473.5	472.7	471.7	470.6	469.7	468.6
132.5°	499.4	498.6	497.9	497.2	496.4	495.6	494.8	494.0
135°	536.3	535.7	535.1	534.7	534.3	534.0	533.8	533.4
137.5°	572.3	571.7	571.1	570.5	570.0	569.4	568.8	568.3
140°	596.0	595.9	595.8	595.1	594.1	593.1	592.1	591.0
142.5°	618.3	618.1	618.0	617.5	616.7	615.9	615.1	614.3
145°	650.9	650.9	650.7	650.3	649.7	649.2	648.5	648.0
147.5°	681.9	681.9	681.9	681.4	680.6	679.7	678.8	677.9
150°	700.9	700.9	700.9	700.4	699.5	698.7	697.9	697.0
152.5°	718.4	718.5	718.8	718.5	717.7	717.0	716.2	715.5
155°	743.8	744.4	744.9	744.8	743.7	742.7	741.6	740.7
157.5°	765.7	766.3	767.0	766.8	766.0	765.2	764.4	763.5
160°	779.2	779.9	780.6	780.7	780.2	779.5	778.9	778.4
162.5°	791.8	792.6	793.4	793.3	792.3	791.4	790.4	789.4
165°	807.9	808.8	809.7	809.6	808.6	807.5	806.6	805.5
167.5°	820.9	821.9	822.8	822.8	821.9	820.9	820.0	819.1
170°	828.0	829.1	830.1	830.1	829.1	828.0	827.1	826.0
172.5°	833.7	834.6	835.4	835.4	834.4	833.4	832.3	831.3
175°	839.7	840.5	841.4	841.4	840.3	839.3	838.3	837.2
177.5°	842.4	843.1	843.8	843.7	842.9	842.0	841.2	840.4
180°	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6

(END OF REPORT)