

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332154-940

Luminaire Tested: **S123DIW-S775D460U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332154-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S775D460U940-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 460 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4471.5 lumens  
Efficiency: N/A  
Efficacy: 118.6 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 37.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332154-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

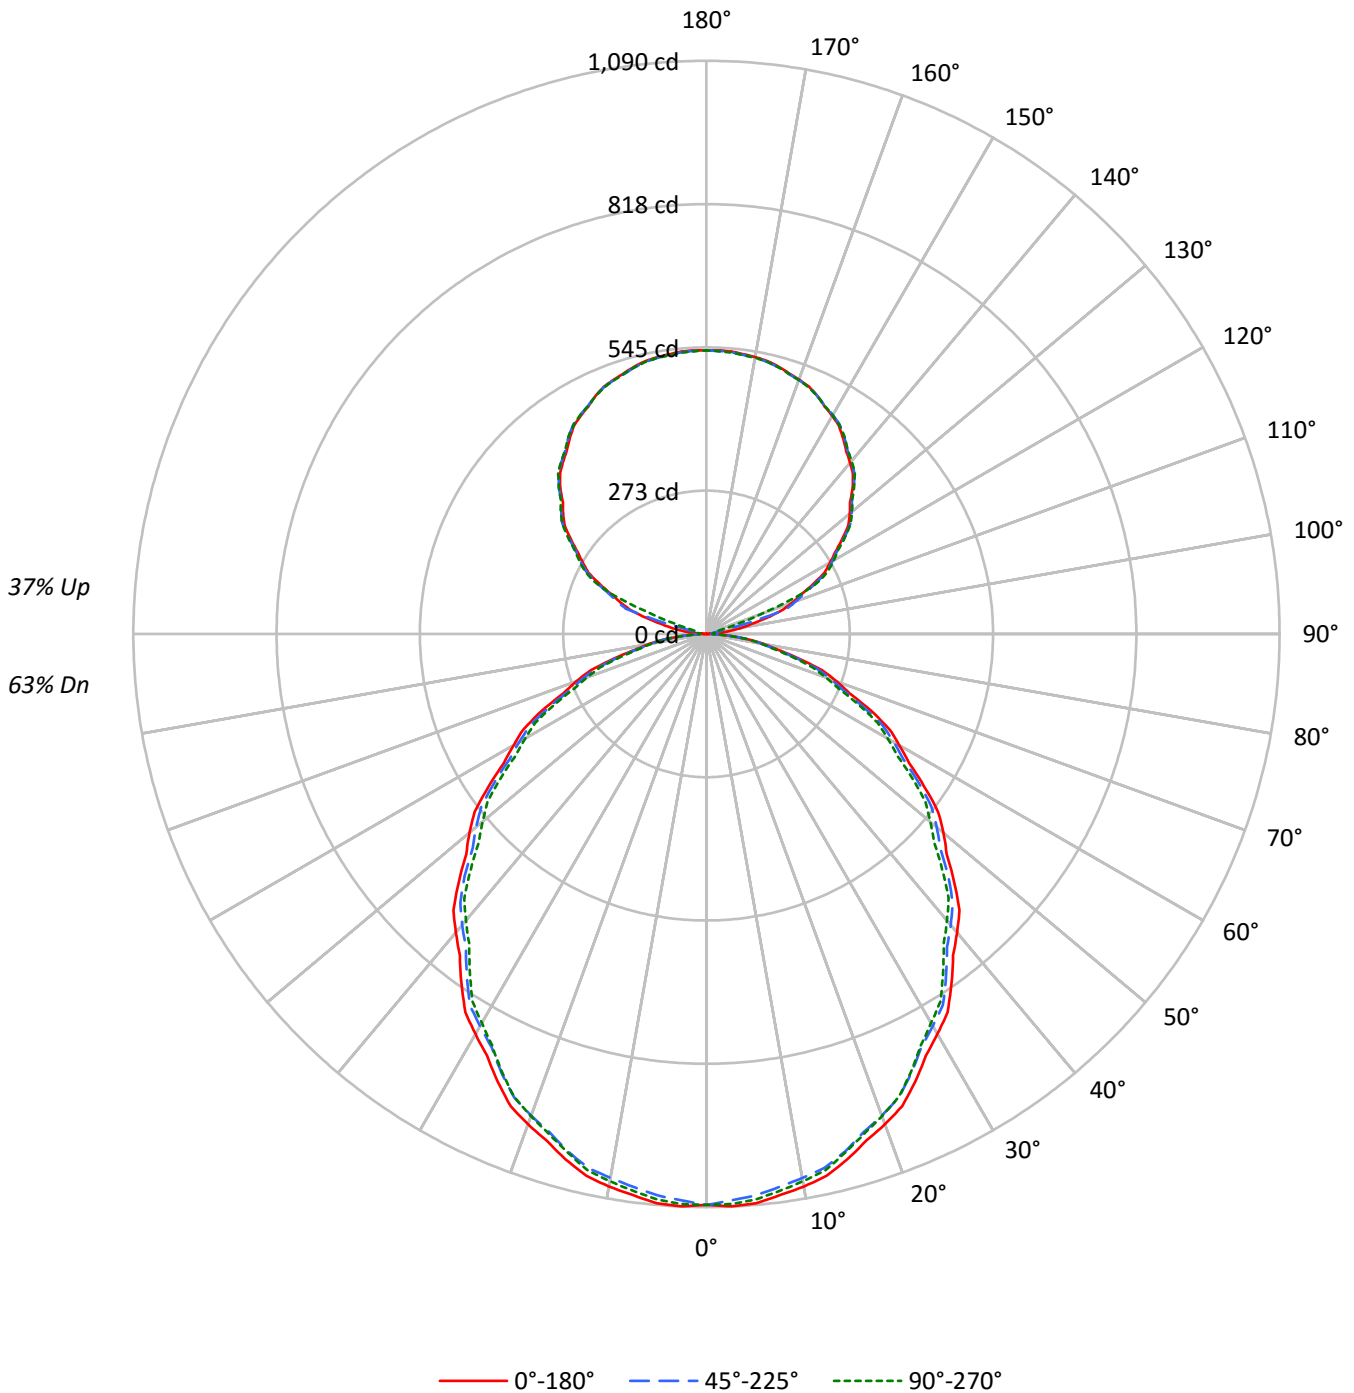



TEST NUMBER: P332154-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68	63
1	101	96	92	89	94	90	87	84	79	77	74	69	68	66	60	59	58	53
2	92	84	78	72	86	79	73	69	70	65	62	61	58	55	53	51	48	44
3	84	74	66	60	78	70	63	57	61	56	52	54	50	46	47	44	41	38
4	77	65	57	51	71	62	54	49	55	49	44	48	43	40	42	38	35	32
5	70	58	50	44	66	55	48	42	49	43	38	43	38	34	38	34	31	28
6	65	52	44	38	61	50	42	36	44	38	33	39	34	30	34	30	27	25
7	60	47	39	33	56	45	37	32	40	34	29	36	31	27	31	27	24	22
8	56	43	35	30	52	41	34	29	37	31	26	33	28	24	29	25	22	19
9	52	39	32	27	49	37	30	26	34	28	24	30	25	22	27	23	20	18
10	49	36	29	24	46	34	28	23	31	25	21	28	23	20	25	21	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11689	11689	11689
5°	11743	11581	11662
10°	11664	11481	11552
15°	11529	11352	11373
20°	11369	11165	11176
25°	11156	10946	10923
30°	10920	10700	10618
35°	10674	10441	10306
40°	10418	10153	9997
45°	10135	9893	9651
50°	9851	9568	9302
55°	9481	9233	8955
60°	9104	8844	8564
65°	8777	8420	8155
70°	8286	7934	7582
75°	7573	7303	6991
80°	6831	6540	6484
85°	5990	5768	5545



TEST NUMBER: P332154-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	102.3	2.3
10°-20°	288.8	6.5
20°-30°	426.6	9.5
30°-40°	498.4	11.1
40°-50°	501.0	11.2
50°-60°	440.1	9.8
60°-70°	327.9	7.3
70°-80°	186.8	4.2
80°-90°	55.1	1.2
90°-100°	19.6	0.4
100°-110°	93.4	2.1
110°-120°	224.4	5.0
120°-130°	285.8	6.4
130°-140°	305.4	6.8
140°-150°	285.5	6.4
150°-160°	230.3	5.2
160°-170°	148.7	3.3
170°-180°	51.2	1.1
0°-30°	817.7	18.3
0°-40°	1316.1	29.4
0°-60°	2257.3	50.5
0°-90°	2827.1	63.2
90°-120°	337.5	7.5
90°-150°	1214.2	27.2
90°-180°	1644.0	36.8
0°-180°	4471.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1086	1086	1086	1086	1086	
5°	1087	1082	1072	1081	1079	103
15°	1035	1030	1019	1025	1021	292
25°	939	933	922	922	920	432
35°	812	806	795	789	784	508
45°	666	662	650	639	634	514
55°	505	504	492	482	477	452
65°	345	340	331	323	320	340
75°	182	178	176	171	168	195
85°	48	47	47	45	45	53
90°	0	4	10	11	12	4
95°	24	9	12	15	15	30
105°	119	122	88	21	18	127
115°	224	226	230	234	236	221
125°	316	319	320	321	322	282
135°	393	395	397	398	397	302
145°	454	456	457	458	458	284
155°	500	499	499	501	499	230
165°	527	526	525	528	526	149
175°	539	537	538	540	537	51
180°	539	539	539	539	539	



TEST NUMBER: P332154-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9
2.5°	1089.6	1089.0	1088.3	1087.6	1087.0	1085.7	1083.9	1082.1	1080.2	1078.4	1080.0
5°	1086.8	1085.7	1084.8	1083.7	1082.6	1081.0	1078.7	1076.5	1074.2	1071.8	1074.0
7.5°	1076.2	1075.1	1074.1	1073.1	1072.0	1070.3	1067.9	1065.6	1063.2	1060.9	1062.7
10°	1067.2	1066.1	1065.1	1064.1	1063.1	1061.2	1058.5	1055.8	1053.1	1050.4	1052.3
12.5°	1055.3	1054.4	1053.6	1052.7	1051.8	1050.1	1047.6	1045.0	1042.5	1039.9	1041.3
15°	1034.6	1033.7	1032.9	1032.1	1031.2	1029.5	1026.7	1024.0	1021.4	1018.7	1020.3
17.5°	1010.4	1009.3	1008.3	1007.2	1006.1	1004.2	1001.6	998.8	996.1	993.5	994.6
20°	992.5	991.2	990.1	988.8	987.6	985.5	982.8	980.2	977.5	974.7	975.6
22.5°	972.3	971.1	969.8	968.6	967.3	965.4	962.7	960.0	957.3	954.6	955.3
25°	939.3	938.1	936.8	935.6	934.3	932.4	929.6	926.9	924.3	921.6	921.8
27.5°	904.0	902.8	901.6	900.4	899.2	897.2	894.2	891.4	888.4	885.5	885.6
30°	878.6	877.5	876.6	875.5	874.4	872.4	869.6	866.7	863.8	860.9	860.9
32.5°	853.2	851.9	850.4	849.1	847.7	846.0	843.6	841.4	839.2	837.0	835.8
35°	812.3	811.1	809.9	808.6	807.4	805.4	802.6	800.0	797.3	794.6	793.4
37.5°	770.4	768.9	767.3	765.7	764.2	762.1	759.3	756.5	753.8	751.1	749.6
40°	741.4	740.1	738.9	737.6	736.4	734.3	731.4	728.5	725.6	722.6	721.0
42.5°	712.2	710.8	709.4	708.0	706.6	704.5	701.5	698.6	695.7	692.8	691.2
45°	665.8	664.9	664.1	663.3	662.4	660.7	657.9	655.2	652.6	649.9	647.4
47.5°	619.6	618.4	617.2	616.0	614.7	612.9	610.4	607.9	605.3	602.8	600.3
50°	588.3	587.2	586.1	585.1	584.1	582.2	579.5	576.8	574.1	571.4	569.2
52.5°	555.4	554.6	553.9	553.2	552.5	550.7	547.9	545.0	542.2	539.3	537.3
55°	505.2	504.9	504.7	504.5	504.3	502.8	500.2	497.5	494.7	492.0	489.8
57.5°	457.4	456.6	455.9	455.2	454.5	453.1	450.9	448.7	446.6	444.4	442.4
60°	422.9	422.8	422.6	422.3	422.1	420.8	418.3	415.8	413.3	410.8	408.9
62.5°	392.4	391.8	391.3	390.7	390.2	388.7	386.2	383.7	381.2	378.7	376.8
65°	344.6	343.5	342.4	341.4	340.4	338.9	336.7	334.7	332.6	330.6	328.9
67.5°	293.9	293.0	292.1	291.1	290.3	289.0	287.5	285.9	284.3	282.8	281.2
70°	263.3	262.1	260.8	259.6	258.3	257.1	255.8	254.6	253.3	252.1	250.7
72.5°	231.2	230.2	229.3	228.5	227.6	226.4	225.0	223.6	222.1	220.7	219.5
75°	182.1	181.2	180.4	179.6	178.8	178.0	177.4	176.7	176.1	175.6	174.5
77.5°	138.6	138.1	137.7	137.2	136.7	136.2	135.4	134.6	133.9	133.1	132.4
80°	110.2	109.6	109.0	108.3	107.7	107.2	106.7	106.4	105.9	105.5	105.3
82.5°	82.6	82.4	82.3	82.1	82.0	81.9	81.9	81.8	81.7	81.6	81.2
85°	48.5	48.2	47.7	47.3	46.9	46.7	46.7	46.7	46.7	46.7	46.3
87.5°	19.5	19.2	18.9	18.5	18.2	18.1	18.2	18.2	18.3	18.4	18.3
90°	0.4	1.2	2.1	3.0	3.9	5.0	6.2	7.3	8.5	9.6	10.0
92.5°	7.5	7.2	7.0	6.7	6.4	6.8	7.7	8.5	9.4	10.3	10.8
95°	24.4	20.8	17.1	13.5	9.8	8.5	9.5	10.4	11.4	12.4	13.0
97.5°	49.1	47.4	45.8	44.2	42.5	38.5	32.1	25.7	19.4	12.9	13.6
100°	67.7	69.5	71.2	73.0	74.8	68.8	54.9	41.0	27.1	13.2	13.9
102.5°	88.8	90.2	91.4	92.7	94.0	87.0	71.9	56.7	41.6	26.4	24.2
105°	119.4	120.4	121.4	122.3	123.3	119.8	111.7	103.8	95.8	87.7	72.0
107.5°	151.6	152.4	153.2	153.9	154.7	155.8	157.0	158.3	159.5	160.8	149.3
110°	173.1	173.8	174.5	175.2	175.9	176.7	177.7	178.7	179.7	180.7	177.7



TEST NUMBER: P332154-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	193.6	194.2	194.8	195.5	196.2	197.0	198.0	198.9	199.9	200.9	200.9
115°	223.9	224.4	225.0	225.5	226.0	226.8	227.6	228.4	229.2	230.0	230.9
117.5°	253.3	254.0	254.7	255.3	256.0	256.5	256.9	257.3	257.8	258.2	258.9
120°	271.6	272.4	273.2	274.0	274.8	275.4	275.6	275.9	276.2	276.4	277.1
122.5°	290.3	290.9	291.5	292.2	292.8	293.4	293.7	294.0	294.4	294.7	295.2
125°	315.7	316.4	317.1	317.8	318.5	319.1	319.4	319.8	320.1	320.5	320.7
127.5°	340.4	341.1	341.8	342.5	343.2	343.8	344.2	344.6	345.1	345.5	345.8
130°	355.8	356.5	357.2	357.9	358.6	359.2	359.5	359.9	360.3	360.5	360.9
132.5°	370.5	371.2	371.9	372.6	373.4	373.8	374.2	374.4	374.7	375.0	375.3
135°	393.0	393.5	394.0	394.6	395.1	395.6	395.9	396.3	396.6	397.0	397.3
137.5°	412.2	413.0	413.6	414.3	414.9	415.4	415.6	415.8	416.0	416.2	416.6
140°	425.1	425.6	426.1	426.7	427.2	427.6	427.8	428.1	428.4	428.6	429.0
142.5°	436.9	437.5	438.0	438.5	439.1	439.4	439.7	440.0	440.2	440.5	440.8
145°	453.5	454.1	454.8	455.4	456.0	456.4	456.6	456.7	456.9	457.1	457.3
147.5°	469.1	469.6	469.9	470.4	470.7	471.1	471.3	471.4	471.6	471.8	472.0
150°	478.8	479.0	479.3	479.6	479.8	480.0	480.2	480.4	480.5	480.7	480.9
152.5°	487.4	487.5	487.7	487.8	487.9	488.0	488.1	488.2	488.3	488.5	488.7
155°	499.5	499.4	499.2	499.1	498.9	498.8	498.9	499.0	499.1	499.2	499.6
157.5°	509.1	509.0	509.0	509.0	509.0	508.9	508.8	508.7	508.6	508.5	509.1
160°	514.8	514.7	514.6	514.5	514.4	514.3	514.2	514.2	514.1	514.0	514.5
162.5°	520.2	520.0	519.8	519.6	519.3	519.2	519.1	519.0	518.9	518.8	519.4
165°	526.8	526.6	526.3	526.0	525.8	525.6	525.5	525.4	525.3	525.2	525.9
167.5°	532.0	531.6	531.3	530.9	530.6	530.4	530.4	530.4	530.4	530.4	531.1
170°	534.8	534.5	534.1	533.8	533.4	533.2	533.2	533.2	533.2	533.2	534.0
172.5°	536.7	536.4	535.9	535.5	535.0	534.8	534.9	535.0	535.1	535.1	535.8
175°	539.2	538.8	538.3	537.9	537.4	537.3	537.3	537.4	537.5	537.6	538.2
177.5°	539.8	539.5	539.1	538.8	538.4	538.3	538.4	538.4	538.5	538.6	539.1
180°	539.2	539.2	539.2	539.2	539.2	539.2	539.2	539.2	539.2	539.2	539.2



TEST NUMBER: P332154-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9
2.5°	1081.7	1083.4	1085.0	1085.8	1085.7	1085.5	1085.3	1085.1
5°	1076.0	1078.1	1080.2	1081.0	1080.6	1080.2	1079.8	1079.3
7.5°	1064.6	1066.5	1068.4	1069.2	1068.9	1068.6	1068.4	1068.2
10°	1054.2	1056.0	1057.8	1058.6	1058.2	1057.7	1057.4	1056.9
12.5°	1042.7	1044.0	1045.4	1046.0	1045.7	1045.4	1045.3	1045.0
15°	1022.0	1023.6	1025.3	1025.5	1024.2	1023.0	1021.8	1020.6
17.5°	995.8	996.9	998.1	998.4	998.0	997.6	997.1	996.7
20°	976.4	977.2	978.1	978.2	977.6	977.0	976.3	975.7
22.5°	955.9	956.6	957.3	957.2	956.4	955.6	954.8	954.0
25°	921.9	922.2	922.4	922.2	921.6	921.0	920.3	919.7
27.5°	885.8	886.0	886.2	885.8	885.1	884.3	883.5	882.7
30°	860.9	860.9	860.9	860.1	858.7	857.2	855.8	854.3
32.5°	834.6	833.5	832.3	831.3	830.5	829.7	828.9	828.2
35°	792.1	790.9	789.6	788.5	787.4	786.4	785.3	784.3
37.5°	748.1	746.5	745.1	744.0	743.3	742.7	742.0	741.4
40°	719.3	717.7	716.0	714.8	714.0	713.1	712.3	711.5
42.5°	689.5	687.8	686.2	684.9	684.1	683.2	682.4	681.6
45°	644.9	642.4	639.9	638.1	637.1	636.1	635.0	634.0
47.5°	597.9	595.5	593.0	591.3	590.4	589.5	588.6	587.6
50°	566.9	564.5	562.3	560.5	559.3	558.0	556.8	555.5
52.5°	535.4	533.4	531.5	529.9	528.7	527.4	526.2	525.0
55°	487.5	485.2	483.0	481.3	480.2	479.2	478.1	477.2
57.5°	440.3	438.4	436.3	434.7	433.5	432.3	431.1	429.9
60°	407.1	405.2	403.3	401.9	400.8	399.8	398.8	397.8
62.5°	375.0	373.1	371.2	370.0	369.3	368.5	367.8	367.1
65°	327.2	325.6	323.9	322.7	322.1	321.5	320.8	320.2
67.5°	279.8	278.4	276.9	275.7	274.9	274.0	273.1	272.2
70°	249.2	247.7	246.3	245.0	244.0	243.0	241.9	240.9
72.5°	218.1	216.9	215.6	214.6	214.1	213.6	213.0	212.5
75°	173.4	172.5	171.4	170.6	170.0	169.3	168.7	168.1
77.5°	131.7	131.0	130.3	130.0	130.0	130.0	130.0	130.0
80°	105.1	104.9	104.7	104.6	104.6	104.6	104.6	104.6
82.5°	80.9	80.5	80.1	79.8	79.7	79.5	79.4	79.2
85°	45.8	45.5	45.0	44.9	44.9	44.9	44.9	44.9
87.5°	18.2	18.1	18.0	17.9	18.0	18.0	18.0	18.1
90°	10.3	10.7	11.1	11.3	11.5	11.7	11.9	12.0
92.5°	11.4	11.9	12.6	12.8	13.0	13.1	13.2	13.3
95°	13.6	14.3	14.9	15.2	15.2	15.2	15.2	15.2
97.5°	14.4	15.1	15.8	16.1	16.2	16.3	16.4	16.5
100°	14.6	15.3	16.1	16.5	16.6	16.7	16.8	16.9
102.5°	21.9	19.7	17.6	16.5	16.7	16.9	16.9	17.1
105°	56.2	40.5	24.7	16.9	17.1	17.3	17.5	17.7
107.5°	137.7	126.2	114.6	102.9	91.0	79.1	67.2	55.4
110°	174.8	171.8	168.9	161.1	148.4	135.6	122.9	110.2





TEST NUMBER: P332154-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	201.0	201.0	201.1	199.7	197.1	194.4	191.7	189.0
115°	231.8	232.6	233.5	234.2	234.5	234.9	235.2	235.6
117.5°	259.6	260.3	261.0	261.4	261.4	261.5	261.6	261.7
120°	277.9	278.6	279.3	279.6	279.6	279.6	279.6	279.6
122.5°	295.7	296.2	296.7	296.9	297.0	297.1	297.2	297.3
125°	320.8	321.0	321.2	321.4	321.6	321.7	321.9	322.1
127.5°	346.1	346.3	346.6	346.7	346.5	346.3	346.2	346.0
130°	361.2	361.6	361.9	362.0	361.9	361.7	361.5	361.3
132.5°	375.7	376.0	376.4	376.5	376.2	375.9	375.7	375.5
135°	397.5	397.8	398.1	398.1	397.8	397.5	397.3	397.0
137.5°	417.1	417.4	417.9	418.0	417.9	417.7	417.5	417.3
140°	429.4	429.7	430.1	430.2	430.0	429.8	429.6	429.4
142.5°	441.1	441.4	441.7	441.7	441.4	441.2	441.0	440.7
145°	457.4	457.6	457.8	457.9	457.9	457.9	457.9	457.9
147.5°	472.2	472.3	472.5	472.3	472.0	471.5	471.2	470.7
150°	481.1	481.3	481.4	481.4	481.2	480.9	480.6	480.4
152.5°	489.1	489.4	489.7	489.6	489.3	488.8	488.5	488.0
155°	500.1	500.5	501.0	500.9	500.3	499.8	499.3	498.8
157.5°	509.6	510.1	510.7	510.6	509.9	509.3	508.5	507.8
160°	515.1	515.6	516.1	516.1	515.5	514.9	514.2	513.6
162.5°	520.0	520.7	521.2	521.3	520.7	520.1	519.6	519.1
165°	526.6	527.4	528.1	528.1	527.4	526.9	526.3	525.7
167.5°	531.8	532.4	533.2	533.2	532.4	531.8	531.1	530.4
170°	534.7	535.4	536.1	536.1	535.4	534.7	534.0	533.2
172.5°	536.5	537.3	538.0	538.0	537.2	536.4	535.7	534.8
175°	538.9	539.5	540.1	540.1	539.4	538.7	538.0	537.3
177.5°	539.8	540.3	540.9	540.8	540.1	539.4	538.7	538.0
180°	539.2	539.2	539.2	539.2	539.2	539.2	539.2	539.2

(END OF REPORT)