

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332155-940

Luminaire Tested: **S123DIW-S775D460U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332155-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S775D460U940-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 460 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4252.4 lumens
Efficiency: N/A
Efficacy: 112.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 37.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332155-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

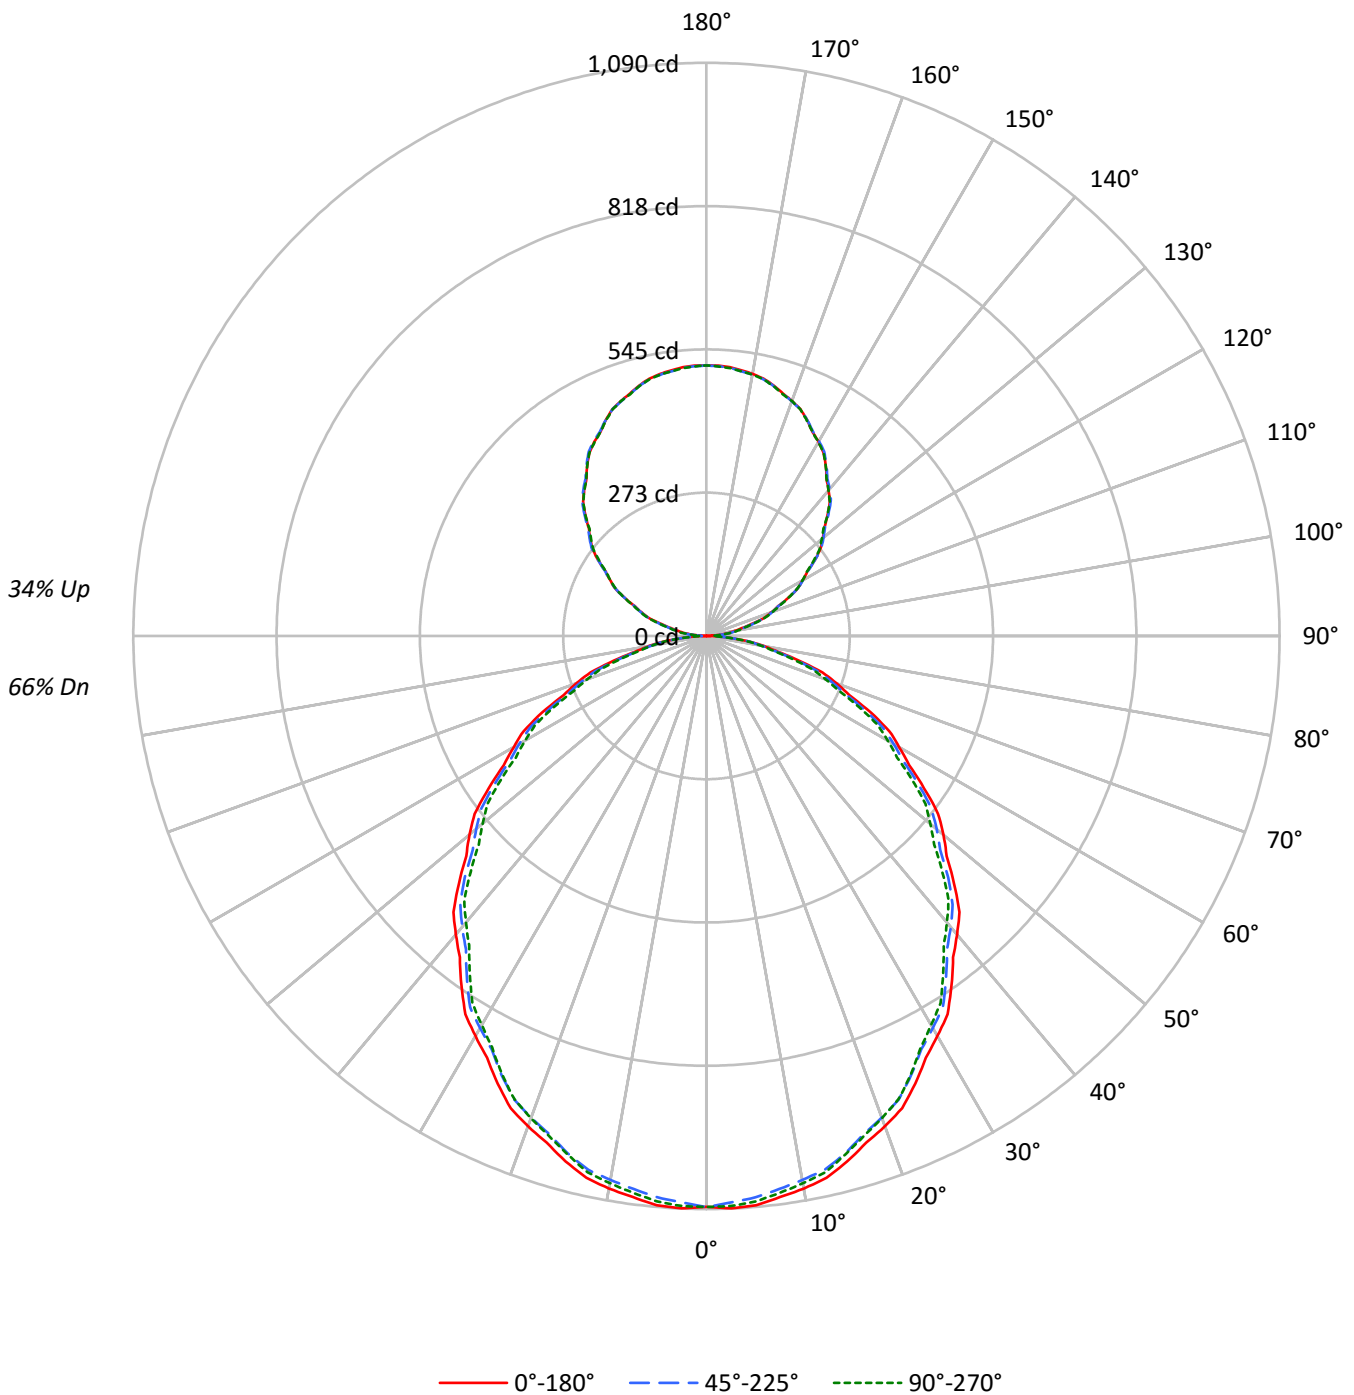



TEST NUMBER: P332155-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	92	92	92	81	81	81	71	71	71	66
1	101	97	93	89	95	91	88	85	81	78	76	72	70	68	63	61	60	56
2	92	85	78	73	87	80	74	69	71	67	63	63	59	57	55	53	51	47
3	84	74	67	61	79	70	64	58	63	57	53	56	51	48	49	46	43	40
4	77	66	58	51	72	62	55	49	56	50	45	50	45	41	44	40	37	34
5	71	59	50	44	66	56	48	42	50	44	39	44	39	36	39	35	32	29
6	65	53	44	38	61	50	43	37	45	39	34	40	35	31	36	32	28	26
7	60	48	40	34	57	45	38	33	41	35	30	37	32	28	33	28	25	23
8	56	43	36	30	53	41	34	29	37	31	27	34	28	25	30	26	23	20
9	52	40	32	27	49	38	31	26	34	28	24	31	26	22	28	24	20	18
10	49	37	29	24	46	35	28	23	32	26	22	29	24	20	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11689	11689	11689
5°	11743	11581	11662
10°	11664	11481	11552
15°	11529	11352	11373
20°	11369	11165	11176
25°	11156	10946	10923
30°	10920	10700	10618
35°	10674	10441	10306
40°	10418	10153	9997
45°	10135	9893	9651
50°	9851	9568	9302
55°	9481	9233	8955
60°	9104	8844	8564
65°	8777	8420	8155
70°	8286	7934	7582
75°	7573	7303	6991
80°	6831	6540	6484
85°	5990	5768	5545



TEST NUMBER: P332155-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.3	2.4
10°-20°	288.8	6.8
20°-30°	426.6	10.0
30°-40°	498.4	11.7
40°-50°	501.0	11.8
50°-60°	440.1	10.3
60°-70°	327.9	7.7
70°-80°	186.8	4.4
80°-90°	55.2	1.3
90°-100°	33.5	0.8
100°-110°	100.3	2.4
110°-120°	170.6	4.0
120°-130°	224.4	5.3
130°-140°	252.2	5.9
140°-150°	247.9	5.8
150°-160°	208.7	4.9
160°-170°	138.9	3.3
170°-180°	48.7	1.1
0°-30°	817.7	19.2
0°-40°	1316.1	30.9
0°-60°	2257.3	53.1
0°-90°	2827.1	66.5
90°-120°	304.4	7.2
90°-150°	1029.0	24.2
90°-180°	1425.0	33.5
0°-180°	4252.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1086	1086	1086	1086	1086	
5°	1087	1082	1072	1081	1079	103
15°	1035	1030	1019	1025	1021	292
25°	939	933	922	922	920	432
35°	812	806	795	789	784	508
45°	666	662	650	639	634	514
55°	505	504	492	482	477	452
65°	345	340	331	323	320	340
75°	182	178	176	171	168	195
85°	48	47	47	45	45	53
90°	0	4	10	11	12	4
95°	24	27	30	31	32	27
105°	91	92	95	95	96	97
115°	172	173	172	172	172	170
125°	251	252	252	250	248	224
135°	326	328	328	327	326	251
145°	396	396	398	397	396	247
155°	453	453	453	455	452	208
165°	493	492	492	494	492	139
175°	513	512	512	514	511	49
180°	514	514	514	514	514	



TEST NUMBER: P332155-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9
2.5°	1089.6	1089.0	1088.3	1087.6	1087.0	1085.7	1083.9	1082.1	1080.2	1078.4	1080.0
5°	1086.8	1085.7	1084.8	1083.7	1082.6	1081.0	1078.7	1076.5	1074.2	1071.8	1074.0
7.5°	1076.2	1075.1	1074.1	1073.1	1072.0	1070.3	1067.9	1065.6	1063.2	1060.9	1062.7
10°	1067.2	1066.1	1065.1	1064.1	1063.1	1061.2	1058.5	1055.8	1053.1	1050.4	1052.3
12.5°	1055.3	1054.4	1053.6	1052.7	1051.8	1050.1	1047.6	1045.0	1042.5	1039.9	1041.3
15°	1034.6	1033.7	1032.9	1032.1	1031.2	1029.5	1026.7	1024.0	1021.4	1018.7	1020.3
17.5°	1010.4	1009.3	1008.3	1007.2	1006.1	1004.2	1001.6	998.8	996.1	993.5	994.6
20°	992.5	991.2	990.1	988.8	987.6	985.5	982.8	980.2	977.5	974.7	975.6
22.5°	972.3	971.1	969.8	968.6	967.3	965.4	962.7	960.0	957.3	954.6	955.3
25°	939.3	938.1	936.8	935.6	934.3	932.4	929.6	926.9	924.3	921.6	921.8
27.5°	904.0	902.8	901.6	900.4	899.2	897.2	894.2	891.4	888.4	885.5	885.6
30°	878.6	877.5	876.6	875.5	874.4	872.4	869.6	866.7	863.8	860.9	860.9
32.5°	853.2	851.9	850.4	849.1	847.7	846.0	843.6	841.4	839.2	837.0	835.8
35°	812.3	811.1	809.9	808.6	807.4	805.4	802.6	800.0	797.3	794.6	793.4
37.5°	770.4	768.9	767.3	765.7	764.2	762.1	759.3	756.5	753.8	751.1	749.6
40°	741.4	740.1	738.9	737.6	736.4	734.3	731.4	728.5	725.6	722.6	721.0
42.5°	712.2	710.8	709.4	708.0	706.6	704.5	701.5	698.6	695.7	692.8	691.2
45°	665.8	664.9	664.1	663.3	662.4	660.7	657.9	655.2	652.6	649.9	647.4
47.5°	619.6	618.4	617.2	616.0	614.7	612.9	610.4	607.9	605.3	602.8	600.3
50°	588.3	587.2	586.1	585.1	584.1	582.2	579.5	576.8	574.1	571.4	569.2
52.5°	555.4	554.6	553.9	553.2	552.5	550.7	547.9	545.0	542.2	539.3	537.3
55°	505.2	504.9	504.7	504.5	504.3	502.8	500.2	497.5	494.7	492.0	489.8
57.5°	457.4	456.6	455.9	455.2	454.5	453.1	450.9	448.7	446.6	444.4	442.4
60°	422.9	422.8	422.6	422.3	422.1	420.8	418.3	415.8	413.3	410.8	408.9
62.5°	392.4	391.8	391.3	390.7	390.2	388.7	386.2	383.7	381.2	378.7	376.8
65°	344.6	343.5	342.4	341.4	340.4	338.9	336.7	334.7	332.6	330.6	328.9
67.5°	293.9	293.0	292.1	291.1	290.3	289.0	287.5	285.9	284.3	282.8	281.2
70°	263.3	262.1	260.8	259.6	258.3	257.1	255.8	254.6	253.3	252.1	250.7
72.5°	231.2	230.2	229.3	228.5	227.6	226.4	225.0	223.6	222.1	220.7	219.5
75°	182.1	181.2	180.4	179.6	178.8	178.0	177.4	176.7	176.1	175.6	174.5
77.5°	138.6	138.1	137.7	137.2	136.7	136.2	135.4	134.6	133.9	133.1	132.4
80°	110.2	109.6	109.0	108.3	107.7	107.2	106.7	106.4	105.9	105.5	105.3
82.5°	82.6	82.4	82.3	82.1	82.0	81.9	81.9	81.8	81.7	81.6	81.2
85°	48.5	48.2	47.7	47.3	46.9	46.7	46.7	46.7	46.7	46.7	46.3
87.5°	19.5	19.2	18.9	18.5	18.2	18.1	18.2	18.3	18.3	18.4	18.3
90°	0.4	1.3	2.2	3.1	4.0	5.0	6.2	7.4	8.6	9.7	10.1
92.5°	9.8	10.4	11.0	11.6	12.2	12.8	13.6	14.2	14.9	15.5	15.8
95°	23.8	24.4	25.1	25.8	26.4	27.0	27.7	28.4	29.2	29.9	30.2
97.5°	42.4	42.8	43.2	43.8	44.2	44.7	45.2	45.7	46.3	46.8	47.2
100°	54.9	55.5	56.0	56.5	57.1	57.6	58.1	58.5	58.9	59.4	59.7
102.5°	69.5	69.8	70.2	70.4	70.8	71.2	71.9	72.4	73.0	73.7	73.9
105°	91.0	91.1	91.3	91.5	91.7	92.1	92.9	93.7	94.5	95.3	95.3
107.5°	115.8	115.9	116.0	116.1	116.3	116.5	116.8	117.1	117.4	117.8	118.1
110°	131.3	131.5	131.7	131.9	132.1	132.2	132.4	132.6	132.8	133.0	133.3



TEST NUMBER: P332155-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	147.5	147.6	147.8	147.8	147.9	148.0	148.0	148.1	148.1	148.1	148.6
115°	171.7	172.0	172.3	172.5	172.8	172.9	172.7	172.5	172.4	172.2	172.3
117.5°	196.2	196.4	196.5	196.7	196.9	196.8	196.6	196.4	196.2	195.9	195.9
120°	211.3	211.9	212.4	212.9	213.5	213.6	213.1	212.7	212.2	211.8	211.7
122.5°	227.2	227.6	228.0	228.4	228.7	228.8	228.6	228.4	228.2	227.9	227.7
125°	251.4	251.6	251.9	252.2	252.4	252.4	252.3	252.1	251.9	251.7	251.4
127.5°	273.7	274.2	274.8	275.4	276.0	276.2	276.0	275.7	275.5	275.4	274.8
130°	288.6	289.3	290.0	290.7	291.4	291.6	291.3	291.1	290.8	290.5	290.2
132.5°	303.4	304.1	304.9	305.6	306.3	306.6	306.3	306.1	305.9	305.8	305.3
135°	326.1	326.6	327.2	327.7	328.2	328.5	328.4	328.3	328.2	328.1	327.8
137.5°	347.1	347.6	348.0	348.5	348.9	349.3	349.5	349.7	350.0	350.2	349.8
140°	361.7	362.1	362.6	363.0	363.5	363.7	363.8	363.9	364.0	364.1	364.0
142.5°	375.0	375.4	375.9	376.3	376.7	377.0	377.2	377.4	377.6	377.6	377.6
145°	395.7	395.8	396.0	396.2	396.4	396.5	396.8	397.1	397.3	397.6	397.5
147.5°	413.8	414.0	414.4	414.6	415.0	415.3	415.5	415.8	416.1	416.3	416.3
150°	426.3	426.5	426.7	426.9	427.0	427.2	427.4	427.6	427.8	427.9	427.9
152.5°	436.7	436.9	437.2	437.4	437.7	437.8	437.9	438.1	438.2	438.3	438.5
155°	453.0	453.0	453.0	453.0	453.0	453.1	453.2	453.3	453.3	453.4	453.8
157.5°	466.9	466.8	466.7	466.5	466.5	466.5	466.5	466.6	466.6	466.7	467.1
160°	475.6	475.5	475.3	475.1	474.9	474.8	474.8	474.8	474.8	474.8	475.3
162.5°	483.4	483.1	482.9	482.6	482.4	482.3	482.3	482.4	482.5	482.6	483.0
165°	493.4	493.1	492.8	492.6	492.3	492.2	492.2	492.2	492.2	492.2	492.8
167.5°	501.4	501.1	500.7	500.3	500.0	499.8	499.9	500.0	500.1	500.1	500.7
170°	506.0	505.6	505.2	504.9	504.5	504.4	504.4	504.4	504.4	504.4	505.0
172.5°	509.5	509.2	508.8	508.5	508.0	507.8	507.8	507.8	507.8	507.8	508.5
175°	513.2	512.8	512.5	512.1	511.8	511.6	511.6	511.6	511.6	511.6	512.1
177.5°	514.8	514.4	514.2	513.9	513.6	513.4	513.4	513.4	513.4	513.4	513.9
180°	514.4	514.4	514.4	514.4	514.4	514.4	514.4	514.4	514.4	514.4	514.4



TEST NUMBER: P332155-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9
2.5°	1081.7	1083.4	1085.0	1085.8	1085.7	1085.5	1085.3	1085.1
5°	1076.0	1078.1	1080.2	1081.0	1080.6	1080.2	1079.8	1079.3
7.5°	1064.6	1066.5	1068.4	1069.2	1068.9	1068.6	1068.4	1068.2
10°	1054.2	1056.0	1057.8	1058.6	1058.2	1057.7	1057.4	1056.9
12.5°	1042.7	1044.0	1045.4	1046.0	1045.7	1045.4	1045.3	1045.0
15°	1022.0	1023.6	1025.3	1025.5	1024.2	1023.0	1021.8	1020.6
17.5°	995.8	996.9	998.1	998.4	998.0	997.6	997.1	996.7
20°	976.4	977.2	978.1	978.2	977.6	977.0	976.3	975.7
22.5°	955.9	956.6	957.3	957.2	956.4	955.6	954.8	954.0
25°	921.9	922.2	922.4	922.2	921.6	921.0	920.3	919.7
27.5°	885.8	886.0	886.2	885.8	885.1	884.3	883.5	882.7
30°	860.9	860.9	860.9	860.1	858.7	857.2	855.8	854.3
32.5°	834.6	833.5	832.3	831.3	830.5	829.7	828.9	828.2
35°	792.1	790.9	789.6	788.5	787.4	786.4	785.3	784.3
37.5°	748.1	746.5	745.1	744.0	743.3	742.7	742.0	741.4
40°	719.3	717.7	716.0	714.8	714.0	713.1	712.3	711.5
42.5°	689.5	687.8	686.2	684.9	684.1	683.2	682.4	681.6
45°	644.9	642.4	639.9	638.1	637.1	636.1	635.0	634.0
47.5°	597.9	595.5	593.0	591.3	590.4	589.5	588.6	587.6
50°	566.9	564.5	562.3	560.5	559.3	558.0	556.8	555.5
52.5°	535.4	533.4	531.5	529.9	528.7	527.4	526.2	525.0
55°	487.5	485.2	483.0	481.3	480.2	479.2	478.1	477.2
57.5°	440.3	438.4	436.3	434.7	433.5	432.3	431.1	429.9
60°	407.1	405.2	403.3	401.9	400.8	399.8	398.8	397.8
62.5°	375.0	373.1	371.2	370.0	369.3	368.5	367.8	367.1
65°	327.2	325.6	323.9	322.7	322.1	321.5	320.8	320.2
67.5°	279.8	278.4	276.9	275.7	274.9	274.0	273.1	272.2
70°	249.2	247.7	246.3	245.0	244.0	243.0	241.9	240.9
72.5°	218.1	216.9	215.6	214.6	214.1	213.6	213.0	212.5
75°	173.4	172.5	171.4	170.6	170.0	169.3	168.7	168.1
77.5°	131.7	131.0	130.3	130.0	130.0	130.0	130.0	130.0
80°	105.1	104.9	104.7	104.6	104.6	104.6	104.6	104.6
82.5°	80.9	80.5	80.1	79.8	79.7	79.5	79.4	79.2
85°	45.8	45.5	45.0	44.9	44.9	44.9	44.9	44.9
87.5°	18.2	18.1	18.0	17.9	18.0	18.0	18.1	18.1
90°	10.4	10.8	11.1	11.4	11.6	11.8	11.9	12.1
92.5°	16.1	16.4	16.7	16.8	16.7	16.5	16.4	16.3
95°	30.6	30.9	31.3	31.5	31.5	31.5	31.5	31.5
97.5°	47.6	48.1	48.4	48.6	48.6	48.6	48.5	48.5
100°	59.9	60.2	60.5	60.7	60.9	61.1	61.3	61.4
102.5°	74.2	74.5	74.7	74.8	74.8	74.7	74.7	74.6
105°	95.3	95.3	95.3	95.4	95.7	95.9	96.0	96.2
107.5°	118.3	118.6	118.9	119.0	118.9	118.8	118.7	118.6
110°	133.7	134.0	134.4	134.5	134.3	134.1	133.9	133.8



TEST NUMBER: P332155-940

CATALOG NUMBER: S123DIW-S775D460U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	149.0	149.5	149.9	150.1	150.0	150.0	150.0	149.9
115°	172.4	172.5	172.5	172.5	172.5	172.4	172.3	172.2
117.5°	195.9	195.8	195.8	195.7	195.5	195.2	194.9	194.7
120°	211.6	211.5	211.4	211.2	211.1	210.9	210.7	210.5
122.5°	227.5	227.2	226.9	226.8	226.5	226.2	226.0	225.7
125°	251.0	250.7	250.3	249.9	249.6	249.2	248.9	248.5
127.5°	274.4	273.8	273.3	272.9	272.5	272.1	271.6	271.3
130°	289.8	289.4	289.1	288.6	288.0	287.4	286.8	286.1
132.5°	304.9	304.4	304.0	303.5	303.1	302.6	302.1	301.6
135°	327.4	327.1	326.7	326.5	326.3	326.1	325.9	325.7
137.5°	349.5	349.1	348.7	348.3	347.9	347.7	347.3	347.0
140°	363.9	363.8	363.7	363.4	362.7	362.1	361.5	360.9
142.5°	377.5	377.4	377.3	377.0	376.6	376.0	375.6	375.1
145°	397.4	397.3	397.3	397.1	396.7	396.4	396.0	395.7
147.5°	416.3	416.3	416.3	416.1	415.5	414.9	414.4	413.8
150°	427.9	427.9	427.9	427.7	427.1	426.6	426.1	425.5
152.5°	438.5	438.7	438.9	438.7	438.3	437.7	437.3	436.8
155°	454.1	454.5	454.9	454.7	454.1	453.4	452.8	452.2
157.5°	467.5	467.9	468.2	468.1	467.7	467.2	466.6	466.2
160°	475.7	476.2	476.6	476.6	476.3	475.9	475.5	475.2
162.5°	483.5	483.9	484.4	484.3	483.8	483.1	482.6	482.0
165°	493.3	493.8	494.4	494.3	493.7	493.0	492.4	491.8
167.5°	501.2	501.8	502.3	502.3	501.8	501.2	500.7	500.1
170°	505.6	506.2	506.8	506.8	506.2	505.6	505.0	504.4
172.5°	509.0	509.5	510.1	510.1	509.4	508.8	508.2	507.6
175°	512.6	513.2	513.7	513.7	513.1	512.5	511.8	511.2
177.5°	514.3	514.8	515.1	515.1	514.6	514.2	513.6	513.1
180°	514.4	514.4	514.4	514.4	514.4	514.4	514.4	514.4

(END OF REPORT)