

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332157-940

Luminaire Tested: **S123DIW-S775D755U940-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332157-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S775D755U940-4F0-1E-UDD-A1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 755 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5245.0 lumens
Efficiency: N/A
Efficacy: 116.6 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

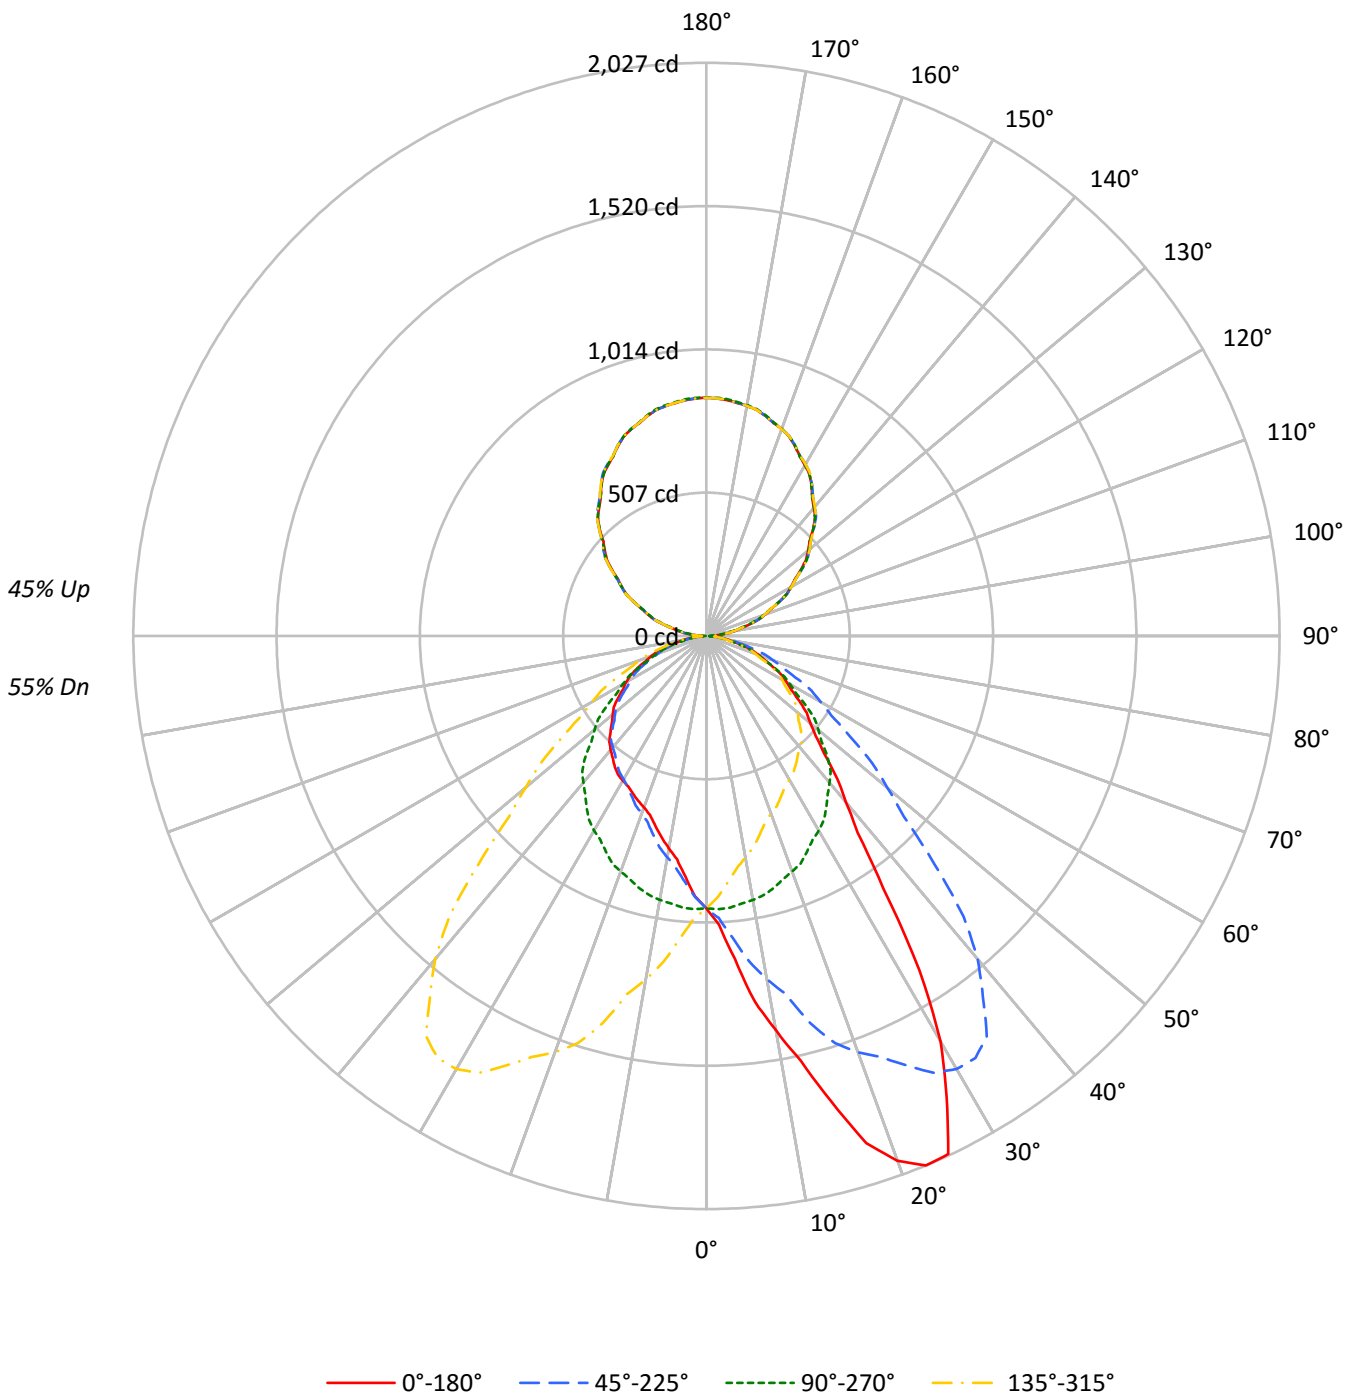



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	55	53	52	47
2	91	83	77	72	84	78	72	68	67	63	60	57	54	52	48	46	44	40
3	83	74	66	60	77	69	62	57	59	55	51	51	47	44	43	40	38	34
4	76	65	57	51	70	61	54	49	53	48	43	46	41	38	39	36	33	30
5	70	58	50	44	65	55	47	42	48	42	37	41	37	33	35	32	29	26
6	64	52	44	38	60	49	42	37	43	37	33	37	33	29	32	28	26	23
7	60	47	39	34	55	44	37	32	39	33	29	34	29	26	29	25	23	20
8	55	43	35	30	51	40	33	29	36	30	26	31	26	23	27	23	20	18
9	52	39	32	27	48	37	30	26	33	27	23	28	24	21	25	21	18	16
10	48	36	29	24	45	34	27	23	30	25	21	26	22	19	23	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10371	10371	10371	10371
5°	12369	10416	9231	10416
10°	15481	10364	8337	10364
15°	18988	10280	7762	10280
20°	22620	10149	7391	10149
25°	24018	9991	7308	9991
30°	20586	9875	7346	9875
35°	14318	9711	7423	9711
40°	10784	9517	7399	9517
45°	8954	9232	7305	9232
50°	8020	8646	7239	8646
55°	7499	8015	7148	8015
60°	7035	7356	7076	7356
65°	6612	6706	6849	6706
70°	6200	5964	6521	5964
75°	5552	5224	5976	5224
80°	4866	4283	5151	4283
85°	3816	3112	3458	3112



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.9	1.8
10°-20°	304.3	5.8
20°-30°	510.8	9.7
30°-40°	578.4	11.0
40°-50°	518.7	9.9
50°-60°	418.6	8.0
60°-70°	291.7	5.6
70°-80°	153.3	2.9
80°-90°	40.0	0.8
90°-100°	54.9	1.0
100°-110°	164.3	3.1
110°-120°	279.4	5.3
120°-130°	367.5	7.0
130°-140°	413.1	7.9
140°-150°	406.1	7.7
150°-160°	341.9	6.5
160°-170°	227.6	4.3
170°-180°	79.7	1.5
0°-30°	910.1	17.4
0°-40°	1488.4	28.4
0°-60°	2425.7	46.2
0°-90°	2910.6	55.5
90°-120°	498.6	9.5
90°-150°	1685.3	32.1
90°-180°	2334.0	44.5
0°-180°	5245.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	964	964	964	964	964	
5°	1145	964	854	964	1145	119
15°	1704	922	696	922	1704	492
25°	2022	841	615	841	2022	887
35°	1090	739	565	739	1090	708
45°	588	606	480	606	588	465
55°	400	427	381	427	400	359
65°	260	263	269	263	260	259
75°	134	126	144	126	134	143
85°	31	25	28	25	31	37
90°	20	1	20	1	20	11
95°	52	39	52	39	52	53
105°	158	149	158	149	158	167
115°	282	281	282	281	282	279
125°	407	412	407	412	407	364
135°	533	534	533	534	533	410
145°	648	648	648	648	648	404
155°	741	742	741	742	741	341
165°	806	808	806	808	806	227
175°	837	840	837	840	837	80
180°	843	843	843	843	843	



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	1022.5	1021.8	1019.9	1021.5	1018.4	1014.3	1014.0	1010.2	999.3	998.6	995.7
5°	1144.7	1140.9	1140.5	1140.0	1133.5	1124.6	1107.8	1106.3	1084.0	1072.7	1059.3
7.5°	1302.8	1304.8	1298.0	1292.0	1272.0	1258.8	1240.8	1217.7	1190.3	1162.3	1143.7
10°	1416.4	1431.7	1412.6	1399.5	1387.4	1364.5	1337.9	1304.8	1271.7	1232.9	1203.5
12.5°	1538.1	1545.7	1541.9	1529.6	1510.6	1475.9	1428.7	1392.1	1361.6	1297.1	1271.0
15°	1703.9	1732.4	1714.2	1672.1	1673.1	1639.9	1578.3	1510.6	1474.7	1418.2	1341.2
17.5°	1880.5	1884.1	1876.3	1841.4	1818.0	1772.5	1715.6	1650.7	1577.9	1509.5	1427.8
20°	1974.7	1971.8	1955.5	1937.3	1897.2	1861.7	1799.7	1727.2	1633.9	1566.6	1477.5
22.5°	2026.9	2022.3	2014.6	1999.3	1965.9	1927.8	1872.1	1793.0	1704.1	1611.5	1508.5
25°	2022.3	2028.4	2029.3	2025.1	2013.4	1990.6	1946.7	1883.6	1794.9	1675.9	1568.5
27.5°	1839.3	1847.9	1872.9	1895.0	1919.7	1944.9	1941.5	1910.2	1844.6	1741.9	1610.5
30°	1656.3	1637.6	1683.8	1742.2	1781.9	1851.9	1891.1	1893.5	1856.5	1768.4	1640.4
32.5°	1402.3	1422.9	1443.3	1515.1	1601.9	1680.5	1758.5	1821.4	1828.5	1769.9	1658.0
35°	1089.6	1115.3	1152.6	1189.9	1283.4	1363.6	1500.8	1620.3	1715.6	1728.2	1659.6
37.5°	878.0	890.7	914.4	951.7	1012.8	1108.0	1214.2	1365.3	1503.2	1605.9	1610.3
40°	767.5	771.2	797.8	826.3	875.7	954.2	1049.9	1183.4	1348.6	1492.0	1551.8
42.5°	684.6	692.8	704.1	731.4	770.8	829.8	918.8	1029.1	1180.6	1345.6	1462.5
45°	588.2	597.5	604.6	622.8	650.8	690.5	752.5	853.4	968.7	1139.1	1296.4
47.5°	524.5	525.3	530.5	544.2	563.3	593.1	636.9	701.8	807.6	945.7	1107.3
50°	478.9	486.4	488.3	499.0	514.0	535.9	572.3	627.4	714.3	835.6	984.1
52.5°	446.8	449.1	454.3	462.1	475.1	492.2	523.8	566.9	635.1	738.5	875.0
55°	399.6	399.6	404.7	410.8	418.3	433.6	454.7	486.4	538.2	618.6	731.6
57.5°	355.9	358.2	361.9	363.7	370.1	380.3	397.8	422.0	460.6	522.4	612.2
60°	326.8	331.0	330.6	334.2	339.8	347.8	362.7	382.4	416.9	466.4	542.0
62.5°	301.4	301.1	301.0	305.5	311.1	318.7	328.3	345.4	374.7	418.6	483.0
65°	259.6	258.6	261.9	264.7	266.5	272.2	279.6	294.5	314.1	346.9	396.8
67.5°	222.4	219.7	221.5	222.4	225.6	230.0	236.9	246.2	261.8	288.0	325.7
70°	197.0	194.7	194.2	195.1	198.0	201.2	206.3	215.2	229.7	250.7	278.2
72.5°	170.9	169.2	169.2	171.2	172.5	174.7	178.3	186.5	198.0	213.7	239.4
75°	133.5	133.5	133.5	133.9	135.4	137.2	140.1	144.3	153.1	164.3	181.6
77.5°	100.0	100.0	99.4	99.3	101.4	102.3	102.9	106.8	111.7	119.3	131.9
80°	78.5	76.1	77.0	78.5	79.4	79.8	81.2	82.1	86.4	90.6	99.4
82.5°	58.2	56.3	56.4	58.7	58.9	59.3	60.7	62.0	63.6	67.4	72.1
85°	30.9	30.9	31.3	31.3	31.7	31.3	32.6	33.2	33.2	35.5	38.3
87.5°	15.2	14.4	14.7	15.0	14.5	14.9	15.1	15.3	15.6	15.9	15.9
90°	19.9	19.5	19.3	19.0	18.6	18.3	17.7	17.0	16.5	15.9	14.0
92.5°	26.8	26.9	27.1	27.3	27.5	27.3	26.8	26.4	25.9	25.4	24.3
95°	51.6	51.6	51.6	51.6	51.6	51.4	50.7	50.1	49.6	49.0	47.8
97.5°	79.5	79.5	79.5	79.6	79.6	79.4	78.6	78.0	77.3	76.7	75.8
100°	100.6	100.3	100.0	99.7	99.4	99.1	98.6	98.2	97.7	97.3	96.6
102.5°	122.3	122.3	122.4	122.5	122.5	122.3	121.9	121.5	121.0	120.6	119.6
105°	157.6	157.2	156.9	156.7	156.3	156.2	156.2	156.2	156.2	156.2	154.9
107.5°	194.2	194.4	194.6	194.7	194.9	194.7	194.3	193.8	193.3	192.9	192.3
110°	219.1	219.4	219.6	220.0	220.3	220.1	219.5	218.9	218.4	217.8	217.5



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	245.6	245.6	245.7	245.8	245.8	245.5	244.8	244.1	243.3	242.6	242.5
115°	282.0	282.1	282.2	282.4	282.6	282.6	282.4	282.2	282.1	282.0	282.2
117.5°	318.9	319.3	319.7	320.1	320.6	320.7	320.7	320.8	320.8	320.8	321.3
120°	344.8	345.1	345.4	345.7	346.0	346.3	346.3	346.5	346.7	346.8	347.6
122.5°	369.7	370.1	370.5	371.0	371.4	371.8	372.1	372.6	372.9	373.3	373.7
125°	407.1	407.6	408.2	408.8	409.4	410.0	410.5	411.2	411.8	412.3	412.6
127.5°	444.3	445.0	445.6	446.3	446.9	447.7	448.5	449.3	450.1	451.0	451.3
130°	468.6	469.7	470.6	471.7	472.7	473.5	474.1	474.7	475.3	475.9	476.4
132.5°	494.0	494.8	495.6	496.4	497.2	497.9	498.6	499.4	500.1	500.8	501.1
135°	533.4	533.8	534.0	534.3	534.7	535.1	535.7	536.3	536.8	537.4	537.6
137.5°	568.3	568.8	569.4	570.0	570.5	571.1	571.7	572.3	572.9	573.5	573.2
140°	591.0	592.1	593.1	594.1	595.1	595.8	595.9	596.0	596.2	596.4	596.2
142.5°	614.3	615.1	615.9	616.7	617.5	618.0	618.1	618.3	618.4	618.6	618.3
145°	648.0	648.5	649.2	649.7	650.3	650.7	650.9	650.9	651.1	651.3	650.9
147.5°	677.9	678.8	679.7	680.6	681.4	681.9	681.9	681.9	681.9	681.9	681.4
150°	697.0	697.9	698.7	699.5	700.4	700.9	700.9	700.9	700.9	700.9	700.6
152.5°	715.5	716.2	717.0	717.7	718.5	718.8	718.5	718.4	718.1	717.8	717.6
155°	740.7	741.6	742.7	743.7	744.8	744.9	744.4	743.8	743.2	742.6	742.4
157.5°	763.5	764.4	765.2	766.0	766.8	767.0	766.3	765.7	765.1	764.5	764.4
160°	778.4	778.9	779.5	780.2	780.7	780.6	779.9	779.2	778.5	777.7	777.7
162.5°	789.4	790.4	791.4	792.3	793.3	793.4	792.6	791.8	791.1	790.4	790.3
165°	805.5	806.6	807.5	808.6	809.6	809.7	808.8	807.9	807.0	806.1	806.1
167.5°	819.1	820.0	820.9	821.9	822.8	822.8	821.9	820.9	820.0	819.1	819.0
170°	826.0	827.1	828.0	829.1	830.1	830.1	829.1	828.0	827.1	826.0	826.0
172.5°	831.3	832.3	833.4	834.4	835.4	835.4	834.6	833.7	832.8	831.8	831.8
175°	837.2	838.3	839.3	840.3	841.4	841.4	840.5	839.7	838.8	837.9	837.9
177.5°	840.4	841.2	842.0	842.9	843.7	843.8	843.1	842.4	841.7	841.0	841.0
180°	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	993.4	990.4	987.4	982.2	977.8	971.3	969.5	967.2	960.6	954.6	950.1
5°	1054.1	1042.9	1026.5	1011.6	999.5	983.1	973.8	964.0	950.0	937.4	927.1
7.5°	1117.6	1095.6	1070.1	1042.7	1017.1	992.5	972.6	954.8	935.2	916.7	902.2
10°	1168.0	1136.2	1100.8	1062.5	1029.8	998.1	971.4	948.2	922.9	901.0	882.8
12.5°	1225.5	1178.5	1129.5	1083.1	1044.4	1000.3	968.1	938.4	909.8	883.4	863.0
15°	1293.6	1233.9	1175.9	1112.0	1053.2	998.1	959.8	922.5	889.3	862.2	836.1
17.5°	1355.6	1287.9	1211.6	1133.8	1062.8	997.6	944.0	901.7	860.2	827.2	801.1
20°	1390.7	1313.7	1227.3	1146.6	1068.1	995.2	936.5	886.0	841.2	806.2	776.8
22.5°	1420.9	1330.8	1241.4	1155.1	1067.7	989.3	922.7	870.8	822.2	787.9	756.6
25°	1452.3	1344.4	1254.8	1153.5	1056.0	974.7	900.0	841.2	792.6	752.5	720.3
27.5°	1479.2	1343.5	1237.2	1128.2	1037.5	956.1	876.3	813.2	761.7	718.1	685.4
30°	1497.1	1345.4	1218.9	1111.1	1019.6	935.5	858.0	794.5	740.4	696.1	665.2
32.5°	1508.3	1344.3	1202.1	1087.2	991.1	916.9	838.2	772.5	716.8	673.2	643.5
35°	1514.8	1336.1	1173.1	1037.8	945.3	873.0	807.2	739.0	680.6	640.0	606.5
37.5°	1501.8	1318.8	1139.5	990.2	888.9	817.7	762.3	704.3	648.5	603.7	574.8
40°	1481.2	1307.6	1113.4	956.5	850.1	781.5	734.3	677.3	622.2	579.8	552.7
42.5°	1442.0	1284.8	1084.6	919.2	809.8	741.1	697.8	650.1	598.0	558.1	531.1
45°	1346.3	1235.2	1041.5	863.2	750.2	679.2	641.0	606.5	559.3	520.5	497.1
47.5°	1213.5	1160.7	979.1	804.1	688.0	619.7	580.0	552.1	517.7	486.4	464.0
50°	1121.3	1099.4	936.9	763.8	646.6	579.8	541.5	516.3	491.6	460.3	439.8
52.5°	1014.9	1028.4	887.6	721.9	604.3	538.7	502.7	482.7	460.2	434.5	416.6
55°	865.0	914.0	802.5	651.7	541.5	478.9	444.9	427.1	414.1	394.9	379.5
57.5°	724.7	787.1	710.4	579.3	479.8	425.9	393.2	373.8	365.4	355.4	343.3
60°	641.4	703.0	644.7	530.7	438.4	387.0	358.0	341.7	333.3	326.3	316.0
62.5°	567.1	629.5	580.4	481.5	397.6	350.0	324.9	308.9	302.3	298.6	289.9
65°	464.9	518.6	486.0	404.7	339.4	297.4	274.5	263.3	257.3	255.8	250.2
67.5°	378.4	419.3	395.5	335.7	284.3	248.0	228.5	219.0	214.4	213.9	209.7
70°	321.6	359.9	341.7	287.6	243.3	214.7	198.0	189.5	186.7	186.3	184.0
72.5°	277.6	304.3	289.8	244.6	210.4	184.5	172.2	163.4	160.2	160.9	159.3
75°	205.4	225.5	217.0	185.8	158.3	141.4	131.2	125.6	122.8	124.2	122.3
77.5°	147.8	160.5	152.9	131.3	114.3	102.1	94.6	91.1	88.6	88.5	87.7
80°	111.6	119.0	114.9	101.7	87.7	77.5	71.4	69.1	67.7	67.2	66.8
82.5°	79.5	85.8	80.9	71.9	62.3	56.2	52.8	49.7	48.7	49.0	48.4
85°	40.1	42.4	40.6	35.0	31.3	28.4	26.6	25.2	24.3	24.7	23.8
87.5°	16.2	16.2	14.7	12.9	11.9	10.4	10.2	9.1	8.6	8.9	8.8
90°	12.0	10.2	8.2	6.5	5.1	3.6	2.1	0.6	2.1	3.6	5.1
92.5°	23.3	22.1	21.0	20.0	19.0	18.0	17.0	16.1	17.0	18.0	19.0
95°	46.6	45.5	44.2	43.2	42.2	41.1	40.0	39.1	40.0	41.1	42.2
97.5°	74.9	74.1	73.2	72.4	71.7	70.9	70.1	69.4	70.1	70.9	71.7
100°	95.9	95.1	94.3	93.5	92.6	91.8	90.9	90.0	90.9	91.8	92.6
102.5°	118.7	117.7	116.7	115.9	115.4	114.9	114.4	113.9	114.4	114.9	115.4
105°	153.6	152.2	150.9	150.1	149.8	149.5	149.2	148.9	149.2	149.5	149.8
107.5°	191.8	191.3	190.7	190.4	190.2	190.0	189.8	189.7	189.8	190.0	190.2
110°	217.1	216.9	216.6	216.2	216.0	215.7	215.4	215.1	215.4	215.7	216.0



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	242.5	242.5	242.4	242.3	242.1	241.9	241.7	241.6	241.7	241.9	242.1
115°	282.6	282.9	283.1	283.0	282.6	282.1	281.7	281.3	281.7	282.1	282.6
117.5°	321.6	322.0	322.4	322.4	322.2	321.8	321.6	321.3	321.6	321.8	322.2
120°	348.3	349.0	349.7	349.7	348.8	347.9	347.1	346.2	347.1	347.9	348.8
122.5°	374.1	374.4	374.8	374.7	374.1	373.4	372.7	372.1	372.7	373.4	374.1
125°	413.0	413.2	413.5	413.5	413.0	412.6	412.1	411.7	412.1	412.6	413.0
127.5°	451.7	452.0	452.3	452.0	451.0	450.1	449.2	448.2	449.2	450.1	451.0
130°	476.8	477.2	477.7	477.2	476.1	474.9	473.8	472.6	473.8	474.9	476.1
132.5°	501.4	501.8	502.0	501.7	500.4	499.3	498.1	497.0	498.1	499.3	500.4
135°	537.7	537.9	538.1	537.6	536.8	535.9	535.0	534.1	535.0	535.9	536.8
137.5°	572.8	572.4	572.0	571.5	570.8	570.0	569.3	568.6	569.3	570.0	570.8
140°	596.0	595.9	595.8	595.3	594.6	593.9	593.1	592.4	593.1	593.9	594.6
142.5°	618.0	617.8	617.5	617.0	616.3	615.5	614.8	614.1	614.8	615.5	616.3
145°	650.4	650.0	649.5	649.2	648.8	648.5	648.3	648.0	648.3	648.5	648.8
147.5°	681.0	680.6	680.2	679.8	679.2	678.7	678.1	677.6	678.1	678.7	679.2
150°	700.3	700.0	699.7	699.5	699.2	698.8	698.6	698.3	698.6	698.8	699.2
152.5°	717.5	717.3	717.1	716.8	716.5	716.0	715.6	715.2	715.6	716.0	716.5
155°	742.3	742.2	742.0	742.0	742.0	742.0	742.0	742.0	742.0	742.0	742.0
157.5°	764.2	764.1	764.0	764.0	764.2	764.4	764.6	764.7	764.6	764.4	764.2
160°	777.7	777.7	777.7	777.8	778.1	778.5	778.7	779.0	778.7	778.5	778.1
162.5°	790.1	790.1	790.0	790.1	790.5	790.9	791.3	791.8	791.3	790.9	790.5
165°	806.1	806.1	806.1	806.4	806.8	807.3	807.7	808.2	807.7	807.3	806.8
167.5°	818.9	818.8	818.7	818.9	819.5	820.1	820.6	821.3	820.6	820.1	819.5
170°	826.0	826.0	826.0	826.3	826.9	827.5	828.0	828.7	828.0	827.5	826.9
172.5°	831.8	831.8	831.8	832.1	832.7	833.3	833.9	834.5	833.9	833.3	832.7
175°	837.9	837.9	837.9	838.2	838.8	839.4	840.0	840.5	840.0	839.4	838.8
177.5°	841.0	841.0	841.0	841.2	841.7	842.1	842.6	843.1	842.6	842.1	841.7
180°	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	947.4	944.9	941.1	935.5	931.0	923.9	923.9	925.1	925.1	924.7	923.9
5°	918.7	911.7	903.3	893.5	883.2	873.0	871.1	867.4	864.6	862.7	860.3
7.5°	888.4	875.9	863.7	850.0	837.5	827.2	819.9	814.0	810.1	806.0	803.1
10°	867.8	852.4	837.9	823.5	807.6	795.0	787.1	781.5	777.3	773.6	771.7
12.5°	843.6	825.9	809.9	796.2	778.8	765.9	758.3	755.7	750.7	742.9	738.8
15°	808.1	791.8	772.6	751.6	743.2	727.3	718.5	714.3	711.4	705.3	703.5
17.5°	777.8	756.3	734.9	719.2	703.6	690.7	685.7	680.6	676.8	671.8	670.4
20°	753.5	734.3	714.7	697.9	681.5	667.5	663.3	659.6	655.9	653.5	651.7
22.5°	728.8	709.7	693.4	677.7	660.3	651.1	646.6	642.5	639.8	638.3	636.4
25°	694.2	677.3	659.2	645.2	631.2	625.1	622.2	619.9	618.0	615.7	615.3
27.5°	663.2	644.9	630.1	617.1	607.0	601.9	599.2	598.1	598.5	599.3	599.9
30°	640.0	623.2	611.1	599.9	590.6	585.9	585.4	585.4	587.3	587.7	588.7
32.5°	618.8	604.9	592.8	581.9	574.9	571.7	573.5	573.5	575.0	576.1	577.8
35°	587.7	575.6	566.2	557.0	550.9	552.2	553.2	554.1	556.4	559.3	561.2
37.5°	558.1	547.6	537.9	530.6	527.8	530.3	532.5	534.5	537.3	539.4	541.3
40°	536.8	528.9	519.6	513.0	514.0	515.4	517.3	519.6	521.9	523.3	525.2
42.5°	517.0	508.7	501.7	496.2	497.6	499.4	500.4	501.7	504.4	506.8	508.0
45°	486.9	480.4	473.9	470.6	471.5	472.4	473.3	474.7	477.1	478.9	479.5
47.5°	453.0	448.4	444.1	440.9	442.4	442.0	443.2	446.2	446.9	448.1	450.7
50°	431.3	427.1	422.0	421.1	421.1	421.1	421.5	425.3	425.3	427.1	429.0
52.5°	407.4	404.7	401.4	399.8	399.0	399.0	401.0	402.9	403.6	406.3	408.1
55°	372.0	369.3	366.5	365.1	364.1	365.1	368.8	369.7	372.0	373.4	374.9
57.5°	335.2	333.1	330.8	330.0	329.8	331.1	333.1	335.9	336.5	340.8	343.0
60°	310.9	307.6	305.8	305.8	304.9	309.1	308.1	312.8	313.7	316.5	319.8
62.5°	285.9	281.5	280.7	280.7	282.0	283.3	284.5	286.6	289.1	292.6	295.2
65°	245.6	243.3	246.5	246.0	245.0	247.9	247.9	250.2	253.0	256.3	261.4
67.5°	207.3	206.2	206.4	206.4	207.9	209.5	210.7	212.8	216.2	219.6	222.9
70°	181.6	183.0	180.7	182.5	184.0	184.4	185.3	188.2	191.9	194.2	198.0
72.5°	156.6	156.5	156.8	157.5	158.9	159.7	160.7	163.9	168.0	170.0	172.9
75°	120.5	119.9	121.4	121.4	123.7	124.7	125.6	127.0	130.7	133.5	135.8
77.5°	87.9	88.5	88.2	89.8	89.2	89.3	92.2	93.6	94.0	99.5	100.8
80°	66.3	67.2	67.7	68.1	68.7	67.7	71.0	72.3	72.3	75.6	77.9
82.5°	47.6	48.2	49.4	49.8	49.9	50.9	51.2	52.2	53.3	54.8	57.8
85°	23.8	25.2	25.7	25.2	25.7	24.7	26.1	26.6	27.1	27.1	27.1
87.5°	8.7	9.5	9.5	10.3	10.3	11.1	11.1	10.5	10.6	11.9	10.4
90°	6.5	8.2	10.2	12.0	14.0	15.9	16.5	17.0	17.7	18.3	18.6
92.5°	20.0	21.0	22.1	23.3	24.3	25.4	25.9	26.4	26.8	27.3	27.5
95°	43.2	44.2	45.5	46.6	47.8	49.0	49.6	50.1	50.7	51.4	51.6
97.5°	72.4	73.2	74.1	74.9	75.8	76.7	77.3	78.0	78.6	79.4	79.6
100°	93.5	94.3	95.1	95.9	96.6	97.3	97.7	98.2	98.6	99.1	99.4
102.5°	115.9	116.7	117.7	118.7	119.6	120.6	121.0	121.5	121.9	122.3	122.5
105°	150.1	150.9	152.2	153.6	154.9	156.2	156.2	156.2	156.2	156.2	156.3
107.5°	190.4	190.7	191.3	191.8	192.3	192.9	193.3	193.8	194.3	194.7	194.9
110°	216.2	216.6	216.9	217.1	217.5	217.8	218.4	218.9	219.5	220.1	220.3



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	242.3	242.4	242.5	242.5	242.5	242.6	243.3	244.1	244.8	245.5	245.8
115°	283.0	283.1	282.9	282.6	282.2	282.0	282.1	282.2	282.4	282.6	282.6
117.5°	322.4	322.4	322.0	321.6	321.3	320.8	320.8	320.8	320.7	320.7	320.6
120°	349.7	349.7	349.0	348.3	347.6	346.8	346.7	346.5	346.3	346.3	346.0
122.5°	374.7	374.8	374.4	374.1	373.7	373.3	372.9	372.6	372.1	371.8	371.4
125°	413.5	413.5	413.2	413.0	412.6	412.3	411.8	411.2	410.5	410.0	409.4
127.5°	452.0	452.3	452.0	451.7	451.3	451.0	450.1	449.3	448.5	447.7	446.9
130°	477.2	477.7	477.2	476.8	476.4	475.9	475.3	474.7	474.1	473.5	472.7
132.5°	501.7	502.0	501.8	501.4	501.1	500.8	500.1	499.4	498.6	497.9	497.2
135°	537.6	538.1	537.9	537.7	537.6	537.4	536.8	536.3	535.7	535.1	534.7
137.5°	571.5	572.0	572.4	572.8	573.2	573.5	572.9	572.3	571.7	571.1	570.5
140°	595.3	595.8	595.9	596.0	596.2	596.4	596.2	596.0	595.9	595.8	595.1
142.5°	617.0	617.5	617.8	618.0	618.3	618.6	618.4	618.3	618.1	618.0	617.5
145°	649.2	649.5	650.0	650.4	650.9	651.3	651.1	650.9	650.9	650.7	650.3
147.5°	679.8	680.2	680.6	681.0	681.4	681.9	681.9	681.9	681.9	681.9	681.4
150°	699.5	699.7	700.0	700.3	700.6	700.9	700.9	700.9	700.9	700.9	700.4
152.5°	716.8	717.1	717.3	717.5	717.6	717.8	718.1	718.4	718.5	718.8	718.5
155°	742.0	742.0	742.2	742.3	742.4	742.6	743.2	743.8	744.4	744.9	744.8
157.5°	764.0	764.0	764.1	764.2	764.4	764.5	765.1	765.7	766.3	767.0	766.8
160°	777.8	777.7	777.7	777.7	777.7	777.7	778.5	779.2	779.9	780.6	780.7
162.5°	790.1	790.0	790.1	790.1	790.3	790.4	791.1	791.8	792.6	793.4	793.3
165°	806.4	806.1	806.1	806.1	806.1	806.1	807.0	807.9	808.8	809.7	809.6
167.5°	818.9	818.7	818.8	818.9	819.0	819.1	820.0	820.9	821.9	822.8	822.8
170°	826.3	826.0	826.0	826.0	826.0	826.0	827.1	828.0	829.1	830.1	830.1
172.5°	832.1	831.8	831.8	831.8	831.8	831.8	832.8	833.7	834.6	835.4	835.4
175°	838.2	837.9	837.9	837.9	837.9	837.9	838.8	839.7	840.5	841.4	841.4
177.5°	841.2	841.0	841.0	841.0	841.0	841.0	841.7	842.4	843.1	843.8	843.7
180°	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	921.3	921.0	923.5	921.7	923.5	921.0	921.3	923.9	924.7	925.1	925.1
5°	857.6	859.0	854.3	854.3	854.3	859.0	857.6	860.3	862.7	864.6	867.4
7.5°	800.8	798.7	798.9	796.4	798.9	798.7	800.8	803.1	806.0	810.1	814.0
10°	766.1	763.3	762.3	762.8	762.3	763.3	766.1	771.7	773.6	777.3	781.5
12.5°	737.3	736.7	730.6	730.7	730.6	736.7	737.3	738.8	742.9	750.7	755.7
15°	703.5	694.6	693.7	696.5	693.7	694.6	703.5	703.5	705.3	711.4	714.3
17.5°	669.6	664.9	665.2	663.8	665.2	664.9	669.6	670.4	671.8	676.8	680.6
20°	651.7	648.9	648.5	645.2	648.5	648.9	651.7	651.7	653.5	655.9	659.6
22.5°	635.3	634.4	634.6	631.0	634.6	634.4	635.3	636.4	638.3	639.8	642.5
25°	614.8	617.2	615.3	615.3	615.3	617.2	614.8	615.3	615.7	618.0	619.9
27.5°	601.0	600.9	599.9	599.9	599.9	600.9	601.0	599.9	599.3	598.5	598.1
30°	590.6	590.0	591.0	591.0	591.0	590.0	590.6	588.7	587.7	587.3	585.4
32.5°	580.1	580.8	580.9	581.3	580.9	580.8	580.1	577.8	576.1	575.0	573.5
35°	563.9	564.4	565.8	564.9	565.8	564.4	563.9	561.2	559.3	556.4	554.1
37.5°	542.1	544.2	543.8	544.5	543.8	544.2	542.1	541.3	539.4	537.3	534.5
40°	525.7	527.1	526.6	526.6	526.6	527.1	525.7	525.2	523.3	521.9	519.6
42.5°	508.8	509.9	508.6	507.9	508.6	509.9	508.8	508.0	506.8	504.4	501.7
45°	481.3	480.4	481.8	479.9	481.8	480.4	481.3	479.5	478.9	477.1	474.7
47.5°	450.5	451.4	451.8	453.2	451.8	451.4	450.5	450.7	448.1	446.9	446.2
50°	430.0	432.7	432.7	432.3	432.7	432.7	430.0	429.0	427.1	425.3	425.3
52.5°	409.7	411.1	413.0	412.9	413.0	411.1	409.7	408.1	406.3	403.6	402.9
55°	378.6	379.5	380.5	380.9	380.5	379.5	378.6	374.9	373.4	372.0	369.7
57.5°	346.3	345.9	348.1	348.8	348.1	345.9	346.3	343.0	340.8	336.5	335.9
60°	323.5	323.5	327.3	328.7	327.3	323.5	323.5	319.8	316.5	313.7	312.8
62.5°	299.3	300.8	304.4	302.5	304.4	300.8	299.3	295.2	292.6	289.1	286.6
65°	263.8	267.5	267.1	268.9	267.1	267.5	263.8	261.4	256.3	253.0	250.2
67.5°	226.7	229.0	232.4	232.6	232.4	229.0	226.7	222.9	219.6	216.2	212.8
70°	201.7	204.0	205.9	207.2	205.9	204.0	201.7	198.0	194.2	191.9	188.2
72.5°	177.4	178.6	183.1	181.1	183.1	178.6	177.4	172.9	170.0	168.0	163.9
75°	139.1	142.4	145.2	143.7	145.2	142.4	139.1	135.8	133.5	130.7	127.0
77.5°	102.9	106.1	107.5	106.3	107.5	106.1	102.9	100.8	99.5	94.0	93.6
80°	81.2	80.8	83.6	83.1	83.6	80.8	81.2	77.9	75.6	72.3	72.3
82.5°	59.6	59.1	60.4	60.7	60.4	59.1	59.6	57.8	54.8	53.3	52.2
85°	29.0	30.3	28.4	28.0	28.4	30.3	29.0	27.1	27.1	27.1	26.6
87.5°	10.5	10.6	10.3	10.0	10.3	10.6	10.5	10.4	11.9	10.6	10.5
90°	19.0	19.3	19.5	19.9	19.5	19.3	19.0	18.6	18.3	17.7	17.0
92.5°	27.3	27.1	26.9	26.8	26.9	27.1	27.3	27.5	27.3	26.8	26.4
95°	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.4	50.7	50.1
97.5°	79.6	79.5	79.5	79.5	79.5	79.5	79.6	79.6	79.4	78.6	78.0
100°	99.7	100.0	100.3	100.6	100.3	100.0	99.7	99.4	99.1	98.6	98.2
102.5°	122.5	122.4	122.3	122.3	122.3	122.4	122.5	122.5	122.3	121.9	121.5
105°	156.7	156.9	157.2	157.6	157.2	156.9	156.7	156.3	156.2	156.2	156.2
107.5°	194.7	194.6	194.4	194.2	194.4	194.6	194.7	194.9	194.7	194.3	193.8
110°	220.0	219.6	219.4	219.1	219.4	219.6	220.0	220.3	220.1	219.5	218.9



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	245.8	245.7	245.6	245.6	245.6	245.7	245.8	245.8	245.5	244.8	244.1
115°	282.4	282.2	282.1	282.0	282.1	282.2	282.4	282.6	282.6	282.4	282.2
117.5°	320.1	319.7	319.3	318.9	319.3	319.7	320.1	320.6	320.7	320.7	320.8
120°	345.7	345.4	345.1	344.8	345.1	345.4	345.7	346.0	346.3	346.3	346.5
122.5°	371.0	370.5	370.1	369.7	370.1	370.5	371.0	371.4	371.8	372.1	372.6
125°	408.8	408.2	407.6	407.1	407.6	408.2	408.8	409.4	410.0	410.5	411.2
127.5°	446.3	445.6	445.0	444.3	445.0	445.6	446.3	446.9	447.7	448.5	449.3
130°	471.7	470.6	469.7	468.6	469.7	470.6	471.7	472.7	473.5	474.1	474.7
132.5°	496.4	495.6	494.8	494.0	494.8	495.6	496.4	497.2	497.9	498.6	499.4
135°	534.3	534.0	533.8	533.4	533.8	534.0	534.3	534.7	535.1	535.7	536.3
137.5°	570.0	569.4	568.8	568.3	568.8	569.4	570.0	570.5	571.1	571.7	572.3
140°	594.1	593.1	592.1	591.0	592.1	593.1	594.1	595.1	595.8	595.9	596.0
142.5°	616.7	615.9	615.1	614.3	615.1	615.9	616.7	617.5	618.0	618.1	618.3
145°	649.7	649.2	648.5	648.0	648.5	649.2	649.7	650.3	650.7	650.9	650.9
147.5°	680.6	679.7	678.8	677.9	678.8	679.7	680.6	681.4	681.9	681.9	681.9
150°	699.5	698.7	697.9	697.0	697.9	698.7	699.5	700.4	700.9	700.9	700.9
152.5°	717.7	717.0	716.2	715.5	716.2	717.0	717.7	718.5	718.8	718.5	718.4
155°	743.7	742.7	741.6	740.7	741.6	742.7	743.7	744.8	744.9	744.4	743.8
157.5°	766.0	765.2	764.4	763.5	764.4	765.2	766.0	766.8	767.0	766.3	765.7
160°	780.2	779.5	778.9	778.4	778.9	779.5	780.2	780.7	780.6	779.9	779.2
162.5°	792.3	791.4	790.4	789.4	790.4	791.4	792.3	793.3	793.4	792.6	791.8
165°	808.6	807.5	806.6	805.5	806.6	807.5	808.6	809.6	809.7	808.8	807.9
167.5°	821.9	820.9	820.0	819.1	820.0	820.9	821.9	822.8	822.8	821.9	820.9
170°	829.1	828.0	827.1	826.0	827.1	828.0	829.1	830.1	830.1	829.1	828.0
172.5°	834.4	833.4	832.3	831.3	832.3	833.4	834.4	835.4	835.4	834.6	833.7
175°	840.3	839.3	838.3	837.2	838.3	839.3	840.3	841.4	841.4	840.5	839.7
177.5°	842.9	842.0	841.2	840.4	841.2	842.0	842.9	843.7	843.8	843.1	842.4
180°	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	923.9	923.9	931.0	935.5	941.1	944.9	947.4	950.1	954.6	960.6	967.2
5°	871.1	873.0	883.2	893.5	903.3	911.7	918.7	927.1	937.4	950.0	964.0
7.5°	819.9	827.2	837.5	850.0	863.7	875.9	888.4	902.2	916.7	935.2	954.8
10°	787.1	795.0	807.6	823.5	837.9	852.4	867.8	882.8	901.0	922.9	948.2
12.5°	758.3	765.9	778.8	796.2	809.9	825.9	843.6	863.0	883.4	909.8	938.4
15°	718.5	727.3	743.2	751.6	772.6	791.8	808.1	836.1	862.2	889.3	922.5
17.5°	685.7	690.7	703.6	719.2	734.9	756.3	777.8	801.1	827.2	860.2	901.7
20°	663.3	667.5	681.5	697.9	714.7	734.3	753.5	776.8	806.2	841.2	886.0
22.5°	646.6	651.1	660.3	677.7	693.4	709.7	728.8	756.6	787.9	822.2	870.8
25°	622.2	625.1	631.2	645.2	659.2	677.3	694.2	720.3	752.5	792.6	841.2
27.5°	599.2	601.9	607.0	617.1	630.1	644.9	663.2	685.4	718.1	761.7	813.2
30°	585.4	585.9	590.6	599.9	611.1	623.2	640.0	665.2	696.1	740.4	794.5
32.5°	573.5	571.7	574.9	581.9	592.8	604.9	618.8	643.5	673.2	716.8	772.5
35°	553.2	552.2	550.9	557.0	566.2	575.6	587.7	606.5	640.0	680.6	739.0
37.5°	532.5	530.3	527.8	530.6	537.9	547.6	558.1	574.8	603.7	648.5	704.3
40°	517.3	515.4	514.0	513.0	519.6	528.9	536.8	552.7	579.8	622.2	677.3
42.5°	500.4	499.4	497.6	496.2	501.7	508.7	517.0	531.1	558.1	598.0	650.1
45°	473.3	472.4	471.5	470.6	473.9	480.4	486.9	497.1	520.5	559.3	606.5
47.5°	443.2	442.0	442.4	440.9	444.1	448.4	453.0	464.0	486.4	517.7	552.1
50°	421.5	421.1	421.1	421.1	422.0	427.1	431.3	439.8	460.3	491.6	516.3
52.5°	401.0	399.0	399.0	399.8	401.4	404.7	407.4	416.6	434.5	460.2	482.7
55°	368.8	365.1	364.1	365.1	366.5	369.3	372.0	379.5	394.9	414.1	427.1
57.5°	333.1	331.1	329.8	330.0	330.8	333.1	335.2	343.3	355.4	365.4	373.8
60°	308.1	309.1	304.9	305.8	305.8	307.6	310.9	316.0	326.3	333.3	341.7
62.5°	284.5	283.3	282.0	280.7	280.7	281.5	285.9	289.9	298.6	302.3	308.9
65°	247.9	247.9	245.0	246.0	246.5	243.3	245.6	250.2	255.8	257.3	263.3
67.5°	210.7	209.5	207.9	206.4	206.4	206.2	207.3	209.7	213.9	214.4	219.0
70°	185.3	184.4	184.0	182.5	180.7	183.0	181.6	184.0	186.3	186.7	189.5
72.5°	160.7	159.7	158.9	157.5	156.8	156.5	156.6	159.3	160.9	160.2	163.4
75°	125.6	124.7	123.7	121.4	121.4	119.9	120.5	122.3	124.2	122.8	125.6
77.5°	92.2	89.3	89.2	89.8	88.2	88.5	87.9	87.7	88.5	88.6	91.1
80°	71.0	67.7	68.7	68.1	67.7	67.2	66.3	66.8	67.2	67.7	69.1
82.5°	51.2	50.9	49.9	49.8	49.4	48.2	47.6	48.4	49.0	48.7	49.7
85°	26.1	24.7	25.7	25.2	25.7	25.2	23.8	23.8	24.7	24.3	25.2
87.5°	11.1	11.1	10.3	10.3	9.5	9.5	8.7	8.8	8.9	8.6	9.1
90°	16.5	15.9	14.0	12.0	10.2	8.2	6.5	5.1	3.6	2.1	0.6
92.5°	25.9	25.4	24.3	23.3	22.1	21.0	20.0	19.0	18.0	17.0	16.1
95°	49.6	49.0	47.8	46.6	45.5	44.2	43.2	42.2	41.1	40.0	39.1
97.5°	77.3	76.7	75.8	74.9	74.1	73.2	72.4	71.7	70.9	70.1	69.4
100°	97.7	97.3	96.6	95.9	95.1	94.3	93.5	92.6	91.8	90.9	90.0
102.5°	121.0	120.6	119.6	118.7	117.7	116.7	115.9	115.4	114.9	114.4	113.9
105°	156.2	156.2	154.9	153.6	152.2	150.9	150.1	149.8	149.5	149.2	148.9
107.5°	193.3	192.9	192.3	191.8	191.3	190.7	190.4	190.2	190.0	189.8	189.7
110°	218.4	217.8	217.5	217.1	216.9	216.6	216.2	216.0	215.7	215.4	215.1



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	243.3	242.6	242.5	242.5	242.5	242.4	242.3	242.1	241.9	241.7	241.6
115°	282.1	282.0	282.2	282.6	282.9	283.1	283.0	282.6	282.1	281.7	281.3
117.5°	320.8	320.8	321.3	321.6	322.0	322.4	322.4	322.2	321.8	321.6	321.3
120°	346.7	346.8	347.6	348.3	349.0	349.7	349.7	348.8	347.9	347.1	346.2
122.5°	372.9	373.3	373.7	374.1	374.4	374.8	374.7	374.1	373.4	372.7	372.1
125°	411.8	412.3	412.6	413.0	413.2	413.5	413.5	413.0	412.6	412.1	411.7
127.5°	450.1	451.0	451.3	451.7	452.0	452.3	452.0	451.0	450.1	449.2	448.2
130°	475.3	475.9	476.4	476.8	477.2	477.7	477.2	476.1	474.9	473.8	472.6
132.5°	500.1	500.8	501.1	501.4	501.8	502.0	501.7	500.4	499.3	498.1	497.0
135°	536.8	537.4	537.6	537.7	537.9	538.1	537.6	536.8	535.9	535.0	534.1
137.5°	572.9	573.5	573.2	572.8	572.4	572.0	571.5	570.8	570.0	569.3	568.6
140°	596.2	596.4	596.2	596.0	595.9	595.8	595.3	594.6	593.9	593.1	592.4
142.5°	618.4	618.6	618.3	618.0	617.8	617.5	617.0	616.3	615.5	614.8	614.1
145°	651.1	651.3	650.9	650.4	650.0	649.5	649.2	648.8	648.5	648.3	648.0
147.5°	681.9	681.9	681.4	681.0	680.6	680.2	679.8	679.2	678.7	678.1	677.6
150°	700.9	700.9	700.6	700.3	700.0	699.7	699.5	699.2	698.8	698.6	698.3
152.5°	718.1	717.8	717.6	717.5	717.3	717.1	716.8	716.5	716.0	715.6	715.2
155°	743.2	742.6	742.4	742.3	742.2	742.0	742.0	742.0	742.0	742.0	742.0
157.5°	765.1	764.5	764.4	764.2	764.1	764.0	764.0	764.2	764.4	764.6	764.7
160°	778.5	777.7	777.7	777.7	777.7	777.7	777.8	778.1	778.5	778.7	779.0
162.5°	791.1	790.4	790.3	790.1	790.1	790.0	790.1	790.5	790.9	791.3	791.8
165°	807.0	806.1	806.1	806.1	806.1	806.1	806.4	806.8	807.3	807.7	808.2
167.5°	820.0	819.1	819.0	818.9	818.8	818.7	818.9	819.5	820.1	820.6	821.3
170°	827.1	826.0	826.0	826.0	826.0	826.0	826.3	826.9	827.5	828.0	828.7
172.5°	832.8	831.8	831.8	831.8	831.8	831.8	832.1	832.7	833.3	833.9	834.5
175°	838.8	837.9	837.9	837.9	837.9	837.9	838.2	838.8	839.4	840.0	840.5
177.5°	841.7	841.0	841.0	841.0	841.0	841.0	841.2	841.7	842.1	842.6	843.1
180°	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	969.5	971.3	977.8	982.2	987.4	990.4	993.4	995.7	998.6	999.3	1010.2
5°	973.8	983.1	999.5	1011.6	1026.5	1042.9	1054.1	1059.3	1072.7	1084.0	1106.3
7.5°	972.6	992.5	1017.1	1042.7	1070.1	1095.6	1117.6	1143.7	1162.3	1190.3	1217.7
10°	971.4	998.1	1029.8	1062.5	1100.8	1136.2	1168.0	1203.5	1232.9	1271.7	1304.8
12.5°	968.1	1000.3	1044.4	1083.1	1129.5	1178.5	1225.5	1271.0	1297.1	1361.6	1392.1
15°	959.8	998.1	1053.2	1112.0	1175.9	1233.9	1293.6	1341.2	1418.2	1474.7	1510.6
17.5°	944.0	997.6	1062.8	1133.8	1211.6	1287.9	1355.6	1427.8	1509.5	1577.9	1650.7
20°	936.5	995.2	1068.1	1146.6	1227.3	1313.7	1390.7	1477.5	1566.6	1633.9	1727.2
22.5°	922.7	989.3	1067.7	1155.1	1241.4	1330.8	1420.9	1508.5	1611.5	1704.1	1793.0
25°	900.0	974.7	1056.0	1153.5	1254.8	1344.4	1452.3	1568.5	1675.9	1794.9	1883.6
27.5°	876.3	956.1	1037.5	1128.2	1237.2	1343.5	1479.2	1610.5	1741.9	1844.6	1910.2
30°	858.0	935.5	1019.6	1111.1	1218.9	1345.4	1497.1	1640.4	1768.4	1856.5	1893.5
32.5°	838.2	916.9	991.1	1087.2	1202.1	1344.3	1508.3	1658.0	1769.9	1828.5	1821.4
35°	807.2	873.0	945.3	1037.8	1173.1	1336.1	1514.8	1659.6	1728.2	1715.6	1620.3
37.5°	762.3	817.7	888.9	990.2	1139.5	1318.8	1501.8	1610.3	1605.9	1503.2	1365.3
40°	734.3	781.5	850.1	956.5	1113.4	1307.6	1481.2	1551.8	1492.0	1348.6	1183.4
42.5°	697.8	741.1	809.8	919.2	1084.6	1284.8	1442.0	1462.5	1345.6	1180.6	1029.1
45°	641.0	679.2	750.2	863.2	1041.5	1235.2	1346.3	1296.4	1139.1	968.7	853.4
47.5°	580.0	619.7	688.0	804.1	979.1	1160.7	1213.5	1107.3	945.7	807.6	701.8
50°	541.5	579.8	646.6	763.8	936.9	1099.4	1121.3	984.1	835.6	714.3	627.4
52.5°	502.7	538.7	604.3	721.9	887.6	1028.4	1014.9	875.0	738.5	635.1	566.9
55°	444.9	478.9	541.5	651.7	802.5	914.0	865.0	731.6	618.6	538.2	486.4
57.5°	393.2	425.9	479.8	579.3	710.4	787.1	724.7	612.2	522.4	460.6	422.0
60°	358.0	387.0	438.4	530.7	644.7	703.0	641.4	542.0	466.4	416.9	382.4
62.5°	324.9	350.0	397.6	481.5	580.4	629.5	567.1	483.0	418.6	374.7	345.4
65°	274.5	297.4	339.4	404.7	486.0	518.6	464.9	396.8	346.9	314.1	294.5
67.5°	228.5	248.0	284.3	335.7	395.5	419.3	378.4	325.7	288.0	261.8	246.2
70°	198.0	214.7	243.3	287.6	341.7	359.9	321.6	278.2	250.7	229.7	215.2
72.5°	172.2	184.5	210.4	244.6	289.8	304.3	277.6	239.4	213.7	198.0	186.5
75°	131.2	141.4	158.3	185.8	217.0	225.5	205.4	181.6	164.3	153.1	144.3
77.5°	94.6	102.1	114.3	131.3	152.9	160.5	147.8	131.9	119.3	111.7	106.8
80°	71.4	77.5	87.7	101.7	114.9	119.0	111.6	99.4	90.6	86.4	82.1
82.5°	52.8	56.2	62.3	71.9	80.9	85.8	79.5	72.1	67.4	63.6	62.0
85°	26.6	28.4	31.3	35.0	40.6	42.4	40.1	38.3	35.5	33.2	33.2
87.5°	10.2	10.4	11.9	12.9	14.7	16.2	16.2	15.9	15.9	15.6	15.3
90°	2.1	3.6	5.1	6.5	8.2	10.2	12.0	14.0	15.9	16.5	17.0
92.5°	17.0	18.0	19.0	20.0	21.0	22.1	23.3	24.3	25.4	25.9	26.4
95°	40.0	41.1	42.2	43.2	44.2	45.5	46.6	47.8	49.0	49.6	50.1
97.5°	70.1	70.9	71.7	72.4	73.2	74.1	74.9	75.8	76.7	77.3	78.0
100°	90.9	91.8	92.6	93.5	94.3	95.1	95.9	96.6	97.3	97.7	98.2
102.5°	114.4	114.9	115.4	115.9	116.7	117.7	118.7	119.6	120.6	121.0	121.5
105°	149.2	149.5	149.8	150.1	150.9	152.2	153.6	154.9	156.2	156.2	156.2
107.5°	189.8	190.0	190.2	190.4	190.7	191.3	191.8	192.3	192.9	193.3	193.8
110°	215.4	215.7	216.0	216.2	216.6	216.9	217.1	217.5	217.8	218.4	218.9



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	241.7	241.9	242.1	242.3	242.4	242.5	242.5	242.5	242.6	243.3	244.1
115°	281.7	282.1	282.6	283.0	283.1	282.9	282.6	282.2	282.0	282.1	282.2
117.5°	321.6	321.8	322.2	322.4	322.4	322.0	321.6	321.3	320.8	320.8	320.8
120°	347.1	347.9	348.8	349.7	349.7	349.0	348.3	347.6	346.8	346.7	346.5
122.5°	372.7	373.4	374.1	374.7	374.8	374.4	374.1	373.7	373.3	372.9	372.6
125°	412.1	412.6	413.0	413.5	413.5	413.2	413.0	412.6	412.3	411.8	411.2
127.5°	449.2	450.1	451.0	452.0	452.3	452.0	451.7	451.3	451.0	450.1	449.3
130°	473.8	474.9	476.1	477.2	477.7	477.2	476.8	476.4	475.9	475.3	474.7
132.5°	498.1	499.3	500.4	501.7	502.0	501.8	501.4	501.1	500.8	500.1	499.4
135°	535.0	535.9	536.8	537.6	538.1	537.9	537.7	537.6	537.4	536.8	536.3
137.5°	569.3	570.0	570.8	571.5	572.0	572.4	572.8	573.2	573.5	572.9	572.3
140°	593.1	593.9	594.6	595.3	595.8	595.9	596.0	596.2	596.4	596.2	596.0
142.5°	614.8	615.5	616.3	617.0	617.5	617.8	618.0	618.3	618.6	618.4	618.3
145°	648.3	648.5	648.8	649.2	649.5	650.0	650.4	650.9	651.3	651.1	650.9
147.5°	678.1	678.7	679.2	679.8	680.2	680.6	681.0	681.4	681.9	681.9	681.9
150°	698.6	698.8	699.2	699.5	699.7	700.0	700.3	700.6	700.9	700.9	700.9
152.5°	715.6	716.0	716.5	716.8	717.1	717.3	717.5	717.6	717.8	718.1	718.4
155°	742.0	742.0	742.0	742.0	742.0	742.2	742.3	742.4	742.6	743.2	743.8
157.5°	764.6	764.4	764.2	764.0	764.0	764.1	764.2	764.4	764.5	765.1	765.7
160°	778.7	778.5	778.1	777.8	777.7	777.7	777.7	777.7	777.7	778.5	779.2
162.5°	791.3	790.9	790.5	790.1	790.0	790.1	790.1	790.3	790.4	791.1	791.8
165°	807.7	807.3	806.8	806.4	806.1	806.1	806.1	806.1	806.1	807.0	807.9
167.5°	820.6	820.1	819.5	818.9	818.7	818.8	818.9	819.0	819.1	820.0	820.9
170°	828.0	827.5	826.9	826.3	826.0	826.0	826.0	826.0	826.0	827.1	828.0
172.5°	833.9	833.3	832.7	832.1	831.8	831.8	831.8	831.8	831.8	832.8	833.7
175°	840.0	839.4	838.8	838.2	837.9	837.9	837.9	837.9	837.9	838.8	839.7
177.5°	842.6	842.1	841.7	841.2	841.0	841.0	841.0	841.0	841.0	841.7	842.4
180°	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6	842.6



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	1014.0	1014.3	1018.4	1021.5	1019.9	1021.8	1022.5
5°	1107.8	1124.6	1133.5	1140.0	1140.5	1140.9	1144.7
7.5°	1240.8	1258.8	1272.0	1292.0	1298.0	1304.8	1302.8
10°	1337.9	1364.5	1387.4	1399.5	1412.6	1431.7	1416.4
12.5°	1428.7	1475.9	1510.6	1529.6	1541.9	1545.7	1538.1
15°	1578.3	1639.9	1673.1	1672.1	1714.2	1732.4	1703.9
17.5°	1715.6	1772.5	1818.0	1841.4	1876.3	1884.1	1880.5
20°	1799.7	1861.7	1897.2	1937.3	1955.5	1971.8	1974.7
22.5°	1872.1	1927.8	1965.9	1999.3	2014.6	2022.3	2026.9
25°	1946.7	1990.6	2013.4	2025.1	2029.3	2028.4	2022.3
27.5°	1941.5	1944.9	1919.7	1895.0	1872.9	1847.9	1839.3
30°	1891.1	1851.9	1781.9	1742.2	1683.8	1637.6	1656.3
32.5°	1758.5	1680.5	1601.9	1515.1	1443.3	1422.9	1402.3
35°	1500.8	1363.6	1283.4	1189.9	1152.6	1115.3	1089.6
37.5°	1214.2	1108.0	1012.8	951.7	914.4	890.7	878.0
40°	1049.9	954.2	875.7	826.3	797.8	771.2	767.5
42.5°	918.8	829.8	770.8	731.4	704.1	692.8	684.6
45°	752.5	690.5	650.8	622.8	604.6	597.5	588.2
47.5°	636.9	593.1	563.3	544.2	530.5	525.3	524.5
50°	572.3	535.9	514.0	499.0	488.3	486.4	478.9
52.5°	523.8	492.2	475.1	462.1	454.3	449.1	446.8
55°	454.7	433.6	418.3	410.8	404.7	399.6	399.6
57.5°	397.8	380.3	370.1	363.7	361.9	358.2	355.9
60°	362.7	347.8	339.8	334.2	330.6	331.0	326.8
62.5°	328.3	318.7	311.1	305.5	301.0	301.1	301.4
65°	279.6	272.2	266.5	264.7	261.9	258.6	259.6
67.5°	236.9	230.0	225.6	222.4	221.5	219.7	222.4
70°	206.3	201.2	198.0	195.1	194.2	194.7	197.0
72.5°	178.3	174.7	172.5	171.2	169.2	169.2	170.9
75°	140.1	137.2	135.4	133.9	133.5	133.5	133.5
77.5°	102.9	102.3	101.4	99.3	99.4	100.0	100.0
80°	81.2	79.8	79.4	78.5	77.0	76.1	78.5
82.5°	60.7	59.3	58.9	58.7	56.4	56.3	58.2
85°	32.6	31.3	31.7	31.3	31.3	30.9	30.9
87.5°	15.1	14.9	14.5	15.0	14.7	14.4	15.2
90°	17.7	18.3	18.6	19.0	19.3	19.5	19.9
92.5°	26.8	27.3	27.5	27.3	27.1	26.9	26.8
95°	50.7	51.4	51.6	51.6	51.6	51.6	51.6
97.5°	78.6	79.4	79.6	79.6	79.5	79.5	79.5
100°	98.6	99.1	99.4	99.7	100.0	100.3	100.6
102.5°	121.9	122.3	122.5	122.5	122.4	122.3	122.3
105°	156.2	156.2	156.3	156.7	156.9	157.2	157.6
107.5°	194.3	194.7	194.9	194.7	194.6	194.4	194.2
110°	219.5	220.1	220.3	220.0	219.6	219.4	219.1



TEST NUMBER: P332157-940

CATALOG NUMBER: S123DIW-S775D755U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	244.8	245.5	245.8	245.8	245.7	245.6	245.6
115°	282.4	282.6	282.6	282.4	282.2	282.1	282.0
117.5°	320.7	320.7	320.6	320.1	319.7	319.3	318.9
120°	346.3	346.3	346.0	345.7	345.4	345.1	344.8
122.5°	372.1	371.8	371.4	371.0	370.5	370.1	369.7
125°	410.5	410.0	409.4	408.8	408.2	407.6	407.1
127.5°	448.5	447.7	446.9	446.3	445.6	445.0	444.3
130°	474.1	473.5	472.7	471.7	470.6	469.7	468.6
132.5°	498.6	497.9	497.2	496.4	495.6	494.8	494.0
135°	535.7	535.1	534.7	534.3	534.0	533.8	533.4
137.5°	571.7	571.1	570.5	570.0	569.4	568.8	568.3
140°	595.9	595.8	595.1	594.1	593.1	592.1	591.0
142.5°	618.1	618.0	617.5	616.7	615.9	615.1	614.3
145°	650.9	650.7	650.3	649.7	649.2	648.5	648.0
147.5°	681.9	681.9	681.4	680.6	679.7	678.8	677.9
150°	700.9	700.9	700.4	699.5	698.7	697.9	697.0
152.5°	718.5	718.8	718.5	717.7	717.0	716.2	715.5
155°	744.4	744.9	744.8	743.7	742.7	741.6	740.7
157.5°	766.3	767.0	766.8	766.0	765.2	764.4	763.5
160°	779.9	780.6	780.7	780.2	779.5	778.9	778.4
162.5°	792.6	793.4	793.3	792.3	791.4	790.4	789.4
165°	808.8	809.7	809.6	808.6	807.5	806.6	805.5
167.5°	821.9	822.8	822.8	821.9	820.9	820.0	819.1
170°	829.1	830.1	830.1	829.1	828.0	827.1	826.0
172.5°	834.6	835.4	835.4	834.4	833.4	832.3	831.3
175°	840.5	841.4	841.4	840.3	839.3	838.3	837.2
177.5°	843.1	843.8	843.7	842.9	842.0	841.2	840.4
180°	842.6	842.6	842.6	842.6	842.6	842.6	842.6

(END OF REPORT)