

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332461-940

Luminaire Tested: **S123RDIW-S1000D1030U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332461-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S1000D1030U940-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1030 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6570.3 lumens
Efficiency: N/A
Efficacy: 107.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332461-940

CATALOG NUMBER: S123RDIW-S1000D1030U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

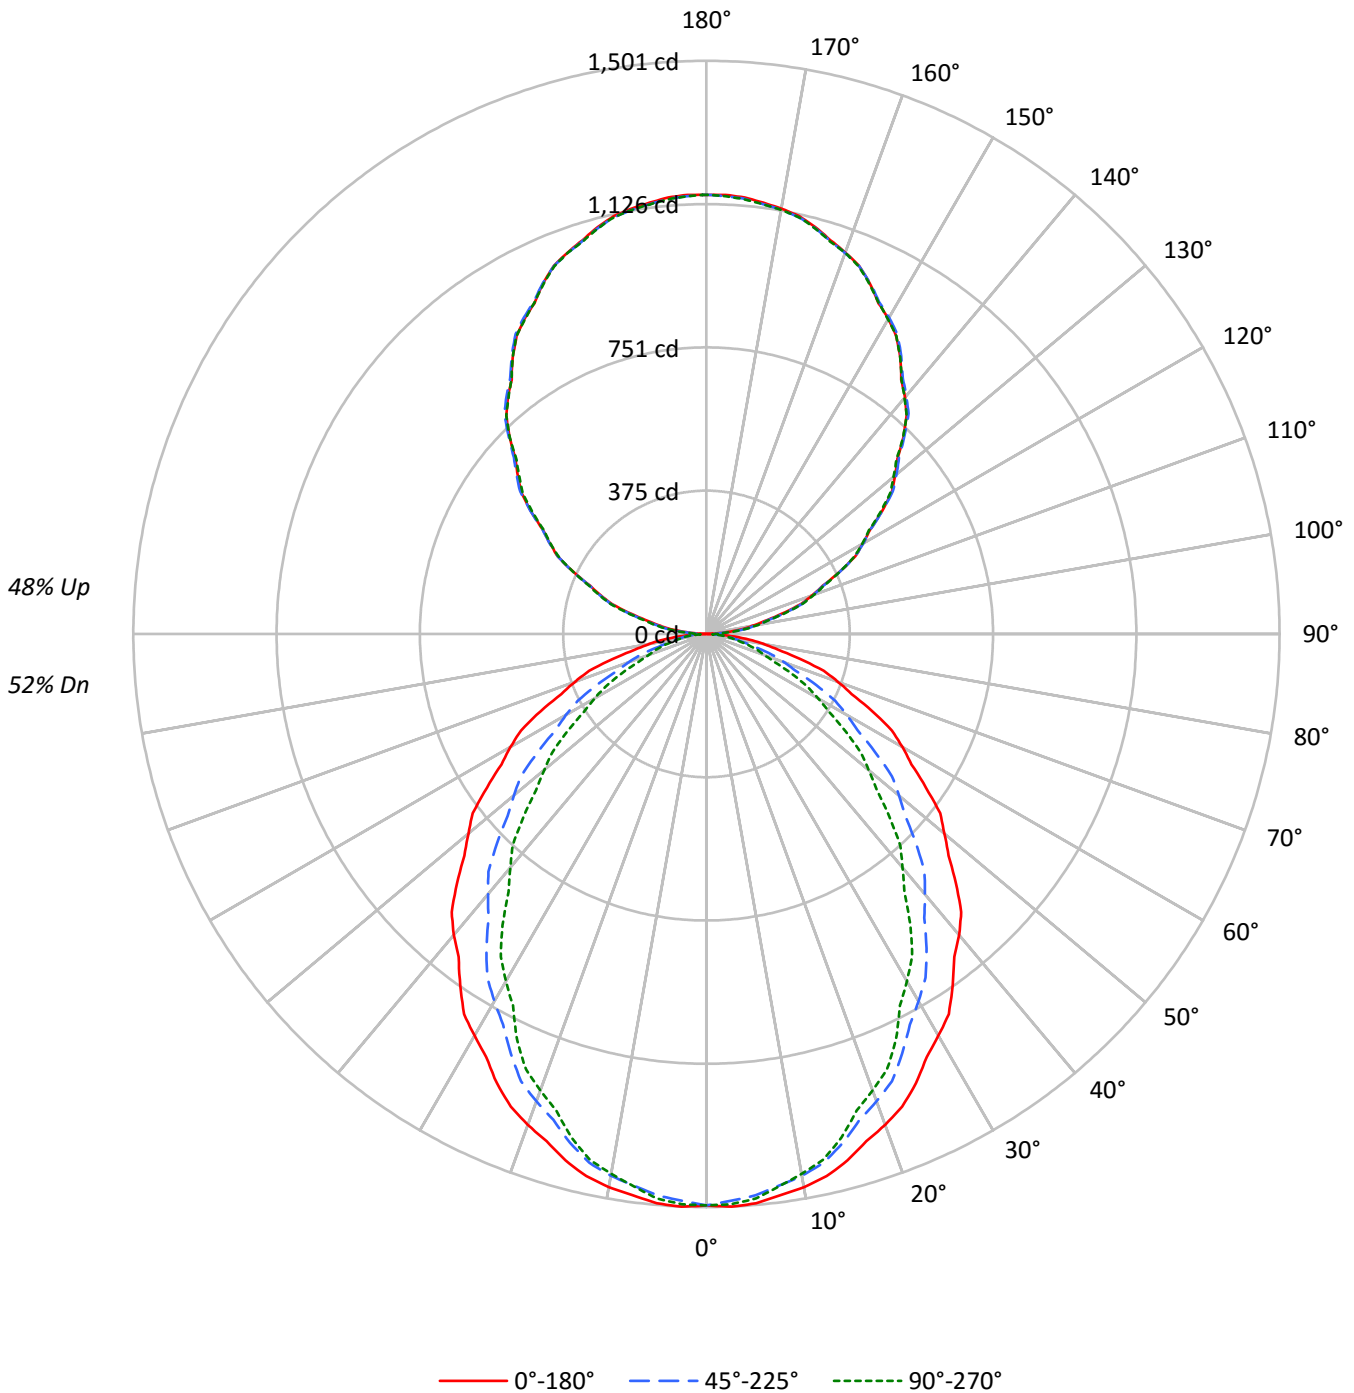



TEST NUMBER: P332461-940

CATALOG NUMBER: S123RDIW-S1000D1030U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	52
1	98	94	90	87	91	87	84	81	74	72	70	62	61	59	51	50	49	44
2	90	83	77	72	83	77	72	67	65	62	58	55	52	50	46	44	42	37
3	82	73	66	60	76	68	62	56	58	53	49	49	46	43	41	38	36	32
4	75	65	57	51	69	60	53	48	52	47	42	44	40	37	37	34	31	28
5	69	58	50	44	64	54	47	42	46	41	37	40	35	32	33	30	27	24
6	64	52	44	38	59	49	41	36	42	36	32	36	32	28	30	27	24	21
7	59	47	39	34	55	44	37	32	38	33	28	33	28	25	28	24	22	19
8	55	43	35	30	51	40	33	28	35	29	25	30	26	22	25	22	20	17
9	51	39	32	27	47	37	30	25	32	27	23	28	23	20	23	20	18	16
10	48	36	29	24	44	34	27	23	30	24	21	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16108	16108	16108
5°	16170	15946	16038
10°	16078	15746	15692
15°	15905	15377	15216
20°	15668	14917	14569
25°	15423	14400	13938
30°	15100	13803	13048
35°	14767	13205	12232
40°	14462	12500	11221
45°	14059	11805	10310
50°	13618	11015	9287
55°	13165	10113	8336
60°	12751	9145	7289
65°	12210	8099	6243
70°	11534	6801	5042
75°	10551	5352	4741
80°	9403	4736	4364
85°	7941	4199	3903



TEST NUMBER: P332461-940

CATALOG NUMBER: S123RDIW-S1000D1030U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.5	2.1
10°-20°	391.0	6.0
20°-30°	563.0	8.6
30°-40°	634.1	9.7
40°-50°	606.7	9.2
50°-60°	496.8	7.6
60°-70°	335.2	5.1
70°-80°	168.6	2.6
80°-90°	48.0	0.7
90°-100°	74.9	1.1
100°-110°	224.2	3.4
110°-120°	381.4	5.8
120°-130°	501.7	7.6
130°-140°	563.9	8.6
140°-150°	554.3	8.4
150°-160°	466.6	7.1
160°-170°	310.6	4.7
170°-180°	108.8	1.7
0°-30°	1094.5	16.7
0°-40°	1728.6	26.3
0°-60°	2832.1	43.1
0°-90°	3384.0	51.5
90°-120°	680.6	10.4
90°-150°	2300.3	35.0
90°-180°	3186.0	48.5
0°-180°	6570.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1496	1496	1496	1496	1496	
5°	1496	1490	1476	1486	1484	142
15°	1427	1413	1380	1374	1365	402
25°	1299	1267	1212	1188	1174	597
35°	1124	1078	1005	954	931	703
45°	924	867	776	709	677	712
55°	702	640	539	471	444	629
65°	479	411	318	261	245	474
75°	254	195	129	117	114	270
85°	64	39	34	32	32	72
90°	1	10	22	25	27	6
95°	53	60	67	70	70	60
105°	203	205	213	213	215	218
115°	384	386	385	386	385	380
125°	562	564	563	559	556	501
135°	729	734	734	730	728	562
145°	884	886	889	888	884	552
155°	1013	1013	1014	1017	1011	466
165°	1103	1100	1100	1105	1100	311
175°	1147	1144	1144	1148	1143	109
180°	1150	1150	1150	1150	1150	



TEST NUMBER: P332461-940

CATALOG NUMBER: S123RDIW-S1000D1030U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5
2.5°	1501.3	1500.4	1499.6	1498.7	1497.8	1496.1	1493.5	1490.9	1488.4	1485.8	1488.1
5°	1496.5	1495.0	1493.7	1492.4	1491.0	1488.7	1485.5	1482.3	1479.1	1475.8	1478.2
7.5°	1482.6	1481.1	1479.7	1478.2	1476.8	1473.9	1469.7	1465.5	1461.3	1457.1	1458.5
10°	1471.0	1469.1	1467.1	1465.3	1463.4	1460.0	1455.2	1450.3	1445.5	1440.6	1440.9
12.5°	1454.5	1452.3	1450.3	1448.1	1446.0	1442.0	1436.1	1430.1	1424.2	1418.3	1418.1
15°	1427.3	1424.3	1421.3	1418.4	1415.4	1410.2	1402.6	1395.0	1387.5	1379.9	1378.6
17.5°	1393.0	1389.6	1386.2	1382.7	1379.2	1372.7	1363.1	1353.5	1343.9	1334.3	1331.4
20°	1367.8	1363.5	1359.1	1354.9	1350.5	1343.3	1333.0	1322.8	1312.5	1302.3	1298.8
22.5°	1339.6	1334.7	1329.7	1324.7	1319.8	1311.9	1300.9	1290.0	1279.2	1268.3	1263.9
25°	1298.6	1291.9	1285.1	1278.4	1271.7	1262.0	1249.6	1237.2	1224.9	1212.5	1206.8
27.5°	1248.8	1241.4	1233.9	1226.5	1219.1	1208.4	1194.6	1180.8	1167.0	1153.2	1145.3
30°	1214.9	1206.8	1198.7	1190.6	1182.5	1170.9	1155.8	1140.7	1125.6	1110.5	1101.4
32.5°	1180.9	1171.7	1162.5	1153.3	1144.2	1131.7	1115.7	1099.7	1083.7	1067.7	1057.7
35°	1123.8	1114.1	1104.4	1094.8	1085.0	1071.7	1055.1	1038.3	1021.6	1004.9	993.3
37.5°	1066.0	1055.3	1044.5	1033.7	1022.9	1008.6	990.8	972.9	955.0	937.2	924.0
40°	1029.2	1017.4	1005.4	993.5	981.7	966.2	947.1	927.9	908.7	889.6	875.6
42.5°	987.4	975.5	963.7	951.8	940.0	924.2	904.4	884.6	864.8	845.0	829.6
45°	923.6	911.4	899.3	887.2	875.0	858.6	837.9	817.1	796.3	775.5	760.2
47.5°	859.8	846.4	833.1	819.7	806.5	789.4	768.7	747.9	727.1	706.3	689.6
50°	813.2	800.5	787.8	775.2	762.4	745.2	723.4	701.5	679.7	657.8	641.1
52.5°	771.4	757.7	743.9	730.1	716.4	698.7	677.1	655.4	633.8	612.2	594.8
55°	701.5	688.3	675.0	661.8	648.6	630.5	607.6	584.7	561.8	538.9	523.3
57.5°	636.9	622.5	608.1	593.7	579.3	560.6	537.5	514.5	491.5	468.5	453.7
60°	592.3	577.5	562.6	547.8	532.9	514.3	492.0	469.6	447.2	424.8	410.2
62.5°	547.6	532.8	517.9	503.1	488.3	469.7	447.3	424.9	402.5	380.1	366.4
65°	479.4	464.6	449.7	434.9	420.1	402.2	381.1	360.1	339.0	318.0	304.8
67.5°	411.2	396.2	381.2	366.2	351.2	333.6	313.4	293.3	273.1	252.9	243.1
70°	366.5	352.0	337.4	322.8	308.3	291.6	272.7	253.8	234.9	216.1	206.6
72.5°	321.8	307.6	293.2	278.8	264.5	248.7	231.6	214.5	197.2	180.1	172.4
75°	253.7	240.7	227.7	214.8	201.9	188.0	173.2	158.3	143.5	128.7	125.9
77.5°	191.5	179.8	168.1	156.4	144.7	134.0	124.5	114.9	105.4	95.9	94.4
80°	151.7	140.6	129.6	118.5	107.5	99.2	93.5	87.7	82.1	76.4	75.6
82.5°	113.9	104.3	94.8	85.2	75.6	69.6	66.9	64.3	61.6	58.9	58.1
85°	64.3	58.4	52.4	46.5	40.6	37.2	36.4	35.6	34.8	34.0	33.4
87.5°	23.5	21.5	19.5	17.6	15.6	14.9	15.4	15.9	16.4	16.9	16.9
90°	0.9	2.9	4.9	7.0	8.9	11.2	13.8	16.5	19.1	21.7	22.5
92.5°	21.8	23.2	24.6	25.9	27.3	28.7	30.2	31.7	33.2	34.7	35.3
95°	53.3	54.7	56.1	57.5	58.9	60.5	62.1	63.7	65.3	66.9	67.7
97.5°	94.7	95.7	96.8	97.8	98.9	100.0	101.1	102.3	103.4	104.6	105.6
100°	122.9	124.0	125.3	126.4	127.7	128.8	129.8	130.8	131.8	132.8	133.4
102.5°	155.4	156.1	156.9	157.6	158.3	159.3	160.6	161.9	163.3	164.6	165.2
105°	203.3	203.7	204.1	204.5	204.9	206.0	207.8	209.6	211.4	213.2	213.2
107.5°	259.0	259.1	259.4	259.7	259.8	260.4	261.1	261.8	262.5	263.2	263.9
110°	293.6	294.0	294.4	294.8	295.2	295.6	296.0	296.4	296.9	297.2	298.0



TEST NUMBER: P332461-940

CATALOG NUMBER: S123RDIW-S1000D1030U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	329.8	330.0	330.2	330.5	330.7	330.8	330.9	331.0	331.1	331.2	332.2
115°	384.0	384.5	385.1	385.8	386.4	386.5	386.0	385.7	385.2	384.9	385.0
117.5°	438.5	438.9	439.3	439.7	440.1	440.1	439.5	439.0	438.5	438.0	437.9
120°	472.5	473.7	474.9	476.1	477.3	477.4	476.4	475.4	474.4	473.4	473.1
122.5°	507.9	508.8	509.7	510.5	511.4	511.6	511.1	510.6	510.1	509.5	509.0
125°	562.0	562.5	563.1	563.7	564.4	564.5	564.0	563.7	563.2	562.8	562.0
127.5°	611.8	613.1	614.4	615.6	616.9	617.3	616.9	616.4	616.0	615.5	614.5
130°	645.1	646.7	648.3	649.9	651.5	651.9	651.4	650.8	650.1	649.5	648.7
132.5°	678.2	679.8	681.4	683.1	684.7	685.3	684.8	684.4	683.9	683.5	682.5
135°	729.1	730.2	731.5	732.6	733.9	734.3	734.1	734.0	733.8	733.5	732.7
137.5°	776.1	777.0	778.0	779.0	780.1	780.8	781.3	781.9	782.4	782.9	782.0
140°	808.5	809.6	810.6	811.5	812.5	813.2	813.3	813.6	813.8	814.0	813.8
142.5°	838.2	839.2	840.2	841.2	842.2	842.8	843.2	843.6	844.0	844.4	844.1
145°	884.4	884.8	885.2	885.6	886.0	886.5	887.2	887.8	888.3	888.9	888.8
147.5°	924.9	925.6	926.3	927.1	927.8	928.4	929.0	929.6	930.1	930.7	930.7
150°	953.1	953.5	953.9	954.3	954.7	955.1	955.5	955.9	956.3	956.7	956.7
152.5°	976.2	976.8	977.3	977.9	978.5	978.8	979.1	979.4	979.6	979.8	980.2
155°	1012.7	1012.7	1012.7	1012.7	1012.7	1012.8	1013.0	1013.3	1013.4	1013.6	1014.4
157.5°	1043.8	1043.6	1043.3	1043.0	1042.9	1042.8	1042.9	1043.1	1043.3	1043.4	1044.3
160°	1063.3	1062.9	1062.5	1062.1	1061.7	1061.5	1061.5	1061.5	1061.5	1061.5	1062.5
162.5°	1080.7	1080.1	1079.5	1079.0	1078.4	1078.2	1078.3	1078.5	1078.7	1078.9	1079.9
165°	1103.0	1102.4	1101.9	1101.3	1100.6	1100.4	1100.4	1100.4	1100.4	1100.4	1101.5
167.5°	1121.0	1120.2	1119.4	1118.6	1117.8	1117.4	1117.6	1117.8	1117.9	1118.0	1119.3
170°	1131.0	1130.2	1129.4	1128.6	1127.8	1127.5	1127.5	1127.5	1127.5	1127.5	1128.8
172.5°	1139.0	1138.2	1137.4	1136.6	1135.8	1135.4	1135.4	1135.4	1135.4	1135.4	1136.7
175°	1147.4	1146.6	1145.8	1145.0	1144.2	1143.7	1143.7	1143.7	1143.7	1143.7	1145.0
177.5°	1150.8	1150.1	1149.5	1148.8	1148.2	1147.9	1147.9	1147.9	1147.9	1147.9	1148.8
180°	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0



TEST NUMBER: P332461-940

CATALOG NUMBER: S123RDIW-S1000D1030U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5
2.5°	1490.5	1492.9	1495.2	1496.2	1495.8	1495.4	1495.0	1494.5
5°	1480.7	1483.1	1485.5	1486.5	1485.9	1485.4	1484.9	1484.3
7.5°	1459.8	1461.2	1462.5	1462.8	1461.8	1460.9	1460.0	1459.0
10°	1441.2	1441.5	1441.7	1441.2	1439.8	1438.4	1437.1	1435.7
12.5°	1417.9	1417.8	1417.6	1416.8	1415.2	1413.6	1412.1	1410.5
15°	1377.2	1375.9	1374.6	1372.9	1371.0	1369.1	1367.3	1365.4
17.5°	1328.6	1325.7	1322.9	1320.0	1317.2	1314.4	1311.6	1308.8
20°	1295.2	1291.7	1288.3	1284.9	1281.7	1278.4	1275.1	1271.9
22.5°	1259.5	1255.2	1250.8	1247.1	1244.1	1241.1	1238.1	1235.0
25°	1201.1	1195.4	1189.8	1185.4	1182.5	1179.6	1176.6	1173.6
27.5°	1137.5	1129.6	1121.7	1115.5	1111.0	1106.4	1101.9	1097.4
30°	1092.2	1083.0	1073.8	1067.1	1062.7	1058.5	1054.1	1049.8
32.5°	1047.7	1037.7	1027.6	1020.4	1015.8	1011.3	1006.7	1002.2
35°	981.7	970.1	958.5	950.3	945.5	940.6	935.8	930.9
37.5°	910.9	897.7	884.6	874.9	869.0	863.0	857.0	851.0
40°	861.6	847.6	833.5	823.4	817.2	811.0	804.8	798.6
42.5°	814.3	799.0	783.6	773.2	767.7	762.1	756.5	751.0
45°	744.8	729.4	714.0	703.1	696.6	690.2	683.7	677.3
47.5°	672.9	656.2	639.4	628.2	622.4	616.7	610.9	605.1
50°	624.4	607.6	590.9	579.4	573.3	567.0	560.9	554.6
52.5°	577.5	560.1	542.7	531.2	525.7	520.1	514.6	509.0
55°	507.6	492.0	476.3	465.7	460.4	455.0	449.6	444.2
57.5°	438.9	424.1	409.4	399.7	395.1	390.5	385.9	381.3
60°	395.7	381.1	366.5	357.0	352.4	347.8	343.2	338.6
62.5°	352.7	339.0	325.3	316.0	311.3	306.5	301.7	296.9
65°	291.6	278.3	265.1	257.0	254.0	251.1	248.2	245.1
67.5°	233.2	223.3	213.5	206.9	203.8	200.5	197.3	194.2
70°	197.2	187.7	178.3	172.1	169.1	166.1	163.2	160.2
72.5°	164.7	156.9	149.3	144.8	143.6	142.3	141.1	139.8
75°	123.2	120.6	117.9	116.3	115.7	115.1	114.6	114.0
77.5°	93.0	91.5	90.1	89.1	88.5	88.0	87.5	86.9
80°	74.8	74.0	73.2	72.6	72.1	71.5	70.9	70.4
82.5°	57.3	56.5	55.7	55.3	55.2	55.1	54.9	54.8
85°	32.9	32.4	31.8	31.6	31.6	31.6	31.6	31.6
87.5°	16.9	16.8	16.8	16.7	16.5	16.4	16.2	16.1
90°	23.3	24.1	24.9	25.5	25.9	26.3	26.7	27.1
92.5°	35.9	36.6	37.3	37.5	37.2	37.0	36.7	36.5
95°	68.5	69.3	70.1	70.4	70.4	70.4	70.4	70.4
97.5°	106.5	107.4	108.3	108.7	108.6	108.6	108.5	108.4
100°	134.0	134.6	135.2	135.7	136.1	136.5	136.9	137.3
102.5°	165.8	166.4	167.0	167.3	167.2	167.1	167.0	166.9
105°	213.2	213.2	213.2	213.4	213.8	214.2	214.6	215.0
107.5°	264.6	265.2	265.8	266.0	265.8	265.6	265.3	265.0
110°	298.8	299.6	300.4	300.6	300.2	299.8	299.4	299.0



TEST NUMBER: P332461-940

CATALOG NUMBER: S123RDIW-S1000D1030U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	333.1	334.0	335.0	335.5	335.4	335.3	335.3	335.2
115°	385.2	385.5	385.7	385.7	385.5	385.2	385.0	384.9
117.5°	437.9	437.8	437.8	437.5	436.9	436.4	435.8	435.2
120°	473.0	472.8	472.6	472.3	471.9	471.4	471.1	470.6
122.5°	508.5	507.9	507.5	506.8	506.3	505.8	505.2	504.6
125°	561.2	560.4	559.6	558.8	558.0	557.2	556.4	555.6
127.5°	613.3	612.2	611.1	610.0	609.1	608.2	607.3	606.4
130°	647.9	647.1	646.3	645.2	643.8	642.4	641.1	639.6
132.5°	681.6	680.6	679.7	678.7	677.5	676.5	675.4	674.3
135°	731.9	731.1	730.3	729.8	729.3	729.0	728.5	728.2
137.5°	781.2	780.3	779.5	778.7	777.9	777.2	776.4	775.7
140°	813.6	813.3	813.2	812.3	810.9	809.6	808.2	806.7
142.5°	843.9	843.7	843.6	842.8	841.8	840.7	839.6	838.6
145°	888.6	888.3	888.1	887.6	886.8	886.0	885.2	884.4
147.5°	930.7	930.7	930.7	930.1	928.9	927.6	926.5	925.2
150°	956.7	956.7	956.7	956.1	954.9	953.7	952.5	951.3
152.5°	980.4	980.8	981.1	980.8	979.7	978.7	977.6	976.6
155°	1015.2	1016.0	1016.8	1016.6	1015.1	1013.7	1012.4	1010.9
157.5°	1045.1	1046.0	1046.8	1046.7	1045.5	1044.5	1043.3	1042.1
160°	1063.5	1064.5	1065.5	1065.6	1064.8	1064.0	1063.2	1062.4
162.5°	1080.8	1081.8	1082.9	1082.7	1081.5	1080.1	1078.9	1077.5
165°	1102.8	1103.9	1105.2	1105.1	1103.7	1102.2	1100.8	1099.5
167.5°	1120.5	1121.8	1123.0	1123.0	1121.8	1120.5	1119.3	1118.0
170°	1130.2	1131.7	1133.1	1133.1	1131.7	1130.2	1128.8	1127.5
172.5°	1137.9	1139.2	1140.4	1140.3	1138.9	1137.5	1136.0	1134.7
175°	1146.1	1147.4	1148.5	1148.4	1147.0	1145.6	1144.2	1142.8
177.5°	1149.8	1150.8	1151.7	1151.6	1150.5	1149.4	1148.3	1147.2
180°	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0

(END OF REPORT)