

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332418-940

Luminaire Tested: **S123RDIW-S560D1030U940-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332418-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S560D1030U940-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1030 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5666.1 lumens
Efficiency: N/A
Efficacy: 125.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

Luminous Intensity Polar Plot

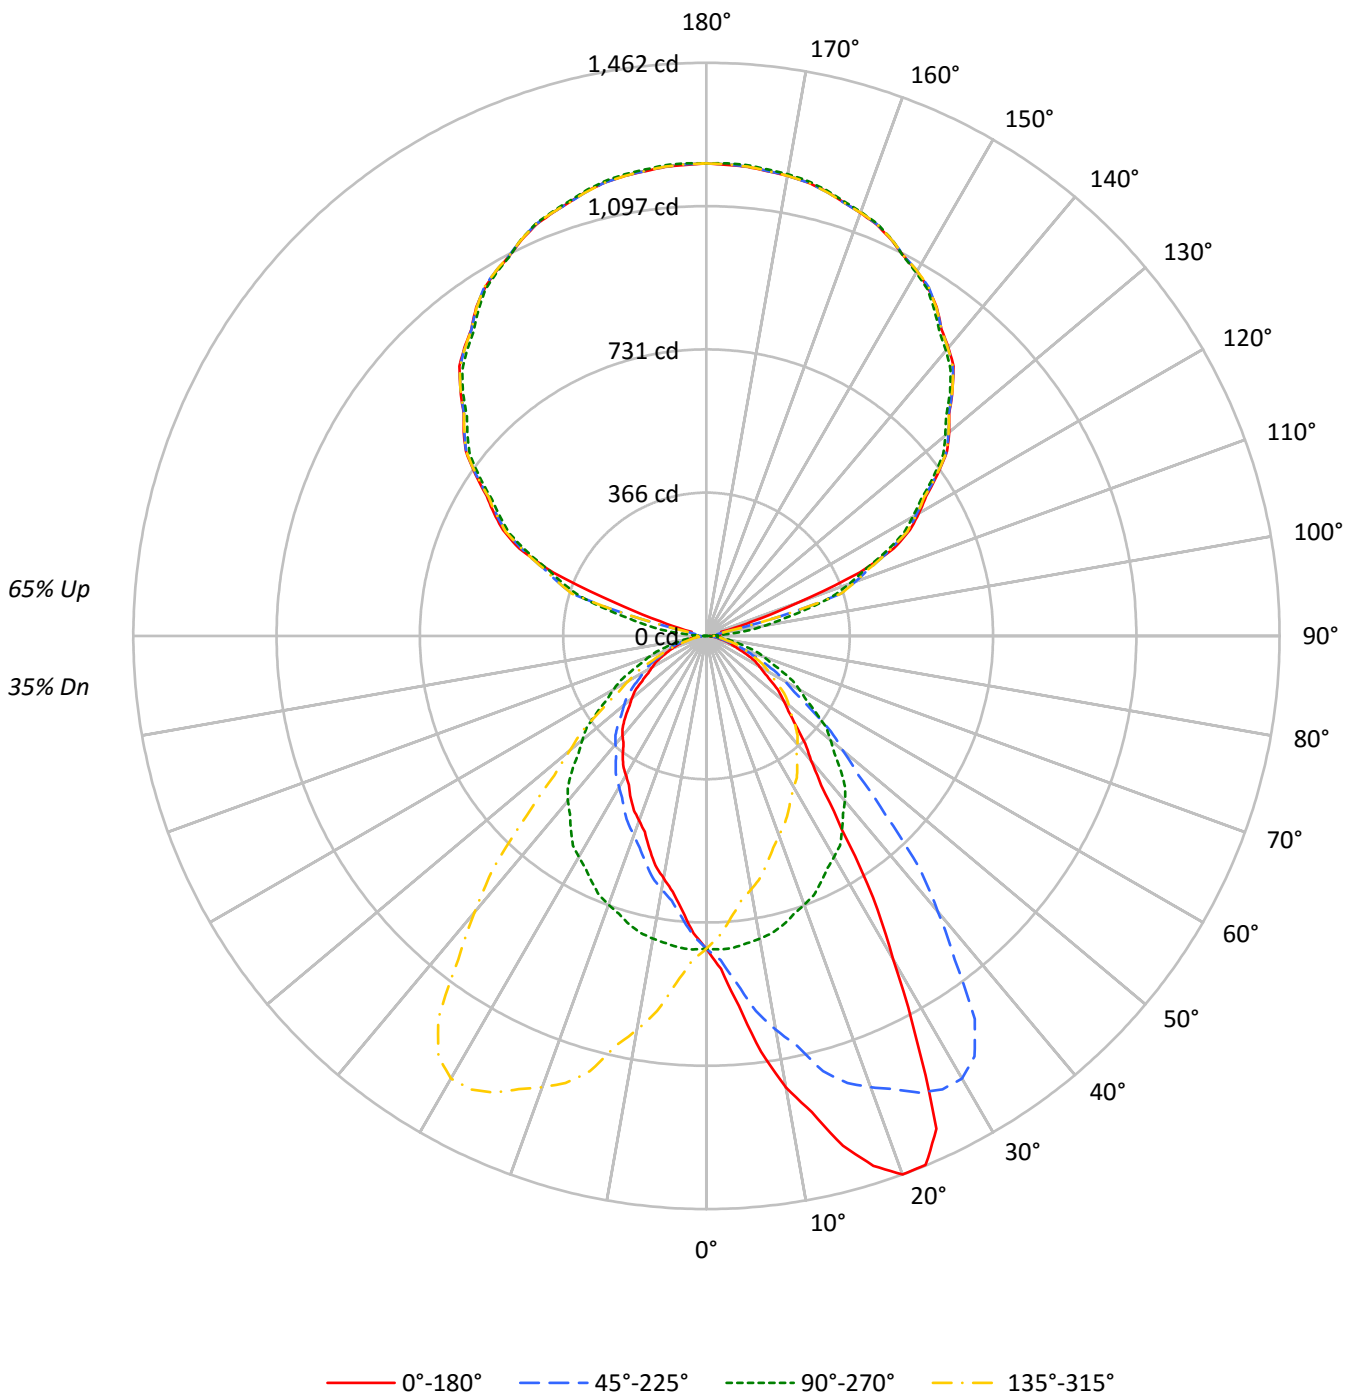



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	42	42	42	35
1	95	91	87	84	86	82	79	76	66	64	62	52	50	49	38	37	37	30
2	87	80	74	69	78	72	67	63	59	55	52	46	44	42	34	33	31	26
3	79	70	63	58	71	64	58	53	52	48	44	41	38	36	31	29	27	23
4	73	62	55	49	66	57	50	45	46	42	38	37	33	31	27	25	24	20
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	25	23	21	17
6	62	50	42	37	56	46	39	34	38	33	29	30	26	24	23	20	19	15
7	57	45	38	32	51	41	35	30	34	29	25	27	24	21	21	18	17	14
8	53	41	34	29	48	38	31	27	31	26	23	25	21	19	19	17	15	12
9	49	37	30	25	44	34	28	24	28	24	20	23	19	17	18	15	14	11
10	46	34	27	23	42	31	25	21	26	21	18	21	18	15	16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	8587	8587	8587	8587
5°	10237	8625	7595	8625
10°	12783	8575	6862	8575
15°	15004	8487	6257	8487
20°	16745	8356	5743	8356
25°	16476	8219	5428	8219
30°	11844	8090	5102	8090
35°	7908	7926	4892	7926
40°	5826	7727	4675	7727
45°	4886	7377	4460	7377
50°	4312	6921	4163	6921
55°	3781	6397	3755	6397
60°	3367	5896	3442	5896
65°	2957	5359	3202	5359
70°	2319	4881	2924	4881
75°	2046	4263	2670	4263
80°	1779	3620	2628	3620
85°	1433	2902	2791	2902



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.5	1.4
10°-20°	245.1	4.3
20°-30°	385.1	6.8
30°-40°	401.8	7.1
40°-50°	343.8	6.1
50°-60°	262.1	4.6
60°-70°	168.0	3.0
70°-80°	80.8	1.4
80°-90°	24.8	0.4
90°-100°	43.8	0.8
100°-110°	208.9	3.7
110°-120°	501.7	8.9
120°-130°	638.9	11.3
130°-140°	682.7	12.0
140°-150°	638.4	11.3
150°-160°	514.9	9.1
160°-170°	332.3	5.9
170°-180°	114.5	2.0
0°-30°	708.7	12.5
0°-40°	1110.4	19.6
0°-60°	1716.3	30.3
0°-90°	1989.9	35.1
90°-120°	754.5	13.3
90°-150°	2714.5	47.9
90°-180°	3676.0	64.9
0°-180°	5666.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	798	798	798	798	798	
5°	947	798	703	798	947	98
15°	1346	762	562	762	1346	382
25°	1387	692	457	692	1387	596
35°	602	603	372	603	602	395
45°	321	485	293	485	321	252
55°	202	341	200	341	202	182
65°	116	210	126	210	116	114
75°	49	102	64	102	49	53
85°	12	24	23	24	12	14
90°	27	1	27	1	27	13
95°	34	55	34	55	34	28
105°	39	267	39	267	39	90
115°	527	501	527	501	527	487
125°	720	706	720	706	720	643
135°	888	879	888	879	888	684
145°	1024	1014	1024	1014	1024	639
155°	1115	1117	1115	1117	1115	514
165°	1175	1178	1175	1178	1175	332
175°	1201	1206	1201	1206	1201	114
180°	1206	1206	1206	1206	1206	



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8
2.5°	849.7	850.9	847.3	846.8	842.7	841.6	841.6	835.8	832.2	827.6	824.9
5°	947.4	952.9	950.2	944.1	933.8	931.4	924.9	914.6	903.0	888.7	881.9
7.5°	1069.4	1076.9	1074.0	1064.5	1053.8	1045.1	1026.8	1009.8	986.0	965.1	947.2
10°	1169.5	1161.5	1155.5	1146.2	1136.3	1120.3	1101.2	1074.9	1044.5	1020.6	993.9
12.5°	1244.3	1243.0	1235.2	1225.7	1211.7	1196.5	1173.0	1140.9	1105.6	1071.0	1040.6
15°	1346.4	1348.4	1343.3	1333.4	1313.6	1286.6	1251.1	1237.8	1187.2	1149.6	1112.1
17.5°	1417.0	1416.6	1415.9	1402.1	1382.0	1362.7	1329.8	1294.8	1249.0	1196.1	1145.5
20°	1461.8	1458.4	1459.1	1443.7	1428.7	1406.5	1374.4	1323.5	1285.9	1224.8	1172.5
22.5°	1460.7	1460.0	1462.6	1457.3	1446.4	1429.4	1404.2	1361.2	1313.2	1251.5	1192.8
25°	1387.3	1384.6	1400.7	1405.1	1422.5	1425.6	1418.1	1394.5	1349.1	1285.6	1212.8
27.5°	1161.1	1159.6	1189.4	1226.6	1274.0	1310.7	1346.2	1363.3	1349.1	1303.6	1230.7
30°	952.9	985.0	1000.1	1054.0	1114.1	1185.8	1248.7	1308.4	1323.1	1303.3	1243.6
32.5°	791.1	819.1	831.7	878.1	934.1	1018.1	1112.3	1196.9	1256.8	1271.9	1235.9
35°	601.8	602.2	630.8	651.3	703.2	789.6	881.2	994.5	1107.2	1192.7	1201.6
37.5°	480.2	481.9	499.3	519.7	558.7	604.3	684.9	779.2	909.4	1040.4	1117.3
40°	414.6	417.7	430.7	450.8	478.8	513.4	576.2	664.9	773.6	919.4	1038.7
42.5°	372.6	377.6	384.2	399.8	417.1	449.4	500.2	568.8	667.5	805.5	943.0
45°	321.0	323.8	328.9	336.1	351.8	374.3	408.5	454.6	536.5	647.6	785.2
47.5°	283.2	281.8	287.1	293.0	303.4	318.8	341.7	379.3	437.8	526.8	643.6
50°	257.5	257.2	260.9	265.4	275.3	286.6	305.3	333.7	380.1	453.9	560.8
52.5°	233.4	234.8	237.5	243.0	250.1	259.2	276.1	296.5	336.4	400.1	489.2
55°	201.5	202.5	206.3	209.4	214.5	223.7	234.3	251.4	278.7	323.1	396.5
57.5°	174.4	174.0	177.6	178.3	184.1	191.6	199.8	213.1	232.9	265.9	315.4
60°	156.4	155.4	158.5	160.9	163.9	170.0	176.9	189.9	205.6	229.9	272.2
62.5°	140.0	139.6	141.8	144.2	146.7	152.3	158.1	168.0	180.5	200.9	234.5
65°	116.1	117.2	118.2	119.2	120.6	123.9	129.5	136.3	144.8	159.2	183.4
67.5°	91.2	92.3	92.6	94.7	97.6	99.8	103.2	109.2	115.2	127.2	141.1
70°	73.7	73.4	73.7	74.8	78.6	82.3	86.8	91.2	95.0	103.5	115.1
72.5°	63.4	62.8	63.7	63.8	65.7	66.7	69.6	73.7	78.6	84.4	92.7
75°	49.2	49.2	49.2	49.2	50.6	51.3	52.3	53.3	55.0	57.7	63.8
77.5°	36.4	36.4	36.9	37.2	37.5	37.9	38.5	39.6	40.1	41.6	44.2
80°	28.7	29.1	28.7	29.1	29.1	29.7	30.1	31.1	31.4	33.2	34.2
82.5°	21.6	21.4	21.6	21.9	21.9	22.6	22.6	23.5	23.5	24.3	25.4
85°	11.6	11.0	11.6	11.2	11.9	11.2	11.6	12.3	12.3	12.7	14.0
87.5°	8.1	8.6	7.9	8.1	8.0	8.2	8.0	7.9	8.3	7.8	7.6
90°	26.8	26.5	26.0	25.7	25.2	24.7	23.9	23.1	22.3	21.5	18.9
92.5°	29.7	29.5	29.2	29.0	28.8	28.0	26.8	25.5	24.2	22.9	21.0
95°	34.1	34.1	34.1	34.1	34.1	33.3	31.9	30.6	29.2	27.7	25.6
97.5°	36.9	36.7	36.5	36.3	36.1	35.2	33.6	32.0	30.4	28.8	43.2
100°	37.6	37.5	37.2	37.0	36.8	35.9	34.3	32.7	31.1	29.5	60.6
102.5°	38.3	38.0	37.6	37.3	36.9	39.1	44.1	49.0	54.0	58.9	92.8
105°	39.4	39.0	38.6	38.3	37.8	55.2	90.4	125.7	161.0	196.2	214.1
107.5°	123.8	150.3	176.9	203.4	230.0	256.2	282.0	307.8	333.7	359.5	356.7
110°	246.3	274.7	303.2	331.7	360.2	377.6	384.2	390.8	397.3	403.9	401.7



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	422.6	428.6	434.6	440.6	446.6	449.5	449.4	449.3	449.2	449.1	446.9
115°	526.6	525.8	525.0	524.2	523.4	522.1	520.0	518.1	516.1	514.1	512.3
117.5°	585.1	584.9	584.7	584.5	584.4	583.5	581.9	580.3	578.7	577.1	576.2
120°	625.2	625.2	625.2	625.2	625.2	624.4	622.8	621.2	619.6	618.0	617.4
122.5°	664.6	664.4	664.2	664.1	664.0	663.3	662.2	661.0	660.0	658.8	658.1
125°	720.1	719.7	719.3	718.9	718.5	718.1	717.7	717.3	716.9	716.5	715.7
127.5°	773.5	773.9	774.3	774.6	775.1	775.0	774.3	773.6	773.0	772.4	771.4
130°	807.9	808.2	808.7	809.0	809.5	809.2	808.4	807.7	806.9	806.1	805.3
132.5°	839.4	840.0	840.5	841.1	841.6	841.5	840.7	839.9	839.1	838.3	837.7
135°	887.6	888.1	888.8	889.4	889.9	889.9	889.4	888.8	888.1	887.6	886.8
137.5°	932.9	933.3	933.7	934.1	934.5	934.2	933.3	932.3	931.3	930.4	930.0
140°	960.1	960.6	960.9	961.4	961.7	961.5	960.7	959.9	959.1	958.3	957.7
142.5°	985.2	985.8	986.3	986.9	987.4	987.4	986.8	986.1	985.5	984.8	984.3
145°	1023.7	1023.7	1023.7	1023.7	1023.7	1023.5	1023.1	1022.7	1022.3	1021.9	1021.5
147.5°	1052.4	1053.3	1054.2	1055.2	1056.1	1056.3	1055.9	1055.5	1055.1	1054.7	1054.3
150°	1073.9	1074.5	1075.0	1075.7	1076.3	1076.4	1075.9	1075.6	1075.1	1074.8	1074.3
152.5°	1091.1	1092.0	1092.9	1093.8	1094.8	1094.8	1094.1	1093.4	1092.7	1092.0	1091.7
155°	1115.1	1116.2	1117.5	1118.7	1119.8	1120.0	1118.9	1117.9	1117.0	1116.0	1115.8
157.5°	1135.3	1136.8	1138.4	1140.0	1141.5	1141.7	1140.5	1139.3	1138.1	1136.9	1137.1
160°	1148.2	1149.6	1151.0	1152.4	1153.8	1153.9	1152.7	1151.5	1150.3	1149.1	1149.3
162.5°	1160.4	1161.6	1162.9	1164.1	1165.3	1165.3	1164.0	1162.5	1161.2	1159.8	1160.0
165°	1175.1	1176.4	1177.9	1179.3	1180.6	1180.5	1178.9	1177.3	1175.8	1174.2	1174.4
167.5°	1185.6	1187.2	1188.8	1190.4	1192.0	1192.0	1190.4	1188.8	1187.2	1185.6	1185.6
170°	1192.1	1193.6	1195.2	1196.9	1198.5	1198.5	1196.9	1195.2	1193.6	1192.1	1192.1
172.5°	1195.7	1197.4	1199.2	1201.0	1202.7	1202.7	1201.1	1199.6	1198.0	1196.4	1196.2
175°	1201.0	1202.7	1204.3	1205.9	1207.5	1207.6	1206.1	1204.7	1203.4	1201.9	1201.8
177.5°	1202.7	1204.3	1205.9	1207.5	1209.1	1209.2	1207.9	1206.7	1205.4	1204.1	1203.9
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8
2.5°	823.8	823.0	819.1	814.8	809.0	805.2	802.2	800.6	795.7	789.6	785.5
5°	874.7	864.4	853.5	840.2	827.9	815.3	807.4	798.2	786.9	774.3	765.4
7.5°	929.2	909.1	887.4	865.1	843.0	823.2	805.7	790.8	772.8	754.7	742.0
10°	971.0	941.6	911.2	880.1	851.8	825.2	804.7	784.5	763.0	742.2	726.5
12.5°	1009.0	970.4	935.3	897.1	860.9	829.0	799.5	775.8	749.9	727.7	709.8
15°	1057.0	1017.4	975.1	917.0	868.9	828.6	792.7	761.6	730.2	702.9	685.5
17.5°	1102.0	1042.4	985.5	937.0	874.5	824.1	780.3	743.2	708.7	679.8	658.3
20°	1120.6	1062.9	1001.0	939.2	877.8	821.4	770.5	729.5	693.7	660.8	641.1
22.5°	1131.8	1066.4	1001.3	934.9	869.6	811.0	760.7	715.6	676.7	645.6	621.2
25°	1144.9	1066.9	995.2	929.7	863.1	799.5	739.8	692.0	650.0	616.8	590.8
27.5°	1153.4	1061.8	977.0	904.2	836.6	773.4	718.6	667.9	625.3	590.2	562.4
30°	1155.1	1057.7	963.1	884.2	815.6	757.5	699.5	650.9	605.9	568.6	542.7
32.5°	1157.3	1047.7	944.3	860.5	790.2	732.7	680.1	633.7	587.5	550.9	524.4
35°	1148.3	1042.1	915.7	819.4	749.0	693.3	645.9	603.2	557.8	522.2	495.3
37.5°	1109.5	1019.8	886.0	773.0	699.5	647.9	609.2	572.0	530.4	492.0	466.6
40°	1070.4	998.0	863.1	744.9	668.1	615.1	580.2	549.9	509.6	473.7	446.4
42.5°	1012.2	968.2	841.2	715.4	632.5	581.5	552.1	523.6	488.3	451.8	426.1
45°	905.4	911.2	796.5	668.4	583.4	532.1	504.4	484.6	453.3	423.2	396.9
47.5°	771.5	825.8	744.0	618.3	531.5	483.4	459.2	441.9	420.8	391.3	367.3
50°	684.1	761.6	701.9	584.7	499.0	451.2	427.3	413.3	394.8	371.6	348.7
52.5°	603.5	686.8	651.0	547.2	463.8	420.0	396.6	385.1	370.5	348.7	328.0
55°	492.1	576.5	568.3	490.8	410.9	371.6	353.8	340.9	330.9	314.6	298.2
57.5°	398.1	478.0	482.3	427.9	364.3	325.5	310.2	300.4	293.9	281.6	266.4
60°	338.9	412.2	426.6	385.6	330.9	296.8	281.8	273.9	268.8	258.9	247.3
62.5°	289.6	352.1	368.4	338.9	299.0	267.0	255.3	247.7	244.2	235.7	225.4
65°	221.7	273.6	289.3	272.9	252.1	226.4	216.9	210.4	207.3	202.5	195.0
67.5°	166.7	204.6	221.8	210.2	202.7	186.5	180.4	176.9	174.2	170.9	164.6
70°	133.8	161.9	179.7	176.6	170.4	161.9	157.5	155.1	152.3	149.6	144.1
72.5°	107.6	126.9	143.6	145.2	140.1	138.4	134.5	133.5	131.8	128.6	125.6
75°	71.4	84.7	96.3	100.8	102.8	104.5	102.8	102.5	102.1	99.4	97.6
77.5°	46.8	53.9	61.3	68.8	72.1	74.4	74.9	76.2	75.3	73.8	73.0
80°	35.8	37.5	42.7	49.2	54.3	56.4	57.7	58.4	58.1	57.7	56.4
82.5°	26.0	27.5	29.9	34.4	38.7	42.2	43.0	42.8	43.6	43.8	42.7
85°	14.0	14.4	15.1	15.7	18.1	21.8	22.9	23.5	24.3	24.3	22.2
87.5°	7.7	6.9	6.9	6.4	6.9	6.7	7.9	8.9	9.6	8.9	9.3
90°	16.3	13.7	11.1	8.8	6.9	4.9	2.9	0.9	2.9	4.9	6.9
92.5°	19.0	17.1	15.2	14.4	15.0	15.5	16.1	16.7	16.1	15.5	15.0
95°	23.4	21.2	19.0	22.0	30.1	38.3	46.5	54.7	46.5	38.3	30.1
97.5°	57.5	71.9	86.1	95.1	98.8	102.5	106.1	109.8	106.1	102.5	98.8
100°	91.7	122.7	153.7	167.3	163.3	159.3	155.3	151.3	155.3	159.3	163.3
102.5°	126.8	160.7	194.6	210.1	207.2	204.4	201.5	198.7	201.5	204.4	207.2
105°	231.9	249.9	267.8	275.6	273.5	271.3	269.1	266.9	269.1	271.3	273.5
107.5°	353.8	351.1	348.2	345.9	344.2	342.4	340.6	338.9	340.6	342.4	344.2
110°	399.6	397.3	395.2	393.2	391.7	390.1	388.5	386.9	388.5	390.1	391.7



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	444.7	442.5	440.3	438.5	437.1	435.6	434.2	432.7	434.2	435.6	437.1
115°	510.5	508.7	506.9	505.4	504.3	503.0	501.9	500.7	501.9	503.0	504.3
117.5°	575.3	574.4	573.5	572.3	570.8	569.4	567.8	566.4	567.8	569.4	570.8
120°	616.8	616.2	615.6	614.4	612.6	610.8	609.0	607.3	609.0	610.8	612.6
122.5°	657.3	656.6	655.8	654.7	653.2	651.8	650.2	648.8	650.2	651.8	653.2
125°	714.9	714.1	713.4	712.1	710.5	708.9	707.4	705.8	707.4	708.9	710.5
127.5°	770.5	769.5	768.6	767.3	765.7	764.1	762.5	760.9	762.5	764.1	765.7
130°	804.5	803.7	802.9	801.7	800.1	798.5	796.9	795.3	796.9	798.5	800.1
132.5°	837.0	836.4	835.8	834.6	833.0	831.4	829.9	828.3	829.9	831.4	833.0
135°	886.0	885.2	884.4	883.4	882.2	881.0	879.9	878.6	879.9	881.0	882.2
137.5°	929.5	929.1	928.6	927.6	926.1	924.6	923.1	921.6	923.1	924.6	926.1
140°	957.2	956.5	955.9	955.0	953.9	952.7	951.5	950.3	951.5	952.7	953.9
142.5°	983.6	983.0	982.5	981.6	980.3	979.2	977.9	976.8	977.9	979.2	980.3
145°	1021.1	1020.7	1020.3	1019.4	1018.1	1016.6	1015.2	1013.9	1015.2	1016.6	1018.1
147.5°	1053.9	1053.5	1053.1	1052.5	1051.5	1050.6	1049.7	1048.8	1049.7	1050.6	1051.5
150°	1074.0	1073.5	1073.2	1072.6	1072.1	1071.5	1070.9	1070.3	1070.9	1071.5	1072.1
152.5°	1091.5	1091.3	1091.0	1090.7	1090.5	1090.2	1089.9	1089.7	1089.9	1090.2	1090.5
155°	1115.5	1115.4	1115.2	1115.3	1115.7	1116.1	1116.4	1116.9	1116.4	1116.1	1115.7
157.5°	1137.3	1137.6	1137.7	1137.8	1137.9	1137.9	1138.0	1138.0	1138.0	1137.9	1137.9
160°	1149.5	1149.7	1149.9	1150.1	1150.3	1150.5	1150.7	1150.9	1150.7	1150.5	1150.3
162.5°	1160.3	1160.5	1160.7	1161.0	1161.5	1162.1	1162.5	1163.1	1162.5	1162.1	1161.5
165°	1174.6	1174.7	1175.0	1175.4	1176.0	1176.6	1177.1	1177.8	1177.1	1176.6	1176.0
167.5°	1185.6	1185.6	1185.6	1186.1	1186.9	1187.7	1188.5	1189.2	1188.5	1187.7	1186.9
170°	1192.1	1192.1	1192.1	1192.5	1193.3	1194.1	1194.9	1195.7	1194.9	1194.1	1193.3
172.5°	1196.1	1195.9	1195.8	1196.1	1197.1	1198.1	1199.0	1200.0	1199.0	1198.1	1197.1
175°	1201.6	1201.3	1201.1	1201.6	1202.6	1203.5	1204.5	1205.5	1204.5	1203.5	1202.6
177.5°	1203.8	1203.6	1203.5	1203.8	1204.6	1205.4	1206.1	1206.9	1206.1	1205.4	1204.6
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8
2.5°	784.2	780.6	778.2	772.7	769.2	765.4	761.5	763.9	763.7	763.4	763.4
5°	757.9	750.0	742.9	733.6	727.8	720.7	715.2	714.5	715.9	711.1	708.4
7.5°	731.8	721.0	710.9	700.7	689.9	681.3	675.9	673.4	669.9	667.0	663.9
10°	713.5	700.9	690.9	678.3	666.7	656.5	650.0	645.5	643.1	640.7	636.3
12.5°	694.6	682.2	669.6	655.3	644.3	632.4	627.6	622.6	618.0	615.3	609.2
15°	667.0	650.9	637.7	622.6	610.4	598.7	591.9	582.0	580.6	577.2	571.1
17.5°	639.4	622.0	603.6	592.5	578.5	566.5	556.1	552.8	543.0	539.3	534.0
20°	617.5	601.5	587.5	572.7	552.6	541.4	533.2	528.7	520.8	516.0	512.6
22.5°	598.7	582.3	566.1	549.0	532.4	519.8	513.7	506.8	502.6	495.9	492.1
25°	571.8	554.0	534.5	516.0	504.1	494.5	485.0	478.8	472.7	469.6	462.8
27.5°	540.5	521.9	503.7	489.7	475.0	465.6	456.9	451.5	444.1	438.9	435.2
30°	523.3	501.4	485.7	473.1	454.2	445.4	438.9	432.0	426.6	421.2	417.3
32.5°	503.3	483.3	468.4	452.8	438.4	428.7	420.3	414.3	409.7	404.5	400.7
35°	472.0	455.3	439.9	424.2	413.6	403.7	393.8	388.7	384.2	379.4	376.0
37.5°	443.7	428.1	413.5	398.6	385.5	377.4	369.4	365.5	359.5	356.3	352.8
40°	426.2	410.9	395.2	380.8	367.1	361.1	353.8	348.0	342.6	340.2	336.4
42.5°	407.2	391.7	378.5	363.0	351.9	343.5	336.9	330.6	326.5	323.0	320.8
45°	378.8	365.1	352.1	336.8	326.2	319.0	311.5	305.7	301.9	299.5	295.8
47.5°	351.2	337.6	324.4	311.0	300.8	292.6	285.1	281.0	276.1	273.1	270.5
50°	331.3	319.0	305.0	292.7	282.5	274.3	268.1	263.0	258.5	254.8	253.1
52.5°	313.0	299.9	287.8	276.3	265.6	256.2	250.7	245.2	241.9	237.6	235.6
55°	282.8	270.2	259.9	248.6	238.1	230.2	223.4	218.6	215.2	210.4	207.7
57.5°	254.4	243.1	230.9	221.1	210.2	203.6	197.9	191.4	187.3	183.5	180.8
60°	235.3	222.3	211.8	202.5	193.0	184.4	179.3	174.2	169.8	165.9	163.6
62.5°	215.3	204.0	194.0	184.0	175.2	167.7	161.8	157.5	153.6	151.2	148.8
65°	184.8	175.9	165.7	157.5	149.3	143.8	139.0	135.3	132.5	130.8	128.8
67.5°	156.7	148.0	139.1	131.0	125.6	121.4	118.2	115.0	113.7	111.5	110.1
70°	138.3	129.5	121.6	115.5	109.9	106.9	104.9	102.5	101.1	98.4	97.0
72.5°	118.4	112.0	106.3	101.2	96.8	94.1	91.5	88.5	86.3	83.4	81.9
75°	93.3	87.5	83.0	79.5	76.9	73.1	69.4	66.3	65.3	64.2	63.8
77.5°	69.0	65.4	62.2	59.3	55.9	53.1	52.3	51.6	51.5	50.9	50.9
80°	54.3	50.9	48.5	45.1	43.1	43.1	43.1	42.4	42.7	42.7	42.7
82.5°	40.4	37.2	35.9	34.7	34.3	34.6	34.6	34.7	34.5	35.0	34.8
85°	20.9	21.1	21.8	21.5	21.8	21.8	22.6	22.2	22.6	21.8	22.6
87.5°	9.5	10.7	11.5	12.3	13.1	13.3	13.7	13.9	14.4	14.5	14.6
90°	8.8	11.1	13.7	16.3	18.9	21.5	22.3	23.1	23.9	24.7	25.2
92.5°	14.4	15.2	17.1	19.0	21.0	22.9	24.2	25.5	26.8	28.0	28.8
95°	22.0	19.0	21.2	23.4	25.6	27.7	29.2	30.6	31.9	33.3	34.1
97.5°	95.1	86.1	71.9	57.5	43.2	28.8	30.4	32.0	33.6	35.2	36.1
100°	167.3	153.7	122.7	91.7	60.6	29.5	31.1	32.7	34.3	35.9	36.8
102.5°	210.1	194.6	160.7	126.8	92.8	58.9	54.0	49.0	44.1	39.1	36.9
105°	275.6	267.8	249.9	231.9	214.1	196.2	161.0	125.7	90.4	55.2	37.8
107.5°	345.9	348.2	351.1	353.8	356.7	359.5	333.7	307.8	282.0	256.2	230.0
110°	393.2	395.2	397.3	399.6	401.7	403.9	397.3	390.8	384.2	377.6	360.2



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	438.5	440.3	442.5	444.7	446.9	449.1	449.2	449.3	449.4	449.5	446.6
115°	505.4	506.9	508.7	510.5	512.3	514.1	516.1	518.1	520.0	522.1	523.4
117.5°	572.3	573.5	574.4	575.3	576.2	577.1	578.7	580.3	581.9	583.5	584.4
120°	614.4	615.6	616.2	616.8	617.4	618.0	619.6	621.2	622.8	624.4	625.2
122.5°	654.7	655.8	656.6	657.3	658.1	658.8	660.0	661.0	662.2	663.3	664.0
125°	712.1	713.4	714.1	714.9	715.7	716.5	716.9	717.3	717.7	718.1	718.5
127.5°	767.3	768.6	769.5	770.5	771.4	772.4	773.0	773.6	774.3	775.0	775.1
130°	801.7	802.9	803.7	804.5	805.3	806.1	806.9	807.7	808.4	809.2	809.5
132.5°	834.6	835.8	836.4	837.0	837.7	838.3	839.1	839.9	840.7	841.5	841.6
135°	883.4	884.4	885.2	886.0	886.8	887.6	888.1	888.8	889.4	889.9	889.9
137.5°	927.6	928.6	929.1	929.5	930.0	930.4	931.3	932.3	933.3	934.2	934.5
140°	955.0	955.9	956.5	957.2	957.7	958.3	959.1	959.9	960.7	961.5	961.7
142.5°	981.6	982.5	983.0	983.6	984.3	984.8	985.5	986.1	986.8	987.4	987.4
145°	1019.4	1020.3	1020.7	1021.1	1021.5	1021.9	1022.3	1022.7	1023.1	1023.5	1023.7
147.5°	1052.5	1053.1	1053.5	1053.9	1054.3	1054.7	1055.1	1055.5	1055.9	1056.3	1056.1
150°	1072.6	1073.2	1073.5	1074.0	1074.3	1074.8	1075.1	1075.6	1075.9	1076.4	1076.3
152.5°	1090.7	1091.0	1091.3	1091.5	1091.7	1092.0	1092.7	1093.4	1094.1	1094.8	1094.8
155°	1115.3	1115.2	1115.4	1115.5	1115.8	1116.0	1117.0	1117.9	1118.9	1120.0	1119.8
157.5°	1137.8	1137.7	1137.6	1137.3	1137.1	1136.9	1138.1	1139.3	1140.5	1141.7	1141.5
160°	1150.1	1149.9	1149.7	1149.5	1149.3	1149.1	1150.3	1151.5	1152.7	1153.9	1153.8
162.5°	1161.0	1160.7	1160.5	1160.3	1160.0	1159.8	1161.2	1162.5	1164.0	1165.3	1165.3
165°	1175.4	1175.0	1174.7	1174.6	1174.4	1174.2	1175.8	1177.3	1178.9	1180.5	1180.6
167.5°	1186.1	1185.6	1185.6	1185.6	1185.6	1185.6	1187.2	1188.8	1190.4	1192.0	1192.0
170°	1192.5	1192.1	1192.1	1192.1	1192.1	1192.1	1193.6	1195.2	1196.9	1198.5	1198.5
172.5°	1196.1	1195.8	1195.9	1196.1	1196.2	1196.4	1198.0	1199.6	1201.1	1202.7	1202.7
175°	1201.6	1201.1	1201.3	1201.6	1201.8	1201.9	1203.4	1204.7	1206.1	1207.6	1207.5
177.5°	1203.8	1203.5	1203.6	1203.8	1203.9	1204.1	1205.4	1206.7	1207.9	1209.2	1209.1
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8
2.5°	760.1	759.8	760.1	759.0	760.1	759.8	760.1	763.4	763.4	763.7	763.9
5°	707.3	706.9	706.0	702.9	706.0	706.9	707.3	708.4	711.1	715.9	714.5
7.5°	661.2	660.8	657.7	657.8	657.7	660.8	661.2	663.9	667.0	669.9	673.4
10°	633.9	634.3	630.2	627.8	630.2	634.3	633.9	636.3	640.7	643.1	645.5
12.5°	607.4	605.8	602.5	599.9	602.5	605.8	607.4	609.2	615.3	618.0	622.6
15°	572.4	569.0	560.8	561.5	560.8	569.0	572.4	571.1	577.2	580.6	582.0
17.5°	531.2	528.7	528.6	523.8	528.6	528.7	531.2	534.0	539.3	543.0	552.8
20°	507.2	505.5	506.1	501.4	506.1	505.5	507.2	512.6	516.0	520.8	528.7
22.5°	488.3	486.6	483.8	482.2	483.8	486.6	488.3	492.1	495.9	502.6	506.8
25°	460.7	458.0	455.3	457.0	455.3	458.0	460.7	462.8	469.6	472.7	478.8
27.5°	433.1	431.1	428.4	428.0	428.4	431.1	433.1	435.2	438.9	444.1	451.5
30°	415.6	413.6	412.2	410.5	412.2	413.6	415.6	417.3	421.2	426.6	432.0
32.5°	397.9	397.5	395.0	394.7	395.0	397.5	397.9	400.7	404.5	409.7	414.3
35°	374.7	372.6	371.9	372.3	371.9	372.6	374.7	376.0	379.4	384.2	388.7
37.5°	352.6	349.9	348.7	347.4	348.7	349.9	352.6	352.8	356.3	359.5	365.5
40°	336.8	334.0	333.3	332.7	333.3	334.0	336.8	336.4	340.2	342.6	348.0
42.5°	319.0	317.9	317.5	316.3	317.5	317.9	319.0	320.8	323.0	326.5	330.6
45°	294.7	294.4	292.4	293.0	292.4	294.4	294.7	295.8	299.5	301.9	305.7
47.5°	269.2	267.7	266.3	267.2	266.3	267.7	269.2	270.5	273.1	276.1	281.0
50°	251.7	251.0	248.0	248.6	248.0	251.0	251.7	253.1	254.8	258.5	263.0
52.5°	234.3	231.7	230.5	230.1	230.5	231.7	234.3	235.6	237.6	241.9	245.2
55°	205.3	202.2	200.8	200.1	200.8	202.2	205.3	207.7	210.4	215.2	218.6
57.5°	176.8	176.0	175.0	175.7	175.0	176.0	176.8	180.8	183.5	187.3	191.4
60°	160.2	160.2	160.2	159.9	160.2	160.2	160.2	163.6	165.9	169.8	174.2
62.5°	147.3	146.5	146.2	146.7	146.2	146.5	147.3	148.8	151.2	153.6	157.5
65°	127.7	127.4	126.0	125.7	126.0	127.4	127.7	128.8	130.8	132.5	135.3
67.5°	109.2	108.0	107.6	107.1	107.6	108.0	109.2	110.1	111.5	113.7	115.0
70°	95.3	94.6	92.6	92.9	92.6	94.6	95.3	97.0	98.4	101.1	102.5
72.5°	80.3	79.5	79.2	78.6	79.2	79.5	80.3	81.9	83.4	86.3	88.5
75°	63.5	63.2	62.9	64.2	62.9	63.2	63.5	63.8	64.2	65.3	66.3
77.5°	50.9	50.9	51.1	50.6	51.1	50.9	50.9	50.9	50.9	51.5	51.6
80°	42.7	42.7	42.4	42.4	42.4	42.7	42.7	42.7	42.7	42.7	42.4
82.5°	34.2	34.5	34.7	34.2	34.7	34.5	34.2	34.8	35.0	34.5	34.7
85°	22.6	22.2	22.9	22.6	22.9	22.2	22.6	22.6	21.8	22.6	22.2
87.5°	15.2	14.8	14.9	15.2	14.9	14.8	15.2	14.6	14.5	14.4	13.9
90°	25.7	26.0	26.5	26.8	26.5	26.0	25.7	25.2	24.7	23.9	23.1
92.5°	29.0	29.2	29.5	29.7	29.5	29.2	29.0	28.8	28.0	26.8	25.5
95°	34.1	34.1	34.1	34.1	34.1	34.1	34.1	34.1	33.3	31.9	30.6
97.5°	36.3	36.5	36.7	36.9	36.7	36.5	36.3	36.1	35.2	33.6	32.0
100°	37.0	37.2	37.5	37.6	37.5	37.2	37.0	36.8	35.9	34.3	32.7
102.5°	37.3	37.6	38.0	38.3	38.0	37.6	37.3	36.9	39.1	44.1	49.0
105°	38.3	38.6	39.0	39.4	39.0	38.6	38.3	37.8	55.2	90.4	125.7
107.5°	203.4	176.9	150.3	123.8	150.3	176.9	203.4	230.0	256.2	282.0	307.8
110°	331.7	303.2	274.7	246.3	274.7	303.2	331.7	360.2	377.6	384.2	390.8



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	440.6	434.6	428.6	422.6	428.6	434.6	440.6	446.6	449.5	449.4	449.3
115°	524.2	525.0	525.8	526.6	525.8	525.0	524.2	523.4	522.1	520.0	518.1
117.5°	584.5	584.7	584.9	585.1	584.9	584.7	584.5	584.4	583.5	581.9	580.3
120°	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	624.4	622.8	621.2
122.5°	664.1	664.2	664.4	664.6	664.4	664.2	664.1	664.0	663.3	662.2	661.0
125°	718.9	719.3	719.7	720.1	719.7	719.3	718.9	718.5	718.1	717.7	717.3
127.5°	774.6	774.3	773.9	773.5	773.9	774.3	774.6	775.1	775.0	774.3	773.6
130°	809.0	808.7	808.2	807.9	808.2	808.7	809.0	809.5	809.2	808.4	807.7
132.5°	841.1	840.5	840.0	839.4	840.0	840.5	841.1	841.6	841.5	840.7	839.9
135°	889.4	888.8	888.1	887.6	888.1	888.8	889.4	889.9	889.9	889.4	888.8
137.5°	934.1	933.7	933.3	932.9	933.3	933.7	934.1	934.5	934.2	933.3	932.3
140°	961.4	960.9	960.6	960.1	960.6	960.9	961.4	961.7	961.5	960.7	959.9
142.5°	986.9	986.3	985.8	985.2	985.8	986.3	986.9	987.4	987.4	986.8	986.1
145°	1023.7	1023.7	1023.7	1023.7	1023.7	1023.7	1023.7	1023.7	1023.5	1023.1	1022.7
147.5°	1055.2	1054.2	1053.3	1052.4	1053.3	1054.2	1055.2	1056.1	1056.3	1055.9	1055.5
150°	1075.7	1075.0	1074.5	1073.9	1074.5	1075.0	1075.7	1076.3	1076.4	1075.9	1075.6
152.5°	1093.8	1092.9	1092.0	1091.1	1092.0	1092.9	1093.8	1094.8	1094.8	1094.1	1093.4
155°	1118.7	1117.5	1116.2	1115.1	1116.2	1117.5	1118.7	1119.8	1120.0	1118.9	1117.9
157.5°	1140.0	1138.4	1136.8	1135.3	1136.8	1138.4	1140.0	1141.5	1141.7	1140.5	1139.3
160°	1152.4	1151.0	1149.6	1148.2	1149.6	1151.0	1152.4	1153.8	1153.9	1152.7	1151.5
162.5°	1164.1	1162.9	1161.6	1160.4	1161.6	1162.9	1164.1	1165.3	1165.3	1164.0	1162.5
165°	1179.3	1177.9	1176.4	1175.1	1176.4	1177.9	1179.3	1180.6	1180.5	1178.9	1177.3
167.5°	1190.4	1188.8	1187.2	1185.6	1187.2	1188.8	1190.4	1192.0	1192.0	1190.4	1188.8
170°	1196.9	1195.2	1193.6	1192.1	1193.6	1195.2	1196.9	1198.5	1198.5	1196.9	1195.2
172.5°	1201.0	1199.2	1197.4	1195.7	1197.4	1199.2	1201.0	1202.7	1202.7	1201.1	1199.6
175°	1205.9	1204.3	1202.7	1201.0	1202.7	1204.3	1205.9	1207.5	1207.6	1206.1	1204.7
177.5°	1207.5	1205.9	1204.3	1202.7	1204.3	1205.9	1207.5	1209.1	1209.2	1207.9	1206.7
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8
2.5°	761.5	765.4	769.2	772.7	778.2	780.6	784.2	785.5	789.6	795.7	800.6
5°	715.2	720.7	727.8	733.6	742.9	750.0	757.9	765.4	774.3	786.9	798.2
7.5°	675.9	681.3	689.9	700.7	710.9	721.0	731.8	742.0	754.7	772.8	790.8
10°	650.0	656.5	666.7	678.3	690.9	700.9	713.5	726.5	742.2	763.0	784.5
12.5°	627.6	632.4	644.3	655.3	669.6	682.2	694.6	709.8	727.7	749.9	775.8
15°	591.9	598.7	610.4	622.6	637.7	650.9	667.0	685.5	702.9	730.2	761.6
17.5°	556.1	566.5	578.5	592.5	603.6	622.0	639.4	658.3	679.8	708.7	743.2
20°	533.2	541.4	552.6	572.7	587.5	601.5	617.5	641.1	660.8	693.7	729.5
22.5°	513.7	519.8	532.4	549.0	566.1	582.3	598.7	621.2	645.6	676.7	715.6
25°	485.0	494.5	504.1	516.0	534.5	554.0	571.8	590.8	616.8	650.0	692.0
27.5°	456.9	465.6	475.0	489.7	503.7	521.9	540.5	562.4	590.2	625.3	667.9
30°	438.9	445.4	454.2	473.1	485.7	501.4	523.3	542.7	568.6	605.9	650.9
32.5°	420.3	428.7	438.4	452.8	468.4	483.3	503.3	524.4	550.9	587.5	633.7
35°	393.8	403.7	413.6	424.2	439.9	455.3	472.0	495.3	522.2	557.8	603.2
37.5°	369.4	377.4	385.5	398.6	413.5	428.1	443.7	466.6	492.0	530.4	572.0
40°	353.8	361.1	367.1	380.8	395.2	410.9	426.2	446.4	473.7	509.6	549.9
42.5°	336.9	343.5	351.9	363.0	378.5	391.7	407.2	426.1	451.8	488.3	523.6
45°	311.5	319.0	326.2	336.8	352.1	365.1	378.8	396.9	423.2	453.3	484.6
47.5°	285.1	292.6	300.8	311.0	324.4	337.6	351.2	367.3	391.3	420.8	441.9
50°	268.1	274.3	282.5	292.7	305.0	319.0	331.3	348.7	371.6	394.8	413.3
52.5°	250.7	256.2	265.6	276.3	287.8	299.9	313.0	328.0	348.7	370.5	385.1
55°	223.4	230.2	238.1	248.6	259.9	270.2	282.8	298.2	314.6	330.9	340.9
57.5°	197.9	203.6	210.2	221.1	230.9	243.1	254.4	266.4	281.6	293.9	300.4
60°	179.3	184.4	193.0	202.5	211.8	222.3	235.3	247.3	258.9	268.8	273.9
62.5°	161.8	167.7	175.2	184.0	194.0	204.0	215.3	225.4	235.7	244.2	247.7
65°	139.0	143.8	149.3	157.5	165.7	175.9	184.8	195.0	202.5	207.3	210.4
67.5°	118.2	121.4	125.6	131.0	139.1	148.0	156.7	164.6	170.9	174.2	176.9
70°	104.9	106.9	109.9	115.5	121.6	129.5	138.3	144.1	149.6	152.3	155.1
72.5°	91.5	94.1	96.8	101.2	106.3	112.0	118.4	125.6	128.6	131.8	133.5
75°	69.4	73.1	76.9	79.5	83.0	87.5	93.3	97.6	99.4	102.1	102.5
77.5°	52.3	53.1	55.9	59.3	62.2	65.4	69.0	73.0	73.8	75.3	76.2
80°	43.1	43.1	43.1	45.1	48.5	50.9	54.3	56.4	57.7	58.1	58.4
82.5°	34.6	34.6	34.3	34.7	35.9	37.2	40.4	42.7	43.8	43.6	42.8
85°	22.6	21.8	21.8	21.5	21.8	21.1	20.9	22.2	24.3	24.3	23.5
87.5°	13.7	13.3	13.1	12.3	11.5	10.7	9.5	9.3	8.9	9.6	8.9
90°	22.3	21.5	18.9	16.3	13.7	11.1	8.8	6.9	4.9	2.9	0.9
92.5°	24.2	22.9	21.0	19.0	17.1	15.2	14.4	15.0	15.5	16.1	16.7
95°	29.2	27.7	25.6	23.4	21.2	19.0	22.0	30.1	38.3	46.5	54.7
97.5°	30.4	28.8	43.2	57.5	71.9	86.1	95.1	98.8	102.5	106.1	109.8
100°	31.1	29.5	60.6	91.7	122.7	153.7	167.3	163.3	159.3	155.3	151.3
102.5°	54.0	58.9	92.8	126.8	160.7	194.6	210.1	207.2	204.4	201.5	198.7
105°	161.0	196.2	214.1	231.9	249.9	267.8	275.6	273.5	271.3	269.1	266.9
107.5°	333.7	359.5	356.7	353.8	351.1	348.2	345.9	344.2	342.4	340.6	338.9
110°	397.3	403.9	401.7	399.6	397.3	395.2	393.2	391.7	390.1	388.5	386.9



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	449.2	449.1	446.9	444.7	442.5	440.3	438.5	437.1	435.6	434.2	432.7
115°	516.1	514.1	512.3	510.5	508.7	506.9	505.4	504.3	503.0	501.9	500.7
117.5°	578.7	577.1	576.2	575.3	574.4	573.5	572.3	570.8	569.4	567.8	566.4
120°	619.6	618.0	617.4	616.8	616.2	615.6	614.4	612.6	610.8	609.0	607.3
122.5°	660.0	658.8	658.1	657.3	656.6	655.8	654.7	653.2	651.8	650.2	648.8
125°	716.9	716.5	715.7	714.9	714.1	713.4	712.1	710.5	708.9	707.4	705.8
127.5°	773.0	772.4	771.4	770.5	769.5	768.6	767.3	765.7	764.1	762.5	760.9
130°	806.9	806.1	805.3	804.5	803.7	802.9	801.7	800.1	798.5	796.9	795.3
132.5°	839.1	838.3	837.7	837.0	836.4	835.8	834.6	833.0	831.4	829.9	828.3
135°	888.1	887.6	886.8	886.0	885.2	884.4	883.4	882.2	881.0	879.9	878.6
137.5°	931.3	930.4	930.0	929.5	929.1	928.6	927.6	926.1	924.6	923.1	921.6
140°	959.1	958.3	957.7	957.2	956.5	955.9	955.0	953.9	952.7	951.5	950.3
142.5°	985.5	984.8	984.3	983.6	983.0	982.5	981.6	980.3	979.2	977.9	976.8
145°	1022.3	1021.9	1021.5	1021.1	1020.7	1020.3	1019.4	1018.1	1016.6	1015.2	1013.9
147.5°	1055.1	1054.7	1054.3	1053.9	1053.5	1053.1	1052.5	1051.5	1050.6	1049.7	1048.8
150°	1075.1	1074.8	1074.3	1074.0	1073.5	1073.2	1072.6	1072.1	1071.5	1070.9	1070.3
152.5°	1092.7	1092.0	1091.7	1091.5	1091.3	1091.0	1090.7	1090.5	1090.2	1089.9	1089.7
155°	1117.0	1116.0	1115.8	1115.5	1115.4	1115.2	1115.3	1115.7	1116.1	1116.4	1116.9
157.5°	1138.1	1136.9	1137.1	1137.3	1137.6	1137.7	1137.8	1137.9	1137.9	1138.0	1138.0
160°	1150.3	1149.1	1149.3	1149.5	1149.7	1149.9	1150.1	1150.3	1150.5	1150.7	1150.9
162.5°	1161.2	1159.8	1160.0	1160.3	1160.5	1160.7	1161.0	1161.5	1162.1	1162.5	1163.1
165°	1175.8	1174.2	1174.4	1174.6	1174.7	1175.0	1175.4	1176.0	1176.6	1177.1	1177.8
167.5°	1187.2	1185.6	1185.6	1185.6	1185.6	1185.6	1186.1	1186.9	1187.7	1188.5	1189.2
170°	1193.6	1192.1	1192.1	1192.1	1192.1	1192.1	1192.5	1193.3	1194.1	1194.9	1195.7
172.5°	1198.0	1196.4	1196.2	1196.1	1195.9	1195.8	1196.1	1197.1	1198.1	1199.0	1200.0
175°	1203.4	1201.9	1201.8	1201.6	1201.3	1201.1	1201.6	1202.6	1203.5	1204.5	1205.5
177.5°	1205.4	1204.1	1203.9	1203.8	1203.6	1203.5	1203.8	1204.6	1205.4	1206.1	1206.9
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8	797.8
2.5°	802.2	805.2	809.0	814.8	819.1	823.0	823.8	824.9	827.6	832.2	835.8
5°	807.4	815.3	827.9	840.2	853.5	864.4	874.7	881.9	888.7	903.0	914.6
7.5°	805.7	823.2	843.0	865.1	887.4	909.1	929.2	947.2	965.1	986.0	1009.8
10°	804.7	825.2	851.8	880.1	911.2	941.6	971.0	993.9	1020.6	1044.5	1074.9
12.5°	799.5	829.0	860.9	897.1	935.3	970.4	1009.0	1040.6	1071.0	1105.6	1140.9
15°	792.7	828.6	868.9	917.0	975.1	1017.4	1057.0	1112.1	1149.6	1187.2	1237.8
17.5°	780.3	824.1	874.5	937.0	985.5	1042.4	1102.0	1145.5	1196.1	1249.0	1294.8
20°	770.5	821.4	877.8	939.2	1001.0	1062.9	1120.6	1172.5	1224.8	1285.9	1323.5
22.5°	760.7	811.0	869.6	934.9	1001.3	1066.4	1131.8	1192.8	1251.5	1313.2	1361.2
25°	739.8	799.5	863.1	929.7	995.2	1066.9	1144.9	1212.8	1285.6	1349.1	1394.5
27.5°	718.6	773.4	836.6	904.2	977.0	1061.8	1153.4	1230.7	1303.6	1349.1	1363.3
30°	699.5	757.5	815.6	884.2	963.1	1057.7	1155.1	1243.6	1303.3	1323.1	1308.4
32.5°	680.1	732.7	790.2	860.5	944.3	1047.7	1157.3	1235.9	1271.9	1256.8	1196.9
35°	645.9	693.3	749.0	819.4	915.7	1042.1	1148.3	1201.6	1192.7	1107.2	994.5
37.5°	609.2	647.9	699.5	773.0	886.0	1019.8	1109.5	1117.3	1040.4	909.4	779.2
40°	580.2	615.1	668.1	744.9	863.1	998.0	1070.4	1038.7	919.4	773.6	664.9
42.5°	552.1	581.5	632.5	715.4	841.2	968.2	1012.2	943.0	805.5	667.5	568.8
45°	504.4	532.1	583.4	668.4	796.5	911.2	905.4	785.2	647.6	536.5	454.6
47.5°	459.2	483.4	531.5	618.3	744.0	825.8	771.5	643.6	526.8	437.8	379.3
50°	427.3	451.2	499.0	584.7	701.9	761.6	684.1	560.8	453.9	380.1	333.7
52.5°	396.6	420.0	463.8	547.2	651.0	686.8	603.5	489.2	400.1	336.4	296.5
55°	353.8	371.6	410.9	490.8	568.3	576.5	492.1	396.5	323.1	278.7	251.4
57.5°	310.2	325.5	364.3	427.9	482.3	478.0	398.1	315.4	265.9	232.9	213.1
60°	281.8	296.8	330.9	385.6	426.6	412.2	338.9	272.2	229.9	205.6	189.9
62.5°	255.3	267.0	299.0	338.9	368.4	352.1	289.6	234.5	200.9	180.5	168.0
65°	216.9	226.4	252.1	272.9	289.3	273.6	221.7	183.4	159.2	144.8	136.3
67.5°	180.4	186.5	202.7	210.2	221.8	204.6	166.7	141.1	127.2	115.2	109.2
70°	157.5	161.9	170.4	176.6	179.7	161.9	133.8	115.1	103.5	95.0	91.2
72.5°	134.5	138.4	140.1	145.2	143.6	126.9	107.6	92.7	84.4	78.6	73.7
75°	102.8	104.5	102.8	100.8	96.3	84.7	71.4	63.8	57.7	55.0	53.3
77.5°	74.9	74.4	72.1	68.8	61.3	53.9	46.8	44.2	41.6	40.1	39.6
80°	57.7	56.4	54.3	49.2	42.7	37.5	35.8	34.2	33.2	31.4	31.1
82.5°	43.0	42.2	38.7	34.4	29.9	27.5	26.0	25.4	24.3	23.5	23.5
85°	22.9	21.8	18.1	15.7	15.1	14.4	14.0	14.0	12.7	12.3	12.3
87.5°	7.9	6.7	6.9	6.4	6.9	6.9	7.7	7.6	7.8	8.3	7.9
90°	2.9	4.9	6.9	8.8	11.1	13.7	16.3	18.9	21.5	22.3	23.1
92.5°	16.1	15.5	15.0	14.4	15.2	17.1	19.0	21.0	22.9	24.2	25.5
95°	46.5	38.3	30.1	22.0	19.0	21.2	23.4	25.6	27.7	29.2	30.6
97.5°	106.1	102.5	98.8	95.1	86.1	71.9	57.5	43.2	28.8	30.4	32.0
100°	155.3	159.3	163.3	167.3	153.7	122.7	91.7	60.6	29.5	31.1	32.7
102.5°	201.5	204.4	207.2	210.1	194.6	160.7	126.8	92.8	58.9	54.0	49.0
105°	269.1	271.3	273.5	275.6	267.8	249.9	231.9	214.1	196.2	161.0	125.7
107.5°	340.6	342.4	344.2	345.9	348.2	351.1	353.8	356.7	359.5	333.7	307.8
110°	388.5	390.1	391.7	393.2	395.2	397.3	399.6	401.7	403.9	397.3	390.8



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	434.2	435.6	437.1	438.5	440.3	442.5	444.7	446.9	449.1	449.2	449.3
115°	501.9	503.0	504.3	505.4	506.9	508.7	510.5	512.3	514.1	516.1	518.1
117.5°	567.8	569.4	570.8	572.3	573.5	574.4	575.3	576.2	577.1	578.7	580.3
120°	609.0	610.8	612.6	614.4	615.6	616.2	616.8	617.4	618.0	619.6	621.2
122.5°	650.2	651.8	653.2	654.7	655.8	656.6	657.3	658.1	658.8	660.0	661.0
125°	707.4	708.9	710.5	712.1	713.4	714.1	714.9	715.7	716.5	716.9	717.3
127.5°	762.5	764.1	765.7	767.3	768.6	769.5	770.5	771.4	772.4	773.0	773.6
130°	796.9	798.5	800.1	801.7	802.9	803.7	804.5	805.3	806.1	806.9	807.7
132.5°	829.9	831.4	833.0	834.6	835.8	836.4	837.0	837.7	838.3	839.1	839.9
135°	879.9	881.0	882.2	883.4	884.4	885.2	886.0	886.8	887.6	888.1	888.8
137.5°	923.1	924.6	926.1	927.6	928.6	929.1	929.5	930.0	930.4	931.3	932.3
140°	951.5	952.7	953.9	955.0	955.9	956.5	957.2	957.7	958.3	959.1	959.9
142.5°	977.9	979.2	980.3	981.6	982.5	983.0	983.6	984.3	984.8	985.5	986.1
145°	1015.2	1016.6	1018.1	1019.4	1020.3	1020.7	1021.1	1021.5	1021.9	1022.3	1022.7
147.5°	1049.7	1050.6	1051.5	1052.5	1053.1	1053.5	1053.9	1054.3	1054.7	1055.1	1055.5
150°	1070.9	1071.5	1072.1	1072.6	1073.2	1073.5	1074.0	1074.3	1074.8	1075.1	1075.6
152.5°	1089.9	1090.2	1090.5	1090.7	1091.0	1091.3	1091.5	1091.7	1092.0	1092.7	1093.4
155°	1116.4	1116.1	1115.7	1115.3	1115.2	1115.4	1115.5	1115.8	1116.0	1117.0	1117.9
157.5°	1138.0	1137.9	1137.9	1137.8	1137.7	1137.6	1137.3	1137.1	1136.9	1138.1	1139.3
160°	1150.7	1150.5	1150.3	1150.1	1149.9	1149.7	1149.5	1149.3	1149.1	1150.3	1151.5
162.5°	1162.5	1162.1	1161.5	1161.0	1160.7	1160.5	1160.3	1160.0	1159.8	1161.2	1162.5
165°	1177.1	1176.6	1176.0	1175.4	1175.0	1174.7	1174.6	1174.4	1174.2	1175.8	1177.3
167.5°	1188.5	1187.7	1186.9	1186.1	1185.6	1185.6	1185.6	1185.6	1185.6	1187.2	1188.8
170°	1194.9	1194.1	1193.3	1192.5	1192.1	1192.1	1192.1	1192.1	1192.1	1193.6	1195.2
172.5°	1199.0	1198.1	1197.1	1196.1	1195.8	1195.9	1196.1	1196.2	1196.4	1198.0	1199.6
175°	1204.5	1203.5	1202.6	1201.6	1201.1	1201.3	1201.6	1201.8	1201.9	1203.4	1204.7
177.5°	1206.1	1205.4	1204.6	1203.8	1203.5	1203.6	1203.8	1203.9	1204.1	1205.4	1206.7
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	797.8	797.8	797.8	797.8	797.8	797.8	797.8
2.5°	841.6	841.6	842.7	846.8	847.3	850.9	849.7
5°	924.9	931.4	933.8	944.1	950.2	952.9	947.4
7.5°	1026.8	1045.1	1053.8	1064.5	1074.0	1076.9	1069.4
10°	1101.2	1120.3	1136.3	1146.2	1155.5	1161.5	1169.5
12.5°	1173.0	1196.5	1211.7	1225.7	1235.2	1243.0	1244.3
15°	1251.1	1286.6	1313.6	1333.4	1343.3	1348.4	1346.4
17.5°	1329.8	1362.7	1382.0	1402.1	1415.9	1416.6	1417.0
20°	1374.4	1406.5	1428.7	1443.7	1459.1	1458.4	1461.8
22.5°	1404.2	1429.4	1446.4	1457.3	1462.6	1460.0	1460.7
25°	1418.1	1425.6	1422.5	1405.1	1400.7	1384.6	1387.3
27.5°	1346.2	1310.7	1274.0	1226.6	1189.4	1159.6	1161.1
30°	1248.7	1185.8	1114.1	1054.0	1000.1	985.0	952.9
32.5°	1112.3	1018.1	934.1	878.1	831.7	819.1	791.1
35°	881.2	789.6	703.2	651.3	630.8	602.2	601.8
37.5°	684.9	604.3	558.7	519.7	499.3	481.9	480.2
40°	576.2	513.4	478.8	450.8	430.7	417.7	414.6
42.5°	500.2	449.4	417.1	399.8	384.2	377.6	372.6
45°	408.5	374.3	351.8	336.1	328.9	323.8	321.0
47.5°	341.7	318.8	303.4	293.0	287.1	281.8	283.2
50°	305.3	286.6	275.3	265.4	260.9	257.2	257.5
52.5°	276.1	259.2	250.1	243.0	237.5	234.8	233.4
55°	234.3	223.7	214.5	209.4	206.3	202.5	201.5
57.5°	199.8	191.6	184.1	178.3	177.6	174.0	174.4
60°	176.9	170.0	163.9	160.9	158.5	155.4	156.4
62.5°	158.1	152.3	146.7	144.2	141.8	139.6	140.0
65°	129.5	123.9	120.6	119.2	118.2	117.2	116.1
67.5°	103.2	99.8	97.6	94.7	92.6	92.3	91.2
70°	86.8	82.3	78.6	74.8	73.7	73.4	73.7
72.5°	69.6	66.7	65.7	63.8	63.7	62.8	63.4
75°	52.3	51.3	50.6	49.2	49.2	49.2	49.2
77.5°	38.5	37.9	37.5	37.2	36.9	36.4	36.4
80°	30.1	29.7	29.1	29.1	28.7	29.1	28.7
82.5°	22.6	22.6	21.9	21.9	21.6	21.4	21.6
85°	11.6	11.2	11.9	11.2	11.6	11.0	11.6
87.5°	8.0	8.2	8.0	8.1	7.9	8.6	8.1
90°	23.9	24.7	25.2	25.7	26.0	26.5	26.8
92.5°	26.8	28.0	28.8	29.0	29.2	29.5	29.7
95°	31.9	33.3	34.1	34.1	34.1	34.1	34.1
97.5°	33.6	35.2	36.1	36.3	36.5	36.7	36.9
100°	34.3	35.9	36.8	37.0	37.2	37.5	37.6
102.5°	44.1	39.1	36.9	37.3	37.6	38.0	38.3
105°	90.4	55.2	37.8	38.3	38.6	39.0	39.4
107.5°	282.0	256.2	230.0	203.4	176.9	150.3	123.8
110°	384.2	377.6	360.2	331.7	303.2	274.7	246.3



TEST NUMBER: P332418-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	449.4	449.5	446.6	440.6	434.6	428.6	422.6
115°	520.0	522.1	523.4	524.2	525.0	525.8	526.6
117.5°	581.9	583.5	584.4	584.5	584.7	584.9	585.1
120°	622.8	624.4	625.2	625.2	625.2	625.2	625.2
122.5°	662.2	663.3	664.0	664.1	664.2	664.4	664.6
125°	717.7	718.1	718.5	718.9	719.3	719.7	720.1
127.5°	774.3	775.0	775.1	774.6	774.3	773.9	773.5
130°	808.4	809.2	809.5	809.0	808.7	808.2	807.9
132.5°	840.7	841.5	841.6	841.1	840.5	840.0	839.4
135°	889.4	889.9	889.9	889.4	888.8	888.1	887.6
137.5°	933.3	934.2	934.5	934.1	933.7	933.3	932.9
140°	960.7	961.5	961.7	961.4	960.9	960.6	960.1
142.5°	986.8	987.4	987.4	986.9	986.3	985.8	985.2
145°	1023.1	1023.5	1023.7	1023.7	1023.7	1023.7	1023.7
147.5°	1055.9	1056.3	1056.1	1055.2	1054.2	1053.3	1052.4
150°	1075.9	1076.4	1076.3	1075.7	1075.0	1074.5	1073.9
152.5°	1094.1	1094.8	1094.8	1093.8	1092.9	1092.0	1091.1
155°	1118.9	1120.0	1119.8	1118.7	1117.5	1116.2	1115.1
157.5°	1140.5	1141.7	1141.5	1140.0	1138.4	1136.8	1135.3
160°	1152.7	1153.9	1153.8	1152.4	1151.0	1149.6	1148.2
162.5°	1164.0	1165.3	1165.3	1164.1	1162.9	1161.6	1160.4
165°	1178.9	1180.5	1180.6	1179.3	1177.9	1176.4	1175.1
167.5°	1190.4	1192.0	1192.0	1190.4	1188.8	1187.2	1185.6
170°	1196.9	1198.5	1198.5	1196.9	1195.2	1193.6	1192.1
172.5°	1201.1	1202.7	1202.7	1201.0	1199.2	1197.4	1195.7
175°	1206.1	1207.6	1207.5	1205.9	1204.3	1202.7	1201.0
177.5°	1207.9	1209.2	1209.1	1207.5	1205.9	1204.3	1202.7
180°	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5	1205.5

(END OF REPORT)