

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332421-940

Luminaire Tested: **S123RDIW-S560D1030U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332421-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S560D1030U940-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1030 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5092.4 lumens
Efficiency: N/A
Efficacy: 112.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332421-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

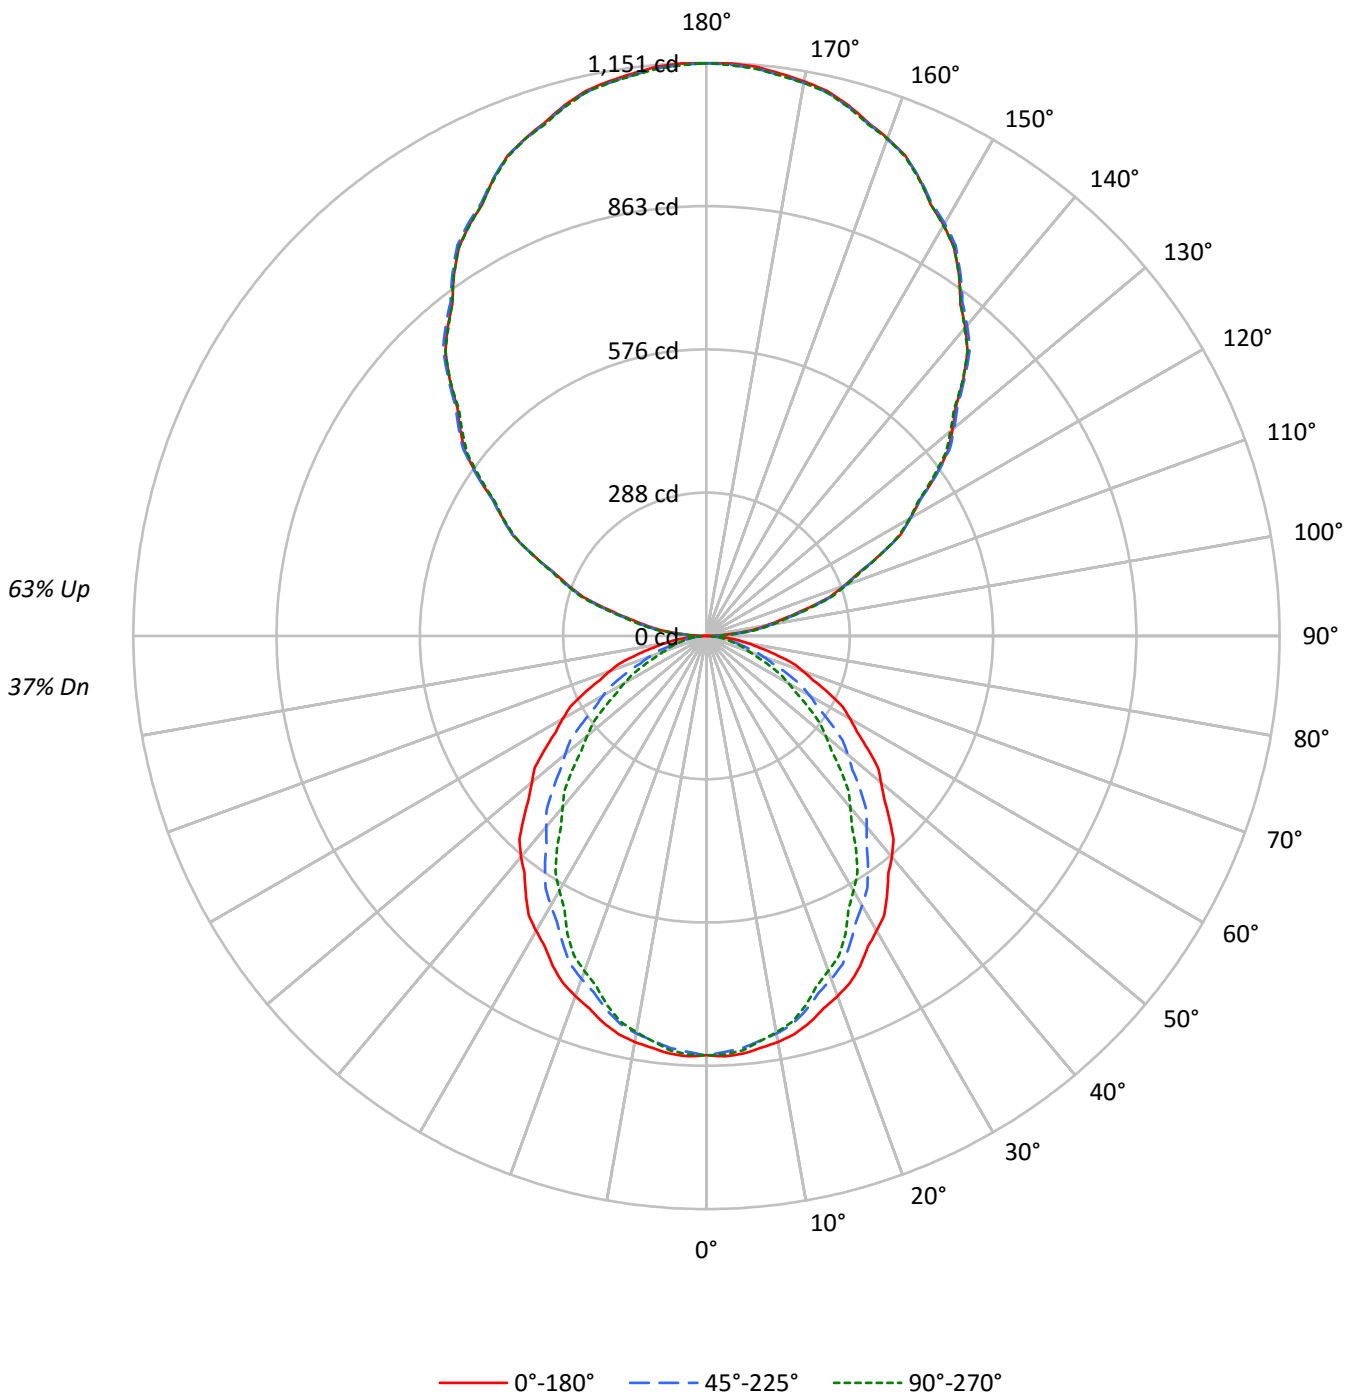



TEST NUMBER: P332421-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45	37
1	95	91	87	84	86	83	80	77	67	65	63	53	51	50	40	39	38	32
2	87	80	74	69	79	73	68	63	59	56	53	47	44	42	35	34	32	27
3	79	70	63	58	72	64	58	53	52	48	44	41	38	36	31	29	28	23
4	73	62	55	49	66	57	50	45	47	42	38	37	34	31	28	26	24	20
5	67	55	48	42	60	51	44	39	42	37	33	33	30	27	25	23	21	18
6	61	50	42	36	56	46	39	34	38	32	29	30	26	24	23	21	19	16
7	57	45	37	32	51	41	34	30	34	29	25	27	24	21	21	19	17	14
8	53	41	33	28	48	37	31	26	31	26	22	25	21	19	20	17	15	13
9	49	37	30	25	44	34	28	23	28	24	20	23	19	17	18	15	14	11
10	46	34	27	22	42	31	25	21	26	21	18	21	18	15	17	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9065	9065	9065
5°	9100	8975	9027
10°	9049	8862	8833
15°	8952	8655	8564
20°	8818	8395	8200
25°	8679	8105	7845
30°	8499	7768	7343
35°	8311	7432	6884
40°	8140	7035	6315
45°	7913	6645	5801
50°	7663	6199	5228
55°	7409	5692	4692
60°	7175	5147	4103
65°	6872	4559	3512
70°	6493	3827	2839
75°	5939	3011	2670
80°	5294	2672	2455
85°	4471	2359	2186



TEST NUMBER: P332421-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.1	1.6
10°-20°	220.1	4.3
20°-30°	316.9	6.2
30°-40°	356.9	7.0
40°-50°	341.4	6.7
50°-60°	279.6	5.5
60°-70°	188.7	3.7
70°-80°	94.9	1.9
80°-90°	28.5	0.6
90°-100°	74.9	1.5
100°-110°	224.2	4.4
110°-120°	381.4	7.5
120°-130°	501.7	9.9
130°-140°	563.9	11.1
140°-150°	554.3	10.9
150°-160°	466.6	9.2
160°-170°	310.6	6.1
170°-180°	108.8	2.1
0°-30°	616.0	12.1
0°-40°	972.9	19.1
0°-60°	1594.0	31.3
0°-90°	1906.0	37.4
90°-120°	680.6	13.4
90°-150°	2300.3	45.2
90°-180°	3186.0	62.6
0°-180°	5092.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	842	842	842	842	842	
5°	842	839	831	836	835	80
15°	803	795	777	773	768	226
25°	731	713	682	668	660	336
35°	632	607	566	537	524	396
45°	520	488	436	399	381	401
55°	395	360	303	265	250	354
65°	270	231	179	147	138	267
75°	143	110	72	66	64	152
85°	36	22	19	18	18	41
90°	1	10	22	25	27	5
95°	53	60	67	70	70	60
105°	203	205	213	213	215	218
115°	384	386	385	386	385	380
125°	562	564	563	559	556	501
135°	729	734	734	730	728	562
145°	884	886	889	888	884	552
155°	1013	1013	1014	1017	1011	466
165°	1103	1100	1100	1105	1100	311
175°	1147	1144	1144	1148	1143	109
180°	1150	1150	1150	1150	1150	



TEST NUMBER: P332421-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.2
2.5°	845.0	844.5	844.0	843.5	843.0	842.0	840.6	839.1	837.7	836.2	837.6
5°	842.2	841.5	840.7	840.0	839.2	837.9	836.1	834.3	832.4	830.6	832.0
7.5°	834.5	833.7	832.8	832.0	831.2	829.6	827.2	824.8	822.4	820.1	820.8
10°	827.9	826.8	825.7	824.7	823.7	821.7	819.0	816.3	813.5	810.8	810.9
12.5°	818.6	817.4	816.2	815.0	813.9	811.6	808.2	804.9	801.6	798.3	798.2
15°	803.3	801.6	800.0	798.3	796.7	793.6	789.4	785.2	780.9	776.7	775.9
17.5°	784.0	782.1	780.2	778.2	776.2	772.6	767.1	761.8	756.3	751.0	749.4
20°	769.8	767.4	765.0	762.5	760.1	756.0	750.2	744.5	738.7	732.9	730.9
22.5°	753.9	751.2	748.4	745.6	742.8	738.3	732.2	726.0	720.0	713.8	711.3
25°	730.8	727.1	723.3	719.5	715.7	710.3	703.3	696.3	689.4	682.4	679.2
27.5°	702.8	698.7	694.5	690.3	686.1	680.1	672.3	664.6	656.8	649.1	644.6
30°	683.8	679.2	674.7	670.1	665.6	659.0	650.5	642.0	633.5	625.0	619.8
32.5°	664.6	659.5	654.3	649.2	644.0	636.9	627.9	618.9	609.9	600.9	595.3
35°	632.5	627.1	621.6	616.2	610.6	603.2	593.8	584.4	575.0	565.6	559.0
37.5°	600.0	594.0	587.9	581.8	575.7	567.7	557.6	547.6	537.5	527.4	520.0
40°	579.3	572.6	565.9	559.2	552.5	543.8	533.1	522.3	511.5	500.7	492.8
42.5°	555.7	549.0	542.4	535.7	529.1	520.1	509.0	497.8	486.7	475.5	466.9
45°	519.8	513.0	506.1	499.4	492.5	483.2	471.5	459.9	448.2	436.5	427.8
47.5°	483.8	476.4	468.9	461.4	453.9	444.3	432.6	420.9	409.2	397.5	388.2
50°	457.6	450.5	443.4	436.2	429.1	419.4	407.1	394.8	382.5	370.2	360.8
52.5°	434.2	426.4	418.7	410.9	403.2	393.2	381.0	368.9	356.7	344.6	334.7
55°	394.8	387.4	380.0	372.5	365.1	354.9	342.0	329.1	316.2	303.3	294.4
57.5°	358.5	350.4	342.2	334.1	326.0	315.5	302.6	289.6	276.6	263.7	255.4
60°	333.3	325.0	316.6	308.3	300.0	289.4	276.9	264.3	251.6	239.1	230.9
62.5°	308.2	299.9	291.5	283.1	274.8	264.3	251.7	239.2	226.5	213.9	206.3
65°	269.8	261.4	253.2	244.8	236.4	226.3	214.5	202.7	190.8	179.0	171.6
67.5°	231.4	223.0	214.5	206.1	197.7	187.8	176.4	165.1	153.7	142.3	136.8
70°	206.3	198.0	189.9	181.7	173.5	164.1	153.5	142.9	132.2	121.6	116.3
72.5°	181.1	173.1	165.0	156.9	148.8	140.0	130.4	120.6	111.0	101.4	97.0
75°	142.8	135.5	128.2	120.9	113.6	105.8	97.5	89.1	80.8	72.4	70.9
77.5°	107.8	101.2	94.6	88.0	81.4	75.4	70.1	64.7	59.3	53.9	53.1
80°	85.4	79.2	72.9	66.7	60.5	55.8	52.6	49.4	46.2	43.1	42.5
82.5°	64.1	58.7	53.3	48.0	42.5	39.1	37.6	36.2	34.7	33.2	32.7
85°	36.2	32.9	29.5	26.2	22.8	21.0	20.5	20.1	19.6	19.1	18.8
87.5°	13.3	12.4	11.4	10.5	9.5	9.4	9.9	10.4	10.9	11.4	11.5
90°	0.9	2.9	4.9	7.0	8.9	11.2	13.8	16.5	19.1	21.7	22.5
92.5°	21.8	23.2	24.6	25.9	27.3	28.7	30.2	31.7	33.2	34.7	35.3
95°	53.3	54.7	56.1	57.5	58.9	60.5	62.1	63.7	65.3	66.9	67.7
97.5°	94.7	95.7	96.8	97.8	98.9	100.0	101.1	102.3	103.4	104.6	105.6
100°	122.9	124.0	125.3	126.4	127.7	128.8	129.8	130.8	131.8	132.8	133.4
102.5°	155.4	156.1	156.9	157.6	158.3	159.3	160.6	161.9	163.3	164.6	165.2
105°	203.3	203.7	204.1	204.5	204.9	206.0	207.8	209.6	211.4	213.2	213.2
107.5°	259.0	259.1	259.4	259.7	259.8	260.4	261.1	261.8	262.5	263.2	263.9
110°	293.6	294.0	294.4	294.8	295.2	295.6	296.0	296.4	296.9	297.2	298.0



TEST NUMBER: P332421-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	329.8	330.0	330.2	330.5	330.7	330.8	330.9	331.0	331.1	331.2	332.2
115°	384.0	384.5	385.1	385.8	386.4	386.5	386.0	385.7	385.2	384.9	385.0
117.5°	438.5	438.9	439.3	439.7	440.1	440.1	439.5	439.0	438.5	438.0	437.9
120°	472.5	473.7	474.9	476.1	477.3	477.4	476.4	475.4	474.4	473.4	473.1
122.5°	507.9	508.8	509.7	510.5	511.4	511.6	511.1	510.6	510.1	509.5	509.0
125°	562.0	562.5	563.1	563.7	564.4	564.5	564.0	563.7	563.2	562.8	562.0
127.5°	611.8	613.1	614.4	615.6	616.9	617.3	616.9	616.4	616.0	615.5	614.5
130°	645.1	646.7	648.3	649.9	651.5	651.9	651.4	650.8	650.1	649.5	648.7
132.5°	678.2	679.8	681.4	683.1	684.7	685.3	684.8	684.4	683.9	683.5	682.5
135°	729.1	730.2	731.5	732.6	733.9	734.3	734.1	734.0	733.8	733.5	732.7
137.5°	776.1	777.0	778.0	779.0	780.1	780.8	781.3	781.9	782.4	782.9	782.0
140°	808.5	809.6	810.6	811.5	812.5	813.2	813.3	813.6	813.8	814.0	813.8
142.5°	838.2	839.2	840.2	841.2	842.2	842.8	843.2	843.6	844.0	844.4	844.1
145°	884.4	884.8	885.2	885.6	886.0	886.5	887.2	887.8	888.3	888.9	888.8
147.5°	924.9	925.6	926.3	927.1	927.8	928.4	929.0	929.6	930.1	930.7	930.7
150°	953.1	953.5	953.9	954.3	954.7	955.1	955.5	955.9	956.3	956.7	956.7
152.5°	976.2	976.8	977.3	977.9	978.5	978.8	979.1	979.4	979.6	979.8	980.2
155°	1012.7	1012.7	1012.7	1012.7	1012.7	1012.8	1013.0	1013.3	1013.4	1013.6	1014.4
157.5°	1043.8	1043.6	1043.3	1043.0	1042.9	1042.8	1042.9	1043.1	1043.3	1043.4	1044.3
160°	1063.3	1062.9	1062.5	1062.1	1061.7	1061.5	1061.5	1061.5	1061.5	1061.5	1062.5
162.5°	1080.7	1080.1	1079.5	1079.0	1078.4	1078.2	1078.3	1078.5	1078.7	1078.9	1079.9
165°	1103.0	1102.4	1101.9	1101.3	1100.6	1100.4	1100.4	1100.4	1100.4	1100.4	1101.5
167.5°	1121.0	1120.2	1119.4	1118.6	1117.8	1117.4	1117.6	1117.8	1117.9	1118.0	1119.3
170°	1131.0	1130.2	1129.4	1128.6	1127.8	1127.5	1127.5	1127.5	1127.5	1127.5	1128.8
172.5°	1139.0	1138.2	1137.4	1136.6	1135.8	1135.4	1135.4	1135.4	1135.4	1135.4	1136.7
175°	1147.4	1146.6	1145.8	1145.0	1144.2	1143.7	1143.7	1143.7	1143.7	1143.7	1145.0
177.5°	1150.8	1150.1	1149.5	1148.8	1148.2	1147.9	1147.9	1147.9	1147.9	1147.9	1148.8
180°	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0



TEST NUMBER: P332421-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.2
2.5°	838.9	840.3	841.6	842.1	841.9	841.6	841.4	841.2
5°	833.3	834.7	836.1	836.6	836.3	836.0	835.7	835.4
7.5°	821.6	822.3	823.1	823.2	822.7	822.2	821.7	821.2
10°	811.1	811.3	811.4	811.1	810.4	809.6	808.9	808.1
12.5°	798.1	798.0	797.9	797.4	796.5	795.6	794.8	793.9
15°	775.2	774.4	773.6	772.7	771.6	770.6	769.5	768.5
17.5°	747.8	746.2	744.5	743.0	741.4	739.8	738.2	736.6
20°	729.0	727.0	725.1	723.2	721.3	719.5	717.6	715.9
22.5°	708.9	706.4	704.0	701.9	700.2	698.5	696.8	695.1
25°	676.0	672.8	669.7	667.2	665.6	663.9	662.2	660.5
27.5°	640.2	635.8	631.3	627.9	625.3	622.8	620.2	617.6
30°	614.7	609.5	604.4	600.6	598.2	595.8	593.3	590.8
32.5°	589.7	584.0	578.4	574.3	571.8	569.2	566.6	564.1
35°	552.5	546.0	539.5	534.8	532.1	529.4	526.6	523.9
37.5°	512.6	505.2	497.8	492.5	489.1	485.7	482.3	478.9
40°	484.9	477.0	469.1	463.4	459.9	456.5	453.0	449.4
42.5°	458.3	449.7	441.0	435.2	432.0	428.9	425.8	422.7
45°	419.2	410.5	401.9	395.7	392.1	388.4	384.8	381.1
47.5°	378.7	369.3	359.9	353.6	350.4	347.1	343.8	340.5
50°	351.4	342.0	332.6	326.1	322.6	319.1	315.7	312.2
52.5°	325.0	315.2	305.4	299.0	295.9	292.7	289.6	286.5
55°	285.7	276.9	268.0	262.2	259.1	256.1	253.1	250.0
57.5°	247.0	238.7	230.4	225.0	222.4	219.8	217.2	214.6
60°	222.7	214.5	206.3	200.9	198.3	195.7	193.1	190.6
62.5°	198.5	190.8	183.1	177.9	175.2	172.5	169.8	167.1
65°	164.1	156.7	149.2	144.6	143.0	141.3	139.6	137.9
67.5°	131.3	125.6	120.1	116.5	114.7	112.9	111.1	109.3
70°	110.9	105.7	100.3	96.8	95.1	93.5	91.8	90.2
72.5°	92.6	88.4	84.0	81.5	80.8	80.1	79.4	78.6
75°	69.4	67.9	66.3	65.5	65.1	64.8	64.5	64.2
77.5°	52.3	51.5	50.6	50.1	49.8	49.5	49.2	48.9
80°	42.1	41.6	41.2	40.8	40.6	40.2	39.9	39.6
82.5°	32.3	31.8	31.4	31.1	31.0	31.0	30.9	30.9
85°	18.5	18.2	17.9	17.7	17.7	17.7	17.7	17.7
87.5°	11.5	11.6	11.6	11.6	11.6	11.5	11.5	11.4
90°	23.3	24.1	24.9	25.5	25.9	26.3	26.7	27.1
92.5°	35.9	36.6	37.3	37.5	37.2	37.0	36.7	36.5
95°	68.5	69.3	70.1	70.4	70.4	70.4	70.4	70.4
97.5°	106.5	107.4	108.3	108.7	108.6	108.6	108.5	108.4
100°	134.0	134.6	135.2	135.7	136.1	136.5	136.9	137.3
102.5°	165.8	166.4	167.0	167.3	167.2	167.1	167.0	166.9
105°	213.2	213.2	213.2	213.4	213.8	214.2	214.6	215.0
107.5°	264.6	265.2	265.8	266.0	265.8	265.6	265.3	265.0
110°	298.8	299.6	300.4	300.6	300.2	299.8	299.4	299.0



TEST NUMBER: P332421-940

CATALOG NUMBER: S123RDIW-S560D1030U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	333.1	334.0	335.0	335.5	335.4	335.3	335.3	335.2
115°	385.2	385.5	385.7	385.7	385.5	385.2	385.0	384.9
117.5°	437.9	437.8	437.8	437.5	436.9	436.4	435.8	435.2
120°	473.0	472.8	472.6	472.3	471.9	471.4	471.1	470.6
122.5°	508.5	507.9	507.5	506.8	506.3	505.8	505.2	504.6
125°	561.2	560.4	559.6	558.8	558.0	557.2	556.4	555.6
127.5°	613.3	612.2	611.1	610.0	609.1	608.2	607.3	606.4
130°	647.9	647.1	646.3	645.2	643.8	642.4	641.1	639.6
132.5°	681.6	680.6	679.7	678.7	677.5	676.5	675.4	674.3
135°	731.9	731.1	730.3	729.8	729.3	729.0	728.5	728.2
137.5°	781.2	780.3	779.5	778.7	777.9	777.2	776.4	775.7
140°	813.6	813.3	813.2	812.3	810.9	809.6	808.2	806.7
142.5°	843.9	843.7	843.6	842.8	841.8	840.7	839.6	838.6
145°	888.6	888.3	888.1	887.6	886.8	886.0	885.2	884.4
147.5°	930.7	930.7	930.7	930.1	928.9	927.6	926.5	925.2
150°	956.7	956.7	956.7	956.1	954.9	953.7	952.5	951.3
152.5°	980.4	980.8	981.1	980.8	979.7	978.7	977.6	976.6
155°	1015.2	1016.0	1016.8	1016.6	1015.1	1013.7	1012.4	1010.9
157.5°	1045.1	1046.0	1046.8	1046.7	1045.5	1044.5	1043.3	1042.1
160°	1063.5	1064.5	1065.5	1065.6	1064.8	1064.0	1063.2	1062.4
162.5°	1080.8	1081.8	1082.9	1082.7	1081.5	1080.1	1078.9	1077.5
165°	1102.8	1103.9	1105.2	1105.1	1103.7	1102.2	1100.8	1099.5
167.5°	1120.5	1121.8	1123.0	1123.0	1121.8	1120.5	1119.3	1118.0
170°	1130.2	1131.7	1133.1	1133.1	1131.7	1130.2	1128.8	1127.5
172.5°	1137.9	1139.2	1140.4	1140.3	1138.9	1137.5	1136.0	1134.7
175°	1146.1	1147.4	1148.5	1148.4	1147.0	1145.6	1144.2	1142.8
177.5°	1149.8	1150.8	1151.7	1151.6	1150.5	1149.4	1148.3	1147.2
180°	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0	1150.0

(END OF REPORT)