

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332428-940

Luminaire Tested: **S123RDIW-S560D1535U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332428-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S560D1535U940-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1535 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7379.6 lumens
Efficiency: N/A
Efficacy: 121.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332428-940

CATALOG NUMBER: S123RDIW-S560D1535U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

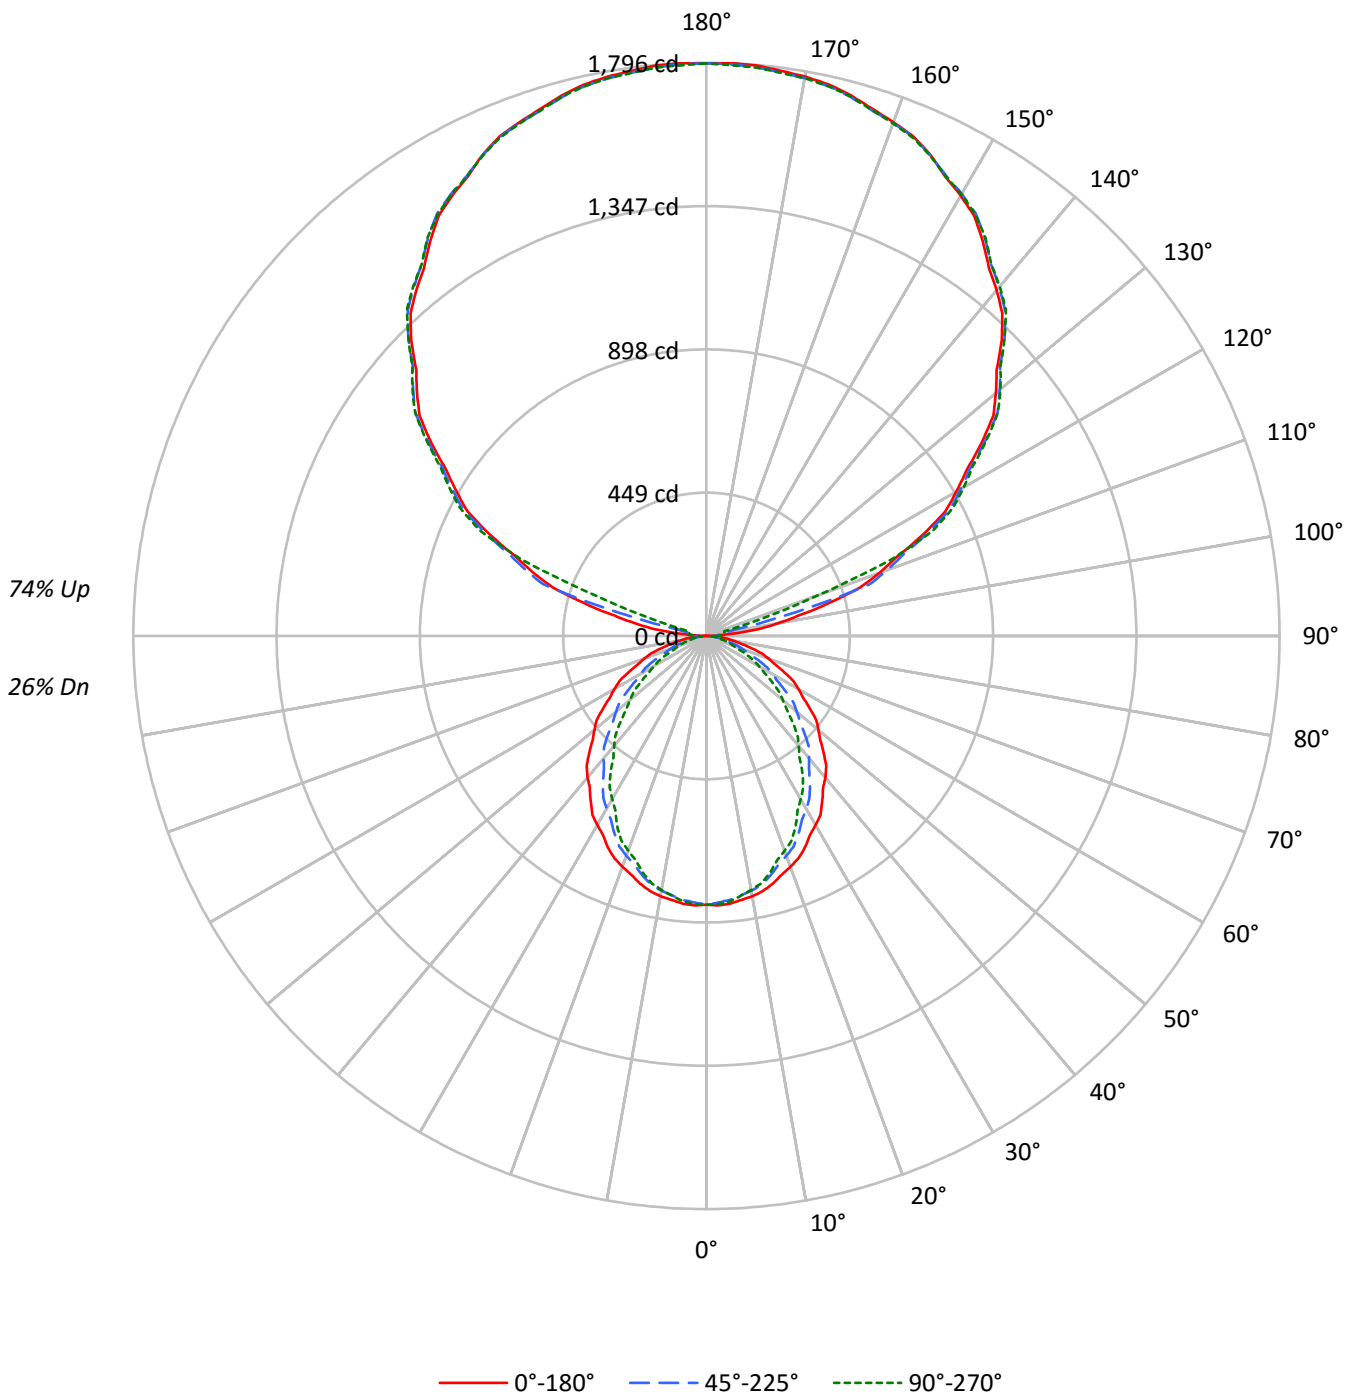



TEST NUMBER: P332428-940

CATALOG NUMBER: S123RDIW-S560D1535U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34	26
1	93	88	85	81	82	79	76	73	61	59	57	45	44	43	30	30	29	22
2	84	77	72	67	75	69	64	60	54	51	48	40	38	36	27	26	25	19
3	77	68	61	56	68	61	55	50	48	44	40	35	33	31	24	22	21	16
4	70	60	53	47	63	54	48	43	42	38	34	31	29	26	21	20	18	14
5	65	54	46	40	57	48	42	37	38	33	30	28	25	23	19	17	16	12
6	59	48	40	35	53	43	36	32	34	29	26	25	22	20	18	16	14	11
7	55	43	36	30	49	39	32	28	31	26	23	23	20	17	16	14	13	10
8	51	39	32	27	45	35	29	24	28	23	20	21	18	16	15	13	11	9
9	47	36	28	24	42	32	26	22	26	21	18	19	16	14	14	12	10	8
10	44	32	26	21	39	29	23	19	23	19	16	18	15	13	13	11	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9065	9065	9065
5°	9100	8975	9027
10°	9049	8862	8833
15°	8952	8655	8564
20°	8818	8395	8200
25°	8679	8105	7845
30°	8499	7768	7343
35°	8311	7432	6884
40°	8140	7035	6315
45°	7913	6645	5801
50°	7663	6199	5228
55°	7409	5692	4692
60°	7175	5147	4103
65°	6872	4559	3512
70°	6493	3827	2839
75°	5939	3011	2670
80°	5294	2672	2455
85°	4471	2359	2186



TEST NUMBER: P332428-940

CATALOG NUMBER: S123RDIW-S560D1535U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.1	1.1
10°-20°	220.1	3.0
20°-30°	316.9	4.3
30°-40°	356.9	4.8
40°-50°	341.4	4.6
50°-60°	279.6	3.8
60°-70°	188.7	2.6
70°-80°	94.9	1.3
80°-90°	30.1	0.4
90°-100°	65.2	0.9
100°-110°	310.9	4.2
110°-120°	746.8	10.1
120°-130°	951.0	12.9
130°-140°	1016.1	13.8
140°-150°	950.2	12.9
150°-160°	766.5	10.4
160°-170°	494.7	6.7
170°-180°	170.5	2.3
0°-30°	616.0	8.3
0°-40°	972.9	13.2
0°-60°	1594.0	21.6
0°-90°	1907.7	25.9
90°-120°	1123.0	15.2
90°-150°	4040.3	54.7
90°-180°	5472.0	74.2
0°-180°	7379.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	842	842	842	842	842	
5°	842	839	831	836	835	80
15°	803	795	777	773	768	226
25°	731	713	682	668	660	336
35°	632	607	566	537	524	396
45°	520	488	436	399	381	401
55°	395	360	303	265	250	354
65°	270	231	179	147	138	267
75°	143	110	72	66	64	152
85°	36	22	19	18	18	41
90°	1	15	32	37	40	6
95°	81	30	41	50	51	101
105°	397	404	292	69	59	421
115°	745	753	765	778	784	735
125°	1050	1061	1066	1069	1072	938
135°	1308	1316	1321	1325	1321	1006
145°	1509	1518	1521	1524	1524	944
155°	1662	1660	1661	1667	1660	766
165°	1753	1749	1748	1757	1749	495
175°	1794	1788	1789	1797	1788	171
180°	1794	1794	1794	1794	1794	



TEST NUMBER: P332428-940

CATALOG NUMBER: S123RDIW-S560D1535U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.2
2.5°	845.0	844.5	844.0	843.5	843.0	842.0	840.6	839.1	837.7	836.2	837.6
5°	842.2	841.5	840.7	840.0	839.2	837.9	836.1	834.3	832.4	830.6	832.0
7.5°	834.5	833.7	832.8	832.0	831.2	829.6	827.2	824.8	822.4	820.1	820.8
10°	827.9	826.8	825.7	824.7	823.7	821.7	819.0	816.3	813.5	810.8	810.9
12.5°	818.6	817.4	816.2	815.0	813.9	811.6	808.2	804.9	801.6	798.3	798.2
15°	803.3	801.6	800.0	798.3	796.7	793.6	789.4	785.2	780.9	776.7	775.9
17.5°	784.0	782.1	780.2	778.2	776.2	772.6	767.1	761.8	756.3	751.0	749.4
20°	769.8	767.4	765.0	762.5	760.1	756.0	750.2	744.5	738.7	732.9	730.9
22.5°	753.9	751.2	748.4	745.6	742.8	738.3	732.2	726.0	720.0	713.8	711.3
25°	730.8	727.1	723.3	719.5	715.7	710.3	703.3	696.3	689.4	682.4	679.2
27.5°	702.8	698.7	694.5	690.3	686.1	680.1	672.3	664.6	656.8	649.1	644.6
30°	683.8	679.2	674.7	670.1	665.6	659.0	650.5	642.0	633.5	625.0	619.8
32.5°	664.6	659.5	654.3	649.2	644.0	636.9	627.9	618.9	609.9	600.9	595.3
35°	632.5	627.1	621.6	616.2	610.6	603.2	593.8	584.4	575.0	565.6	559.0
37.5°	600.0	594.0	587.9	581.8	575.7	567.7	557.6	547.6	537.5	527.4	520.0
40°	579.3	572.6	565.9	559.2	552.5	543.8	533.1	522.3	511.5	500.7	492.8
42.5°	555.7	549.0	542.4	535.7	529.1	520.1	509.0	497.8	486.7	475.5	466.9
45°	519.8	513.0	506.1	499.4	492.5	483.2	471.5	459.9	448.2	436.5	427.8
47.5°	483.8	476.4	468.9	461.4	453.9	444.3	432.6	420.9	409.2	397.5	388.2
50°	457.6	450.5	443.4	436.2	429.1	419.4	407.1	394.8	382.5	370.2	360.8
52.5°	434.2	426.4	418.7	410.9	403.2	393.2	381.0	368.9	356.7	344.6	334.7
55°	394.8	387.4	380.0	372.5	365.1	354.9	342.0	329.1	316.2	303.3	294.4
57.5°	358.5	350.4	342.2	334.1	326.0	315.5	302.6	289.6	276.6	263.7	255.4
60°	333.3	325.0	316.6	308.3	300.0	289.4	276.9	264.3	251.6	239.1	230.9
62.5°	308.2	299.9	291.5	283.1	274.8	264.3	251.7	239.2	226.5	213.9	206.3
65°	269.8	261.4	253.2	244.8	236.4	226.3	214.5	202.7	190.8	179.0	171.6
67.5°	231.4	223.0	214.5	206.1	197.7	187.8	176.4	165.1	153.7	142.3	136.8
70°	206.3	198.0	189.9	181.7	173.5	164.1	153.5	142.9	132.2	121.6	116.3
72.5°	181.1	173.1	165.0	156.9	148.8	140.0	130.4	120.6	111.0	101.4	97.0
75°	142.8	135.5	128.2	120.9	113.6	105.8	97.5	89.1	80.8	72.4	70.9
77.5°	107.8	101.2	94.6	88.0	81.4	75.4	70.1	64.7	59.3	53.9	53.1
80°	85.4	79.2	72.9	66.7	60.5	55.8	52.6	49.4	46.2	43.1	42.5
82.5°	64.1	58.7	53.3	48.0	42.5	39.1	37.6	36.2	34.7	33.2	32.7
85°	36.2	32.9	29.5	26.2	22.8	21.0	20.5	20.1	19.6	19.1	18.8
87.5°	13.4	12.7	11.9	11.1	10.4	10.4	11.2	11.9	12.8	13.5	13.6
90°	1.3	4.3	7.2	10.3	13.2	16.6	20.4	24.3	28.2	32.0	33.2
92.5°	24.8	24.0	23.1	22.3	21.5	22.5	25.4	28.4	31.2	34.2	36.0
95°	81.3	69.2	57.1	44.9	32.7	28.3	31.6	34.8	38.1	41.3	43.4
97.5°	163.5	158.0	152.6	147.0	141.6	128.2	106.9	85.6	64.3	42.9	45.3
100°	225.3	231.2	237.1	243.1	249.0	228.8	182.6	136.4	90.2	44.0	46.4
102.5°	295.7	300.0	304.3	308.4	312.7	289.6	239.2	188.7	138.2	87.7	80.3
105°	397.3	400.6	403.8	407.1	410.3	398.6	371.9	345.3	318.6	291.9	239.5
107.5°	504.4	507.0	509.6	512.3	514.9	518.3	522.5	526.7	530.9	535.1	496.7
110°	575.9	578.3	580.6	583.0	585.4	588.2	591.5	594.7	598.0	601.2	591.5



TEST NUMBER: P332428-940

CATALOG NUMBER: S123RDIW-S560D1535U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	644.2	646.3	648.5	650.6	652.6	655.4	658.6	661.9	665.1	668.4	668.6
115°	745.2	747.0	748.8	750.6	752.3	754.6	757.2	759.8	762.5	765.2	768.1
117.5°	843.0	845.3	847.4	849.6	851.9	853.6	855.0	856.3	857.6	859.1	861.4
120°	903.8	906.5	909.2	911.9	914.5	916.3	917.1	918.0	918.9	919.8	922.2
122.5°	965.7	967.9	970.1	972.2	974.5	976.2	977.2	978.4	979.5	980.6	982.3
125°	1050.4	1052.8	1055.3	1057.6	1060.0	1061.8	1062.9	1064.1	1065.3	1066.5	1067.1
127.5°	1132.6	1135.0	1137.4	1139.7	1142.1	1144.0	1145.4	1146.8	1148.3	1149.7	1150.6
130°	1183.7	1186.2	1188.6	1190.9	1193.3	1195.1	1196.2	1197.4	1198.6	1199.8	1201.0
132.5°	1232.9	1235.2	1237.6	1239.9	1242.3	1244.0	1244.9	1245.9	1246.8	1247.8	1248.9
135°	1307.8	1309.6	1311.3	1313.1	1314.9	1316.3	1317.5	1318.8	1319.9	1321.1	1322.0
137.5°	1371.7	1374.0	1376.3	1378.5	1380.7	1382.2	1382.9	1383.5	1384.2	1384.8	1386.3
140°	1414.4	1416.2	1418.0	1419.8	1421.6	1422.8	1423.7	1424.6	1425.5	1426.4	1427.6
142.5°	1453.8	1455.6	1457.4	1459.2	1461.0	1462.3	1463.2	1464.1	1465.0	1465.9	1466.8
145°	1509.0	1511.1	1513.2	1515.3	1517.3	1518.7	1519.3	1519.8	1520.5	1521.1	1521.6
147.5°	1561.0	1562.5	1563.8	1565.1	1566.5	1567.4	1568.1	1568.7	1569.2	1569.9	1570.5
150°	1593.0	1593.9	1594.8	1595.7	1596.6	1597.3	1597.9	1598.6	1599.1	1599.7	1600.3
152.5°	1621.8	1622.3	1622.6	1623.1	1623.5	1623.9	1624.3	1624.6	1625.0	1625.3	1626.4
155°	1662.3	1661.8	1661.2	1660.6	1660.0	1659.8	1660.2	1660.5	1660.7	1661.0	1662.5
157.5°	1693.8	1693.8	1693.7	1693.6	1693.6	1693.4	1693.1	1692.8	1692.6	1692.2	1694.0
160°	1713.1	1712.7	1712.4	1712.2	1711.8	1711.5	1711.3	1710.9	1710.7	1710.4	1712.2
162.5°	1731.2	1730.4	1729.7	1728.8	1728.0	1727.5	1727.2	1727.0	1726.6	1726.4	1728.4
165°	1753.0	1752.1	1751.2	1750.3	1749.4	1748.9	1748.6	1748.3	1748.0	1747.7	1750.1
167.5°	1770.0	1768.9	1767.7	1766.6	1765.3	1764.8	1764.8	1764.8	1764.8	1764.8	1767.1
170°	1779.7	1778.5	1777.3	1776.1	1775.0	1774.3	1774.3	1774.3	1774.3	1774.3	1776.7
172.5°	1786.1	1784.7	1783.2	1781.8	1780.4	1779.8	1780.0	1780.3	1780.5	1780.7	1783.2
175°	1794.3	1792.9	1791.4	1789.9	1788.4	1787.8	1788.1	1788.4	1788.7	1789.0	1791.1
177.5°	1796.4	1795.3	1794.1	1793.0	1791.7	1791.3	1791.5	1791.7	1792.0	1792.2	1794.1
180°	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3



TEST NUMBER: P332428-940

CATALOG NUMBER: S123RDIW-S560D1535U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.2
2.5°	838.9	840.3	841.6	842.1	841.9	841.6	841.4	841.2
5°	833.3	834.7	836.1	836.6	836.3	836.0	835.7	835.4
7.5°	821.6	822.3	823.1	823.2	822.7	822.2	821.7	821.2
10°	811.1	811.3	811.4	811.1	810.4	809.6	808.9	808.1
12.5°	798.1	798.0	797.9	797.4	796.5	795.6	794.8	793.9
15°	775.2	774.4	773.6	772.7	771.6	770.6	769.5	768.5
17.5°	747.8	746.2	744.5	743.0	741.4	739.8	738.2	736.6
20°	729.0	727.0	725.1	723.2	721.3	719.5	717.6	715.9
22.5°	708.9	706.4	704.0	701.9	700.2	698.5	696.8	695.1
25°	676.0	672.8	669.7	667.2	665.6	663.9	662.2	660.5
27.5°	640.2	635.8	631.3	627.9	625.3	622.8	620.2	617.6
30°	614.7	609.5	604.4	600.6	598.2	595.8	593.3	590.8
32.5°	589.7	584.0	578.4	574.3	571.8	569.2	566.6	564.1
35°	552.5	546.0	539.5	534.8	532.1	529.4	526.6	523.9
37.5°	512.6	505.2	497.8	492.5	489.1	485.7	482.3	478.9
40°	484.9	477.0	469.1	463.4	459.9	456.5	453.0	449.4
42.5°	458.3	449.7	441.0	435.2	432.0	428.9	425.8	422.7
45°	419.2	410.5	401.9	395.7	392.1	388.4	384.8	381.1
47.5°	378.7	369.3	359.9	353.6	350.4	347.1	343.8	340.5
50°	351.4	342.0	332.6	326.1	322.6	319.1	315.7	312.2
52.5°	325.0	315.2	305.4	299.0	295.9	292.7	289.6	286.5
55°	285.7	276.9	268.0	262.2	259.1	256.1	253.1	250.0
57.5°	247.0	238.7	230.4	225.0	222.4	219.8	217.2	214.6
60°	222.7	214.5	206.3	200.9	198.3	195.7	193.1	190.6
62.5°	198.5	190.8	183.1	177.9	175.2	172.5	169.8	167.1
65°	164.1	156.7	149.2	144.6	143.0	141.3	139.6	137.9
67.5°	131.3	125.6	120.1	116.5	114.7	112.9	111.1	109.3
70°	110.9	105.7	100.3	96.8	95.1	93.5	91.8	90.2
72.5°	92.6	88.4	84.0	81.5	80.8	80.1	79.4	78.6
75°	69.4	67.9	66.3	65.5	65.1	64.8	64.5	64.2
77.5°	52.3	51.5	50.6	50.1	49.8	49.5	49.2	48.9
80°	42.1	41.6	41.2	40.8	40.6	40.2	39.9	39.6
82.5°	32.3	31.8	31.4	31.1	31.0	31.0	30.9	30.9
85°	18.5	18.2	17.9	17.7	17.7	17.7	17.7	17.7
87.5°	13.7	13.8	14.0	14.0	14.0	14.0	14.0	14.0
90°	34.3	35.6	36.7	37.6	38.3	38.8	39.4	39.9
92.5°	37.9	39.9	41.7	42.8	43.2	43.5	43.9	44.2
95°	45.5	47.5	49.6	50.6	50.6	50.6	50.6	50.6
97.5°	47.7	50.0	52.4	53.8	54.0	54.3	54.7	54.9
100°	48.7	51.1	53.5	54.8	55.1	55.4	55.7	56.0
102.5°	73.0	65.7	58.3	54.9	55.5	56.0	56.5	57.1
105°	187.1	134.6	82.2	56.3	56.9	57.5	58.1	58.7
107.5°	458.2	419.7	381.3	342.3	302.8	263.2	223.7	184.2
110°	581.7	571.9	562.1	536.0	493.7	451.3	408.9	366.6



TEST NUMBER: P332428-940

CATALOG NUMBER: S123RDIW-S560D1535U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	668.8	669.0	669.1	664.8	655.8	646.8	637.9	628.9
115°	771.2	774.1	777.0	779.1	780.3	781.5	782.7	783.9
117.5°	863.8	866.1	868.5	869.9	870.0	870.3	870.6	870.8
120°	924.6	926.9	929.3	930.5	930.5	930.5	930.5	930.5
122.5°	983.9	985.6	987.3	988.2	988.5	988.6	988.9	989.2
125°	1067.6	1068.3	1068.8	1069.4	1070.1	1070.6	1071.2	1071.8
127.5°	1151.6	1152.5	1153.4	1153.6	1153.1	1152.4	1151.8	1151.3
130°	1202.1	1203.4	1204.5	1204.8	1204.3	1203.6	1203.0	1202.5
132.5°	1250.2	1251.3	1252.5	1252.7	1251.9	1251.1	1250.2	1249.4
135°	1322.9	1323.7	1324.6	1324.6	1323.7	1322.9	1322.0	1321.1
137.5°	1387.7	1389.1	1390.5	1390.9	1390.4	1389.7	1389.1	1388.6
140°	1428.8	1429.9	1431.1	1431.5	1430.8	1430.3	1429.7	1429.1
142.5°	1467.8	1468.7	1469.6	1469.7	1468.9	1468.0	1467.2	1466.4
145°	1522.2	1522.9	1523.4	1523.8	1523.8	1523.8	1523.8	1523.8
147.5°	1571.0	1571.6	1572.3	1571.8	1570.5	1569.1	1567.7	1566.4
150°	1600.9	1601.5	1602.0	1602.0	1601.1	1600.2	1599.3	1598.4
152.5°	1627.5	1628.5	1629.6	1629.4	1628.1	1626.7	1625.3	1624.0
155°	1664.0	1665.4	1667.0	1666.8	1665.0	1663.2	1661.4	1659.7
157.5°	1695.8	1697.5	1699.3	1699.1	1696.7	1694.4	1692.1	1689.8
160°	1714.0	1715.7	1717.4	1717.3	1715.2	1713.2	1711.1	1709.1
162.5°	1730.4	1732.4	1734.4	1734.5	1732.7	1730.8	1729.0	1727.2
165°	1752.4	1754.8	1757.2	1757.3	1755.2	1753.2	1751.1	1749.0
167.5°	1769.5	1771.8	1774.2	1774.2	1771.8	1769.5	1767.1	1764.8
170°	1779.1	1781.5	1783.9	1783.9	1781.5	1779.1	1776.7	1774.3
172.5°	1785.5	1787.9	1790.2	1790.1	1787.5	1784.9	1782.3	1779.7
175°	1793.1	1795.2	1797.3	1797.2	1794.7	1792.4	1790.0	1787.7
177.5°	1796.0	1797.9	1799.8	1799.6	1797.2	1794.8	1792.4	1790.1
180°	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3

(END OF REPORT)