

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332445-940

Luminaire Tested: **S123RDIW-S775D1320U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332445-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S775D1320U940-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1320 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6684.2 lumens
Efficiency: N/A
Efficacy: 108.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332445-940

CATALOG NUMBER: S123RDIW-S775D1320U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

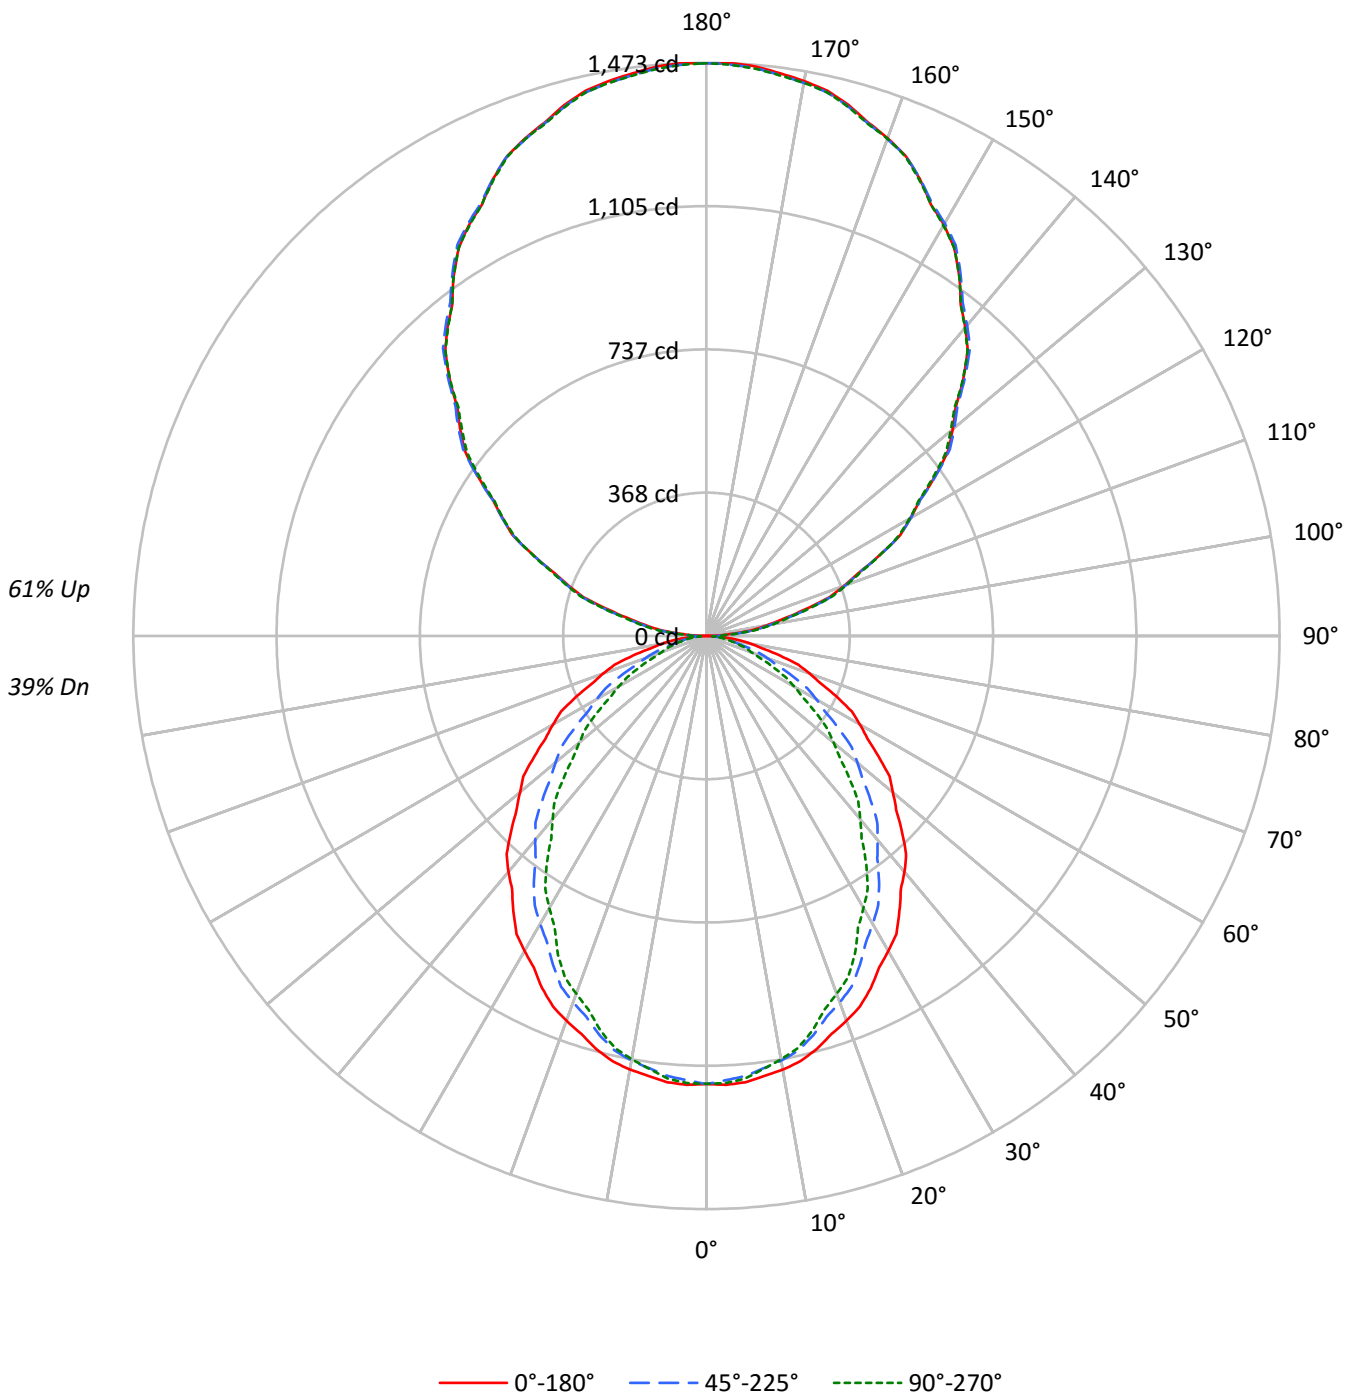



TEST NUMBER: P332445-940

CATALOG NUMBER: S123RDIW-S775D1320U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46	39
1	96	91	88	84	87	83	80	77	68	66	64	54	52	51	41	40	39	33
2	87	80	74	69	79	73	68	64	60	56	53	48	45	43	36	35	33	28
3	80	71	64	58	72	64	58	53	53	49	45	42	39	37	32	30	29	24
4	73	63	55	49	66	57	51	45	47	42	38	38	34	32	29	27	25	21
5	67	56	48	42	61	51	44	39	42	37	33	34	30	27	26	24	22	18
6	62	50	42	37	56	46	39	34	38	33	29	31	27	24	24	21	19	16
7	57	45	37	32	52	41	35	30	35	29	26	28	24	21	22	19	17	14
8	53	41	33	28	48	38	31	26	31	26	23	26	22	19	20	17	15	13
9	49	37	30	25	45	34	28	24	29	24	20	24	20	17	19	16	14	12
10	46	34	27	23	42	32	25	21	27	22	18	22	18	16	17	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12392	12392	12392
5°	12440	12268	12338
10°	12369	12114	12073
15°	12237	11830	11705
20°	12054	11475	11208
25°	11866	11077	10723
30°	11616	10618	10038
35°	11361	10159	9410
40°	11126	9617	8633
45°	10816	9082	7931
50°	10474	8473	7145
55°	10128	7781	6412
60°	9810	7035	5608
65°	9393	6230	4804
70°	8875	5231	3877
75°	8114	4117	3647
80°	7234	3651	3353
85°	6113	3223	3001



TEST NUMBER: P332445-940

CATALOG NUMBER: S123RDIW-S775D1320U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	108.1	1.6
10°-20°	300.8	4.5
20°-30°	433.1	6.5
30°-40°	487.9	7.3
40°-50°	466.7	7.0
50°-60°	382.2	5.7
60°-70°	257.9	3.9
70°-80°	129.7	1.9
80°-90°	38.7	0.6
90°-100°	95.9	1.4
100°-110°	287.1	4.3
110°-120°	488.2	7.3
120°-130°	642.2	9.6
130°-140°	721.9	10.8
140°-150°	709.6	10.6
150°-160°	597.3	8.9
160°-170°	397.6	5.9
170°-180°	139.2	2.1
0°-30°	842.0	12.6
0°-40°	1329.9	19.9
0°-60°	2178.8	32.6
0°-90°	2605.1	39.0
90°-120°	871.3	13.0
90°-150°	2944.9	44.1
90°-180°	4079.0	61.0
0°-180°	6684.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1151	1151	1151	1151	1151	
5°	1151	1146	1135	1143	1142	109
15°	1098	1087	1062	1057	1050	309
25°	999	975	933	914	903	459
35°	865	830	773	734	716	541
45°	710	667	597	545	521	548
55°	540	492	415	362	342	484
65°	369	316	245	201	189	365
75°	195	150	99	90	88	208
85°	50	30	26	24	24	56
90°	1	13	28	32	35	7
95°	68	76	86	90	90	77
105°	260	263	273	273	275	279
115°	492	495	493	494	493	486
125°	719	723	720	716	711	641
135°	933	940	939	935	932	719
145°	1132	1135	1138	1137	1132	707
155°	1296	1297	1298	1302	1294	597
165°	1412	1409	1409	1415	1408	398
175°	1469	1464	1464	1470	1463	139
180°	1472	1472	1472	1472	1472	



TEST NUMBER: P332445-940

CATALOG NUMBER: S123RDIW-S775D1320U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3
2.5°	1154.9	1154.3	1153.6	1153.0	1152.4	1151.0	1149.0	1147.0	1145.0	1143.0	1144.9
5°	1151.3	1150.2	1149.1	1148.2	1147.1	1145.3	1142.8	1140.3	1137.8	1135.4	1137.2
7.5°	1140.6	1139.5	1138.4	1137.2	1136.1	1133.9	1130.7	1127.5	1124.3	1121.0	1122.0
10°	1131.7	1130.2	1128.7	1127.3	1125.8	1123.2	1119.5	1115.8	1112.1	1108.3	1108.5
12.5°	1118.9	1117.3	1115.7	1114.1	1112.5	1109.4	1104.8	1100.3	1095.6	1091.1	1091.0
15°	1098.1	1095.7	1093.4	1091.2	1088.9	1084.9	1079.1	1073.3	1067.4	1061.6	1060.6
17.5°	1071.7	1069.1	1066.4	1063.7	1061.0	1056.1	1048.7	1041.3	1033.8	1026.5	1024.3
20°	1052.3	1048.9	1045.6	1042.3	1039.0	1033.4	1025.5	1017.6	1009.8	1001.8	999.2
22.5°	1030.6	1026.8	1023.0	1019.1	1015.3	1009.2	1000.9	992.5	984.1	975.7	972.3
25°	999.1	993.9	988.6	983.5	978.3	970.9	961.4	951.8	942.3	932.7	928.4
27.5°	960.7	955.0	949.3	943.6	937.9	929.7	919.1	908.5	897.8	887.2	881.1
30°	934.6	928.4	922.2	916.0	909.7	900.8	889.2	877.5	865.9	854.3	847.3
32.5°	908.5	901.4	894.4	887.3	880.3	870.6	858.3	846.1	833.7	821.4	813.8
35°	864.6	857.1	849.6	842.2	834.7	824.6	811.7	798.8	786.0	773.1	764.2
37.5°	820.2	811.8	803.5	795.2	786.9	776.0	762.2	748.5	734.8	721.0	710.9
40°	791.8	782.7	773.5	764.4	755.3	743.3	728.6	713.9	699.1	684.4	673.6
42.5°	759.6	750.6	741.4	732.3	723.2	711.0	695.7	680.5	665.3	650.1	638.3
45°	710.5	701.2	691.9	682.5	673.2	660.6	644.5	628.6	612.6	596.6	584.8
47.5°	661.5	651.2	641.0	630.7	620.5	607.3	591.4	575.3	559.4	543.4	530.6
50°	625.5	615.8	606.1	596.3	586.6	573.3	556.5	539.7	522.9	506.0	493.2
52.5°	593.4	582.9	572.3	561.7	551.2	537.5	520.8	504.3	487.6	470.9	457.6
55°	539.7	529.5	519.3	509.2	499.0	485.1	467.4	449.9	432.2	414.6	402.5
57.5°	490.0	478.9	467.9	456.7	445.7	431.3	413.6	395.8	378.1	360.4	349.0
60°	455.7	444.3	432.8	421.4	410.0	395.7	378.4	361.2	344.0	326.8	315.6
62.5°	421.2	409.8	398.4	387.0	375.7	361.3	344.1	326.9	309.7	292.4	281.9
65°	368.8	357.4	346.0	334.6	323.2	309.3	293.2	277.0	260.8	244.6	234.4
67.5°	316.4	304.8	293.3	281.7	270.2	256.6	241.1	225.6	210.1	194.6	187.0
70°	282.0	270.8	259.6	248.3	237.2	224.3	209.7	195.3	180.7	166.2	158.9
72.5°	247.6	236.6	225.5	214.5	203.5	191.4	178.2	165.0	151.8	138.6	132.6
75°	195.1	185.2	175.2	165.2	155.3	144.6	133.2	121.8	110.4	99.0	96.9
77.5°	147.3	138.3	129.3	120.3	111.3	103.2	95.8	88.5	81.1	73.7	72.7
80°	116.7	108.2	99.7	91.2	82.7	76.2	71.9	67.5	63.2	58.9	58.2
82.5°	87.6	80.3	72.9	65.5	58.2	53.5	51.5	49.4	47.4	45.4	44.8
85°	49.5	44.9	40.4	35.8	31.2	28.6	28.0	27.4	26.8	26.1	25.8
87.5°	18.2	16.9	15.5	14.2	12.9	12.6	13.3	13.9	14.6	15.2	15.3
90°	1.2	3.7	6.3	8.8	11.4	14.4	17.7	21.0	24.4	27.7	28.8
92.5°	28.0	29.7	31.5	33.3	35.0	36.8	38.7	40.6	42.5	44.4	45.2
95°	68.2	70.0	71.9	73.7	75.4	77.4	79.5	81.5	83.6	85.6	86.6
97.5°	121.2	122.5	123.9	125.2	126.5	128.0	129.5	130.9	132.4	133.9	135.1
100°	157.3	158.8	160.3	161.9	163.5	164.9	166.1	167.5	168.7	170.0	170.8
102.5°	198.9	199.8	200.8	201.7	202.6	203.9	205.6	207.3	209.0	210.7	211.5
105°	260.2	260.7	261.3	261.7	262.3	263.7	266.0	268.3	270.6	273.0	273.0
107.5°	331.4	331.8	332.1	332.4	332.7	333.3	334.2	335.2	336.1	337.0	337.9
110°	375.9	376.4	376.9	377.4	377.9	378.4	379.0	379.5	380.0	380.5	381.6



TEST NUMBER: P332445-940

CATALOG NUMBER: S123RDIW-S775D1320U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	422.1	422.4	422.8	423.0	423.4	423.6	423.7	423.7	423.9	424.0	425.3
115°	491.5	492.3	493.0	493.8	494.6	494.7	494.2	493.7	493.2	492.7	492.9
117.5°	561.4	561.9	562.4	562.9	563.5	563.4	562.7	562.0	561.3	560.7	560.6
120°	604.8	606.4	608.0	609.5	611.0	611.2	609.8	608.6	607.3	606.0	605.7
122.5°	650.2	651.3	652.5	653.6	654.7	655.0	654.2	653.6	652.9	652.3	651.6
125°	719.3	720.1	720.9	721.7	722.5	722.6	722.0	721.6	721.0	720.5	719.5
127.5°	783.2	784.9	786.5	788.1	789.8	790.3	789.8	789.2	788.6	788.1	786.6
130°	825.7	827.8	829.9	832.0	834.0	834.6	833.8	833.1	832.3	831.5	830.5
132.5°	868.3	870.4	872.4	874.5	876.6	877.3	876.7	876.2	875.6	875.0	873.8
135°	933.4	934.9	936.4	937.9	939.5	940.1	939.9	939.6	939.3	939.1	938.1
137.5°	993.5	994.7	996.0	997.3	998.6	999.6	1000.2	1000.9	1001.6	1002.3	1001.1
140°	1035.1	1036.3	1037.7	1038.9	1040.3	1041.0	1041.3	1041.5	1041.8	1042.1	1041.8
142.5°	1073.0	1074.3	1075.6	1076.9	1078.2	1079.1	1079.5	1080.0	1080.4	1080.9	1080.7
145°	1132.2	1132.7	1133.3	1133.8	1134.3	1135.0	1135.7	1136.5	1137.3	1138.0	1137.7
147.5°	1184.0	1185.0	1185.9	1186.9	1187.8	1188.6	1189.3	1190.0	1190.7	1191.4	1191.4
150°	1220.1	1220.7	1221.2	1221.6	1222.2	1222.7	1223.2	1223.7	1224.2	1224.8	1224.8
152.5°	1249.7	1250.4	1251.2	1251.9	1252.6	1253.1	1253.5	1253.7	1254.1	1254.4	1254.8
155°	1296.5	1296.5	1296.5	1296.5	1296.5	1296.6	1296.8	1297.1	1297.4	1297.6	1298.7
157.5°	1336.2	1336.0	1335.6	1335.3	1335.0	1335.0	1335.2	1335.3	1335.6	1335.8	1336.9
160°	1361.2	1360.8	1360.2	1359.7	1359.1	1358.9	1358.9	1358.9	1358.9	1358.9	1360.2
162.5°	1383.4	1382.7	1382.0	1381.3	1380.5	1380.3	1380.5	1380.7	1380.9	1381.1	1382.4
165°	1412.1	1411.3	1410.6	1409.8	1409.1	1408.6	1408.6	1408.6	1408.6	1408.6	1410.2
167.5°	1435.0	1434.0	1433.0	1431.9	1430.9	1430.5	1430.7	1430.9	1431.1	1431.3	1432.9
170°	1448.0	1447.0	1445.9	1444.9	1443.9	1443.3	1443.3	1443.3	1443.3	1443.3	1445.1
172.5°	1458.1	1457.1	1456.1	1455.1	1454.0	1453.5	1453.5	1453.5	1453.5	1453.5	1455.1
175°	1468.8	1467.8	1466.8	1465.7	1464.6	1464.2	1464.2	1464.2	1464.2	1464.2	1465.7
177.5°	1473.2	1472.4	1471.5	1470.7	1469.9	1469.5	1469.5	1469.5	1469.5	1469.5	1470.7
180°	1472.3	1472.3	1472.3	1472.3	1472.3	1472.3	1472.3	1472.3	1472.3	1472.3	1472.3



TEST NUMBER: P332445-940

CATALOG NUMBER: S123RDIW-S775D1320U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1151.3	1151.3	<i>1151.3</i>	1151.3	1151.3	1151.3	1151.3	1151.3
2.5°	1146.7	1148.5	<i>1150.3</i>	1151.1	1150.8	1150.4	1150.0	1149.8
5°	1139.1	1140.9	<i>1142.8</i>	1143.5	1143.2	1142.7	1142.3	1141.9
7.5°	1123.1	1124.1	<i>1125.2</i>	1125.3	1124.6	1123.9	1123.2	1122.5
10°	1108.8	1108.9	<i>1109.1</i>	1108.8	1107.7	1106.6	1105.6	1104.6
12.5°	1090.8	1090.7	<i>1090.7</i>	1089.9	1088.8	1087.5	1086.4	1085.1
15°	1059.5	1058.5	<i>1057.5</i>	1056.2	1054.8	1053.3	1051.9	1050.4
17.5°	1022.1	1019.9	<i>1017.7</i>	1015.6	1013.3	1011.2	1009.1	1006.9
20°	996.5	993.7	<i>991.0</i>	988.5	986.0	983.5	981.0	978.5
22.5°	969.0	965.6	<i>962.2</i>	959.4	957.1	954.8	952.4	950.1
25°	924.1	919.7	<i>915.3</i>	912.0	909.7	907.4	905.2	902.9
27.5°	875.0	869.1	<i>863.0</i>	858.2	854.7	851.2	847.7	844.3
30°	840.3	833.1	<i>826.1</i>	820.9	817.6	814.3	810.9	807.6
32.5°	806.0	798.3	<i>790.6</i>	785.0	781.5	778.0	774.5	771.1
35°	755.3	746.4	<i>737.4</i>	731.1	727.4	723.6	719.9	716.1
37.5°	700.7	690.6	<i>680.5</i>	673.2	668.5	663.9	659.3	654.7
40°	662.8	652.0	<i>641.2</i>	633.5	628.7	623.9	619.1	614.4
42.5°	626.4	614.7	<i>602.9</i>	594.9	590.6	586.3	582.0	577.7
45°	573.0	561.2	<i>549.3</i>	540.9	535.9	530.9	526.0	521.0
47.5°	517.6	504.8	<i>492.0</i>	483.3	478.8	474.4	470.0	465.6
50°	480.4	467.4	<i>454.6</i>	445.8	441.0	436.2	431.5	426.7
52.5°	444.3	430.9	<i>417.5</i>	408.7	404.4	400.1	395.8	391.6
55°	390.5	378.4	<i>366.4</i>	358.3	354.2	350.0	345.9	341.7
57.5°	337.7	326.3	<i>315.0</i>	307.5	304.0	300.4	296.9	293.4
60°	304.3	293.2	<i>282.0</i>	274.6	271.1	267.5	264.0	260.5
62.5°	271.3	260.8	<i>250.3</i>	243.2	239.4	235.8	232.1	228.4
65°	224.3	214.1	<i>203.9</i>	197.7	195.5	193.1	190.9	188.6
67.5°	179.4	171.8	<i>164.2</i>	159.2	156.8	154.3	151.9	149.4
70°	151.7	144.4	<i>137.1</i>	132.4	130.1	127.8	125.6	123.2
72.5°	126.7	120.7	<i>114.9</i>	111.4	110.4	109.5	108.5	107.5
75°	94.8	92.7	<i>90.7</i>	89.4	89.0	88.6	88.2	87.7
77.5°	71.5	70.4	<i>69.3</i>	68.5	68.1	67.7	67.2	66.9
80°	57.6	57.0	<i>56.4</i>	55.8	55.4	55.0	54.6	54.1
82.5°	44.1	43.5	<i>42.9</i>	42.5	42.4	42.4	42.3	42.2
85°	25.3	24.9	<i>24.5</i>	24.3	24.3	24.3	24.3	24.3
87.5°	15.3	15.3	<i>15.4</i>	15.4	15.3	15.2	15.2	15.2
90°	29.8	30.9	<i>31.8</i>	32.6	33.2	33.7	34.2	34.7
92.5°	46.0	46.9	<i>47.7</i>	48.0	47.6	47.3	47.0	46.7
95°	87.7	88.6	<i>89.7</i>	90.2	90.2	90.2	90.2	90.2
97.5°	136.3	137.5	<i>138.7</i>	139.2	139.1	139.0	138.9	138.8
100°	171.6	172.3	<i>173.1</i>	173.7	174.2	174.8	175.3	175.8
102.5°	212.2	213.0	<i>213.8</i>	214.1	214.0	213.9	213.8	213.7
105°	273.0	273.0	<i>273.0</i>	273.2	273.8	274.2	274.7	275.3
107.5°	338.7	339.5	<i>340.3</i>	340.5	340.3	339.9	339.7	339.3
110°	382.5	383.6	<i>384.6</i>	384.9	384.3	383.9	383.3	382.8



TEST NUMBER: P332445-940

CATALOG NUMBER: S123RDIW-S775D1320U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	426.4	427.7	428.9	429.4	429.4	429.3	429.2	429.1
115°	493.2	493.5	493.7	493.7	493.5	493.2	492.9	492.7
117.5°	560.6	560.5	560.4	560.1	559.4	558.7	557.9	557.2
120°	605.5	605.3	605.0	604.6	604.1	603.6	603.1	602.5
122.5°	650.9	650.2	649.6	648.9	648.2	647.5	646.8	646.0
125°	718.5	717.5	716.4	715.4	714.3	713.3	712.3	711.2
127.5°	785.2	783.7	782.3	781.0	779.8	778.6	777.5	776.2
130°	829.5	828.5	827.4	826.0	824.2	822.4	820.6	818.9
132.5°	872.5	871.3	870.1	868.8	867.4	866.0	864.6	863.3
135°	937.0	936.0	935.0	934.2	933.7	933.2	932.6	932.2
137.5°	1000.1	999.0	997.9	996.9	996.0	995.0	994.0	993.0
140°	1041.5	1041.3	1041.0	1040.0	1038.2	1036.3	1034.6	1032.8
142.5°	1080.4	1080.1	1079.9	1079.1	1077.6	1076.3	1074.9	1073.5
145°	1137.5	1137.3	1137.0	1136.4	1135.3	1134.3	1133.3	1132.2
147.5°	1191.4	1191.4	1191.4	1190.7	1189.2	1187.6	1186.1	1184.5
150°	1224.8	1224.8	1224.8	1224.0	1222.4	1220.9	1219.3	1217.8
152.5°	1255.2	1255.6	1256.0	1255.5	1254.2	1252.9	1251.5	1250.2
155°	1299.7	1300.7	1301.7	1301.4	1299.6	1297.8	1295.9	1294.1
157.5°	1337.9	1339.0	1340.2	1339.9	1338.5	1337.0	1335.6	1334.2
160°	1361.5	1362.8	1364.1	1364.2	1363.2	1362.2	1361.1	1360.0
162.5°	1383.7	1385.0	1386.3	1386.1	1384.5	1382.8	1381.2	1379.5
165°	1411.8	1413.3	1414.8	1414.7	1412.9	1411.1	1409.3	1407.5
167.5°	1434.5	1436.1	1437.7	1437.7	1436.1	1434.5	1432.9	1431.3
170°	1447.0	1448.8	1450.5	1450.5	1448.8	1447.0	1445.1	1443.3
172.5°	1456.7	1458.3	1459.9	1459.8	1458.0	1456.2	1454.4	1452.6
175°	1467.2	1468.8	1470.3	1470.2	1468.4	1466.6	1464.8	1463.0
177.5°	1471.9	1473.2	1474.4	1474.4	1472.8	1471.4	1470.0	1468.6
180°	1472.3	1472.3	1472.3	1472.3	1472.3	1472.3	1472.3	1472.3

(END OF REPORT)