

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332448-940

Luminaire Tested: **S123RDIW-S775D1535U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332448-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S775D1535U940-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1535 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8077.7 lumens
Efficiency: N/A
Efficacy: 118.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332448-940

CATALOG NUMBER: S123RDIW-S775D1535U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

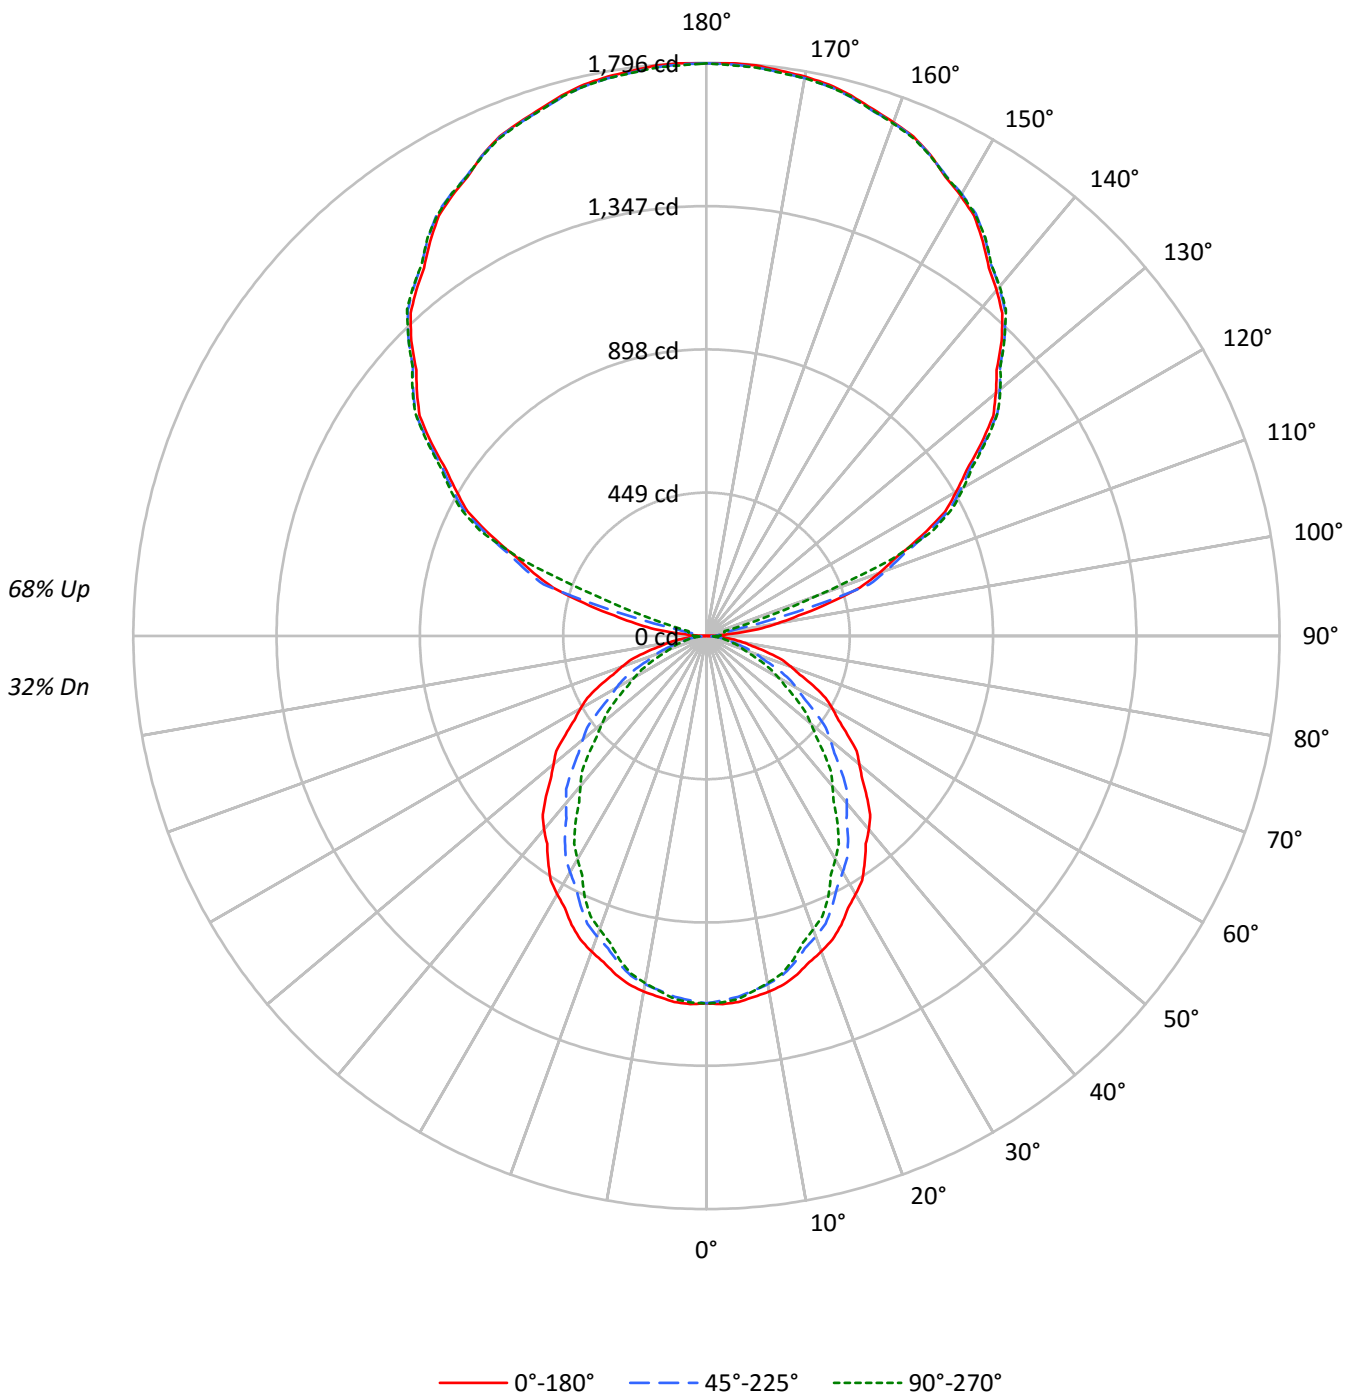



TEST NUMBER: P332448-940

CATALOG NUMBER: S123RDIW-S775D1535U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	73	73	73	56	56	56	40	40	40	32
1	94	90	86	83	85	81	78	75	65	62	61	49	48	47	35	35	34	28
2	86	79	73	68	77	71	66	62	57	53	50	44	41	39	31	30	29	23
3	78	69	62	57	70	63	57	52	50	46	43	39	36	34	28	26	25	20
4	72	61	54	48	64	56	49	44	45	40	36	35	31	29	25	23	22	17
5	66	55	47	41	59	50	43	38	40	35	31	31	28	25	23	21	19	15
6	61	49	41	36	54	44	38	33	36	31	27	28	25	22	21	18	17	13
7	56	44	36	31	50	40	33	29	33	28	24	26	22	19	19	17	15	12
8	52	40	33	27	47	36	30	25	30	25	21	23	20	17	17	15	13	11
9	48	36	29	24	43	33	27	23	27	22	19	21	18	15	16	14	12	10
10	45	33	26	22	41	30	24	20	25	20	17	20	16	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12392	12392	12392
5°	12440	12268	12338
10°	12369	12114	12073
15°	12237	11830	11705
20°	12054	11475	11208
25°	11866	11077	10723
30°	11616	10618	10038
35°	11361	10159	9410
40°	11126	9617	8633
45°	10816	9082	7931
50°	10474	8473	7145
55°	10128	7781	6412
60°	9810	7035	5608
65°	9393	6230	4804
70°	8875	5231	3877
75°	8114	4117	3647
80°	7234	3651	3353
85°	6113	3223	3001



TEST NUMBER: P332448-940

CATALOG NUMBER: S123RDIW-S775D1535U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	108.1	1.3
10°-20°	300.8	3.7
20°-30°	433.1	5.4
30°-40°	487.9	6.0
40°-50°	466.7	5.8
50°-60°	382.2	4.7
60°-70°	257.9	3.2
70°-80°	129.7	1.6
80°-90°	39.3	0.5
90°-100°	65.2	0.8
100°-110°	310.9	3.8
110°-120°	746.8	9.2
120°-130°	951.0	11.8
130°-140°	1016.1	12.6
140°-150°	950.2	11.8
150°-160°	766.5	9.5
160°-170°	494.7	6.1
170°-180°	170.5	2.1
0°-30°	842.0	10.4
0°-40°	1329.9	16.5
0°-60°	2178.8	27.0
0°-90°	2605.8	32.3
90°-120°	1123.0	13.9
90°-150°	4040.3	50.0
90°-180°	5472.0	67.7
0°-180°	8077.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1151	1151	1151	1151	1151	
5°	1151	1146	1135	1143	1142	109
15°	1098	1087	1062	1057	1050	309
25°	999	975	933	914	903	459
35°	865	830	773	734	716	541
45°	710	667	597	545	521	548
55°	540	492	415	362	342	484
65°	369	316	245	201	189	365
75°	195	150	99	90	88	208
85°	50	30	26	24	24	56
90°	1	15	32	37	40	6
95°	81	30	41	50	51	101
105°	397	404	292	69	59	421
115°	745	753	765	778	784	735
125°	1050	1061	1066	1069	1072	938
135°	1308	1316	1321	1325	1321	1006
145°	1509	1518	1521	1524	1524	944
155°	1662	1660	1661	1667	1660	766
165°	1753	1749	1748	1757	1749	495
175°	1794	1788	1789	1797	1788	171
180°	1794	1794	1794	1794	1794	



TEST NUMBER: P332448-940

CATALOG NUMBER: S123RDIW-S775D1535U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3
2.5°	1154.9	1154.3	1153.6	1153.0	1152.4	1151.0	1149.0	1147.0	1145.0	1143.0	1144.9
5°	1151.3	1150.2	1149.1	1148.2	1147.1	1145.3	1142.8	1140.3	1137.8	1135.4	1137.2
7.5°	1140.6	1139.5	1138.4	1137.2	1136.1	1133.9	1130.7	1127.5	1124.3	1121.0	1122.0
10°	1131.7	1130.2	1128.7	1127.3	1125.8	1123.2	1119.5	1115.8	1112.1	1108.3	1108.5
12.5°	1118.9	1117.3	1115.7	1114.1	1112.5	1109.4	1104.8	1100.3	1095.6	1091.1	1091.0
15°	1098.1	1095.7	1093.4	1091.2	1088.9	1084.9	1079.1	1073.3	1067.4	1061.6	1060.6
17.5°	1071.7	1069.1	1066.4	1063.7	1061.0	1056.1	1048.7	1041.3	1033.8	1026.5	1024.3
20°	1052.3	1048.9	1045.6	1042.3	1039.0	1033.4	1025.5	1017.6	1009.8	1001.8	999.2
22.5°	1030.6	1026.8	1023.0	1019.1	1015.3	1009.2	1000.9	992.5	984.1	975.7	972.3
25°	999.1	993.9	988.6	983.5	978.3	970.9	961.4	951.8	942.3	932.7	928.4
27.5°	960.7	955.0	949.3	943.6	937.9	929.7	919.1	908.5	897.8	887.2	881.1
30°	934.6	928.4	922.2	916.0	909.7	900.8	889.2	877.5	865.9	854.3	847.3
32.5°	908.5	901.4	894.4	887.3	880.3	870.6	858.3	846.1	833.7	821.4	813.8
35°	864.6	857.1	849.6	842.2	834.7	824.6	811.7	798.8	786.0	773.1	764.2
37.5°	820.2	811.8	803.5	795.2	786.9	776.0	762.2	748.5	734.8	721.0	710.9
40°	791.8	782.7	773.5	764.4	755.3	743.3	728.6	713.9	699.1	684.4	673.6
42.5°	759.6	750.6	741.4	732.3	723.2	711.0	695.7	680.5	665.3	650.1	638.3
45°	710.5	701.2	691.9	682.5	673.2	660.6	644.5	628.6	612.6	596.6	584.8
47.5°	661.5	651.2	641.0	630.7	620.5	607.3	591.4	575.3	559.4	543.4	530.6
50°	625.5	615.8	606.1	596.3	586.6	573.3	556.5	539.7	522.9	506.0	493.2
52.5°	593.4	582.9	572.3	561.7	551.2	537.5	520.8	504.3	487.6	470.9	457.6
55°	539.7	529.5	519.3	509.2	499.0	485.1	467.4	449.9	432.2	414.6	402.5
57.5°	490.0	478.9	467.9	456.7	445.7	431.3	413.6	395.8	378.1	360.4	349.0
60°	455.7	444.3	432.8	421.4	410.0	395.7	378.4	361.2	344.0	326.8	315.6
62.5°	421.2	409.8	398.4	387.0	375.7	361.3	344.1	326.9	309.7	292.4	281.9
65°	368.8	357.4	346.0	334.6	323.2	309.3	293.2	277.0	260.8	244.6	234.4
67.5°	316.4	304.8	293.3	281.7	270.2	256.6	241.1	225.6	210.1	194.6	187.0
70°	282.0	270.8	259.6	248.3	237.2	224.3	209.7	195.3	180.7	166.2	158.9
72.5°	247.6	236.6	225.5	214.5	203.5	191.4	178.2	165.0	151.8	138.6	132.6
75°	195.1	185.2	175.2	165.2	155.3	144.6	133.2	121.8	110.4	99.0	96.9
77.5°	147.3	138.3	129.3	120.3	111.3	103.2	95.8	88.5	81.1	73.7	72.7
80°	116.7	108.2	99.7	91.2	82.7	76.2	71.9	67.5	63.2	58.9	58.2
82.5°	87.6	80.3	72.9	65.5	58.2	53.5	51.5	49.4	47.4	45.4	44.8
85°	49.5	44.9	40.4	35.8	31.2	28.6	28.0	27.4	26.8	26.1	25.8
87.5°	18.2	16.9	15.7	14.5	13.3	13.0	13.8	14.5	15.3	16.1	16.1
90°	1.3	4.3	7.2	10.3	13.2	16.6	20.4	24.3	28.2	32.0	33.2
92.5°	24.8	24.0	23.1	22.3	21.5	22.5	25.4	28.4	31.2	34.2	36.0
95°	81.3	69.2	57.1	44.9	32.7	28.3	31.6	34.8	38.1	41.3	43.4
97.5°	163.5	158.0	152.6	147.0	141.6	128.2	106.9	85.6	64.3	42.9	45.3
100°	225.3	231.2	237.1	243.1	249.0	228.8	182.6	136.4	90.2	44.0	46.4
102.5°	295.7	300.0	304.3	308.4	312.7	289.6	239.2	188.7	138.2	87.7	80.3
105°	397.3	400.6	403.8	407.1	410.3	398.6	371.9	345.3	318.6	291.9	239.5
107.5°	504.4	507.0	509.6	512.3	514.9	518.3	522.5	526.7	530.9	535.1	496.7
110°	575.9	578.3	580.6	583.0	585.4	588.2	591.5	594.7	598.0	601.2	591.5



TEST NUMBER: P332448-940

CATALOG NUMBER: S123RDIW-S775D1535U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	644.2	646.3	648.5	650.6	652.6	655.4	658.6	661.9	665.1	668.4	668.6
115°	745.2	747.0	748.8	750.6	752.3	754.6	757.2	759.8	762.5	765.2	768.1
117.5°	843.0	845.3	847.4	849.6	851.9	853.6	855.0	856.3	857.6	859.1	861.4
120°	903.8	906.5	909.2	911.9	914.5	916.3	917.1	918.0	918.9	919.8	922.2
122.5°	965.7	967.9	970.1	972.2	974.5	976.2	977.2	978.4	979.5	980.6	982.3
125°	1050.4	1052.8	1055.3	1057.6	1060.0	1061.8	1062.9	1064.1	1065.3	1066.5	1067.1
127.5°	1132.6	1135.0	1137.4	1139.7	1142.1	1144.0	1145.4	1146.8	1148.3	1149.7	1150.6
130°	1183.7	1186.2	1188.6	1190.9	1193.3	1195.1	1196.2	1197.4	1198.6	1199.8	1201.0
132.5°	1232.9	1235.2	1237.6	1239.9	1242.3	1244.0	1244.9	1245.9	1246.8	1247.8	1248.9
135°	1307.8	1309.6	1311.3	1313.1	1314.9	1316.3	1317.5	1318.8	1319.9	1321.1	1322.0
137.5°	1371.7	1374.0	1376.3	1378.5	1380.7	1382.2	1382.9	1383.5	1384.2	1384.8	1386.3
140°	1414.4	1416.2	1418.0	1419.8	1421.6	1422.8	1423.7	1424.6	1425.5	1426.4	1427.6
142.5°	1453.8	1455.6	1457.4	1459.2	1461.0	1462.3	1463.2	1464.1	1465.0	1465.9	1466.8
145°	1509.0	1511.1	1513.2	1515.3	1517.3	1518.7	1519.3	1519.8	1520.5	1521.1	1521.6
147.5°	1561.0	1562.5	1563.8	1565.1	1566.5	1567.4	1568.1	1568.7	1569.2	1569.9	1570.5
150°	1593.0	1593.9	1594.8	1595.7	1596.6	1597.3	1597.9	1598.6	1599.1	1599.7	1600.3
152.5°	1621.8	1622.3	1622.6	1623.1	1623.5	1623.9	1624.3	1624.6	1625.0	1625.3	1626.4
155°	1662.3	1661.8	1661.2	1660.6	1660.0	1659.8	1660.2	1660.5	1660.7	1661.0	1662.5
157.5°	1693.8	1693.8	1693.7	1693.6	1693.6	1693.4	1693.1	1692.8	1692.6	1692.2	1694.0
160°	1713.1	1712.7	1712.4	1712.2	1711.8	1711.5	1711.3	1710.9	1710.7	1710.4	1712.2
162.5°	1731.2	1730.4	1729.7	1728.8	1728.0	1727.5	1727.2	1727.0	1726.6	1726.4	1728.4
165°	1753.0	1752.1	1751.2	1750.3	1749.4	1748.9	1748.6	1748.3	1748.0	1747.7	1750.1
167.5°	1770.0	1768.9	1767.7	1766.6	1765.3	1764.8	1764.8	1764.8	1764.8	1764.8	1767.1
170°	1779.7	1778.5	1777.3	1776.1	1775.0	1774.3	1774.3	1774.3	1774.3	1774.3	1776.7
172.5°	1786.1	1784.7	1783.2	1781.8	1780.4	1779.8	1780.0	1780.3	1780.5	1780.7	1783.2
175°	1794.3	1792.9	1791.4	1789.9	1788.4	1787.8	1788.1	1788.4	1788.7	1789.0	1791.1
177.5°	1796.4	1795.3	1794.1	1793.0	1791.7	1791.3	1791.5	1791.7	1792.0	1792.2	1794.1
180°	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3



TEST NUMBER: P332448-940

CATALOG NUMBER: S123RDIW-S775D1535U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3
2.5°	1146.7	1148.5	1150.3	1151.1	1150.8	1150.4	1150.0	1149.8
5°	1139.1	1140.9	1142.8	1143.5	1143.2	1142.7	1142.3	1141.9
7.5°	1123.1	1124.1	1125.2	1125.3	1124.6	1123.9	1123.2	1122.5
10°	1108.8	1108.9	1109.1	1108.8	1107.7	1106.6	1105.6	1104.6
12.5°	1090.8	1090.7	1090.7	1089.9	1088.8	1087.5	1086.4	1085.1
15°	1059.5	1058.5	1057.5	1056.2	1054.8	1053.3	1051.9	1050.4
17.5°	1022.1	1019.9	1017.7	1015.6	1013.3	1011.2	1009.1	1006.9
20°	996.5	993.7	991.0	988.5	986.0	983.5	981.0	978.5
22.5°	969.0	965.6	962.2	959.4	957.1	954.8	952.4	950.1
25°	924.1	919.7	915.3	912.0	909.7	907.4	905.2	902.9
27.5°	875.0	869.1	863.0	858.2	854.7	851.2	847.7	844.3
30°	840.3	833.1	826.1	820.9	817.6	814.3	810.9	807.6
32.5°	806.0	798.3	790.6	785.0	781.5	778.0	774.5	771.1
35°	755.3	746.4	737.4	731.1	727.4	723.6	719.9	716.1
37.5°	700.7	690.6	680.5	673.2	668.5	663.9	659.3	654.7
40°	662.8	652.0	641.2	633.5	628.7	623.9	619.1	614.4
42.5°	626.4	614.7	602.9	594.9	590.6	586.3	582.0	577.7
45°	573.0	561.2	549.3	540.9	535.9	530.9	526.0	521.0
47.5°	517.6	504.8	492.0	483.3	478.8	474.4	470.0	465.6
50°	480.4	467.4	454.6	445.8	441.0	436.2	431.5	426.7
52.5°	444.3	430.9	417.5	408.7	404.4	400.1	395.8	391.6
55°	390.5	378.4	366.4	358.3	354.2	350.0	345.9	341.7
57.5°	337.7	326.3	315.0	307.5	304.0	300.4	296.9	293.4
60°	304.3	293.2	282.0	274.6	271.1	267.5	264.0	260.5
62.5°	271.3	260.8	250.3	243.2	239.4	235.8	232.1	228.4
65°	224.3	214.1	203.9	197.7	195.5	193.1	190.9	188.6
67.5°	179.4	171.8	164.2	159.2	156.8	154.3	151.9	149.4
70°	151.7	144.4	137.1	132.4	130.1	127.8	125.6	123.2
72.5°	126.7	120.7	114.9	111.4	110.4	109.5	108.5	107.5
75°	94.8	92.7	90.7	89.4	89.0	88.6	88.2	87.7
77.5°	71.5	70.4	69.3	68.5	68.1	67.7	67.2	66.9
80°	57.6	57.0	56.4	55.8	55.4	55.0	54.6	54.1
82.5°	44.1	43.5	42.9	42.5	42.4	42.4	42.3	42.2
85°	25.3	24.9	24.5	24.3	24.3	24.3	24.3	24.3
87.5°	16.2	16.3	16.4	16.4	16.3	16.3	16.2	16.2
90°	34.3	35.6	36.7	37.6	38.3	38.8	39.4	39.9
92.5°	37.9	39.9	41.7	42.8	43.2	43.5	43.9	44.2
95°	45.5	47.5	49.6	50.6	50.6	50.6	50.6	50.6
97.5°	47.7	50.0	52.4	53.8	54.0	54.3	54.7	54.9
100°	48.7	51.1	53.5	54.8	55.1	55.4	55.7	56.0
102.5°	73.0	65.7	58.3	54.9	55.5	56.0	56.5	57.1
105°	187.1	134.6	82.2	56.3	56.9	57.5	58.1	58.7
107.5°	458.2	419.7	381.3	342.3	302.8	263.2	223.7	184.2
110°	581.7	571.9	562.1	536.0	493.7	451.3	408.9	366.6



TEST NUMBER: P332448-940

CATALOG NUMBER: S123RDIW-S775D1535U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	668.8	669.0	669.1	664.8	655.8	646.8	637.9	628.9
115°	771.2	774.1	777.0	779.1	780.3	781.5	782.7	783.9
117.5°	863.8	866.1	868.5	869.9	870.0	870.3	870.6	870.8
120°	924.6	926.9	929.3	930.5	930.5	930.5	930.5	930.5
122.5°	983.9	985.6	987.3	988.2	988.5	988.6	988.9	989.2
125°	1067.6	1068.3	1068.8	1069.4	1070.1	1070.6	1071.2	1071.8
127.5°	1151.6	1152.5	1153.4	1153.6	1153.1	1152.4	1151.8	1151.3
130°	1202.1	1203.4	1204.5	1204.8	1204.3	1203.6	1203.0	1202.5
132.5°	1250.2	1251.3	1252.5	1252.7	1251.9	1251.1	1250.2	1249.4
135°	1322.9	1323.7	1324.6	1324.6	1323.7	1322.9	1322.0	1321.1
137.5°	1387.7	1389.1	1390.5	1390.9	1390.4	1389.7	1389.1	1388.6
140°	1428.8	1429.9	1431.1	1431.5	1430.8	1430.3	1429.7	1429.1
142.5°	1467.8	1468.7	1469.6	1469.7	1468.9	1468.0	1467.2	1466.4
145°	1522.2	1522.9	1523.4	1523.8	1523.8	1523.8	1523.8	1523.8
147.5°	1571.0	1571.6	1572.3	1571.8	1570.5	1569.1	1567.7	1566.4
150°	1600.9	1601.5	1602.0	1602.0	1601.1	1600.2	1599.3	1598.4
152.5°	1627.5	1628.5	1629.6	1629.4	1628.1	1626.7	1625.3	1624.0
155°	1664.0	1665.4	1667.0	1666.8	1665.0	1663.2	1661.4	1659.7
157.5°	1695.8	1697.5	1699.3	1699.1	1696.7	1694.4	1692.1	1689.8
160°	1714.0	1715.7	1717.4	1717.3	1715.2	1713.2	1711.1	1709.1
162.5°	1730.4	1732.4	1734.4	1734.5	1732.7	1730.8	1729.0	1727.2
165°	1752.4	1754.8	1757.2	1757.3	1755.2	1753.2	1751.1	1749.0
167.5°	1769.5	1771.8	1774.2	1774.2	1771.8	1769.5	1767.1	1764.8
170°	1779.1	1781.5	1783.9	1783.9	1781.5	1779.1	1776.7	1774.3
172.5°	1785.5	1787.9	1790.2	1790.1	1787.5	1784.9	1782.3	1779.7
175°	1793.1	1795.2	1797.3	1797.2	1794.7	1792.4	1790.0	1787.7
177.5°	1796.0	1797.9	1799.8	1799.6	1797.2	1794.8	1792.4	1790.1
180°	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3	1794.3

(END OF REPORT)