

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332833-927

Luminaire Tested: **S124DIW-S1020D1560U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332833-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S1020D1560U927-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8453.1 lumens
Efficiency: N/A
Efficacy: 110.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332833-927

CATALOG NUMBER: S124DIW-S1020D1560U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

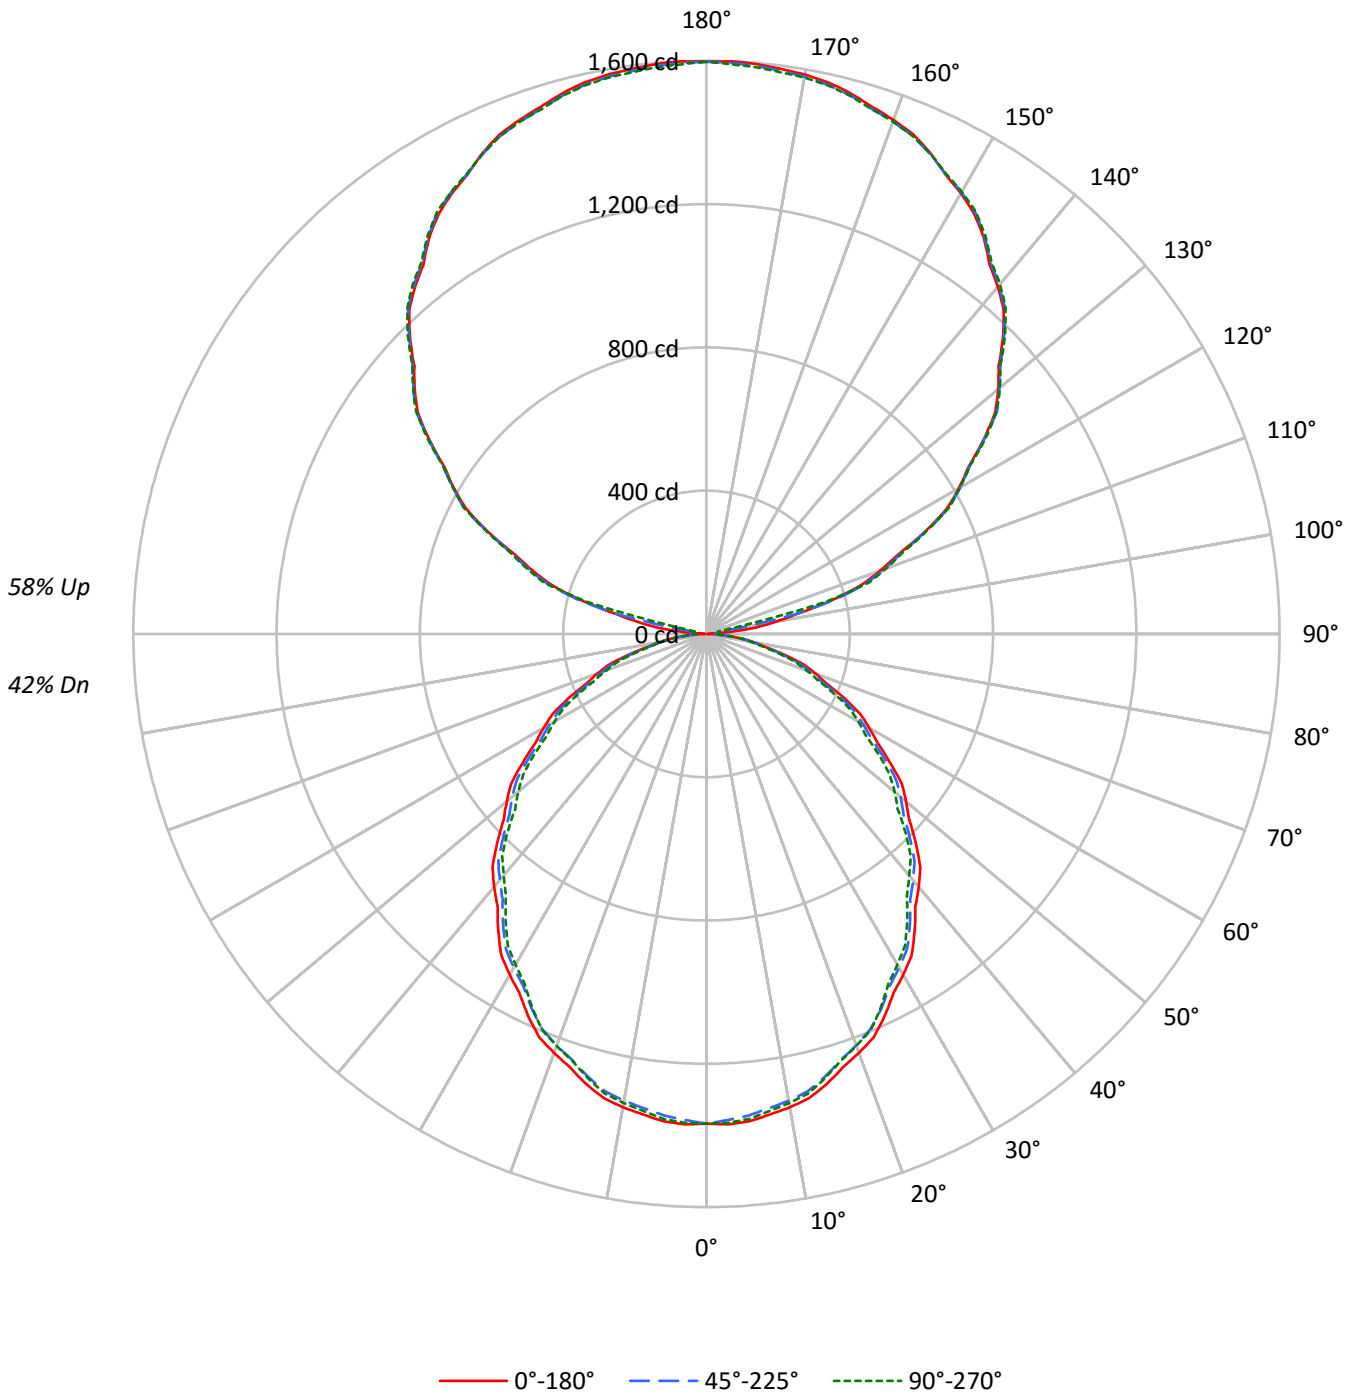



TEST NUMBER: P332833-927

CATALOG NUMBER: S124DIW-S1020D1560U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	48	48	48	42
1	96	92	88	84	87	84	80	77	69	67	64	55	54	52	43	42	41	35
2	87	80	74	69	79	73	68	63	60	57	53	48	46	44	38	36	34	29
3	80	70	63	57	72	64	58	53	53	49	45	43	40	37	33	31	29	25
4	73	62	54	48	66	57	50	45	47	42	38	38	34	32	30	27	25	21
5	67	55	47	41	61	51	44	38	42	37	33	34	30	27	27	24	22	18
6	61	50	42	36	56	46	38	33	38	33	29	31	27	24	24	21	19	16
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17	14
8	53	40	33	28	48	37	31	26	31	26	22	26	22	19	20	17	15	13
9	49	37	30	25	45	34	27	23	29	23	20	24	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11035	11035	11035
5°	11068	10935	11015
10°	10999	10846	10900
15°	10866	10692	10719
20°	10689	10501	10510
25°	10488	10283	10253
30°	10241	10026	9934
35°	9984	9758	9629
40°	9720	9454	9280
45°	9442	9154	8978
50°	9134	8887	8611
55°	8802	8541	8263
60°	8472	8152	7905
65°	8097	7782	7469
70°	7678	7291	7006
75°	7037	6697	6525
80°	6267	6007	5858
85°	5483	5280	5169



TEST NUMBER: P332833-927

CATALOG NUMBER: S124DIW-S1020D1560U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	128.7	1.5
10°-20°	362.7	4.3
20°-30°	533.8	6.3
30°-40°	620.6	7.3
40°-50°	620.6	7.3
50°-60°	542.9	6.4
60°-70°	403.2	4.8
70°-80°	229.1	2.7
80°-90°	70.7	0.8
90°-100°	54.6	0.6
100°-110°	348.3	4.1
110°-120°	666.3	7.9
120°-130°	845.9	10.0
130°-140°	905.0	10.7
140°-150°	846.3	10.0
150°-160°	682.5	8.1
160°-170°	440.2	5.2
170°-180°	151.7	1.8
0°-30°	1025.2	12.1
0°-40°	1645.9	19.5
0°-60°	2809.4	33.2
0°-90°	3512.3	41.6
90°-120°	1069.3	12.6
90°-150°	3666.4	43.4
90°-180°	4941.0	58.5
0°-180°	8453.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1367	1367	1367	1367	1367	
5°	1366	1361	1349	1361	1359	129
15°	1300	1295	1279	1285	1282	366
25°	1177	1169	1154	1155	1151	541
35°	1013	1005	990	983	977	633
45°	827	819	802	790	786	637
55°	625	621	607	594	587	560
65°	424	418	407	397	391	420
75°	226	220	215	210	209	240
85°	59	59	57	57	56	65
90°	4	17	26	33	36	6
95°	66	27	26	33	35	84
105°	360	367	373	380	340	376
115°	671	675	674	676	676	660
125°	944	948	946	950	951	842
135°	1171	1170	1174	1177	1179	902
145°	1350	1353	1354	1355	1357	843
155°	1480	1481	1478	1482	1479	682
165°	1561	1556	1555	1564	1554	441
175°	1597	1591	1591	1601	1588	152
180°	1597	1597	1597	1597	1597	



TEST NUMBER: P332833-927

CATALOG NUMBER: S124DIW-S1020D1560U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9
2.5°	1370.4	1369.8	1369.2	1368.7	1368.1	1366.7	1364.5	1362.4	1360.3	1358.1	1360.1
5°	1365.8	1364.9	1363.9	1362.9	1361.9	1360.1	1357.4	1354.7	1352.1	1349.4	1352.1
7.5°	1353.1	1352.1	1351.1	1350.2	1349.2	1347.3	1344.3	1341.3	1338.3	1335.4	1337.5
10°	1341.7	1340.8	1339.7	1338.8	1337.8	1335.8	1332.6	1329.4	1326.3	1323.1	1325.0
12.5°	1326.8	1325.9	1324.8	1323.9	1322.9	1320.7	1317.4	1314.1	1310.7	1307.3	1309.5
15°	1300.1	1299.1	1298.1	1297.2	1296.2	1293.9	1290.2	1286.6	1282.9	1279.3	1280.7
17.5°	1267.9	1266.7	1265.4	1264.2	1263.1	1260.7	1257.2	1253.8	1250.3	1246.9	1247.8
20°	1244.2	1243.0	1241.8	1240.6	1239.4	1236.9	1233.3	1229.6	1226.0	1222.3	1223.1
22.5°	1218.9	1217.2	1215.6	1214.0	1212.4	1209.7	1206.1	1202.5	1198.8	1195.2	1196.5
25°	1177.4	1175.8	1174.0	1172.3	1170.6	1168.1	1164.7	1161.3	1157.9	1154.4	1154.7
27.5°	1130.1	1128.4	1126.6	1124.8	1123.1	1120.6	1117.5	1114.3	1111.1	1107.9	1107.4
30°	1098.6	1096.6	1094.6	1092.7	1090.8	1088.2	1085.1	1081.9	1078.7	1075.5	1074.6
32.5°	1065.2	1063.5	1061.8	1060.0	1058.3	1055.7	1052.3	1049.0	1045.6	1042.3	1041.1
35°	1013.1	1011.5	1009.7	1008.1	1006.3	1003.8	1000.4	997.0	993.6	990.1	988.4
37.5°	958.1	956.6	955.1	953.5	951.9	949.4	945.6	942.0	938.3	934.7	932.9
40°	922.3	920.3	918.3	916.4	914.4	911.6	908.0	904.4	900.7	897.1	894.6
42.5°	883.7	882.5	881.3	880.2	879.0	876.4	872.4	868.3	864.3	860.2	857.4
45°	827.0	825.2	823.6	821.8	820.1	817.3	813.4	809.5	805.6	801.8	799.1
47.5°	767.5	766.4	765.2	764.1	762.9	760.5	756.9	753.3	749.7	746.1	743.1
50°	727.3	726.3	725.3	724.4	723.3	721.2	717.8	714.4	711.0	707.6	704.2
52.5°	687.9	686.7	685.5	684.4	683.2	680.8	677.2	673.6	669.9	666.4	663.4
55°	625.4	624.6	623.9	623.2	622.5	620.4	617.0	613.6	610.2	606.8	603.9
57.5°	565.9	565.0	564.2	563.3	562.5	560.4	557.1	553.7	550.3	547.0	544.2
60°	524.7	523.4	522.2	521.0	519.8	517.6	514.4	511.3	508.1	504.9	502.7
62.5°	484.3	483.3	482.3	481.3	480.2	478.1	474.7	471.3	467.9	464.6	462.6
65°	423.9	422.6	421.4	420.3	419.0	417.2	414.7	412.3	409.9	407.4	405.0
67.5°	363.0	361.9	360.8	359.7	358.5	356.8	354.4	352.1	349.7	347.5	345.1
70°	325.3	323.6	321.9	320.2	318.5	316.6	314.7	312.8	310.9	308.9	306.9
72.5°	285.0	283.3	281.6	279.9	278.2	276.6	275.0	273.5	271.9	270.3	268.8
75°	225.6	224.4	223.2	222.0	220.8	219.5	218.3	217.1	215.9	214.7	213.7
77.5°	168.9	168.3	167.8	167.3	166.8	166.0	164.9	163.8	162.7	161.7	161.4
80°	134.8	134.0	133.2	132.5	131.8	131.2	130.7	130.2	129.8	129.2	128.7
82.5°	101.4	101.1	100.8	100.4	100.1	99.8	99.7	99.7	99.6	99.4	99.2
85°	59.2	59.2	59.2	59.2	59.2	58.9	58.4	57.9	57.4	57.0	57.0
87.5°	23.5	23.9	24.2	24.6	25.0	25.3	25.6	25.8	26.1	26.3	26.6
90°	3.6	6.5	9.4	12.4	15.3	17.8	19.9	22.0	24.2	26.3	27.9
92.5°	15.1	15.2	15.4	15.5	15.7	16.8	18.9	21.1	23.2	25.3	26.9
95°	65.7	56.6	47.7	38.7	29.6	25.2	25.5	25.7	26.0	26.3	27.9
97.5°	139.5	145.1	150.8	156.5	162.1	150.0	120.4	90.8	61.2	31.5	31.7
100°	195.9	200.7	205.5	210.2	215.0	199.1	162.5	125.8	89.2	52.6	48.1
102.5°	259.0	262.5	266.0	269.5	273.0	272.4	267.6	262.8	258.0	253.3	204.5
105°	359.6	361.2	362.7	364.4	366.0	367.4	368.8	370.1	371.4	372.7	375.1
107.5°	453.0	453.8	454.6	455.4	456.2	457.5	459.3	461.1	462.9	464.7	465.9
110°	516.1	516.9	517.7	518.5	519.3	520.5	522.0	523.6	525.2	526.8	527.4



TEST NUMBER: P332833-927

CATALOG NUMBER: S124DIW-S1020D1560U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	577.3	578.7	580.1	581.5	583.0	584.1	584.8	585.6	586.3	587.1	586.9
115°	671.4	672.2	673.0	673.8	674.5	674.9	674.5	674.3	674.1	673.8	674.3
117.5°	756.2	757.2	758.4	759.4	760.5	761.3	761.8	762.5	763.0	763.6	763.5
120°	813.6	814.6	815.7	816.7	817.8	818.2	817.9	817.7	817.4	817.1	817.7
122.5°	867.0	867.7	868.3	868.9	869.7	870.1	870.5	870.8	871.2	871.6	872.0
125°	943.8	944.8	945.9	947.0	948.0	948.2	947.8	947.2	946.7	946.2	947.0
127.5°	1016.4	1016.7	1016.9	1017.2	1017.5	1018.2	1019.5	1020.6	1021.8	1023.1	1022.9
130°	1063.3	1063.5	1063.7	1064.1	1064.3	1064.9	1065.6	1066.4	1067.2	1068.0	1068.3
132.5°	1106.2	1106.7	1107.2	1107.7	1108.2	1108.9	1109.9	1110.9	1111.9	1112.9	1113.2
135°	1170.8	1170.4	1170.2	1170.0	1169.7	1170.1	1171.2	1172.2	1173.3	1174.3	1174.9
137.5°	1227.9	1228.0	1228.0	1228.2	1228.3	1228.9	1230.1	1231.3	1232.4	1233.6	1234.1
140°	1265.1	1265.7	1266.2	1266.7	1267.3	1267.8	1268.3	1268.8	1269.4	1269.9	1270.7
142.5°	1298.5	1299.5	1300.5	1301.5	1302.4	1303.1	1303.4	1303.7	1304.0	1304.3	1304.9
145°	1350.0	1350.8	1351.5	1352.3	1353.1	1353.5	1353.5	1353.5	1353.5	1353.5	1353.8
147.5°	1390.8	1392.3	1393.8	1395.3	1396.8	1397.3	1397.1	1396.9	1396.5	1396.3	1396.5
150°	1420.5	1421.5	1422.5	1423.6	1424.7	1425.1	1424.8	1424.6	1424.3	1424.0	1424.0
152.5°	1445.3	1446.1	1447.0	1447.8	1448.7	1448.9	1448.3	1447.9	1447.4	1446.9	1447.4
155°	1480.2	1480.4	1480.7	1481.0	1481.2	1481.0	1480.2	1479.4	1478.6	1477.7	1478.8
157.5°	1509.6	1509.4	1509.3	1509.1	1508.9	1508.4	1507.4	1506.6	1505.7	1504.8	1506.2
160°	1526.8	1526.0	1525.2	1524.4	1523.6	1523.0	1522.7	1522.5	1522.3	1521.9	1523.6
162.5°	1542.1	1541.0	1540.0	1539.1	1538.0	1537.4	1537.1	1536.8	1536.6	1536.3	1537.9
165°	1561.4	1560.0	1558.8	1557.4	1556.1	1555.4	1555.4	1555.4	1555.4	1555.4	1557.5
167.5°	1576.7	1575.3	1573.9	1572.6	1571.1	1570.4	1570.3	1570.1	1569.9	1569.8	1572.1
170°	1585.3	1583.7	1582.1	1580.5	1578.9	1578.3	1578.5	1578.8	1579.1	1579.3	1581.4
172.5°	1591.0	1589.4	1587.9	1586.3	1584.7	1584.0	1584.3	1584.5	1584.8	1585.1	1587.1
175°	1597.2	1595.6	1594.0	1592.4	1590.9	1590.2	1590.5	1590.7	1591.0	1591.3	1593.6
177.5°	1600.1	1598.6	1597.1	1595.6	1594.2	1593.6	1594.0	1594.5	1594.9	1595.3	1597.0
180°	1597.2	1597.2	1597.2	1597.2	1597.2	1597.2	1597.2	1597.2	1597.2	1597.2	1597.2



TEST NUMBER: P332833-927

CATALOG NUMBER: S124DIW-S1020D1560U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9
2.5°	1362.0	1364.0	1366.0	1366.8	1366.6	1366.4	1366.2	1366.0
5°	1354.7	1357.4	1360.1	1361.2	1360.7	1360.2	1359.7	1359.2
7.5°	1339.7	1341.8	1343.9	1344.9	1344.6	1344.3	1343.9	1343.7
10°	1327.0	1329.0	1330.9	1331.6	1331.1	1330.6	1330.2	1329.7
12.5°	1311.6	1313.8	1315.9	1316.6	1316.0	1315.3	1314.5	1313.9
15°	1282.2	1283.7	1285.2	1285.5	1284.8	1284.0	1283.3	1282.5
17.5°	1248.7	1249.7	1250.5	1250.8	1250.3	1249.8	1249.4	1248.8
20°	1223.8	1224.6	1225.3	1225.3	1224.9	1224.4	1223.9	1223.4
22.5°	1197.8	1199.1	1200.4	1200.6	1199.8	1198.9	1198.0	1197.1
25°	1154.9	1155.2	1155.4	1155.0	1154.1	1153.1	1152.1	1151.1
27.5°	1106.8	1106.2	1105.6	1104.8	1103.5	1102.3	1101.1	1099.9
30°	1073.6	1072.6	1071.7	1070.6	1069.4	1068.1	1066.9	1065.7
32.5°	1039.9	1038.8	1037.6	1036.4	1035.1	1034.0	1032.8	1031.5
35°	986.7	985.0	983.3	981.8	980.6	979.5	978.2	977.0
37.5°	931.0	929.2	927.3	925.6	924.0	922.3	920.8	919.2
40°	892.2	889.7	887.3	885.5	884.2	883.0	881.9	880.6
42.5°	854.6	851.8	848.9	847.1	846.3	845.4	844.6	843.8
45°	796.4	793.7	791.0	789.3	788.6	787.9	787.1	786.4
47.5°	740.1	737.0	734.0	731.6	729.8	727.9	726.0	724.2
50°	700.8	697.4	694.0	691.5	690.0	688.6	687.1	685.6
52.5°	660.4	657.3	654.3	651.9	650.0	648.2	646.3	644.4
55°	600.9	598.0	595.1	592.9	591.4	590.0	588.5	587.1
57.5°	541.5	538.7	535.9	533.8	532.3	531.0	529.6	528.1
60°	500.6	498.4	496.1	494.5	493.2	492.0	490.8	489.6
62.5°	460.7	458.6	456.6	455.0	453.8	452.6	451.4	450.2
65°	402.6	400.1	397.7	395.9	394.7	393.5	392.2	391.0
67.5°	342.8	340.4	338.1	336.8	336.4	336.0	335.7	335.4
70°	305.0	303.0	301.1	299.8	299.0	298.3	297.5	296.8
72.5°	267.2	265.6	264.1	262.9	262.2	261.5	260.8	260.0
75°	212.7	211.8	210.8	210.2	209.9	209.7	209.5	209.2
77.5°	161.1	160.8	160.5	160.0	159.4	158.8	158.1	157.5
80°	128.3	127.8	127.3	126.9	126.7	126.4	126.2	126.0
82.5°	98.9	98.5	98.3	98.0	97.8	97.5	97.3	97.0
85°	57.0	57.0	57.0	56.8	56.6	56.3	56.1	55.8
87.5°	26.9	27.3	27.6	27.8	27.9	28.0	28.1	28.2
90°	29.5	31.1	32.6	33.7	34.2	34.8	35.3	35.8
92.5°	28.5	30.1	31.7	32.6	32.6	32.8	32.9	33.0
95°	29.5	31.1	32.6	33.6	33.8	34.1	34.4	34.6
97.5°	31.8	32.0	32.2	32.4	32.6	33.0	33.2	33.4
100°	43.6	39.1	34.5	32.4	32.6	33.0	33.2	33.4
102.5°	155.9	107.2	58.5	34.2	34.2	34.3	34.4	34.4
105°	377.5	379.9	382.3	378.7	369.2	359.6	350.1	340.5
107.5°	467.1	468.3	469.4	470.5	471.5	472.5	473.5	474.5
110°	527.9	528.5	528.9	529.7	530.4	531.2	532.0	532.8



TEST NUMBER: P332833-927

CATALOG NUMBER: S124DIW-S1020D1560U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	586.8	586.7	586.6	587.1	588.1	589.1	590.1	591.1
115°	674.9	675.3	675.9	676.2	676.2	676.2	676.2	676.2
117.5°	763.4	763.3	763.2	763.1	763.0	762.9	762.8	762.6
120°	818.2	818.7	819.3	819.3	818.7	818.2	817.7	817.1
122.5°	872.3	872.6	872.9	872.7	872.3	871.7	871.2	870.7
125°	947.8	948.6	949.4	949.9	950.1	950.4	950.7	950.9
127.5°	1022.8	1022.6	1022.5	1022.2	1022.1	1021.8	1021.6	1021.4
130°	1068.6	1068.8	1069.1	1069.2	1069.2	1069.2	1069.2	1069.2
132.5°	1113.5	1113.7	1114.0	1114.0	1113.8	1113.6	1113.4	1113.2
135°	1175.4	1175.9	1176.5	1177.0	1177.5	1178.1	1178.6	1179.1
137.5°	1234.8	1235.3	1236.0	1236.1	1236.0	1235.8	1235.6	1235.5
140°	1271.5	1272.3	1273.1	1273.6	1273.9	1274.1	1274.4	1274.7
142.5°	1305.5	1306.1	1306.6	1306.9	1307.0	1307.1	1307.1	1307.2
145°	1354.1	1354.3	1354.6	1355.0	1355.5	1356.1	1356.6	1357.1
147.5°	1396.7	1396.9	1397.2	1397.4	1397.6	1397.9	1398.2	1398.4
150°	1424.0	1424.0	1424.0	1424.2	1424.4	1424.7	1425.0	1425.2
152.5°	1447.8	1448.2	1448.7	1448.7	1448.6	1448.4	1448.3	1448.1
155°	1479.9	1481.0	1482.0	1482.2	1481.4	1480.6	1479.8	1479.0
157.5°	1507.5	1508.9	1510.3	1510.3	1508.9	1507.5	1506.2	1504.8
160°	1525.2	1526.8	1528.4	1528.4	1526.8	1525.2	1523.6	1521.9
162.5°	1539.5	1541.1	1542.7	1542.5	1540.8	1539.0	1537.2	1535.3
165°	1559.6	1561.8	1563.9	1563.8	1561.4	1559.0	1556.6	1554.3
167.5°	1574.5	1576.8	1579.1	1579.0	1576.3	1573.7	1571.0	1568.4
170°	1583.6	1585.7	1587.9	1587.5	1584.9	1582.2	1579.6	1576.9
172.5°	1589.3	1591.4	1593.6	1593.2	1590.3	1587.5	1584.6	1581.7
175°	1596.0	1598.5	1600.8	1600.4	1597.2	1594.0	1590.9	1587.7
177.5°	1598.7	1600.4	1602.1	1601.7	1599.2	1596.6	1594.0	1591.5
180°	1597.2	1597.2	1597.2	1597.2	1597.2	1597.2	1597.2	1597.2

(END OF REPORT)