

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332852-927

Luminaire Tested: **S124DIW-S1195D1050U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332852-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S1195D1050U927-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6933.1 lumens
Efficiency: N/A
Efficacy: 102.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 67.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332852-927

CATALOG NUMBER: S124DIW-S1195D1050U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

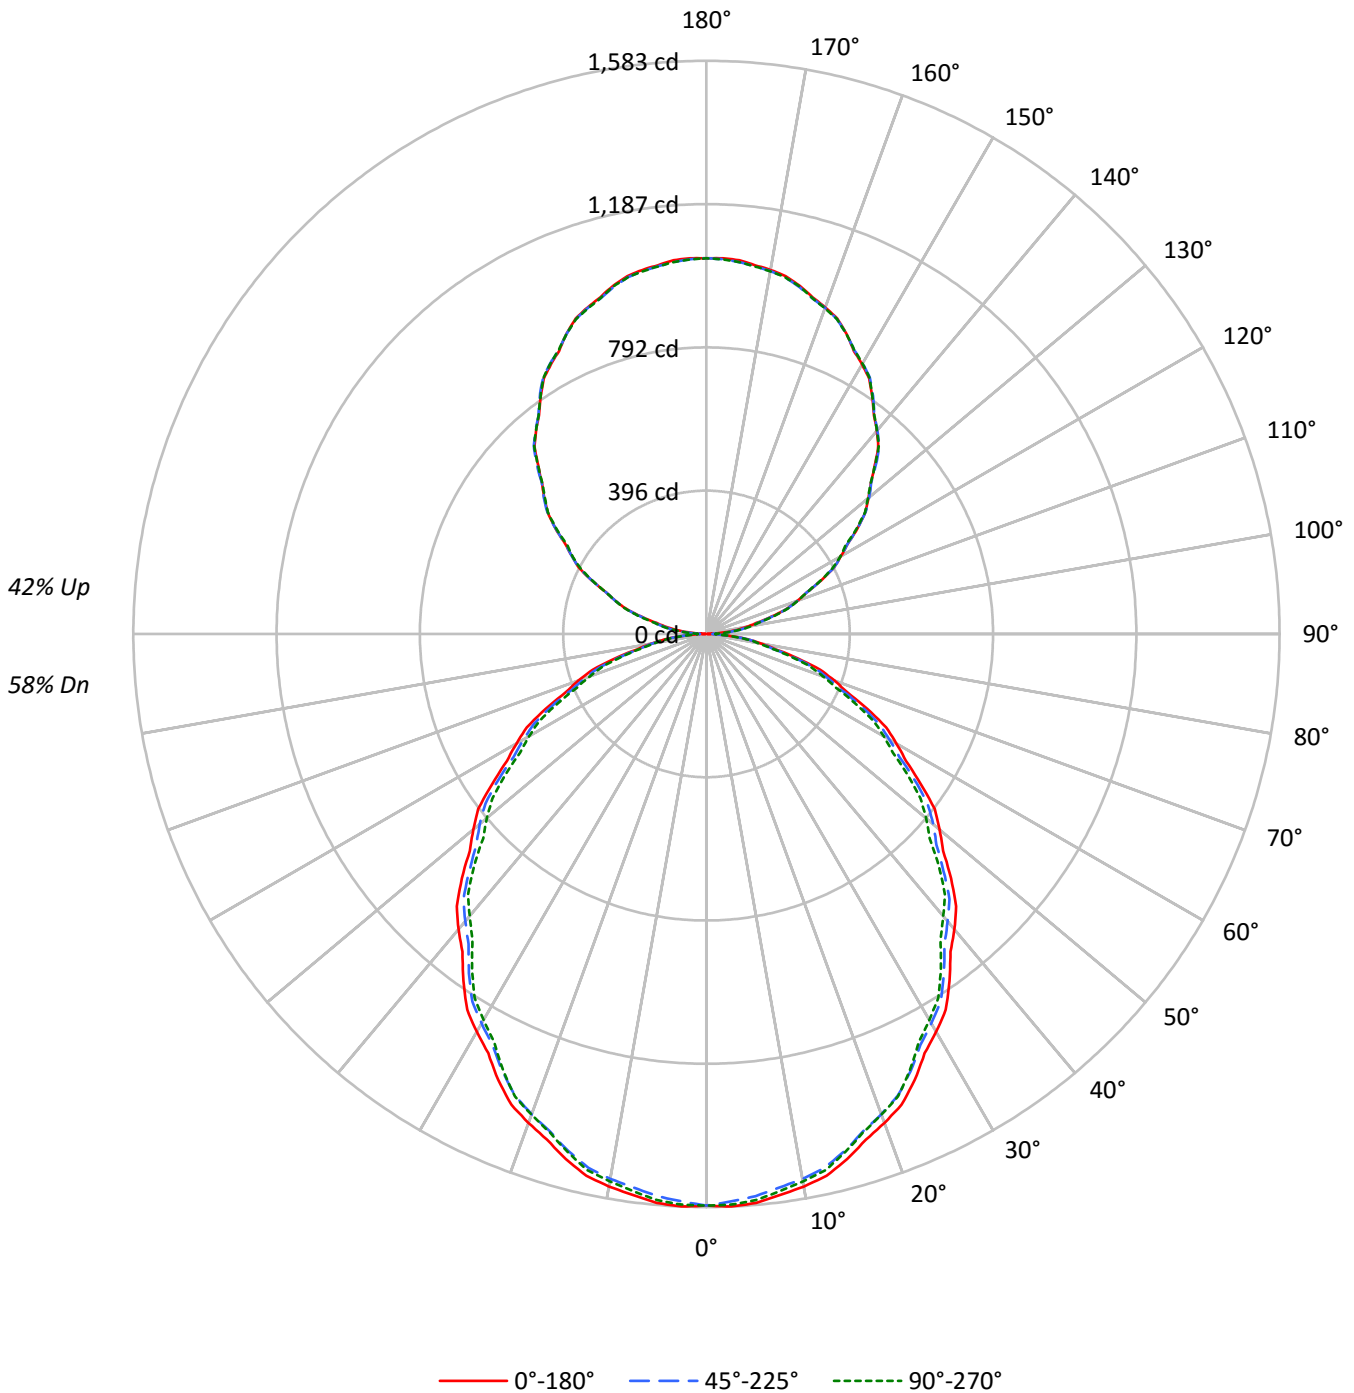



TEST NUMBER: P332852-927

CATALOG NUMBER: S124DIW-S1195D1050U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	64	64	64	58
1	100	95	91	88	93	89	86	82	77	75	72	66	65	63	56	55	54	49
2	91	83	77	72	84	78	72	68	68	63	60	58	55	52	50	47	45	41
3	83	73	66	60	77	68	62	57	60	55	50	52	48	44	44	41	39	35
4	76	65	57	51	70	61	54	48	53	47	43	46	42	38	39	36	33	30
5	70	58	49	43	65	54	47	41	47	42	37	41	37	33	35	32	29	26
6	64	52	44	38	60	49	41	36	43	37	32	37	33	29	32	28	26	23
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	29	26	23	20
8	55	43	35	29	51	40	33	28	35	30	25	31	26	23	27	23	20	18
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	18	16
10	48	36	28	24	45	34	27	23	30	24	21	27	22	19	23	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12745	12745	12745
5°	12783	12630	12721
10°	12703	12527	12588
15°	12549	12349	12380
20°	12345	12128	12138
25°	12113	11875	11843
30°	11828	11580	11473
35°	11532	11269	11121
40°	11225	10918	10718
45°	10904	10572	10369
50°	10550	10262	9946
55°	10166	9864	9543
60°	9783	9415	9131
65°	9352	8990	8627
70°	8868	8419	8091
75°	8125	7735	7536
80°	7234	6936	6760
85°	6326	6095	5974



TEST NUMBER: P332852-927

CATALOG NUMBER: S124DIW-S1195D1050U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.7	2.1
10°-20°	418.9	6.0
20°-30°	616.5	8.9
30°-40°	716.7	10.3
40°-50°	716.8	10.3
50°-60°	627.0	9.0
60°-70°	465.6	6.7
70°-80°	264.5	3.8
80°-90°	79.4	1.1
90°-100°	68.4	1.0
100°-110°	202.7	2.9
110°-120°	344.1	5.0
120°-130°	453.7	6.5
130°-140°	509.6	7.4
140°-150°	500.8	7.2
150°-160°	421.2	6.1
160°-170°	280.2	4.0
170°-180°	98.1	1.4
0°-30°	1184.1	17.1
0°-40°	1900.8	27.4
0°-60°	3244.6	46.8
0°-90°	4054.2	58.5
90°-120°	615.3	8.9
90°-150°	2079.4	30.0
90°-180°	2879.0	41.5
0°-180°	6933.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1579	1579	1579	1579	1579	
5°	1577	1572	1558	1571	1570	150
15°	1502	1496	1478	1484	1481	423
25°	1360	1350	1333	1334	1330	625
35°	1170	1161	1144	1135	1128	731
45°	955	946	926	913	908	736
55°	722	718	701	686	678	647
65°	490	483	471	458	452	485
75°	260	254	248	243	242	277
85°	68	68	66	66	64	75
90°	2	11	18	22	24	7
95°	48	55	61	63	63	54
105°	187	188	191	193	196	198
115°	350	350	348	348	347	345
125°	510	510	509	507	506	454
135°	657	662	662	660	658	508
145°	798	802	802	802	799	500
155°	915	915	914	917	914	421
165°	996	994	992	996	994	281
175°	1036	1032	1031	1036	1031	98
180°	1038	1038	1038	1038	1038	



TEST NUMBER: P332852-927

CATALOG NUMBER: S124DIW-S1195D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7
2.5°	1582.7	1582.1	1581.4	1580.7	1580.0	1578.4	1576.0	1573.5	1571.1	1568.6	1570.8
5°	1577.4	1576.3	1575.2	1574.1	1573.0	1570.8	1567.7	1564.6	1561.5	1558.5	1561.5
7.5°	1562.7	1561.6	1560.5	1559.3	1558.2	1556.0	1552.5	1549.1	1545.7	1542.2	1544.8
10°	1549.6	1548.5	1547.4	1546.2	1545.1	1542.7	1539.1	1535.4	1531.8	1528.1	1530.3
12.5°	1532.4	1531.3	1530.1	1529.0	1527.9	1525.3	1521.5	1517.7	1513.8	1509.9	1512.4
15°	1501.5	1500.4	1499.3	1498.2	1497.0	1494.4	1490.1	1485.9	1481.7	1477.5	1479.2
17.5°	1464.3	1462.9	1461.5	1460.2	1458.7	1456.0	1452.0	1448.0	1444.1	1440.0	1441.1
20°	1437.0	1435.6	1434.2	1432.8	1431.4	1428.5	1424.3	1420.1	1415.9	1411.7	1412.5
22.5°	1407.6	1405.8	1404.0	1402.1	1400.3	1397.2	1393.0	1388.8	1384.6	1380.3	1381.9
25°	1359.9	1357.9	1355.9	1353.9	1351.9	1349.0	1345.0	1341.2	1337.2	1333.2	1333.6
27.5°	1305.2	1303.1	1301.2	1299.1	1297.1	1294.3	1290.6	1287.0	1283.3	1279.6	1279.0
30°	1268.8	1266.5	1264.2	1262.0	1259.8	1256.8	1253.2	1249.5	1245.9	1242.2	1241.1
32.5°	1230.3	1228.3	1226.3	1224.2	1222.2	1219.2	1215.4	1211.5	1207.6	1203.7	1202.4
35°	1170.1	1168.2	1166.2	1164.2	1162.2	1159.3	1155.3	1151.4	1147.5	1143.5	1141.5
37.5°	1106.6	1104.8	1103.0	1101.2	1099.4	1096.4	1092.2	1088.0	1083.7	1079.5	1077.4
40°	1065.1	1062.9	1060.6	1058.4	1056.1	1052.9	1048.7	1044.4	1040.2	1036.0	1033.2
42.5°	1020.6	1019.2	1017.9	1016.5	1015.2	1012.2	1007.5	1002.8	998.1	993.5	990.2
45°	955.1	953.1	951.1	949.1	947.2	944.0	939.4	934.9	930.4	926.0	922.9
47.5°	886.5	885.1	883.8	882.4	881.1	878.4	874.2	870.1	865.9	861.7	858.3
50°	840.0	838.8	837.7	836.5	835.4	832.9	828.9	825.1	821.1	817.1	813.3
52.5°	794.4	793.1	791.7	790.4	789.0	786.2	782.1	777.9	773.8	769.6	766.1
55°	722.3	721.4	720.6	719.8	718.9	716.5	712.6	708.7	704.7	700.8	697.4
57.5°	653.5	652.5	651.6	650.6	649.7	647.2	643.3	639.4	635.6	631.7	628.5
60°	605.9	604.5	603.1	601.7	600.3	597.8	594.1	590.5	586.8	583.1	580.6
62.5°	559.4	558.2	557.0	555.8	554.7	552.2	548.3	544.4	540.5	536.6	534.3
65°	489.6	488.1	486.7	485.3	483.9	481.8	479.0	476.2	473.4	470.6	467.8
67.5°	419.2	418.0	416.6	415.3	414.1	412.0	409.3	406.6	403.9	401.2	398.5
70°	375.7	373.8	371.8	369.8	367.8	365.8	363.5	361.2	358.9	356.7	354.5
72.5°	329.2	327.2	325.2	323.2	321.3	319.4	317.6	315.8	314.0	312.2	310.4
75°	260.5	259.2	257.8	256.4	254.9	253.6	252.2	250.7	249.4	248.0	246.8
77.5°	195.0	194.4	193.8	193.2	192.6	191.6	190.4	189.2	188.0	186.7	186.4
80°	155.6	154.7	153.9	153.0	152.3	151.5	151.0	150.4	149.8	149.2	148.7
82.5°	117.2	116.8	116.4	116.0	115.6	115.3	115.2	115.1	114.9	114.9	114.5
85°	68.3	68.3	68.3	68.3	68.3	68.0	67.5	66.9	66.3	65.8	65.8
87.5°	26.8	26.9	27.1	27.3	27.5	27.6	27.6	27.7	27.7	27.8	28.0
90°	2.4	4.4	6.3	8.3	10.2	12.0	13.4	14.8	16.2	17.7	18.7
92.5°	17.2	19.4	21.7	23.9	26.1	27.8	28.8	29.8	30.8	31.8	32.4
95°	48.2	49.7	51.3	53.0	54.6	56.0	57.3	58.5	59.7	61.0	61.6
97.5°	84.1	85.4	86.7	87.9	89.3	90.6	92.1	93.6	95.0	96.5	97.1
100°	112.3	113.0	113.8	114.5	115.2	116.4	118.0	119.5	121.2	122.8	123.1
102.5°	141.9	142.2	142.4	142.8	143.0	143.9	145.4	146.8	148.3	149.7	150.3
105°	187.0	187.2	187.4	187.5	187.7	188.1	188.9	189.6	190.3	191.0	191.5
107.5°	234.3	234.6	234.7	235.0	235.2	235.4	235.4	235.6	235.7	235.8	236.3
110°	266.4	266.8	267.1	267.5	267.8	267.9	267.8	267.6	267.4	267.2	266.9



TEST NUMBER: P332852-927

CATALOG NUMBER: S124DIW-S1195D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	299.8	299.9	300.0	300.0	300.1	300.0	299.7	299.4	299.0	298.7	298.7
115°	349.9	349.9	349.9	349.9	349.9	349.7	349.4	349.0	348.6	348.3	348.1
117.5°	397.1	397.2	397.4	397.5	397.7	397.6	397.4	397.1	396.9	396.6	396.0
120°	428.6	429.3	430.0	430.7	431.4	431.5	430.9	430.4	429.9	429.4	428.5
122.5°	461.3	461.6	461.8	462.2	462.4	462.5	462.2	461.9	461.7	461.4	460.8
125°	509.6	509.6	509.6	509.6	509.6	509.5	509.3	509.1	509.0	508.8	508.4
127.5°	553.4	554.0	554.4	555.0	555.6	555.7	555.4	555.1	554.8	554.5	554.2
130°	584.2	584.8	585.3	585.8	586.4	586.6	586.6	586.6	586.6	586.6	586.3
132.5°	615.7	616.1	616.5	616.9	617.3	617.3	617.3	617.1	617.0	616.8	616.5
135°	657.3	658.3	659.4	660.4	661.6	662.1	662.1	662.1	662.1	662.1	661.7
137.5°	702.5	703.0	703.5	704.0	704.5	704.9	705.2	705.5	705.8	706.1	705.6
140°	732.7	733.1	733.4	733.8	734.1	734.3	734.3	734.3	734.3	734.3	734.1
142.5°	760.3	760.7	761.0	761.4	761.8	761.8	761.7	761.5	761.4	761.3	761.2
145°	798.5	799.2	799.9	800.7	801.4	801.8	802.0	802.2	802.3	802.5	802.3
147.5°	836.4	837.3	838.1	838.9	839.8	840.2	840.0	839.9	839.7	839.6	839.5
150°	859.5	860.2	860.9	861.7	862.4	862.7	862.7	862.7	862.7	862.7	862.7
152.5°	881.3	881.8	882.2	882.6	883.0	883.3	883.4	883.6	883.8	883.9	884.3
155°	914.9	914.9	914.9	914.9	914.9	914.8	914.6	914.4	914.3	914.1	914.8
157.5°	943.1	942.8	942.5	942.1	941.8	941.7	941.6	941.6	941.5	941.5	942.1
160°	959.8	959.6	959.4	959.3	959.1	958.9	958.7	958.5	958.4	958.2	958.7
162.5°	975.2	974.8	974.3	973.8	973.4	973.0	972.9	972.7	972.5	972.3	973.3
165°	995.9	995.4	994.8	994.3	993.8	993.3	993.0	992.6	992.3	991.9	993.0
167.5°	1011.8	1011.1	1010.3	1009.6	1008.8	1008.4	1008.5	1008.5	1008.5	1008.6	1009.6
170°	1020.8	1019.9	1019.0	1018.1	1017.2	1016.8	1017.1	1017.2	1017.4	1017.6	1018.7
172.5°	1027.2	1026.4	1025.7	1025.0	1024.2	1023.9	1023.9	1024.0	1024.0	1024.0	1025.2
175°	1036.0	1035.1	1034.3	1033.4	1032.5	1032.0	1031.7	1031.6	1031.4	1031.3	1032.5
177.5°	1038.9	1038.2	1037.5	1036.8	1036.1	1035.7	1035.7	1035.7	1035.7	1035.7	1036.7
180°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7



TEST NUMBER: P332852-927

CATALOG NUMBER: S124DIW-S1195D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7
2.5°	1573.0	1575.3	1577.6	1578.6	1578.3	1578.1	1577.9	1577.6
5°	1564.6	1567.7	1570.8	1572.1	1571.5	1571.0	1570.4	1569.8
7.5°	1547.2	1549.7	1552.1	1553.2	1552.9	1552.5	1552.2	1551.9
10°	1532.6	1534.9	1537.1	1537.9	1537.4	1536.8	1536.2	1535.6
12.5°	1514.8	1517.3	1519.8	1520.6	1519.8	1519.0	1518.2	1517.4
15°	1480.8	1482.6	1484.2	1484.6	1483.8	1483.0	1482.1	1481.3
17.5°	1442.2	1443.3	1444.3	1444.5	1444.0	1443.4	1442.9	1442.3
20°	1413.4	1414.2	1415.1	1415.2	1414.7	1414.1	1413.6	1412.9
22.5°	1383.4	1384.9	1386.4	1386.6	1385.7	1384.7	1383.6	1382.6
25°	1333.9	1334.1	1334.4	1334.0	1332.8	1331.7	1330.6	1329.5
27.5°	1278.3	1277.6	1276.9	1275.9	1274.5	1273.1	1271.7	1270.3
30°	1239.9	1238.8	1237.7	1236.4	1235.0	1233.7	1232.2	1230.8
32.5°	1201.0	1199.7	1198.3	1197.0	1195.6	1194.1	1192.8	1191.4
35°	1139.6	1137.7	1135.7	1134.0	1132.6	1131.2	1129.7	1128.4
37.5°	1075.2	1073.1	1071.0	1069.0	1067.1	1065.2	1063.4	1061.5
40°	1030.4	1027.5	1024.8	1022.6	1021.3	1019.9	1018.4	1017.0
42.5°	987.0	983.7	980.5	978.3	977.4	976.4	975.5	974.5
45°	919.8	916.7	913.6	911.6	910.8	909.9	909.1	908.2
47.5°	854.8	851.3	847.8	844.9	842.8	840.7	838.5	836.4
50°	809.3	805.3	801.5	798.6	796.9	795.3	793.5	791.9
52.5°	762.6	759.1	755.7	752.9	750.8	748.6	746.5	744.3
55°	694.0	690.7	687.3	684.8	683.1	681.4	679.7	678.0
57.5°	625.3	622.1	618.9	616.5	614.9	613.2	611.6	610.0
60°	578.1	575.6	573.1	571.1	569.7	568.2	566.9	565.5
62.5°	532.0	529.7	527.4	525.5	524.1	522.7	521.3	519.9
65°	464.9	462.2	459.3	457.2	455.8	454.4	453.0	451.6
67.5°	395.9	393.2	390.5	388.9	388.5	388.1	387.7	387.3
70°	352.2	350.0	347.7	346.2	345.3	344.5	343.6	342.8
72.5°	308.6	306.8	305.0	303.6	302.9	302.0	301.1	300.3
75°	245.7	244.5	243.4	242.7	242.5	242.2	241.9	241.6
77.5°	186.0	185.7	185.4	184.8	184.1	183.4	182.6	181.9
80°	148.1	147.6	147.0	146.6	146.3	146.0	145.8	145.4
82.5°	114.2	113.8	113.5	113.2	112.9	112.6	112.3	112.1
85°	65.8	65.8	65.8	65.7	65.4	65.0	64.8	64.5
87.5°	28.3	28.4	28.7	28.8	28.9	29.0	29.0	29.1
90°	19.8	20.8	21.9	22.7	23.0	23.4	23.7	24.1
92.5°	33.0	33.7	34.4	34.8	35.0	35.2	35.4	35.6
95°	62.0	62.6	63.1	63.4	63.4	63.4	63.4	63.4
97.5°	97.8	98.4	99.0	99.3	99.3	99.3	99.3	99.3
100°	123.5	123.8	124.2	124.4	124.4	124.4	124.4	124.4
102.5°	150.8	151.2	151.8	152.1	152.2	152.3	152.5	152.7
105°	192.1	192.6	193.1	193.7	194.2	194.7	195.3	195.8
107.5°	236.8	237.3	237.8	238.0	238.0	238.0	237.9	237.9
110°	266.5	266.2	265.8	265.9	266.4	267.0	267.5	268.1



TEST NUMBER: P332852-927

CATALOG NUMBER: S124DIW-S1195D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	298.6	298.5	298.4	298.4	298.6	298.7	298.7	298.9
115°	347.9	347.8	347.6	347.4	347.2	347.1	346.9	346.7
117.5°	395.4	394.7	394.2	393.7	393.3	393.0	392.6	392.3
120°	427.5	426.7	425.8	425.5	425.9	426.2	426.6	426.9
122.5°	460.3	459.6	459.0	458.4	457.7	457.1	456.5	455.8
125°	508.1	507.7	507.4	507.0	506.7	506.3	506.0	505.6
127.5°	553.8	553.5	553.1	552.8	552.5	552.2	551.9	551.7
130°	585.9	585.6	585.2	584.7	584.0	583.3	582.6	581.9
132.5°	616.1	615.8	615.4	615.1	614.8	614.5	614.2	613.9
135°	661.4	661.0	660.7	660.2	659.7	659.1	658.6	658.1
137.5°	705.1	704.6	704.2	704.0	704.1	704.3	704.3	704.4
140°	734.0	733.8	733.6	733.4	733.2	733.1	732.8	732.7
142.5°	761.2	761.1	761.1	761.0	761.0	761.0	761.0	761.0
145°	802.2	802.0	801.8	801.5	800.9	800.3	799.9	799.3
147.5°	839.3	839.2	839.0	838.8	838.7	838.5	838.3	838.1
150°	862.7	862.7	862.7	862.6	862.4	862.3	862.1	861.9
152.5°	884.7	885.2	885.6	885.6	885.1	884.6	884.2	883.8
155°	915.5	916.2	917.0	917.0	916.2	915.5	914.8	914.1
157.5°	942.6	943.1	943.6	943.6	943.0	942.4	941.8	941.2
160°	959.3	959.8	960.4	960.1	959.3	958.4	957.5	956.6
162.5°	974.2	975.2	976.2	976.2	975.3	974.5	973.5	972.6
165°	994.0	995.1	996.2	996.3	995.6	994.9	994.2	993.5
167.5°	1010.7	1011.8	1012.9	1012.9	1011.8	1010.7	1009.6	1008.4
170°	1019.7	1020.8	1021.8	1021.8	1020.6	1019.3	1018.0	1016.8
172.5°	1026.4	1027.6	1028.9	1028.8	1027.6	1026.4	1025.1	1023.8
175°	1033.7	1035.0	1036.3	1036.3	1035.0	1033.7	1032.5	1031.3
177.5°	1037.8	1038.7	1039.7	1039.7	1038.5	1037.4	1036.3	1035.1
180°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7

(END OF REPORT)