

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332858-927

Luminaire Tested: **S124DIW-S1195D1340U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332858-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S1195D1340U927-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7740.6 lumens
Efficiency: N/A
Efficacy: 101.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332858-927

CATALOG NUMBER: S124DIW-S1195D1340U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

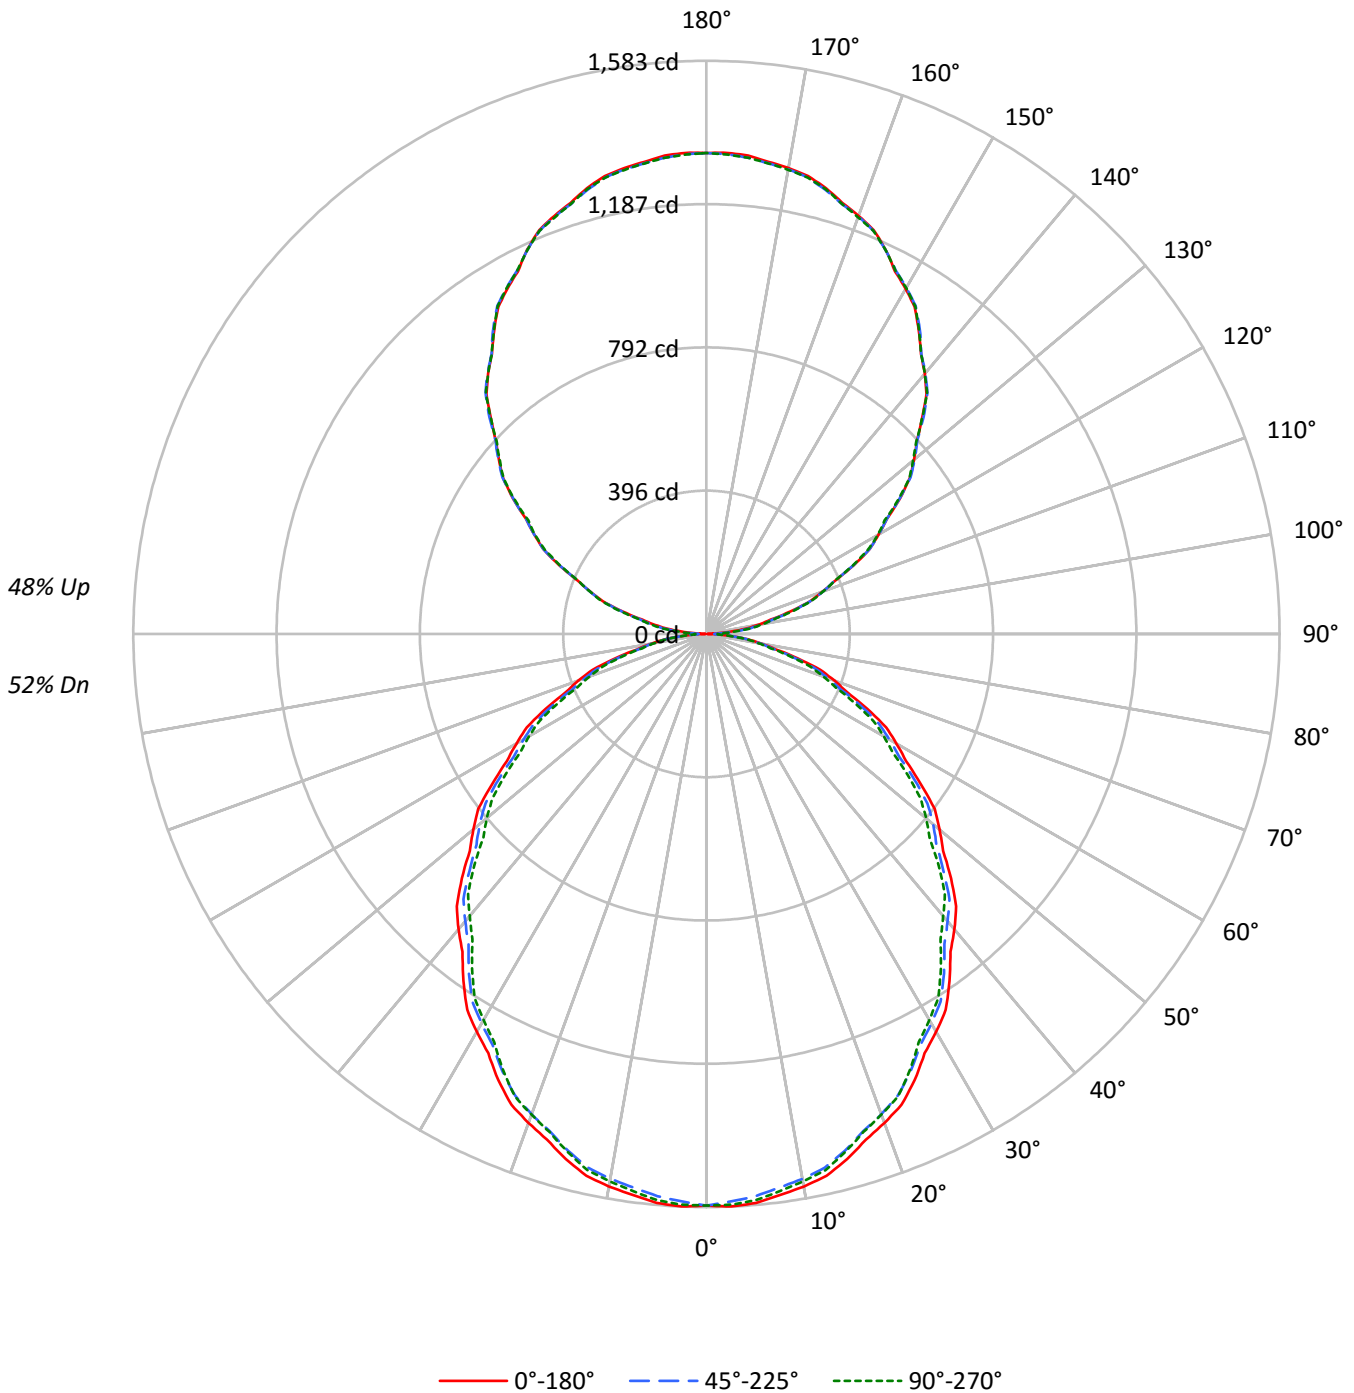



TEST NUMBER: P332858-927

CATALOG NUMBER: S124DIW-S1195D1340U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20						20								20		
RC	80					70						30								10	0	
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10	0
RCR																						
0	108	108	108	108		100	100	100	100		85	85	85		71	71	71		58	58	58	52
1	98	94	90	86		91	87	84	81		74	72	69		62	61	59		51	50	49	44
2	89	82	76	71		83	76	71	66		65	61	57		55	52	49		45	43	41	37
3	82	72	65	59		75	67	60	55		57	52	48		48	45	42		40	37	35	31
4	75	64	56	50		69	59	52	47		51	45	41		43	39	36		36	33	30	27
5	69	57	49	43		63	53	46	40		46	40	36		39	34	31		32	29	26	23
6	63	51	43	37		58	48	40	35		41	35	31		35	31	27		29	26	23	20
7	58	46	38	32		54	43	36	31		37	32	27		32	27	24		27	23	21	18
8	54	42	34	29		50	39	32	27		34	28	24		29	25	21		25	21	19	16
9	50	38	31	26		47	36	29	24		31	26	22		27	22	19		23	19	17	15
10	47	35	28	23		44	33	26	22		29	23	20		25	20	17		21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12745	12745	12745
5°	12783	12630	12721
10°	12703	12527	12588
15°	12549	12349	12380
20°	12345	12128	12138
25°	12113	11875	11843
30°	11828	11580	11473
35°	11532	11269	11121
40°	11225	10918	10718
45°	10904	10572	10369
50°	10550	10262	9946
55°	10166	9864	9543
60°	9783	9415	9131
65°	9352	8990	8627
70°	8868	8419	8091
75°	8125	7735	7536
80°	7234	6936	6760
85°	6326	6095	5974



TEST NUMBER: P332858-927

CATALOG NUMBER: S124DIW-S1195D1340U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.7	1.9
10°-20°	418.9	5.4
20°-30°	616.5	8.0
30°-40°	716.7	9.3
40°-50°	716.8	9.3
50°-60°	627.0	8.1
60°-70°	465.6	6.0
70°-80°	264.5	3.4
80°-90°	80.3	1.0
90°-100°	87.6	1.1
100°-110°	259.5	3.4
110°-120°	440.5	5.7
120°-130°	580.9	7.5
130°-140°	652.4	8.4
140°-150°	641.1	8.3
150°-160°	539.2	7.0
160°-170°	358.7	4.6
170°-180°	125.6	1.6
0°-30°	1184.1	15.3
0°-40°	1900.8	24.6
0°-60°	3244.6	41.9
0°-90°	4055.1	52.4
90°-120°	787.7	10.2
90°-150°	2662.0	34.4
90°-180°	3686.0	47.6
0°-180°	7740.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1579	1579	1579	1579	1579	
5°	1577	1572	1558	1571	1570	150
15°	1502	1496	1478	1484	1481	423
25°	1360	1350	1333	1334	1330	625
35°	1170	1161	1144	1135	1128	731
45°	955	946	926	913	908	736
55°	722	718	701	686	678	647
65°	490	483	471	458	452	485
75°	260	254	248	243	242	277
85°	68	68	66	66	64	75
90°	3	14	23	28	31	8
95°	62	71	78	81	81	69
105°	239	241	244	248	251	254
115°	448	448	446	445	444	442
125°	652	652	651	649	647	581
135°	841	847	848	845	842	651
145°	1022	1026	1027	1026	1023	639
155°	1171	1171	1170	1174	1170	539
165°	1275	1272	1270	1275	1272	359
175°	1326	1321	1320	1327	1320	126
180°	1328	1328	1328	1328	1328	



TEST NUMBER: P332858-927

CATALOG NUMBER: S124DIW-S1195D1340U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7
2.5°	1582.7	1582.1	1581.4	1580.7	1580.0	1578.4	1576.0	1573.5	1571.1	1568.6	1570.8
5°	1577.4	1576.3	1575.2	1574.1	1573.0	1570.8	1567.7	1564.6	1561.5	1558.5	1561.5
7.5°	1562.7	1561.6	1560.5	1559.3	1558.2	1556.0	1552.5	1549.1	1545.7	1542.2	1544.8
10°	1549.6	1548.5	1547.4	1546.2	1545.1	1542.7	1539.1	1535.4	1531.8	1528.1	1530.3
12.5°	1532.4	1531.3	1530.1	1529.0	1527.9	1525.3	1521.5	1517.7	1513.8	1509.9	1512.4
15°	1501.5	1500.4	1499.3	1498.2	1497.0	1494.4	1490.1	1485.9	1481.7	1477.5	1479.2
17.5°	1464.3	1462.9	1461.5	1460.2	1458.7	1456.0	1452.0	1448.0	1444.1	1440.0	1441.1
20°	1437.0	1435.6	1434.2	1432.8	1431.4	1428.5	1424.3	1420.1	1415.9	1411.7	1412.5
22.5°	1407.6	1405.8	1404.0	1402.1	1400.3	1397.2	1393.0	1388.8	1384.6	1380.3	1381.9
25°	1359.9	1357.9	1355.9	1353.9	1351.9	1349.0	1345.0	1341.2	1337.2	1333.2	1333.6
27.5°	1305.2	1303.1	1301.2	1299.1	1297.1	1294.3	1290.6	1287.0	1283.3	1279.6	1279.0
30°	1268.8	1266.5	1264.2	1262.0	1259.8	1256.8	1253.2	1249.5	1245.9	1242.2	1241.1
32.5°	1230.3	1228.3	1226.3	1224.2	1222.2	1219.2	1215.4	1211.5	1207.6	1203.7	1202.4
35°	1170.1	1168.2	1166.2	1164.2	1162.2	1159.3	1155.3	1151.4	1147.5	1143.5	1141.5
37.5°	1106.6	1104.8	1103.0	1101.2	1099.4	1096.4	1092.2	1088.0	1083.7	1079.5	1077.4
40°	1065.1	1062.9	1060.6	1058.4	1056.1	1052.9	1048.7	1044.4	1040.2	1036.0	1033.2
42.5°	1020.6	1019.2	1017.9	1016.5	1015.2	1012.2	1007.5	1002.8	998.1	993.5	990.2
45°	955.1	953.1	951.1	949.1	947.2	944.0	939.4	934.9	930.4	926.0	922.9
47.5°	886.5	885.1	883.8	882.4	881.1	878.4	874.2	870.1	865.9	861.7	858.3
50°	840.0	838.8	837.7	836.5	835.4	832.9	828.9	825.1	821.1	817.1	813.3
52.5°	794.4	793.1	791.7	790.4	789.0	786.2	782.1	777.9	773.8	769.6	766.1
55°	722.3	721.4	720.6	719.8	718.9	716.5	712.6	708.7	704.7	700.8	697.4
57.5°	653.5	652.5	651.6	650.6	649.7	647.2	643.3	639.4	635.6	631.7	628.5
60°	605.9	604.5	603.1	601.7	600.3	597.8	594.1	590.5	586.8	583.1	580.6
62.5°	559.4	558.2	557.0	555.8	554.7	552.2	548.3	544.4	540.5	536.6	534.3
65°	489.6	488.1	486.7	485.3	483.9	481.8	479.0	476.2	473.4	470.6	467.8
67.5°	419.2	418.0	416.6	415.3	414.1	412.0	409.3	406.6	403.9	401.2	398.5
70°	375.7	373.8	371.8	369.8	367.8	365.8	363.5	361.2	358.9	356.7	354.5
72.5°	329.2	327.2	325.2	323.2	321.3	319.4	317.6	315.8	314.0	312.2	310.4
75°	260.5	259.2	257.8	256.4	254.9	253.6	252.2	250.7	249.4	248.0	246.8
77.5°	195.0	194.4	193.8	193.2	192.6	191.6	190.4	189.2	188.0	186.7	186.4
80°	155.6	154.7	153.9	153.0	152.3	151.5	151.0	150.4	149.8	149.2	148.7
82.5°	117.2	116.8	116.4	116.0	115.6	115.3	115.2	115.1	114.9	114.9	114.5
85°	68.3	68.3	68.3	68.3	68.3	68.0	67.5	66.9	66.3	65.8	65.8
87.5°	26.9	27.2	27.5	27.7	28.0	28.3	28.4	28.5	28.7	28.8	29.1
90°	3.1	5.6	8.1	10.6	13.2	15.3	17.1	18.9	20.8	22.6	24.0
92.5°	22.0	24.9	27.7	30.6	33.5	35.6	36.8	38.1	39.4	40.7	41.5
95°	61.6	63.7	65.8	67.8	69.9	71.7	73.3	74.9	76.4	78.1	78.7
97.5°	107.7	109.3	111.0	112.6	114.2	116.0	117.9	119.8	121.6	123.5	124.3
100°	143.9	144.7	145.7	146.6	147.5	148.9	151.0	153.0	155.1	157.2	157.6
102.5°	181.6	182.0	182.4	182.8	183.1	184.2	186.1	188.0	189.8	191.7	192.3
105°	239.4	239.6	239.9	240.0	240.3	240.8	241.8	242.7	243.6	244.5	245.2
107.5°	300.0	300.2	300.6	300.8	301.1	301.3	301.4	301.6	301.7	301.8	302.5
110°	341.1	341.5	342.0	342.5	342.9	343.0	342.8	342.5	342.4	342.1	341.7



TEST NUMBER: P332858-927

CATALOG NUMBER: S124DIW-S1195D1340U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	383.8	383.9	384.0	384.1	384.2	384.0	383.7	383.2	382.8	382.4	382.3
115°	447.9	447.9	447.9	447.9	447.9	447.7	447.3	446.8	446.3	445.8	445.7
117.5°	508.3	508.5	508.7	508.9	509.1	509.0	508.7	508.3	508.0	507.7	506.9
120°	548.6	549.5	550.4	551.4	552.2	552.4	551.7	551.0	550.3	549.6	548.5
122.5°	590.5	590.9	591.3	591.6	592.0	592.0	591.7	591.4	591.0	590.7	589.9
125°	652.4	652.4	652.4	652.4	652.4	652.3	652.0	651.8	651.6	651.3	650.9
127.5°	708.4	709.2	709.9	710.5	711.2	711.4	711.0	710.7	710.3	709.9	709.5
130°	747.9	748.6	749.3	750.0	750.7	751.0	751.0	751.0	751.0	751.0	750.5
132.5°	788.2	788.7	789.2	789.7	790.2	790.4	790.2	790.0	789.8	789.6	789.2
135°	841.4	842.8	844.1	845.5	846.9	847.6	847.6	847.6	847.6	847.6	847.2
137.5°	899.4	900.0	900.6	901.3	901.9	902.5	902.8	903.2	903.5	903.9	903.2
140°	938.0	938.4	938.9	939.4	939.8	940.0	940.0	940.0	940.0	940.0	939.8
142.5°	973.4	973.8	974.2	974.7	975.2	975.3	975.1	974.9	974.8	974.5	974.5
145°	1022.2	1023.2	1024.1	1025.0	1025.9	1026.4	1026.7	1026.9	1027.1	1027.4	1027.1
147.5°	1070.7	1071.8	1072.9	1074.0	1075.1	1075.5	1075.4	1075.2	1075.0	1074.8	1074.7
150°	1100.3	1101.2	1102.2	1103.0	1104.0	1104.4	1104.4	1104.4	1104.4	1104.4	1104.4
152.5°	1128.2	1128.8	1129.3	1129.9	1130.4	1130.8	1131.0	1131.2	1131.4	1131.6	1132.1
155°	1171.2	1171.2	1171.2	1171.2	1171.2	1171.1	1170.8	1170.6	1170.4	1170.2	1171.1
157.5°	1207.4	1207.0	1206.6	1206.1	1205.7	1205.5	1205.5	1205.4	1205.4	1205.3	1206.0
160°	1228.8	1228.5	1228.3	1228.0	1227.8	1227.6	1227.3	1227.2	1226.9	1226.7	1227.3
162.5°	1248.5	1247.8	1247.3	1246.7	1246.1	1245.7	1245.5	1245.2	1245.0	1244.8	1246.0
165°	1274.9	1274.3	1273.6	1272.9	1272.2	1271.7	1271.2	1270.7	1270.3	1269.8	1271.2
167.5°	1295.3	1294.3	1293.4	1292.4	1291.5	1291.0	1291.1	1291.1	1291.2	1291.2	1292.6
170°	1306.8	1305.7	1304.6	1303.4	1302.3	1301.8	1302.0	1302.3	1302.5	1302.7	1304.1
172.5°	1315.0	1314.1	1313.1	1312.2	1311.2	1310.7	1310.8	1310.8	1310.9	1310.9	1312.5
175°	1326.4	1325.2	1324.1	1322.9	1321.8	1321.0	1320.9	1320.6	1320.4	1320.2	1321.8
177.5°	1330.0	1329.1	1328.2	1327.3	1326.4	1326.0	1326.0	1326.0	1326.0	1326.0	1327.2
180°	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4



TEST NUMBER: P332858-927

CATALOG NUMBER: S124DIW-S1195D1340U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7
2.5°	1573.0	1575.3	1577.6	1578.6	1578.3	1578.1	1577.9	1577.6
5°	1564.6	1567.7	1570.8	1572.1	1571.5	1571.0	1570.4	1569.8
7.5°	1547.2	1549.7	1552.1	1553.2	1552.9	1552.5	1552.2	1551.9
10°	1532.6	1534.9	1537.1	1537.9	1537.4	1536.8	1536.2	1535.6
12.5°	1514.8	1517.3	1519.8	1520.6	1519.8	1519.0	1518.2	1517.4
15°	1480.8	1482.6	1484.2	1484.6	1483.8	1483.0	1482.1	1481.3
17.5°	1442.2	1443.3	1444.3	1444.5	1444.0	1443.4	1442.9	1442.3
20°	1413.4	1414.2	1415.1	1415.2	1414.7	1414.1	1413.6	1412.9
22.5°	1383.4	1384.9	1386.4	1386.6	1385.7	1384.7	1383.6	1382.6
25°	1333.9	1334.1	1334.4	1334.0	1332.8	1331.7	1330.6	1329.5
27.5°	1278.3	1277.6	1276.9	1275.9	1274.5	1273.1	1271.7	1270.3
30°	1239.9	1238.8	1237.7	1236.4	1235.0	1233.7	1232.2	1230.8
32.5°	1201.0	1199.7	1198.3	1197.0	1195.6	1194.1	1192.8	1191.4
35°	1139.6	1137.7	1135.7	1134.0	1132.6	1131.2	1129.7	1128.4
37.5°	1075.2	1073.1	1071.0	1069.0	1067.1	1065.2	1063.4	1061.5
40°	1030.4	1027.5	1024.8	1022.6	1021.3	1019.9	1018.4	1017.0
42.5°	987.0	983.7	980.5	978.3	977.4	976.4	975.5	974.5
45°	919.8	916.7	913.6	911.6	910.8	909.9	909.1	908.2
47.5°	854.8	851.3	847.8	844.9	842.8	840.7	838.5	836.4
50°	809.3	805.3	801.5	798.6	796.9	795.3	793.5	791.9
52.5°	762.6	759.1	755.7	752.9	750.8	748.6	746.5	744.3
55°	694.0	690.7	687.3	684.8	683.1	681.4	679.7	678.0
57.5°	625.3	622.1	618.9	616.5	614.9	613.2	611.6	610.0
60°	578.1	575.6	573.1	571.1	569.7	568.2	566.9	565.5
62.5°	532.0	529.7	527.4	525.5	524.1	522.7	521.3	519.9
65°	464.9	462.2	459.3	457.2	455.8	454.4	453.0	451.6
67.5°	395.9	393.2	390.5	388.9	388.5	388.1	387.7	387.3
70°	352.2	350.0	347.7	346.2	345.3	344.5	343.6	342.8
72.5°	308.6	306.8	305.0	303.6	302.9	302.0	301.1	300.3
75°	245.7	244.5	243.4	242.7	242.5	242.2	241.9	241.6
77.5°	186.0	185.7	185.4	184.8	184.1	183.4	182.6	181.9
80°	148.1	147.6	147.0	146.6	146.3	146.0	145.8	145.4
82.5°	114.2	113.8	113.5	113.2	112.9	112.6	112.3	112.1
85°	65.8	65.8	65.8	65.7	65.4	65.0	64.8	64.5
87.5°	29.4	29.6	29.9	30.1	30.2	30.3	30.3	30.4
90°	25.3	26.7	28.0	29.0	29.5	29.9	30.3	30.8
92.5°	42.3	43.2	44.0	44.5	44.8	45.1	45.3	45.6
95°	79.5	80.2	80.8	81.2	81.2	81.2	81.2	81.2
97.5°	125.2	126.0	126.7	127.2	127.2	127.2	127.2	127.2
100°	158.1	158.6	159.0	159.2	159.2	159.2	159.2	159.2
102.5°	193.0	193.6	194.2	194.6	194.9	195.0	195.2	195.4
105°	245.9	246.6	247.2	248.0	248.6	249.3	250.0	250.6
107.5°	303.1	303.7	304.4	304.7	304.7	304.6	304.6	304.5
110°	341.2	340.7	340.3	340.4	341.1	341.7	342.5	343.2



TEST NUMBER: P332858-927

CATALOG NUMBER: S124DIW-S1195D1340U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	382.2	382.1	382.0	382.1	382.1	382.3	382.5	382.6
115°	445.4	445.2	445.0	444.7	444.5	444.3	444.0	443.9
117.5°	506.2	505.4	504.6	504.0	503.5	503.1	502.6	502.2
120°	547.4	546.2	545.1	544.7	545.2	545.7	546.1	546.5
122.5°	589.1	588.4	587.6	586.8	586.0	585.2	584.4	583.5
125°	650.5	650.0	649.5	649.0	648.6	648.2	647.7	647.2
127.5°	709.0	708.5	708.1	707.7	707.3	706.9	706.5	706.2
130°	750.1	749.6	749.2	748.5	747.6	746.6	745.8	744.8
132.5°	788.7	788.3	787.8	787.4	787.0	786.6	786.3	785.9
135°	846.7	846.2	845.7	845.2	844.5	843.8	843.1	842.4
137.5°	902.7	902.1	901.5	901.3	901.4	901.6	901.7	901.8
140°	939.6	939.4	939.1	938.9	938.7	938.4	938.2	938.0
142.5°	974.5	974.5	974.4	974.3	974.3	974.2	974.2	974.1
145°	1026.9	1026.7	1026.4	1026.0	1025.3	1024.6	1024.0	1023.3
147.5°	1074.4	1074.3	1074.1	1073.9	1073.6	1073.4	1073.2	1073.0
150°	1104.4	1104.4	1104.4	1104.3	1104.1	1103.8	1103.6	1103.4
152.5°	1132.7	1133.2	1133.8	1133.7	1133.1	1132.5	1131.9	1131.3
155°	1172.0	1172.9	1173.9	1173.9	1172.9	1172.0	1171.1	1170.2
157.5°	1206.7	1207.4	1208.1	1208.0	1207.2	1206.4	1205.7	1204.9
160°	1228.0	1228.8	1229.4	1229.2	1228.0	1226.9	1225.7	1224.6
162.5°	1247.2	1248.5	1249.7	1249.7	1248.6	1247.4	1246.3	1245.2
165°	1272.6	1273.9	1275.3	1275.6	1274.6	1273.7	1272.8	1271.8
167.5°	1294.0	1295.3	1296.6	1296.6	1295.2	1293.8	1292.4	1291.0
170°	1305.4	1306.8	1308.2	1308.1	1306.5	1304.9	1303.3	1301.7
172.5°	1314.0	1315.6	1317.2	1317.1	1315.5	1313.9	1312.3	1310.7
175°	1323.3	1324.9	1326.6	1326.6	1324.9	1323.3	1321.8	1320.2
177.5°	1328.5	1329.8	1331.0	1330.9	1329.5	1328.0	1326.6	1325.1
180°	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4

(END OF REPORT)