

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332835-927

Luminaire Tested: **S124DIW-S1195D470U927-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332835-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S1195D470U927-4F0-1E-UDD-A
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 470 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5698.7 lumens
Efficiency: N/A
Efficacy: 108.8 lumens/watt
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 52.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

Luminous Intensity Polar Plot

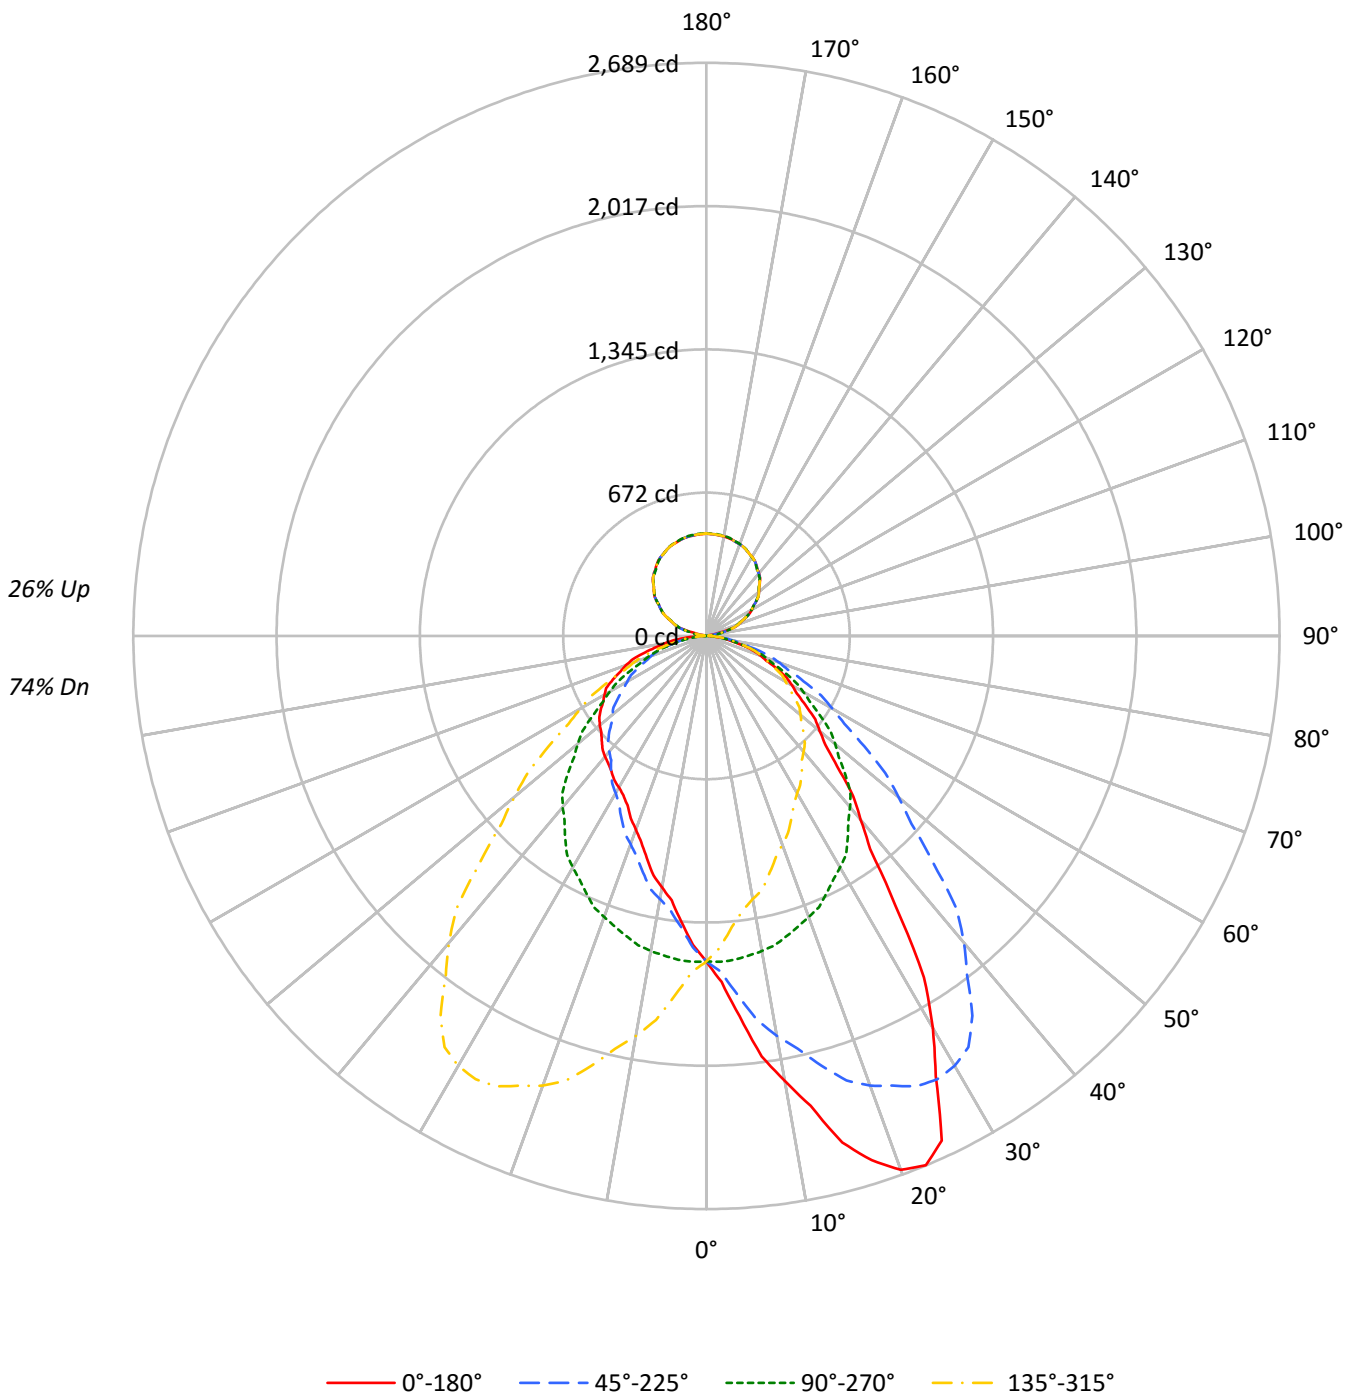



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	113	113	113	113	107	107	107	107	97	97	97	87	87	87	78	78	78	74				
1	103	99	95	92	98	94	91	88	85	83	80	77	75	73	70	68	67	63				
2	95	87	81	75	90	83	77	73	75	71	67	68	65	62	62	59	57	53				
3	86	77	69	63	82	73	67	61	67	61	57	61	56	53	55	52	49	45				
4	79	68	60	54	75	65	58	52	60	54	49	54	49	45	49	45	42	39				
5	73	61	53	47	69	59	51	45	54	47	42	49	44	40	45	40	37	34				
6	68	55	47	41	64	53	45	40	48	42	37	44	39	35	41	36	33	30				
7	63	50	42	36	59	48	40	35	44	38	33	41	35	31	37	33	29	27				
8	58	46	38	32	55	44	36	31	40	34	30	37	32	28	34	30	26	24				
9	54	42	34	29	52	40	33	28	37	31	27	34	29	25	32	27	24	22				
10	51	39	31	26	48	37	30	25	34	28	24	32	27	23	29	25	22	20				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	12327	12327	12327	12327
5°	14515	12358	10907	12358
10°	17379	12304	9820	12304
15°	20563	12179	9018	12179
20°	22898	12052	8303	12052
25°	23267	11866	7808	11866
30°	19799	11686	7652	11686
35°	15221	11395	7655	11395
40°	11864	11052	7798	11052
45°	9893	10535	7929	10535
50°	8706	9905	8199	9905
55°	7976	9151	8528	9151
60°	7476	8477	8925	8477
65°	6959	7721	9255	7721
70°	6359	6973	9465	6973
75°	5680	6135	9351	6135
80°	4761	5026	9056	5026
85°	3511	3631	8670	3631



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.7	2.6
10°-20°	458.5	8.0
20°-30°	727.0	12.8
30°-40°	809.1	14.2
40°-50°	736.5	12.9
50°-60°	601.9	10.6
60°-70°	429.7	7.5
70°-80°	236.6	4.2
80°-90°	66.0	1.2
90°-100°	16.4	0.3
100°-110°	104.7	1.8
110°-120°	200.2	3.5
120°-130°	254.2	4.5
130°-140°	272.0	4.8
140°-150°	254.3	4.5
150°-160°	205.1	3.6
160°-170°	132.3	2.3
170°-180°	45.6	0.8
0°-30°	1334.3	23.4
0°-40°	2143.4	37.6
0°-60°	3481.7	61.1
0°-90°	4213.9	73.9
90°-120°	321.3	5.6
90°-150°	1101.8	19.3
90°-180°	1485.0	26.1
0°-180°	5698.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1527	1527	1527	1527	1527	
5°	1791	1525	1346	1525	1791	182
15°	2460	1457	1079	1457	2460	695
25°	2612	1332	877	1332	2612	1152
35°	1544	1156	777	1156	1544	980
45°	866	923	694	923	866	683
55°	567	650	606	650	567	512
65°	364	404	484	404	364	361
75°	182	197	300	197	182	194
85°	38	39	94	39	38	46
90°	11	1	11	1	11	6
95°	10	20	10	20	10	8
105°	102	108	102	108	102	89
115°	203	202	203	202	203	201
125°	286	284	286	284	286	255
135°	354	352	354	352	354	273
145°	408	406	408	406	408	255
155°	444	445	444	445	444	205
165°	467	469	467	469	467	132
175°	477	480	477	480	477	45
180°	480	480	480	480	480	



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9
2.5°	1625.0	1624.4	1619.5	1618.4	1614.9	1610.3	1609.3	1601.2	1585.0	1577.4	1575.4
5°	1791.2	1803.9	1787.4	1784.2	1782.3	1761.5	1750.7	1738.0	1709.0	1691.9	1678.6
7.5°	1989.6	1991.1	1983.9	1978.1	1962.0	1943.8	1916.4	1887.4	1852.7	1816.6	1789.5
10°	2120.1	2125.2	2116.9	2115.7	2083.4	2063.2	2022.7	1988.5	1949.3	1905.7	1865.8
12.5°	2257.7	2250.7	2246.5	2219.4	2213.4	2176.5	2129.5	2094.3	2033.8	1983.6	1930.6
15°	2460.4	2446.5	2437.6	2400.3	2381.9	2330.7	2280.8	2242.2	2163.1	2087.9	2030.9
17.5°	2579.3	2593.2	2572.7	2557.4	2510.0	2474.1	2423.0	2342.0	2280.1	2186.7	2114.8
20°	2665.3	2666.6	2655.2	2639.4	2602.1	2556.5	2500.8	2412.3	2338.3	2245.4	2146.7
22.5°	2688.6	2688.8	2684.0	2669.3	2641.0	2604.1	2547.9	2474.1	2384.4	2283.3	2184.6
25°	2612.1	2609.6	2615.3	2631.8	2621.0	2609.6	2577.4	2522.4	2438.9	2331.9	2225.7
27.5°	2328.3	2345.7	2377.9	2418.4	2457.3	2487.1	2495.5	2484.1	2432.4	2344.5	2233.2
30°	2123.9	2145.4	2169.5	2209.9	2288.4	2333.2	2382.6	2419.9	2399.0	2328.9	2225.1
32.5°	1899.3	1904.6	1940.2	1986.2	2058.1	2144.5	2222.7	2298.4	2323.6	2286.8	2200.3
35°	1544.5	1553.4	1592.0	1637.5	1725.5	1831.1	1948.7	2053.7	2140.3	2175.1	2130.8
37.5°	1260.4	1285.9	1313.0	1362.0	1439.4	1534.5	1656.8	1792.6	1921.8	2008.3	2022.9
40°	1125.8	1141.6	1161.3	1198.6	1264.3	1358.0	1462.9	1618.5	1755.8	1879.8	1920.2
42.5°	1019.5	1028.8	1040.8	1074.6	1124.7	1217.8	1313.7	1450.6	1588.3	1736.5	1804.4
45°	866.5	876.0	896.2	915.8	953.8	1018.3	1107.5	1220.0	1358.6	1501.5	1626.7
47.5°	756.0	762.0	774.0	795.0	827.3	869.8	942.4	1036.4	1164.8	1303.5	1437.0
50°	693.2	698.2	707.7	726.7	751.4	789.3	848.8	936.7	1037.3	1177.0	1308.0
52.5°	643.6	645.6	652.6	665.5	685.1	717.0	765.8	838.5	932.0	1056.6	1187.1
55°	566.7	569.3	575.6	585.0	602.1	622.3	659.7	714.1	795.7	903.8	1017.0
57.5°	503.4	505.3	510.6	514.2	528.2	544.7	573.4	612.3	674.1	765.8	866.9
60°	463.0	461.7	468.0	471.2	480.7	494.6	516.7	554.1	607.8	681.8	774.8
62.5°	423.5	421.8	427.1	431.3	436.7	448.5	466.7	495.9	539.5	606.4	686.7
65°	364.3	361.8	365.0	370.0	375.1	381.4	394.7	420.6	455.4	503.4	564.8
67.5°	304.8	307.5	308.0	310.5	313.5	322.1	331.1	349.5	374.1	412.5	464.5
70°	269.4	270.1	272.6	272.6	274.5	282.1	289.7	300.4	324.5	359.9	402.3
72.5°	234.0	236.7	235.7	237.7	239.1	244.2	249.7	259.9	280.4	306.7	342.5
75°	182.1	184.0	184.0	184.7	186.6	188.5	192.9	200.5	215.1	234.6	259.3
77.5°	132.8	133.1	134.0	136.3	136.3	139.3	142.6	148.6	155.8	169.3	184.3
80°	102.4	103.7	103.1	104.3	104.3	106.9	108.1	115.7	118.9	127.8	139.7
82.5°	75.2	76.4	76.3	78.0	79.1	79.5	81.4	84.4	87.5	95.4	100.3
85°	37.9	39.2	37.9	39.2	41.1	41.7	43.6	44.3	46.8	48.7	53.2
87.5°	13.3	14.7	14.7	15.2	16.2	16.6	17.0	16.5	18.4	18.8	20.7
90°	10.8	10.6	10.5	10.3	10.1	9.8	9.3	8.9	8.4	7.9	7.3
92.5°	9.9	9.9	9.8	9.8	9.7	9.5	9.0	8.6	8.1	7.6	7.0
95°	10.4	10.3	10.2	10.1	10.1	9.8	9.3	8.9	8.4	7.9	7.8
97.5°	10.1	10.0	9.9	9.8	9.7	9.7	9.6	9.6	9.5	9.5	18.4
100°	10.1	10.0	9.9	9.8	9.7	10.4	11.7	13.1	14.4	15.8	26.8
102.5°	10.4	10.3	10.3	10.3	10.3	17.6	32.2	46.8	61.5	76.1	77.6
105°	102.3	105.2	108.1	110.9	113.8	114.9	114.2	113.4	112.7	112.0	111.6
107.5°	142.6	142.3	142.0	141.7	141.4	141.1	140.7	140.4	140.0	139.7	139.1
110°	160.1	159.9	159.6	159.4	159.1	159.0	158.8	158.7	158.5	158.4	157.9



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	177.6	177.4	177.1	176.7	176.4	176.3	176.3	176.3	176.4	176.4	176.2
115°	203.2	203.2	203.2	203.2	203.2	203.1	203.0	202.8	202.6	202.5	202.6
117.5°	229.2	229.3	229.3	229.3	229.3	229.3	229.4	229.4	229.4	229.5	229.3
120°	245.6	245.7	245.9	246.1	246.2	246.2	246.1	245.9	245.7	245.6	245.7
122.5°	261.7	261.8	262.0	262.1	262.3	262.3	262.2	262.1	262.1	262.0	261.8
125°	285.7	285.7	285.6	285.5	285.4	285.3	285.0	284.8	284.6	284.3	284.5
127.5°	307.0	307.0	307.0	307.1	307.2	307.3	307.3	307.4	307.4	307.4	307.1
130°	321.3	321.3	321.3	321.3	321.3	321.3	321.2	321.2	321.1	321.0	320.8
132.5°	334.5	334.6	334.7	334.7	334.8	334.8	334.7	334.6	334.5	334.5	334.1
135°	354.3	354.2	354.0	353.9	353.7	353.6	353.4	353.2	353.1	352.9	352.6
137.5°	371.3	371.4	371.4	371.5	371.5	371.5	371.2	371.1	370.9	370.7	370.3
140°	383.1	383.0	382.9	382.9	382.8	382.6	382.4	382.1	381.9	381.7	381.5
142.5°	392.8	392.8	392.8	392.8	392.8	392.7	392.5	392.3	392.1	392.0	391.9
145°	407.8	407.7	407.5	407.3	407.2	407.1	407.0	406.9	406.9	406.8	406.8
147.5°	420.3	420.2	420.1	420.0	419.9	419.9	419.8	419.8	419.7	419.6	419.7
150°	428.3	428.3	428.2	428.1	428.0	427.9	427.9	427.9	427.9	427.9	428.0
152.5°	435.2	435.2	435.3	435.4	435.4	435.4	435.2	435.1	435.0	434.8	435.0
155°	444.5	444.7	445.0	445.2	445.4	445.4	445.0	444.7	444.4	444.1	444.3
157.5°	452.3	452.7	453.0	453.4	453.8	453.8	453.4	453.0	452.7	452.3	452.5
160°	457.4	457.9	458.4	458.8	459.3	459.3	458.8	458.4	457.9	457.4	457.5
162.5°	461.4	461.9	462.5	463.0	463.6	463.6	463.1	462.6	462.2	461.7	461.8
165°	467.1	467.8	468.5	469.2	469.9	470.0	469.4	468.7	468.1	467.5	467.5
167.5°	471.3	472.1	472.9	473.7	474.5	474.6	473.9	473.2	472.5	471.7	471.8
170°	473.9	474.7	475.5	476.3	477.1	477.2	476.5	475.9	475.2	474.6	474.5
172.5°	475.3	476.2	477.1	477.9	478.8	478.9	478.2	477.6	477.0	476.3	476.3
175°	477.1	478.1	479.0	480.0	480.9	481.1	480.4	479.7	479.0	478.2	478.2
177.5°	478.3	479.0	479.8	480.6	481.3	481.5	480.9	480.5	479.9	479.4	479.3
180°	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9
2.5°	1575.9	1568.8	1563.8	1559.7	1548.6	1542.0	1536.9	1529.9	1521.8	1513.1	1502.5
5°	1665.3	1643.9	1628.0	1604.0	1581.2	1562.3	1542.6	1525.0	1503.4	1480.0	1462.9
7.5°	1759.4	1727.4	1686.3	1650.8	1610.8	1576.0	1544.9	1513.1	1479.9	1447.8	1418.3
10°	1819.0	1777.9	1732.3	1678.6	1628.0	1583.1	1541.3	1500.9	1461.7	1422.4	1388.9
12.5°	1883.3	1832.1	1764.7	1701.9	1645.2	1585.2	1534.8	1485.2	1437.9	1396.7	1357.6
15°	1969.6	1895.5	1817.7	1733.6	1659.0	1588.8	1519.9	1457.2	1404.1	1349.7	1311.8
17.5°	2022.6	1931.0	1842.1	1754.1	1663.8	1575.3	1500.9	1428.7	1362.2	1308.1	1260.3
20°	2057.5	1966.4	1855.7	1767.8	1660.3	1569.2	1483.2	1402.9	1333.3	1275.7	1226.4
22.5°	2087.9	1982.6	1871.9	1756.2	1649.2	1552.5	1458.4	1377.5	1306.5	1245.9	1198.6
25°	2104.3	1983.5	1863.3	1748.2	1626.7	1512.3	1426.9	1332.1	1256.1	1192.2	1141.6
27.5°	2106.1	1976.9	1841.0	1713.0	1587.7	1481.1	1373.2	1288.5	1209.7	1142.2	1093.6
30°	2100.5	1965.8	1819.6	1681.2	1555.3	1439.6	1345.9	1253.6	1173.3	1106.2	1055.6
32.5°	2082.8	1942.5	1792.3	1645.8	1515.3	1402.1	1305.4	1217.7	1139.4	1073.3	1020.2
35°	2031.6	1893.0	1733.0	1580.6	1447.2	1332.7	1245.4	1156.2	1077.8	1015.2	963.9
37.5°	1951.5	1826.2	1663.6	1505.9	1374.8	1259.8	1173.3	1092.7	1022.0	958.4	905.9
40°	1881.7	1771.6	1608.4	1454.7	1313.0	1203.6	1122.7	1048.7	978.4	918.4	868.4
42.5°	1801.2	1705.3	1554.8	1391.9	1255.4	1145.4	1066.5	1000.1	933.9	878.4	828.5
45°	1657.7	1594.5	1452.9	1302.3	1160.0	1056.2	981.0	922.8	867.1	812.8	771.0
47.5°	1492.8	1461.4	1342.1	1199.2	1064.1	961.9	896.6	842.9	794.0	748.0	711.1
50°	1382.0	1366.8	1263.7	1125.8	996.8	900.6	834.9	788.7	746.9	706.5	671.7
52.5°	1272.7	1272.2	1179.2	1053.0	933.6	841.0	775.7	732.5	696.4	663.5	632.2
55°	1105.6	1123.3	1050.6	937.9	831.1	747.6	688.8	650.2	624.9	597.7	574.3
57.5°	952.1	981.5	921.5	822.4	733.2	656.2	605.1	576.1	549.1	532.7	515.6
60°	852.0	879.8	833.0	749.5	665.4	599.6	550.9	525.0	501.5	490.2	478.2
62.5°	762.9	787.7	753.0	675.7	602.6	539.4	498.3	473.3	457.6	445.1	437.2
65°	635.6	656.6	626.8	570.5	507.9	457.3	423.7	404.2	389.0	383.9	375.1
67.5°	513.8	532.8	516.7	468.9	418.7	380.4	354.2	335.3	326.4	321.9	315.6
70°	441.5	460.4	443.4	401.6	363.1	330.8	306.1	295.4	285.9	284.0	275.1
72.5°	380.2	393.2	376.0	343.4	310.5	283.2	264.1	252.9	248.0	244.5	239.7
75°	285.3	296.7	285.3	259.9	236.5	217.6	201.1	196.7	191.0	189.1	185.9
77.5°	201.9	211.8	203.0	187.2	169.8	155.1	146.2	140.5	139.3	136.0	137.5
80°	154.3	160.7	152.4	141.6	127.8	117.6	111.3	108.1	104.3	103.1	105.6
82.5°	110.8	113.6	109.4	102.2	91.8	85.2	81.0	77.3	76.5	76.8	76.8
85°	57.6	57.0	56.3	50.0	46.8	42.4	39.8	39.2	38.6	39.8	41.1
87.5°	20.5	20.9	20.3	18.1	16.4	14.7	14.0	13.4	14.0	14.7	15.4
90°	6.7	6.0	5.3	4.6	3.7	2.9	2.0	1.1	2.0	2.9	3.7
92.5°	6.3	5.7	5.1	4.8	4.7	4.6	4.6	4.5	4.6	4.6	4.7
95°	7.8	7.7	7.6	8.9	11.6	14.3	17.0	19.7	17.0	14.3	11.6
97.5°	27.3	36.2	45.1	48.7	47.0	45.3	43.6	41.9	43.6	45.3	47.0
100°	37.8	48.8	59.8	64.6	63.2	61.8	60.3	58.9	60.3	61.8	63.2
102.5°	79.0	80.4	81.8	82.1	81.0	79.9	78.9	77.9	78.9	79.9	81.0
105°	111.2	110.8	110.4	110.0	109.5	109.0	108.5	108.1	108.5	109.0	109.5
107.5°	138.6	138.0	137.5	137.1	136.9	136.7	136.4	136.2	136.4	136.7	136.9
110°	157.4	156.9	156.4	156.1	155.8	155.6	155.3	155.1	155.3	155.6	155.8



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	175.9	175.8	175.5	175.2	174.8	174.4	173.9	173.5	173.9	174.4	174.8
115°	202.6	202.7	202.8	202.7	202.5	202.2	202.0	201.8	202.0	202.2	202.5
117.5°	229.1	228.9	228.8	228.5	228.2	227.9	227.6	227.3	227.6	227.9	228.2
120°	245.7	245.8	245.9	245.7	245.4	245.1	244.8	244.5	244.8	245.1	245.4
122.5°	261.7	261.6	261.5	261.3	261.2	260.9	260.8	260.5	260.8	260.9	261.2
125°	284.6	284.8	284.9	284.9	284.6	284.2	283.9	283.6	283.9	284.2	284.6
127.5°	306.7	306.3	306.0	305.8	305.7	305.6	305.5	305.5	305.5	305.6	305.7
130°	320.5	320.3	320.0	319.9	319.8	319.7	319.6	319.5	319.6	319.7	319.8
132.5°	333.8	333.6	333.3	333.0	332.9	332.7	332.6	332.5	332.6	332.7	332.9
135°	352.3	352.0	351.6	351.5	351.6	351.6	351.7	351.8	351.7	351.6	351.6
137.5°	370.0	369.6	369.3	369.2	369.1	369.1	369.0	369.0	369.0	369.1	369.1
140°	381.4	381.1	381.0	380.8	380.6	380.5	380.3	380.2	380.3	380.5	380.6
142.5°	391.8	391.7	391.6	391.4	391.1	390.9	390.5	390.2	390.5	390.9	391.1
145°	406.8	406.8	406.8	406.6	406.4	406.2	405.9	405.7	405.9	406.2	406.4
147.5°	419.8	419.9	419.9	419.8	419.3	418.8	418.4	418.0	418.4	418.8	419.3
150°	428.1	428.2	428.3	428.2	427.9	427.5	427.2	426.9	427.2	427.5	427.9
152.5°	435.1	435.3	435.4	435.4	435.1	434.8	434.6	434.4	434.6	434.8	435.1
155°	444.6	444.8	445.0	445.1	445.0	445.0	444.9	444.8	444.9	445.0	445.0
157.5°	452.7	453.0	453.3	453.4	453.5	453.5	453.6	453.7	453.6	453.5	453.5
160°	457.6	457.6	457.7	457.9	458.1	458.4	458.6	458.8	458.6	458.4	458.1
162.5°	461.8	461.9	462.0	462.2	462.5	462.8	463.1	463.4	463.1	462.8	462.5
165°	467.5	467.5	467.5	467.6	468.0	468.4	468.8	469.2	468.8	468.4	468.0
167.5°	471.8	471.9	471.9	472.1	472.6	473.0	473.4	473.8	473.4	473.0	472.6
170°	474.4	474.4	474.3	474.5	475.0	475.5	475.9	476.4	475.9	475.5	475.0
172.5°	476.2	476.1	476.0	476.3	476.7	477.2	477.7	478.2	477.7	477.2	476.7
175°	478.1	478.0	477.9	478.1	478.6	479.0	479.5	480.0	479.5	479.0	478.6
177.5°	479.2	479.0	479.0	479.1	479.5	480.0	480.5	480.9	480.5	480.0	479.5
180°	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9
2.5°	1497.5	1492.9	1486.4	1477.3	1469.7	1461.6	1459.5	1456.5	1462.5	1457.5	1456.0
5°	1448.4	1435.1	1418.0	1398.4	1387.0	1370.6	1367.5	1361.1	1354.8	1354.2	1347.8
7.5°	1396.4	1376.9	1354.6	1334.5	1316.1	1298.1	1286.3	1283.8	1274.5	1269.0	1262.7
10°	1363.0	1338.9	1313.0	1294.1	1272.6	1253.6	1240.3	1232.7	1226.4	1219.4	1213.1
12.5°	1323.6	1298.0	1276.6	1256.1	1230.6	1216.2	1194.3	1181.1	1179.9	1180.0	1163.6
15°	1277.6	1252.4	1219.4	1190.3	1176.4	1148.6	1136.5	1121.4	1111.9	1102.4	1094.9
17.5°	1225.1	1193.7	1167.9	1134.6	1108.0	1085.8	1070.1	1061.0	1046.6	1033.2	1023.5
20°	1192.2	1158.7	1131.6	1096.1	1067.0	1039.8	1026.5	1013.9	1003.1	991.7	981.0
22.5°	1158.8	1123.8	1090.5	1056.1	1029.0	1000.4	987.5	970.3	960.1	953.8	943.0
25°	1106.2	1068.3	1030.3	997.4	969.6	944.3	927.2	913.9	902.5	897.5	890.6
27.5°	1049.0	1011.4	974.7	937.3	905.7	887.4	873.7	863.7	857.1	850.4	847.3
30°	1012.6	973.4	934.2	899.4	870.3	852.0	839.3	832.3	827.3	824.1	820.9
32.5°	975.7	937.0	895.7	864.0	837.9	821.6	812.0	805.0	802.5	801.4	800.3
35°	916.5	877.3	839.3	810.9	786.2	779.8	771.7	767.9	766.6	771.0	772.9
37.5°	859.2	822.8	787.8	760.3	744.1	734.8	732.1	732.1	736.7	740.6	745.2
40°	822.2	786.8	753.9	729.9	714.7	709.0	707.7	710.9	716.0	720.4	725.5
42.5°	786.3	751.4	721.5	699.0	688.4	683.2	684.0	687.1	694.2	699.7	707.3
45°	730.6	701.4	672.3	654.0	645.2	646.4	646.4	652.1	659.0	667.3	675.5
47.5°	678.0	648.7	624.8	609.3	604.8	603.6	607.2	614.7	624.6	634.8	646.3
50°	642.6	614.8	593.9	580.0	575.0	576.9	581.9	588.8	600.9	613.5	625.5
52.5°	606.7	581.4	562.1	549.1	545.6	549.0	554.1	565.1	575.6	589.2	603.8
55°	550.9	529.4	514.2	504.7	503.4	505.3	511.0	523.1	538.2	555.3	569.3
57.5°	495.4	477.4	463.5	456.9	457.6	459.3	468.7	483.0	499.2	517.4	535.4
60°	457.9	441.5	430.1	425.0	425.6	429.4	440.8	454.2	474.4	492.1	511.0
62.5°	422.5	408.1	397.2	392.7	391.7	400.1	411.0	424.8	445.0	464.8	485.2
65°	365.6	354.2	345.3	342.8	344.7	351.0	365.0	383.3	400.4	421.2	442.8
67.5°	309.9	300.6	294.5	295.6	297.9	307.3	318.9	334.7	354.1	375.7	397.0
70°	274.5	265.6	260.5	261.2	265.0	276.4	286.5	302.3	323.2	345.3	363.1
72.5°	238.1	232.3	227.7	230.4	234.2	242.0	254.6	270.5	288.8	309.4	328.1
75°	182.8	182.8	180.2	182.1	187.8	195.4	204.9	221.3	239.7	256.2	271.3
77.5°	135.6	134.2	135.9	138.2	141.4	150.4	161.3	173.0	186.9	203.3	215.8
80°	103.7	104.3	107.5	111.3	112.6	119.5	130.9	141.6	152.4	166.4	178.4
82.5°	78.0	78.6	80.2	85.0	86.3	93.7	101.1	111.9	121.6	130.9	140.9
85°	42.4	42.4	45.6	47.5	50.6	55.7	60.0	66.4	75.3	81.6	91.1
87.5°	17.1	17.3	19.4	20.5	22.2	24.9	26.0	31.6	33.7	36.4	41.0
90°	4.6	5.3	6.0	6.7	7.3	7.9	8.4	8.9	9.3	9.8	10.1
92.5°	4.8	5.1	5.7	6.3	7.0	7.6	8.1	8.6	9.0	9.5	9.7
95°	8.9	7.6	7.7	7.8	7.8	7.9	8.4	8.9	9.3	9.8	10.1
97.5°	48.7	45.1	36.2	27.3	18.4	9.5	9.5	9.6	9.6	9.7	9.7
100°	64.6	59.8	48.8	37.8	26.8	15.8	14.4	13.1	11.7	10.4	9.7
102.5°	82.1	81.8	80.4	79.0	77.6	76.1	61.5	46.8	32.2	17.6	10.3
105°	110.0	110.4	110.8	111.2	111.6	112.0	112.7	113.4	114.2	114.9	113.8
107.5°	137.1	137.5	138.0	138.6	139.1	139.7	140.0	140.4	140.7	141.1	141.4
110°	156.1	156.4	156.9	157.4	157.9	158.4	158.5	158.7	158.8	159.0	159.1



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	175.2	175.5	175.8	175.9	176.2	176.4	176.4	176.3	176.3	176.3	176.4
115°	202.7	202.8	202.7	202.6	202.6	202.5	202.6	202.8	203.0	203.1	203.2
117.5°	228.5	228.8	228.9	229.1	229.3	229.5	229.4	229.4	229.4	229.3	229.3
120°	245.7	245.9	245.8	245.7	245.7	245.6	245.7	245.9	246.1	246.2	246.2
122.5°	261.3	261.5	261.6	261.7	261.8	262.0	262.1	262.1	262.2	262.3	262.3
125°	284.9	284.9	284.8	284.6	284.5	284.3	284.6	284.8	285.0	285.3	285.4
127.5°	305.8	306.0	306.3	306.7	307.1	307.4	307.4	307.4	307.3	307.3	307.2
130°	319.9	320.0	320.3	320.5	320.8	321.0	321.1	321.2	321.2	321.3	321.3
132.5°	333.0	333.3	333.6	333.8	334.1	334.5	334.5	334.6	334.7	334.8	334.8
135°	351.5	351.6	352.0	352.3	352.6	352.9	353.1	353.2	353.4	353.6	353.7
137.5°	369.2	369.3	369.6	370.0	370.3	370.7	370.9	371.1	371.2	371.5	371.5
140°	380.8	381.0	381.1	381.4	381.5	381.7	381.9	382.1	382.4	382.6	382.8
142.5°	391.4	391.6	391.7	391.8	391.9	392.0	392.1	392.3	392.5	392.7	392.8
145°	406.6	406.8	406.8	406.8	406.8	406.8	406.9	406.9	407.0	407.1	407.2
147.5°	419.8	419.9	419.9	419.8	419.7	419.6	419.7	419.8	419.8	419.9	419.9
150°	428.2	428.3	428.2	428.1	428.0	427.9	427.9	427.9	427.9	427.9	428.0
152.5°	435.4	435.4	435.3	435.1	435.0	434.8	435.0	435.1	435.2	435.4	435.4
155°	445.1	445.0	444.8	444.6	444.3	444.1	444.4	444.7	445.0	445.4	445.4
157.5°	453.4	453.3	453.0	452.7	452.5	452.3	452.7	453.0	453.4	453.8	453.8
160°	457.9	457.7	457.6	457.6	457.5	457.4	457.9	458.4	458.8	459.3	459.3
162.5°	462.2	462.0	461.9	461.8	461.8	461.7	462.2	462.6	463.1	463.6	463.6
165°	467.6	467.5	467.5	467.5	467.5	467.5	468.1	468.7	469.4	470.0	469.9
167.5°	472.1	471.9	471.9	471.8	471.8	471.7	472.5	473.2	473.9	474.6	474.5
170°	474.5	474.3	474.4	474.4	474.5	474.6	475.2	475.9	476.5	477.2	477.1
172.5°	476.3	476.0	476.1	476.2	476.3	476.3	477.0	477.6	478.2	478.9	478.8
175°	478.1	477.9	478.0	478.1	478.2	478.2	479.0	479.7	480.4	481.1	480.9
177.5°	479.1	479.0	479.0	479.2	479.3	479.4	479.9	480.5	480.9	481.5	481.3
180°	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9
2.5°	1455.0	1454.0	1450.4	1449.9	1450.4	1454.0	1455.0	1456.0	1457.5	1462.5	1456.5
5°	1344.0	1340.8	1338.9	1345.9	1338.9	1340.8	1344.0	1347.8	1354.2	1354.8	1361.1
7.5°	1260.4	1257.9	1252.4	1250.5	1252.4	1257.9	1260.4	1262.7	1269.0	1274.5	1283.8
10°	1206.8	1204.3	1199.2	1197.9	1199.2	1204.3	1206.8	1213.1	1219.4	1226.4	1232.7
12.5°	1155.2	1150.1	1149.1	1150.4	1149.1	1150.1	1155.2	1163.6	1180.0	1179.9	1181.1
15°	1086.6	1084.1	1077.1	1079.0	1077.1	1084.1	1086.6	1094.9	1102.4	1111.9	1121.4
17.5°	1019.1	1016.1	1007.6	1015.0	1007.6	1016.1	1019.1	1023.5	1033.2	1046.6	1061.0
20°	976.5	971.5	967.1	966.5	967.1	971.5	976.5	981.0	991.7	1003.1	1013.9
22.5°	936.0	931.5	931.1	927.0	931.1	931.5	936.0	943.0	953.8	960.1	970.3
25°	885.5	881.1	879.8	876.6	879.8	881.1	885.5	890.6	897.5	902.5	913.9
27.5°	846.7	844.5	842.2	843.2	842.2	844.5	846.7	847.3	850.4	857.1	863.7
30°	822.8	822.2	820.9	820.9	820.9	822.2	822.8	820.9	824.1	827.3	832.3
32.5°	803.1	803.0	803.7	803.7	803.7	803.0	803.1	800.3	801.4	802.5	805.0
35°	775.5	777.3	778.6	776.7	778.6	777.3	775.5	772.9	771.0	766.6	767.9
37.5°	750.4	752.3	754.1	756.2	754.1	752.3	750.4	745.2	740.6	736.7	732.1
40°	731.2	735.6	736.8	740.0	736.8	735.6	731.2	725.5	720.4	716.0	710.9
42.5°	713.0	717.9	721.1	721.8	721.1	717.9	713.0	707.3	699.7	694.2	687.1
45°	685.0	690.1	694.5	694.5	694.5	690.1	685.0	675.5	667.3	659.0	652.1
47.5°	656.0	663.4	667.8	668.9	667.8	663.4	656.0	646.3	634.8	624.6	614.7
50°	636.3	645.2	649.6	652.8	649.6	645.2	636.3	625.5	613.5	600.9	588.8
52.5°	617.0	625.9	631.8	633.5	631.8	625.9	617.0	603.8	589.2	575.6	565.1
55°	583.8	596.4	603.4	605.9	603.4	596.4	583.8	569.3	555.3	538.2	523.1
57.5°	552.4	564.0	572.1	574.0	572.1	564.0	552.4	535.4	517.4	499.2	483.0
60°	528.1	540.7	550.9	552.8	550.9	540.7	528.1	511.0	492.1	474.4	454.2
62.5°	503.4	516.5	525.6	530.5	525.6	516.5	503.4	485.2	464.8	445.0	424.8
65°	460.4	473.7	482.6	484.5	482.6	473.7	460.4	442.8	421.2	400.4	383.3
67.5°	413.7	426.9	432.8	436.4	432.8	426.9	413.7	397.0	375.7	354.1	334.7
70°	380.7	391.5	397.8	401.0	397.8	391.5	380.7	363.1	345.3	323.2	302.3
72.5°	343.3	354.6	361.9	362.5	361.9	354.6	343.3	328.1	309.4	288.8	270.5
75°	285.9	296.0	299.8	299.8	299.8	296.0	285.9	271.3	256.2	239.7	221.3
77.5°	226.3	231.5	236.3	237.3	236.3	231.5	226.3	215.8	203.3	186.9	173.0
80°	187.8	191.0	194.8	194.8	194.8	191.0	187.8	178.4	166.4	152.4	141.6
82.5°	148.4	151.1	154.9	154.3	154.9	151.1	148.4	140.9	130.9	121.6	111.9
85°	89.8	95.5	94.9	93.6	94.9	95.5	89.8	91.1	81.6	75.3	66.4
87.5°	42.5	43.1	44.6	45.6	44.6	43.1	42.5	41.0	36.4	33.7	31.6
90°	10.3	10.5	10.6	10.8	10.6	10.5	10.3	10.1	9.8	9.3	8.9
92.5°	9.8	9.8	9.9	9.9	9.9	9.8	9.8	9.7	9.5	9.0	8.6
95°	10.1	10.2	10.3	10.4	10.3	10.2	10.1	10.1	9.8	9.3	8.9
97.5°	9.8	9.9	10.0	10.1	10.0	9.9	9.8	9.7	9.7	9.6	9.6
100°	9.8	9.9	10.0	10.1	10.0	9.9	9.8	9.7	10.4	11.7	13.1
102.5°	10.3	10.3	10.3	10.4	10.3	10.3	10.3	10.3	17.6	32.2	46.8
105°	110.9	108.1	105.2	102.3	105.2	108.1	110.9	113.8	114.9	114.2	113.4
107.5°	141.7	142.0	142.3	142.6	142.3	142.0	141.7	141.4	141.1	140.7	140.4
110°	159.4	159.6	159.9	160.1	159.9	159.6	159.4	159.1	159.0	158.8	158.7



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	176.7	177.1	177.4	177.6	177.4	177.1	176.7	176.4	176.3	176.3	176.3
115°	203.2	203.2	203.2	203.2	203.2	203.2	203.2	203.2	203.1	203.0	202.8
117.5°	229.3	229.3	229.3	229.2	229.3	229.3	229.3	229.3	229.3	229.4	229.4
120°	246.1	245.9	245.7	245.6	245.7	245.9	246.1	246.2	246.2	246.1	245.9
122.5°	262.1	262.0	261.8	261.7	261.8	262.0	262.1	262.3	262.3	262.2	262.1
125°	285.5	285.6	285.7	285.7	285.7	285.6	285.5	285.4	285.3	285.0	284.8
127.5°	307.1	307.0	307.0	307.0	307.0	307.0	307.1	307.2	307.3	307.3	307.4
130°	321.3	321.3	321.3	321.3	321.3	321.3	321.3	321.3	321.3	321.2	321.2
132.5°	334.7	334.7	334.6	334.5	334.6	334.7	334.7	334.8	334.8	334.7	334.6
135°	353.9	354.0	354.2	354.3	354.2	354.0	353.9	353.7	353.6	353.4	353.2
137.5°	371.5	371.4	371.4	371.3	371.4	371.4	371.5	371.5	371.5	371.2	371.1
140°	382.9	382.9	383.0	383.1	383.0	382.9	382.9	382.8	382.6	382.4	382.1
142.5°	392.8	392.8	392.8	392.8	392.8	392.8	392.8	392.8	392.7	392.5	392.3
145°	407.3	407.5	407.7	407.8	407.7	407.5	407.3	407.2	407.1	407.0	406.9
147.5°	420.0	420.1	420.2	420.3	420.2	420.1	420.0	419.9	419.9	419.8	419.8
150°	428.1	428.2	428.3	428.3	428.3	428.2	428.1	428.0	427.9	427.9	427.9
152.5°	435.4	435.3	435.2	435.2	435.2	435.3	435.4	435.4	435.4	435.2	435.1
155°	445.2	445.0	444.7	444.5	444.7	445.0	445.2	445.4	445.4	445.0	444.7
157.5°	453.4	453.0	452.7	452.3	452.7	453.0	453.4	453.8	453.8	453.4	453.0
160°	458.8	458.4	457.9	457.4	457.9	458.4	458.8	459.3	459.3	458.8	458.4
162.5°	463.0	462.5	461.9	461.4	461.9	462.5	463.0	463.6	463.6	463.1	462.6
165°	469.2	468.5	467.8	467.1	467.8	468.5	469.2	469.9	470.0	469.4	468.7
167.5°	473.7	472.9	472.1	471.3	472.1	472.9	473.7	474.5	474.6	473.9	473.2
170°	476.3	475.5	474.7	473.9	474.7	475.5	476.3	477.1	477.2	476.5	475.9
172.5°	477.9	477.1	476.2	475.3	476.2	477.1	477.9	478.8	478.9	478.2	477.6
175°	480.0	479.0	478.1	477.1	478.1	479.0	480.0	480.9	481.1	480.4	479.7
177.5°	480.6	479.8	479.0	478.3	479.0	479.8	480.6	481.3	481.5	480.9	480.5
180°	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9
2.5°	1459.5	1461.6	1469.7	1477.3	1486.4	1492.9	1497.5	1502.5	1513.1	1521.8	1529.9
5°	1367.5	1370.6	1387.0	1398.4	1418.0	1435.1	1448.4	1462.9	1480.0	1503.4	1525.0
7.5°	1286.3	1298.1	1316.1	1334.5	1354.6	1376.9	1396.4	1418.3	1447.8	1479.9	1513.1
10°	1240.3	1253.6	1272.6	1294.1	1313.0	1338.9	1363.0	1388.9	1422.4	1461.7	1500.9
12.5°	1194.3	1216.2	1230.6	1256.1	1276.6	1298.0	1323.6	1357.6	1396.7	1437.9	1485.2
15°	1136.5	1148.6	1176.4	1190.3	1219.4	1252.4	1277.6	1311.8	1349.7	1404.1	1457.2
17.5°	1070.1	1085.8	1108.0	1134.6	1167.9	1193.7	1225.1	1260.3	1308.1	1362.2	1428.7
20°	1026.5	1039.8	1067.0	1096.1	1131.6	1158.7	1192.2	1226.4	1275.7	1333.3	1402.9
22.5°	987.5	1000.4	1029.0	1056.1	1090.5	1123.8	1158.8	1198.6	1245.9	1306.5	1377.5
25°	927.2	944.3	969.6	997.4	1030.3	1068.3	1106.2	1141.6	1192.2	1256.1	1332.1
27.5°	873.7	887.4	905.7	937.3	974.7	1011.4	1049.0	1093.6	1142.2	1209.7	1288.5
30°	839.3	852.0	870.3	899.4	934.2	973.4	1012.6	1055.6	1106.2	1173.3	1253.6
32.5°	812.0	821.6	837.9	864.0	895.7	937.0	975.7	1020.2	1073.3	1139.4	1217.7
35°	771.7	779.8	786.2	810.9	839.3	877.3	916.5	963.9	1015.2	1077.8	1156.2
37.5°	732.1	734.8	744.1	760.3	787.8	822.8	859.2	905.9	958.4	1022.0	1092.7
40°	707.7	709.0	714.7	729.9	753.9	786.8	822.2	868.4	918.4	978.4	1048.7
42.5°	684.0	683.2	688.4	699.0	721.5	751.4	786.3	828.5	878.4	933.9	1000.1
45°	646.4	646.4	645.2	654.0	672.3	701.4	730.6	771.0	812.8	867.1	922.8
47.5°	607.2	603.6	604.8	609.3	624.8	648.7	678.0	711.1	748.0	794.0	842.9
50°	581.9	576.9	575.0	580.0	593.9	614.8	642.6	671.7	706.5	746.9	788.7
52.5°	554.1	549.0	545.6	549.1	562.1	581.4	606.7	632.2	663.5	696.4	732.5
55°	511.0	505.3	503.4	504.7	514.2	529.4	550.9	574.3	597.7	624.9	650.2
57.5°	468.7	459.3	457.6	456.9	463.5	477.4	495.4	515.6	532.7	549.1	576.1
60°	440.8	429.4	425.6	425.0	430.1	441.5	457.9	478.2	490.2	501.5	525.0
62.5°	411.0	400.1	391.7	392.7	397.2	408.1	422.5	437.2	445.1	457.6	473.3
65°	365.0	351.0	344.7	342.8	345.3	354.2	365.6	375.1	383.9	389.0	404.2
67.5°	318.9	307.3	297.9	295.6	294.5	300.6	309.9	315.6	321.9	326.4	335.3
70°	286.5	276.4	265.0	261.2	260.5	265.6	274.5	275.1	284.0	285.9	295.4
72.5°	254.6	242.0	234.2	230.4	227.7	232.3	238.1	239.7	244.5	248.0	252.9
75°	204.9	195.4	187.8	182.1	180.2	182.8	182.8	185.9	189.1	191.0	196.7
77.5°	161.3	150.4	141.4	138.2	135.9	134.2	135.6	137.5	136.0	139.3	140.5
80°	130.9	119.5	112.6	111.3	107.5	104.3	103.7	105.6	103.1	104.3	108.1
82.5°	101.1	93.7	86.3	85.0	80.2	78.6	78.0	76.8	76.8	76.5	77.3
85°	60.0	55.7	50.6	47.5	45.6	42.4	42.4	41.1	39.8	38.6	39.2
87.5°	26.0	24.9	22.2	20.5	19.4	17.3	17.1	15.4	14.7	14.0	13.4
90°	8.4	7.9	7.3	6.7	6.0	5.3	4.6	3.7	2.9	2.0	1.1
92.5°	8.1	7.6	7.0	6.3	5.7	5.1	4.8	4.7	4.6	4.6	4.5
95°	8.4	7.9	7.8	7.8	7.7	7.6	8.9	11.6	14.3	17.0	19.7
97.5°	9.5	9.5	18.4	27.3	36.2	45.1	48.7	47.0	45.3	43.6	41.9
100°	14.4	15.8	26.8	37.8	48.8	59.8	64.6	63.2	61.8	60.3	58.9
102.5°	61.5	76.1	77.6	79.0	80.4	81.8	82.1	81.0	79.9	78.9	77.9
105°	112.7	112.0	111.6	111.2	110.8	110.4	110.0	109.5	109.0	108.5	108.1
107.5°	140.0	139.7	139.1	138.6	138.0	137.5	137.1	136.9	136.7	136.4	136.2
110°	158.5	158.4	157.9	157.4	156.9	156.4	156.1	155.8	155.6	155.3	155.1



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	176.4	176.4	176.2	175.9	175.8	175.5	175.2	174.8	174.4	173.9	173.5
115°	202.6	202.5	202.6	202.6	202.7	202.8	202.7	202.5	202.2	202.0	201.8
117.5°	229.4	229.5	229.3	229.1	228.9	228.8	228.5	228.2	227.9	227.6	227.3
120°	245.7	245.6	245.7	245.7	245.8	245.9	245.7	245.4	245.1	244.8	244.5
122.5°	262.1	262.0	261.8	261.7	261.6	261.5	261.3	261.2	260.9	260.8	260.5
125°	284.6	284.3	284.5	284.6	284.8	284.9	284.9	284.6	284.2	283.9	283.6
127.5°	307.4	307.4	307.1	306.7	306.3	306.0	305.8	305.7	305.6	305.5	305.5
130°	321.1	321.0	320.8	320.5	320.3	320.0	319.9	319.8	319.7	319.6	319.5
132.5°	334.5	334.5	334.1	333.8	333.6	333.3	333.0	332.9	332.7	332.6	332.5
135°	353.1	352.9	352.6	352.3	352.0	351.6	351.5	351.6	351.6	351.7	351.8
137.5°	370.9	370.7	370.3	370.0	369.6	369.3	369.2	369.1	369.1	369.0	369.0
140°	381.9	381.7	381.5	381.4	381.1	381.0	380.8	380.6	380.5	380.3	380.2
142.5°	392.1	392.0	391.9	391.8	391.7	391.6	391.4	391.1	390.9	390.5	390.2
145°	406.9	406.8	406.8	406.8	406.8	406.8	406.6	406.4	406.2	405.9	405.7
147.5°	419.7	419.6	419.7	419.8	419.9	419.9	419.8	419.3	418.8	418.4	418.0
150°	427.9	427.9	428.0	428.1	428.2	428.3	428.2	427.9	427.5	427.2	426.9
152.5°	435.0	434.8	435.0	435.1	435.3	435.4	435.4	435.1	434.8	434.6	434.4
155°	444.4	444.1	444.3	444.6	444.8	445.0	445.1	445.0	445.0	444.9	444.8
157.5°	452.7	452.3	452.5	452.7	453.0	453.3	453.4	453.5	453.5	453.6	453.7
160°	457.9	457.4	457.5	457.6	457.6	457.7	457.9	458.1	458.4	458.6	458.8
162.5°	462.2	461.7	461.8	461.8	461.9	462.0	462.2	462.5	462.8	463.1	463.4
165°	468.1	467.5	467.5	467.5	467.5	467.5	467.6	468.0	468.4	468.8	469.2
167.5°	472.5	471.7	471.8	471.8	471.9	471.9	472.1	472.6	473.0	473.4	473.8
170°	475.2	474.6	474.5	474.4	474.4	474.3	474.5	475.0	475.5	475.9	476.4
172.5°	477.0	476.3	476.3	476.2	476.1	476.0	476.3	476.7	477.2	477.7	478.2
175°	479.0	478.2	478.2	478.1	478.0	477.9	478.1	478.6	479.0	479.5	480.0
177.5°	479.9	479.4	479.3	479.2	479.0	479.0	479.1	479.5	480.0	480.5	480.9
180°	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9
2.5°	1536.9	1542.0	1548.6	1559.7	1563.8	1568.8	1575.9	1575.4	1577.4	1585.0	1601.2
5°	1542.6	1562.3	1581.2	1604.0	1628.0	1643.9	1665.3	1678.6	1691.9	1709.0	1738.0
7.5°	1544.9	1576.0	1610.8	1650.8	1686.3	1727.4	1759.4	1789.5	1816.6	1852.7	1887.4
10°	1541.3	1583.1	1628.0	1678.6	1732.3	1777.9	1819.0	1865.8	1905.7	1949.3	1988.5
12.5°	1534.8	1585.2	1645.2	1701.9	1764.7	1832.1	1883.3	1930.6	1983.6	2033.8	2094.3
15°	1519.9	1588.8	1659.0	1733.6	1817.7	1895.5	1969.6	2030.9	2087.9	2163.1	2242.2
17.5°	1500.9	1575.3	1663.8	1754.1	1842.1	1931.0	2022.6	2114.8	2186.7	2280.1	2342.0
20°	1483.2	1569.2	1660.3	1767.8	1855.7	1966.4	2057.5	2146.7	2245.4	2338.3	2412.3
22.5°	1458.4	1552.5	1649.2	1756.2	1871.9	1982.6	2087.9	2184.6	2283.3	2384.4	2474.1
25°	1426.9	1512.3	1626.7	1748.2	1863.3	1983.5	2104.3	2225.7	2331.9	2438.9	2522.4
27.5°	1373.2	1481.1	1587.7	1713.0	1841.0	1976.9	2106.1	2233.2	2344.5	2432.4	2484.1
30°	1345.9	1439.6	1555.3	1681.2	1819.6	1965.8	2100.5	2225.1	2328.9	2399.0	2419.9
32.5°	1305.4	1402.1	1515.3	1645.8	1792.3	1942.5	2082.8	2200.3	2286.8	2323.6	2298.4
35°	1245.4	1332.7	1447.2	1580.6	1733.0	1893.0	2031.6	2130.8	2175.1	2140.3	2053.7
37.5°	1173.3	1259.8	1374.8	1505.9	1663.6	1826.2	1951.5	2022.9	2008.3	1921.8	1792.6
40°	1122.7	1203.6	1313.0	1454.7	1608.4	1771.6	1881.7	1920.2	1879.8	1755.8	1618.5
42.5°	1066.5	1145.4	1255.4	1391.9	1554.8	1705.3	1801.2	1804.4	1736.5	1588.3	1450.6
45°	981.0	1056.2	1160.0	1302.3	1452.9	1594.5	1657.7	1626.7	1501.5	1358.6	1220.0
47.5°	896.6	961.9	1064.1	1199.2	1342.1	1461.4	1492.8	1437.0	1303.5	1164.8	1036.4
50°	834.9	900.6	996.8	1125.8	1263.7	1366.8	1382.0	1308.0	1177.0	1037.3	936.7
52.5°	775.7	841.0	933.6	1053.0	1179.2	1272.2	1272.7	1187.1	1056.6	932.0	838.5
55°	688.8	747.6	831.1	937.9	1050.6	1123.3	1105.6	1017.0	903.8	795.7	714.1
57.5°	605.1	656.2	733.2	822.4	921.5	981.5	952.1	866.9	765.8	674.1	612.3
60°	550.9	599.6	665.4	749.5	833.0	879.8	852.0	774.8	681.8	607.8	554.1
62.5°	498.3	539.4	602.6	675.7	753.0	787.7	762.9	686.7	606.4	539.5	495.9
65°	423.7	457.3	507.9	570.5	626.8	656.6	635.6	564.8	503.4	455.4	420.6
67.5°	354.2	380.4	418.7	468.9	516.7	532.8	513.8	464.5	412.5	374.1	349.5
70°	306.1	330.8	363.1	401.6	443.4	460.4	441.5	402.3	359.9	324.5	300.4
72.5°	264.1	283.2	310.5	343.4	376.0	393.2	380.2	342.5	306.7	280.4	259.9
75°	201.1	217.6	236.5	259.9	285.3	296.7	285.3	259.3	234.6	215.1	200.5
77.5°	146.2	155.1	169.8	187.2	203.0	211.8	201.9	184.3	169.3	155.8	148.6
80°	111.3	117.6	127.8	141.6	152.4	160.7	154.3	139.7	127.8	118.9	115.7
82.5°	81.0	85.2	91.8	102.2	109.4	113.6	110.8	100.3	95.4	87.5	84.4
85°	39.8	42.4	46.8	50.0	56.3	57.0	57.6	53.2	48.7	46.8	44.3
87.5°	14.0	14.7	16.4	18.1	20.3	20.9	20.5	20.7	18.8	18.4	16.5
90°	2.0	2.9	3.7	4.6	5.3	6.0	6.7	7.3	7.9	8.4	8.9
92.5°	4.6	4.6	4.7	4.8	5.1	5.7	6.3	7.0	7.6	8.1	8.6
95°	17.0	14.3	11.6	8.9	7.6	7.7	7.8	7.8	7.9	8.4	8.9
97.5°	43.6	45.3	47.0	48.7	45.1	36.2	27.3	18.4	9.5	9.5	9.6
100°	60.3	61.8	63.2	64.6	59.8	48.8	37.8	26.8	15.8	14.4	13.1
102.5°	78.9	79.9	81.0	82.1	81.8	80.4	79.0	77.6	76.1	61.5	46.8
105°	108.5	109.0	109.5	110.0	110.4	110.8	111.2	111.6	112.0	112.7	113.4
107.5°	136.4	136.7	136.9	137.1	137.5	138.0	138.6	139.1	139.7	140.0	140.4
110°	155.3	155.6	155.8	156.1	156.4	156.9	157.4	157.9	158.4	158.5	158.7



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	173.9	174.4	174.8	175.2	175.5	175.8	175.9	176.2	176.4	176.4	176.3
115°	202.0	202.2	202.5	202.7	202.8	202.7	202.6	202.6	202.5	202.6	202.8
117.5°	227.6	227.9	228.2	228.5	228.8	228.9	229.1	229.3	229.5	229.4	229.4
120°	244.8	245.1	245.4	245.7	245.9	245.8	245.7	245.7	245.6	245.7	245.9
122.5°	260.8	260.9	261.2	261.3	261.5	261.6	261.7	261.8	262.0	262.1	262.1
125°	283.9	284.2	284.6	284.9	284.9	284.8	284.6	284.5	284.3	284.6	284.8
127.5°	305.5	305.6	305.7	305.8	306.0	306.3	306.7	307.1	307.4	307.4	307.4
130°	319.6	319.7	319.8	319.9	320.0	320.3	320.5	320.8	321.0	321.1	321.2
132.5°	332.6	332.7	332.9	333.0	333.3	333.6	333.8	334.1	334.5	334.5	334.6
135°	351.7	351.6	351.6	351.5	351.6	352.0	352.3	352.6	352.9	353.1	353.2
137.5°	369.0	369.1	369.1	369.2	369.3	369.6	370.0	370.3	370.7	370.9	371.1
140°	380.3	380.5	380.6	380.8	381.0	381.1	381.4	381.5	381.7	381.9	382.1
142.5°	390.5	390.9	391.1	391.4	391.6	391.7	391.8	391.9	392.0	392.1	392.3
145°	405.9	406.2	406.4	406.6	406.8	406.8	406.8	406.8	406.8	406.9	406.9
147.5°	418.4	418.8	419.3	419.8	419.9	419.9	419.8	419.7	419.6	419.7	419.8
150°	427.2	427.5	427.9	428.2	428.3	428.2	428.1	428.0	427.9	427.9	427.9
152.5°	434.6	434.8	435.1	435.4	435.4	435.3	435.1	435.0	434.8	435.0	435.1
155°	444.9	445.0	445.0	445.1	445.0	444.8	444.6	444.3	444.1	444.4	444.7
157.5°	453.6	453.5	453.5	453.4	453.3	453.0	452.7	452.5	452.3	452.7	453.0
160°	458.6	458.4	458.1	457.9	457.7	457.6	457.6	457.5	457.4	457.9	458.4
162.5°	463.1	462.8	462.5	462.2	462.0	461.9	461.8	461.8	461.7	462.2	462.6
165°	468.8	468.4	468.0	467.6	467.5	467.5	467.5	467.5	467.5	468.1	468.7
167.5°	473.4	473.0	472.6	472.1	471.9	471.9	471.8	471.8	471.7	472.5	473.2
170°	475.9	475.5	475.0	474.5	474.3	474.4	474.4	474.5	474.6	475.2	475.9
172.5°	477.7	477.2	476.7	476.3	476.0	476.1	476.2	476.3	476.3	477.0	477.6
175°	479.5	479.0	478.6	478.1	477.9	478.0	478.1	478.2	478.2	479.0	479.7
177.5°	480.5	480.0	479.5	479.1	479.0	479.0	479.2	479.3	479.4	479.9	480.5
180°	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0	480.0



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9	1526.9
2.5°	1609.3	1610.3	1614.9	1618.4	1619.5	1624.4	1625.0
5°	1750.7	1761.5	1782.3	1784.2	1787.4	1803.9	1791.2
7.5°	1916.4	1943.8	1962.0	1978.1	1983.9	1991.1	1989.6
10°	2022.7	2063.2	2083.4	2115.7	2116.9	2125.2	2120.1
12.5°	2129.5	2176.5	2213.4	2219.4	2246.5	2250.7	2257.7
15°	2280.8	2330.7	2381.9	2400.3	2437.6	2446.5	2460.4
17.5°	2423.0	2474.1	2510.0	2557.4	2572.7	2593.2	2579.3
20°	2500.8	2556.5	2602.1	2639.4	2655.2	2666.6	2665.3
22.5°	2547.9	2604.1	2641.0	2669.3	2684.0	2688.8	2688.6
25°	2577.4	2609.6	2621.0	2631.8	2615.3	2609.6	2612.1
27.5°	2495.5	2487.1	2457.3	2418.4	2377.9	2345.7	2328.3
30°	2382.6	2333.2	2288.4	2209.9	2169.5	2145.4	2123.9
32.5°	2222.7	2144.5	2058.1	1986.2	1940.2	1904.6	1899.3
35°	1948.7	1831.1	1725.5	1637.5	1592.0	1553.4	1544.5
37.5°	1656.8	1534.5	1439.4	1362.0	1313.0	1285.9	1260.4
40°	1462.9	1358.0	1264.3	1198.6	1161.3	1141.6	1125.8
42.5°	1313.7	1217.8	1124.7	1074.6	1040.8	1028.8	1019.5
45°	1107.5	1018.3	953.8	915.8	896.2	876.0	866.5
47.5°	942.4	869.8	827.3	795.0	774.0	762.0	756.0
50°	848.8	789.3	751.4	726.7	707.7	698.2	693.2
52.5°	765.8	717.0	685.1	665.5	652.6	645.6	643.6
55°	659.7	622.3	602.1	585.0	575.6	569.3	566.7
57.5°	573.4	544.7	528.2	514.2	510.6	505.3	503.4
60°	516.7	494.6	480.7	471.2	468.0	461.7	463.0
62.5°	466.7	448.5	436.7	431.3	427.1	421.8	423.5
65°	394.7	381.4	375.1	370.0	365.0	361.8	364.3
67.5°	331.1	322.1	313.5	310.5	308.0	307.5	304.8
70°	289.7	282.1	274.5	272.6	272.6	270.1	269.4
72.5°	249.7	244.2	239.1	237.7	235.7	236.7	234.0
75°	192.9	188.5	186.6	184.7	184.0	184.0	182.1
77.5°	142.6	139.3	136.3	136.3	134.0	133.1	132.8
80°	108.1	106.9	104.3	104.3	103.1	103.7	102.4
82.5°	81.4	79.5	79.1	78.0	76.3	76.4	75.2
85°	43.6	41.7	41.1	39.2	37.9	39.2	37.9
87.5°	17.0	16.6	16.2	15.2	14.7	14.7	13.3
90°	9.3	9.8	10.1	10.3	10.5	10.6	10.8
92.5°	9.0	9.5	9.7	9.8	9.8	9.9	9.9
95°	9.3	9.8	10.1	10.1	10.2	10.3	10.4
97.5°	9.6	9.7	9.7	9.8	9.9	10.0	10.1
100°	11.7	10.4	9.7	9.8	9.9	10.0	10.1
102.5°	32.2	17.6	10.3	10.3	10.3	10.3	10.4
105°	114.2	114.9	113.8	110.9	108.1	105.2	102.3
107.5°	140.7	141.1	141.4	141.7	142.0	142.3	142.6
110°	158.8	159.0	159.1	159.4	159.6	159.9	160.1



TEST NUMBER: P332835-927

CATALOG NUMBER: S124DIW-S1195D470U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	176.3	176.3	176.4	176.7	177.1	177.4	177.6
115°	203.0	203.1	203.2	203.2	203.2	203.2	203.2
117.5°	229.4	229.3	229.3	229.3	229.3	229.3	229.2
120°	246.1	246.2	246.2	246.1	245.9	245.7	245.6
122.5°	262.2	262.3	262.3	262.1	262.0	261.8	261.7
125°	285.0	285.3	285.4	285.5	285.6	285.7	285.7
127.5°	307.3	307.3	307.2	307.1	307.0	307.0	307.0
130°	321.2	321.3	321.3	321.3	321.3	321.3	321.3
132.5°	334.7	334.8	334.8	334.7	334.7	334.6	334.5
135°	353.4	353.6	353.7	353.9	354.0	354.2	354.3
137.5°	371.2	371.5	371.5	371.5	371.4	371.4	371.3
140°	382.4	382.6	382.8	382.9	382.9	383.0	383.1
142.5°	392.5	392.7	392.8	392.8	392.8	392.8	392.8
145°	407.0	407.1	407.2	407.3	407.5	407.7	407.8
147.5°	419.8	419.9	419.9	420.0	420.1	420.2	420.3
150°	427.9	427.9	428.0	428.1	428.2	428.3	428.3
152.5°	435.2	435.4	435.4	435.4	435.3	435.2	435.2
155°	445.0	445.4	445.4	445.2	445.0	444.7	444.5
157.5°	453.4	453.8	453.8	453.4	453.0	452.7	452.3
160°	458.8	459.3	459.3	458.8	458.4	457.9	457.4
162.5°	463.1	463.6	463.6	463.0	462.5	461.9	461.4
165°	469.4	470.0	469.9	469.2	468.5	467.8	467.1
167.5°	473.9	474.6	474.5	473.7	472.9	472.1	471.3
170°	476.5	477.2	477.1	476.3	475.5	474.7	473.9
172.5°	478.2	478.9	478.8	477.9	477.1	476.2	475.3
175°	480.4	481.1	480.9	480.0	479.0	478.1	477.1
177.5°	480.9	481.5	481.3	480.6	479.8	479.0	478.3
180°	480.0	480.0	480.0	480.0	480.0	480.0	480.0

(END OF REPORT)