

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332761-927

Luminaire Tested: **S124DIW-S575D1050U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332761-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S575D1050U927-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5296.7 lumens
Efficiency: N/A
Efficacy: 117.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332761-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

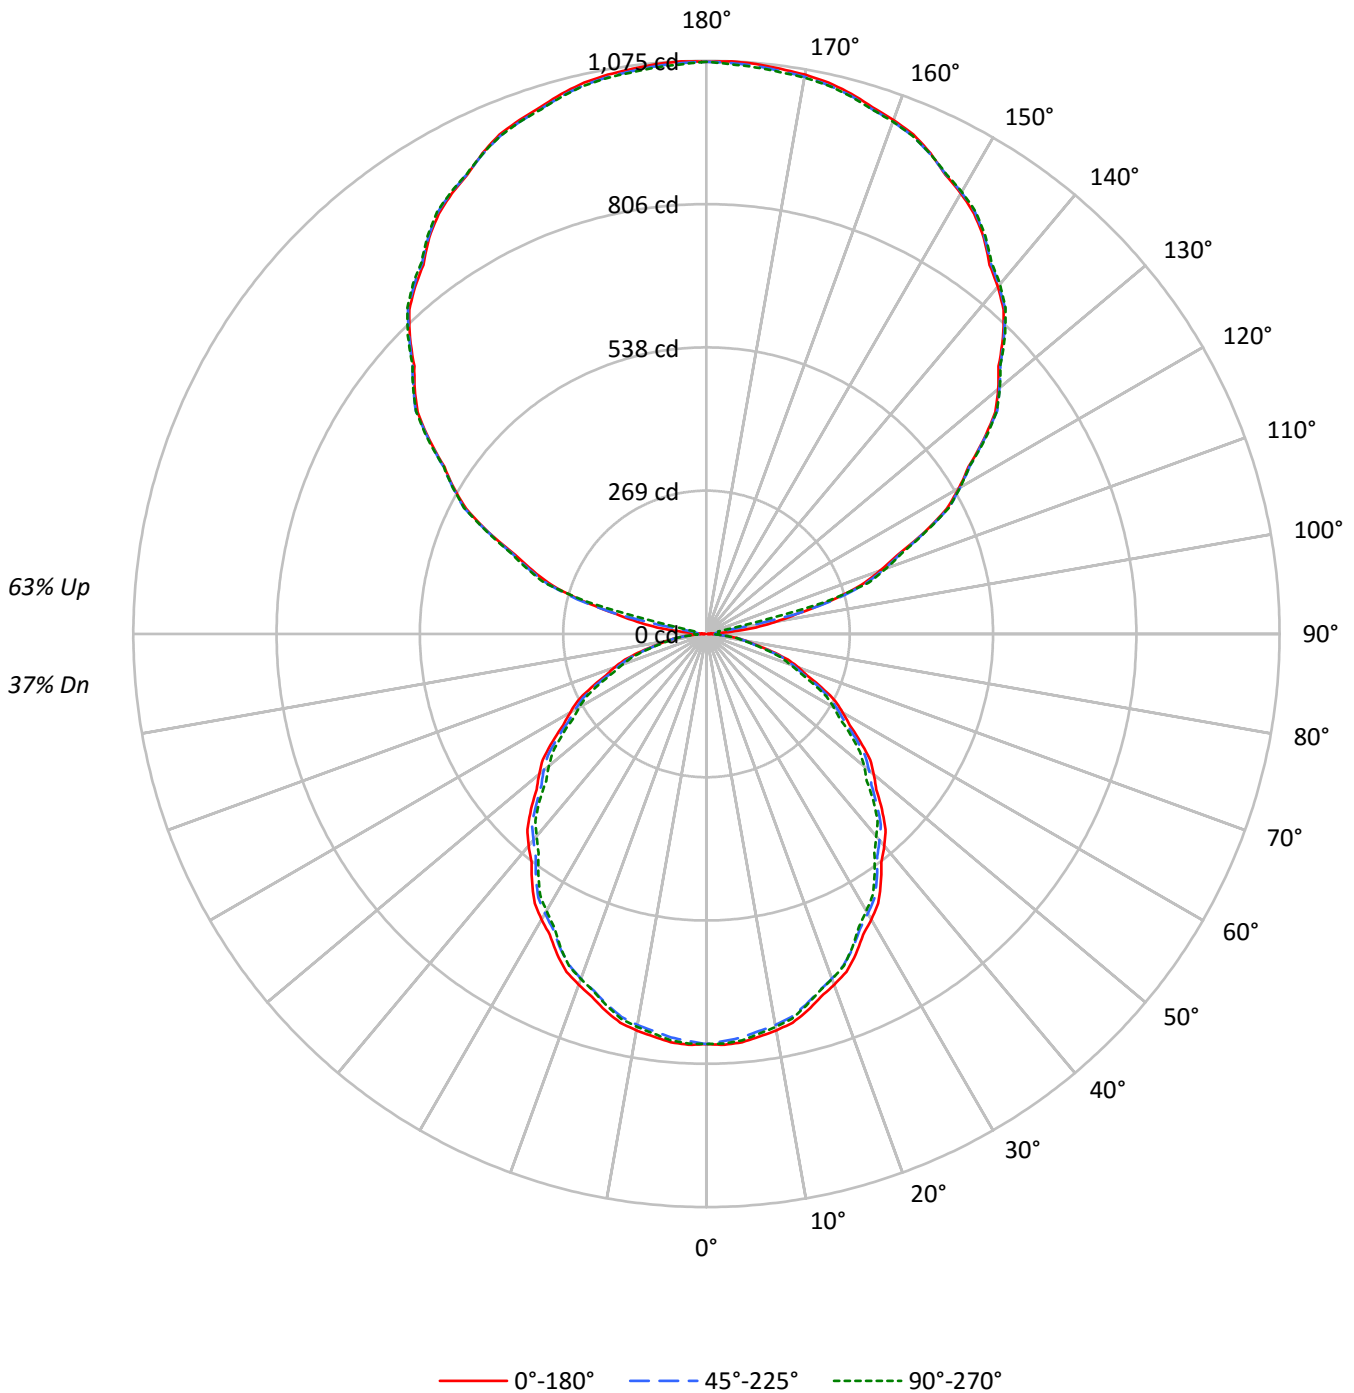



TEST NUMBER: P332761-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	44	44	44	37
1	95	91	87	83	86	82	79	76	67	64	62	52	51	50	39	38	37	31
2	86	79	73	68	78	72	67	62	58	55	52	46	44	41	35	33	32	26
3	79	69	62	57	71	63	57	52	52	47	43	41	38	35	31	29	27	22
4	72	61	54	48	65	56	49	44	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	25	22	20	17
6	61	49	41	35	55	45	38	33	37	31	28	29	25	23	22	20	18	15
7	56	44	36	31	51	40	33	29	33	28	24	27	23	20	20	18	16	13
8	52	40	32	27	47	37	30	25	30	25	21	24	20	18	19	16	14	12
9	48	36	29	24	44	33	27	22	28	23	19	22	19	16	17	15	13	10
10	45	33	26	22	41	31	24	20	25	21	17	21	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6211	6211	6211
5°	6229	6155	6199
10°	6190	6105	6135
15°	6115	6018	6033
20°	6016	5910	5916
25°	5903	5787	5770
30°	5764	5643	5591
35°	5619	5492	5419
40°	5469	5321	5223
45°	5313	5151	5053
50°	5141	5001	4847
55°	4954	4807	4650
60°	4766	4589	4448
65°	4556	4380	4204
70°	4322	4102	3944
75°	3961	3768	3671
80°	3524	3380	3296
85°	3084	2973	2908



TEST NUMBER: P332761-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.5	1.4
10°-20°	204.1	3.9
20°-30°	300.5	5.7
30°-40°	349.3	6.6
40°-50°	349.3	6.6
50°-60°	305.5	5.8
60°-70°	226.9	4.3
70°-80°	128.9	2.4
80°-90°	40.3	0.8
90°-100°	36.7	0.7
100°-110°	234.0	4.4
110°-120°	447.7	8.5
120°-130°	568.3	10.7
130°-140°	608.0	11.5
140°-150°	568.6	10.7
150°-160°	458.5	8.7
160°-170°	295.7	5.6
170°-180°	101.9	1.9
0°-30°	577.0	10.9
0°-40°	926.3	17.5
0°-60°	1581.2	29.9
0°-90°	1977.3	37.3
90°-120°	718.4	13.6
90°-150°	2463.3	46.5
90°-180°	3319.0	62.7
0°-180°	5296.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	769	769	769	769	769	
5°	769	766	760	766	765	73
15°	732	729	720	723	722	206
25°	663	658	650	650	648	305
35°	570	566	557	553	550	356
45°	465	461	451	445	443	359
55°	352	350	342	334	330	315
65°	238	235	229	223	220	236
75°	127	124	121	118	118	135
85°	33	33	32	32	31	37
90°	2	11	18	22	24	4
95°	44	18	18	22	23	57
105°	242	246	250	256	229	253
115°	451	453	453	454	454	444
125°	634	637	636	638	639	566
135°	787	786	789	791	792	606
145°	907	909	909	910	912	567
155°	994	995	993	996	994	458
165°	1049	1045	1045	1051	1044	296
175°	1073	1069	1069	1075	1067	102
180°	1073	1073	1073	1073	1073	



TEST NUMBER: P332761-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3
2.5°	771.3	771.0	770.6	770.3	770.0	769.2	768.0	766.8	765.6	764.4	765.5
5°	768.7	768.2	767.6	767.1	766.5	765.5	764.0	762.5	761.0	759.5	761.0
7.5°	761.5	761.0	760.5	759.9	759.4	758.3	756.6	754.9	753.2	751.5	752.8
10°	755.1	754.6	754.1	753.5	753.0	751.8	750.0	748.2	746.5	744.7	745.8
12.5°	746.8	746.2	745.7	745.1	744.6	743.4	741.5	739.6	737.7	735.8	737.0
15°	731.7	731.2	730.6	730.1	729.5	728.3	726.2	724.1	722.1	720.0	720.8
17.5°	713.6	712.9	712.3	711.5	710.8	709.6	707.6	705.7	703.7	701.8	702.3
20°	700.3	699.6	698.9	698.2	697.5	696.2	694.1	692.1	690.0	687.9	688.3
22.5°	686.0	685.1	684.2	683.3	682.4	680.9	678.8	676.8	674.7	672.6	673.4
25°	662.7	661.7	660.8	659.8	658.9	657.4	655.5	653.6	651.6	649.7	649.9
27.5°	636.0	635.1	634.1	633.1	632.1	630.7	628.9	627.2	625.3	623.6	623.3
30°	618.3	617.2	616.1	615.0	613.9	612.4	610.7	608.9	607.1	605.4	604.8
32.5°	599.5	598.6	597.5	596.6	595.6	594.1	592.3	590.4	588.5	586.6	586.0
35°	570.2	569.3	568.3	567.4	566.4	564.9	563.0	561.1	559.2	557.3	556.3
37.5°	539.2	538.4	537.5	536.6	535.8	534.3	532.3	530.2	528.1	526.1	525.1
40°	519.0	517.9	516.8	515.8	514.7	513.1	511.0	509.0	506.9	504.9	503.5
42.5°	497.3	496.7	496.1	495.4	494.7	493.2	491.0	488.7	486.4	484.2	482.6
45°	465.4	464.5	463.5	462.6	461.6	460.0	457.8	455.6	453.4	451.2	449.7
47.5°	432.0	431.3	430.7	430.0	429.4	428.0	426.0	424.0	421.9	419.9	418.2
50°	409.3	408.8	408.2	407.7	407.1	405.9	404.0	402.0	400.1	398.2	396.3
52.5°	387.1	386.5	385.8	385.2	384.5	383.2	381.1	379.1	377.1	375.0	373.4
55°	352.0	351.6	351.2	350.8	350.4	349.2	347.3	345.3	343.4	341.5	339.8
57.5°	318.5	318.0	317.5	317.0	316.6	315.4	313.5	311.6	309.7	307.8	306.3
60°	295.2	294.6	293.9	293.2	292.6	291.3	289.5	287.7	286.0	284.2	283.0
62.5°	272.6	272.0	271.4	270.8	270.3	269.0	267.2	265.3	263.4	261.5	260.4
65°	238.5	237.9	237.2	236.5	235.8	234.8	233.5	232.0	230.7	229.3	227.9
67.5°	204.3	203.7	203.0	202.4	201.8	200.8	199.5	198.2	196.9	195.5	194.2
70°	183.1	182.1	181.2	180.2	179.3	178.2	177.1	176.0	174.9	173.8	172.8
72.5°	160.4	159.5	158.5	157.5	156.5	155.7	154.8	153.9	153.0	152.1	151.2
75°	127.0	126.3	125.6	124.9	124.2	123.6	122.9	122.2	121.5	120.8	120.3
77.5°	95.1	94.7	94.4	94.2	93.9	93.4	92.8	92.2	91.6	91.0	90.8
80°	75.8	75.4	75.0	74.6	74.1	73.8	73.6	73.3	73.0	72.7	72.5
82.5°	57.1	56.9	56.7	56.5	56.3	56.2	56.2	56.1	56.0	56.0	55.8
85°	33.3	33.3	33.3	33.3	33.3	33.1	32.9	32.6	32.3	32.1	32.1
87.5°	13.3	13.6	13.9	14.2	14.4	14.7	14.8	15.1	15.2	15.4	15.6
90°	2.4	4.4	6.3	8.3	10.2	12.0	13.4	14.8	16.2	17.7	18.7
92.5°	10.1	10.2	10.3	10.5	10.5	11.3	12.8	14.2	15.6	17.0	18.1
95°	44.1	38.1	32.0	26.0	19.9	17.0	17.1	17.3	17.5	17.7	18.7
97.5°	93.7	97.5	101.3	105.1	108.8	100.8	80.9	61.0	41.1	21.2	21.3
100°	131.7	134.8	138.1	141.2	144.5	133.8	109.2	84.5	60.0	35.3	32.3
102.5°	174.0	176.3	178.7	181.1	183.4	183.0	179.8	176.6	173.3	170.2	137.4
105°	241.6	242.6	243.8	244.8	245.9	246.8	247.7	248.7	249.5	250.4	252.0
107.5°	304.4	304.9	305.4	305.9	306.5	307.4	308.6	309.8	311.0	312.2	313.0
110°	346.7	347.3	347.8	348.3	348.9	349.7	350.8	351.8	352.9	353.9	354.3



TEST NUMBER: P332761-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	387.9	388.8	389.8	390.7	391.7	392.4	392.9	393.4	393.9	394.4	394.3
115°	451.1	451.6	452.2	452.7	453.2	453.4	453.2	453.0	452.9	452.7	453.0
117.5°	508.0	508.7	509.5	510.2	510.9	511.4	511.8	512.2	512.6	513.0	512.9
120°	546.6	547.3	548.0	548.7	549.5	549.7	549.5	549.4	549.1	549.0	549.4
122.5°	582.6	583.0	583.4	583.8	584.2	584.6	584.9	585.1	585.3	585.6	585.8
125°	634.1	634.8	635.5	636.2	636.9	637.1	636.8	636.4	636.0	635.6	636.2
127.5°	682.9	683.0	683.3	683.4	683.6	684.0	684.9	685.7	686.5	687.4	687.3
130°	714.3	714.5	714.7	714.9	715.0	715.4	716.0	716.4	717.0	717.6	717.7
132.5°	743.2	743.5	743.9	744.2	744.5	745.0	745.7	746.4	747.0	747.7	747.9
135°	786.6	786.4	786.2	786.0	785.8	786.2	786.9	787.6	788.3	789.0	789.3
137.5°	824.9	825.0	825.1	825.1	825.2	825.6	826.4	827.2	828.0	828.8	829.2
140°	850.0	850.3	850.7	851.0	851.4	851.8	852.2	852.5	852.9	853.2	853.7
142.5°	872.4	873.1	873.7	874.4	875.0	875.4	875.7	875.8	876.1	876.3	876.7
145°	907.0	907.5	908.0	908.6	909.1	909.3	909.3	909.3	909.3	909.3	909.6
147.5°	934.4	935.4	936.4	937.4	938.4	938.8	938.7	938.5	938.3	938.1	938.3
150°	954.3	955.1	955.8	956.5	957.2	957.4	957.3	957.1	956.9	956.7	956.7
152.5°	971.0	971.6	972.2	972.7	973.3	973.4	973.1	972.8	972.5	972.2	972.4
155°	994.4	994.7	994.8	995.0	995.1	995.0	994.4	994.0	993.4	992.8	993.6
157.5°	1014.2	1014.1	1014.0	1013.8	1013.8	1013.4	1012.8	1012.2	1011.6	1011.0	1011.9
160°	1025.7	1025.2	1024.7	1024.1	1023.6	1023.3	1023.1	1022.9	1022.7	1022.5	1023.6
162.5°	1036.0	1035.4	1034.7	1034.0	1033.3	1032.8	1032.7	1032.5	1032.4	1032.1	1033.2
165°	1049.0	1048.1	1047.3	1046.3	1045.4	1045.0	1045.0	1045.0	1045.0	1045.0	1046.5
167.5°	1059.3	1058.4	1057.5	1056.5	1055.6	1055.1	1054.9	1054.9	1054.8	1054.6	1056.2
170°	1065.1	1064.0	1063.0	1061.8	1060.8	1060.3	1060.5	1060.7	1060.9	1061.0	1062.5
172.5°	1068.9	1067.9	1066.8	1065.7	1064.6	1064.2	1064.4	1064.5	1064.8	1064.9	1066.4
175°	1073.1	1072.1	1071.0	1069.9	1068.8	1068.4	1068.6	1068.7	1068.9	1069.1	1070.7
177.5°	1075.0	1074.0	1073.0	1072.1	1071.0	1070.7	1071.0	1071.3	1071.5	1071.8	1072.9
180°	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1



TEST NUMBER: P332761-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3
2.5°	766.6	767.7	768.8	769.3	769.1	769.1	769.0	768.8
5°	762.5	764.0	765.5	766.1	765.8	765.6	765.2	765.0
7.5°	754.0	755.2	756.4	756.9	756.8	756.6	756.5	756.2
10°	746.9	748.0	749.1	749.5	749.2	748.9	748.6	748.4
12.5°	738.2	739.4	740.6	741.0	740.6	740.2	739.9	739.5
15°	721.7	722.5	723.3	723.5	723.1	722.7	722.2	721.8
17.5°	702.8	703.3	703.9	703.9	703.7	703.4	703.1	702.9
20°	688.8	689.2	689.6	689.7	689.4	689.1	688.9	688.6
22.5°	674.1	674.9	675.7	675.7	675.3	674.8	674.3	673.8
25°	650.0	650.1	650.3	650.1	649.5	649.0	648.4	647.8
27.5°	623.0	622.6	622.3	621.8	621.1	620.4	619.7	619.0
30°	604.3	603.7	603.2	602.5	601.8	601.2	600.5	599.8
32.5°	585.3	584.6	584.0	583.3	582.7	581.9	581.2	580.6
35°	555.3	554.4	553.4	552.6	551.9	551.2	550.6	549.9
37.5°	524.0	522.9	521.9	520.9	520.1	519.1	518.2	517.3
40°	502.2	500.7	499.4	498.4	497.6	497.0	496.3	495.6
42.5°	481.0	479.3	477.8	476.7	476.3	475.9	475.4	474.9
45°	448.2	446.7	445.2	444.3	443.9	443.5	443.0	442.6
47.5°	416.5	414.8	413.1	411.8	410.7	409.6	408.6	407.6
50°	394.3	392.4	390.5	389.2	388.3	387.5	386.7	385.9
52.5°	371.6	369.9	368.3	366.9	365.8	364.8	363.8	362.7
55°	338.3	336.6	334.9	333.7	332.9	332.1	331.2	330.4
57.5°	304.8	303.2	301.6	300.4	299.6	298.8	298.0	297.2
60°	281.7	280.5	279.2	278.3	277.6	276.9	276.2	275.5
62.5°	259.3	258.1	257.0	256.1	255.4	254.8	254.1	253.3
65°	226.6	225.2	223.9	222.8	222.1	221.4	220.8	220.1
67.5°	192.9	191.6	190.3	189.5	189.3	189.2	188.9	188.8
70°	171.7	170.6	169.4	168.7	168.3	167.9	167.5	167.1
72.5°	150.4	149.5	148.6	148.0	147.6	147.2	146.8	146.3
75°	119.7	119.1	118.7	118.3	118.1	118.0	117.9	117.7
77.5°	90.6	90.5	90.3	90.1	89.7	89.4	89.0	88.6
80°	72.2	71.9	71.6	71.5	71.3	71.1	71.1	70.9
82.5°	55.6	55.5	55.3	55.1	55.1	54.9	54.7	54.6
85°	32.1	32.1	32.1	32.0	31.8	31.7	31.6	31.4
87.5°	15.8	16.0	16.2	16.4	16.4	16.5	16.6	16.6
90°	19.8	20.8	21.9	22.7	23.0	23.4	23.7	24.1
92.5°	19.2	20.2	21.3	21.9	21.9	22.0	22.1	22.2
95°	19.8	20.8	21.9	22.6	22.7	22.9	23.1	23.3
97.5°	21.4	21.5	21.6	21.8	21.9	22.1	22.3	22.5
100°	29.2	26.2	23.2	21.8	21.9	22.1	22.3	22.5
102.5°	104.7	72.0	39.3	23.0	23.0	23.1	23.1	23.1
105°	253.7	255.2	256.8	254.4	248.0	241.6	235.2	228.8
107.5°	313.8	314.6	315.4	316.1	316.8	317.4	318.1	318.8
110°	354.7	355.1	355.4	355.8	356.4	356.9	357.4	358.0



TEST NUMBER: P332761-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	394.3	394.2	394.1	394.4	395.1	395.8	396.5	397.1
115°	453.4	453.8	454.1	454.3	454.3	454.3	454.3	454.3
117.5°	512.9	512.9	512.8	512.7	512.6	512.5	512.5	512.4
120°	549.7	550.1	550.4	550.4	550.1	549.7	549.4	549.0
122.5°	586.1	586.2	586.5	586.4	586.1	585.7	585.3	584.9
125°	636.8	637.3	637.8	638.2	638.3	638.5	638.7	638.9
127.5°	687.1	687.1	686.9	686.8	686.7	686.5	686.3	686.3
130°	717.9	718.1	718.3	718.4	718.4	718.4	718.4	718.4
132.5°	748.1	748.3	748.5	748.5	748.3	748.1	748.1	747.9
135°	789.7	790.0	790.4	790.8	791.2	791.5	791.9	792.2
137.5°	829.6	830.0	830.4	830.5	830.4	830.3	830.2	830.0
140°	854.3	854.8	855.3	855.7	855.9	856.0	856.2	856.4
142.5°	877.1	877.5	877.9	878.1	878.1	878.1	878.2	878.2
145°	909.7	909.9	910.1	910.4	910.7	911.1	911.4	911.8
147.5°	938.4	938.5	938.7	938.8	939.1	939.2	939.4	939.5
150°	956.7	956.7	956.7	956.8	957.0	957.2	957.4	957.5
152.5°	972.7	973.0	973.3	973.4	973.3	973.1	973.0	973.0
155°	994.3	995.0	995.7	995.8	995.2	994.7	994.2	993.6
157.5°	1012.8	1013.8	1014.7	1014.7	1013.8	1012.8	1011.9	1011.0
160°	1024.7	1025.7	1026.8	1026.8	1025.7	1024.7	1023.6	1022.5
162.5°	1034.3	1035.4	1036.4	1036.4	1035.1	1034.0	1032.8	1031.5
165°	1047.9	1049.3	1050.8	1050.6	1049.0	1047.4	1045.8	1044.2
167.5°	1057.8	1059.4	1060.9	1060.8	1059.1	1057.2	1055.5	1053.7
170°	1063.9	1065.3	1066.8	1066.6	1064.8	1063.0	1061.2	1059.5
172.5°	1067.8	1069.2	1070.6	1070.4	1068.4	1066.5	1064.6	1062.6
175°	1072.3	1073.9	1075.5	1075.2	1073.1	1071.0	1068.8	1066.7
177.5°	1074.1	1075.2	1076.4	1076.1	1074.4	1072.7	1071.0	1069.3
180°	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1

(END OF REPORT)