

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332762-927

Luminaire Tested: **S124DIW-S575D1050U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332762-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S575D1050U927-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4856.2 lumens
Efficiency: N/A
Efficacy: 107.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332762-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

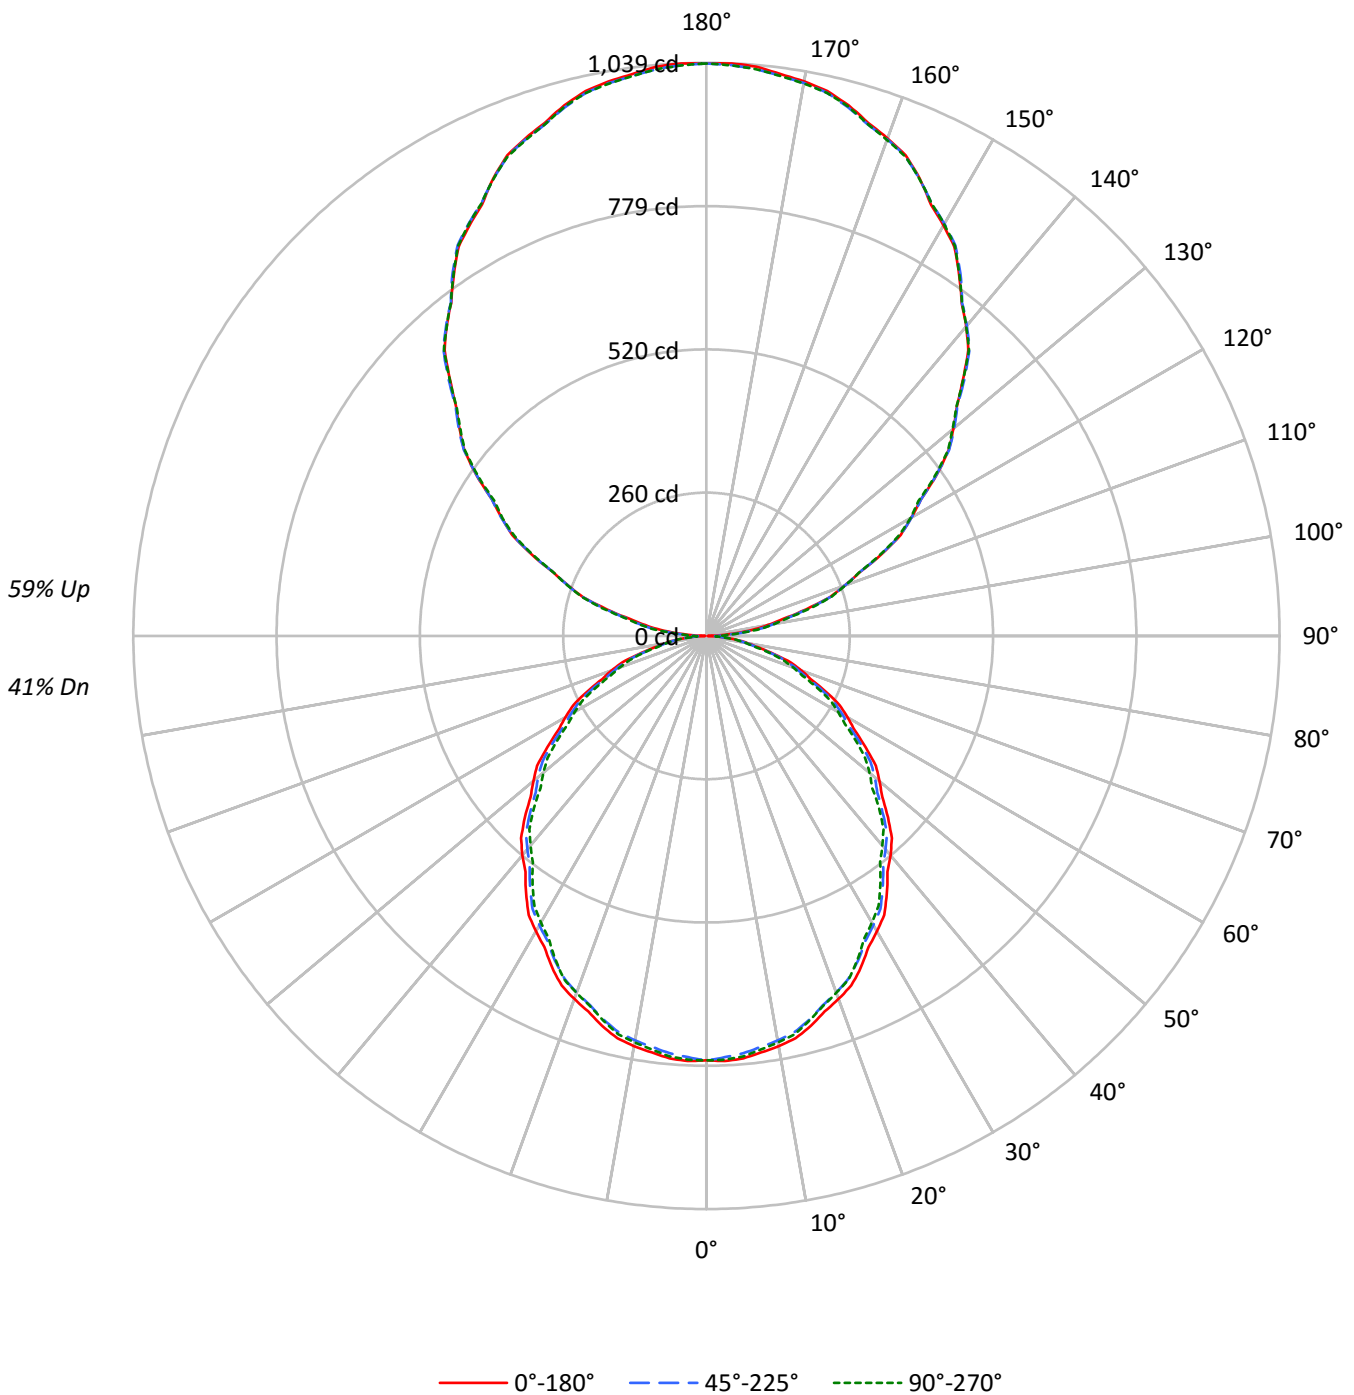



TEST NUMBER: P332762-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	41
1	96	91	88	84	87	83	80	77	68	66	64	55	53	52	42	41	40	34
2	87	80	74	69	79	73	68	63	60	56	53	48	45	43	37	35	34	29
3	79	70	63	57	72	64	58	53	53	48	44	42	39	36	33	31	29	24
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	29	27	25	21
5	67	55	47	41	60	51	44	38	42	37	33	34	30	27	26	24	22	18
6	61	49	41	36	56	45	38	33	38	32	28	31	27	24	24	21	19	16
7	57	45	37	31	51	41	34	29	34	29	25	28	24	21	22	19	17	14
8	52	40	33	27	48	37	30	26	31	26	22	25	21	19	20	17	15	13
9	49	37	29	24	44	34	27	23	28	23	20	23	19	17	18	16	14	11
10	46	34	27	22	42	31	25	20	26	21	18	22	18	15	17	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6211	6211	6211
5°	6229	6155	6199
10°	6190	6105	6135
15°	6115	6018	6033
20°	6016	5910	5916
25°	5903	5787	5770
30°	5764	5643	5591
35°	5619	5492	5419
40°	5469	5321	5223
45°	5313	5151	5053
50°	5141	5001	4847
55°	4954	4807	4650
60°	4766	4589	4448
65°	4556	4380	4204
70°	4322	4102	3944
75°	3961	3768	3671
80°	3524	3380	3296
85°	3084	2973	2908



TEST NUMBER: P332762-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.5	1.5
10°-20°	204.1	4.2
20°-30°	300.5	6.2
30°-40°	349.3	7.2
40°-50°	349.3	7.2
50°-60°	305.5	6.3
60°-70°	226.9	4.7
70°-80°	128.9	2.7
80°-90°	40.3	0.8
90°-100°	68.4	1.4
100°-110°	202.7	4.2
110°-120°	344.1	7.1
120°-130°	453.7	9.3
130°-140°	509.6	10.5
140°-150°	500.8	10.3
150°-160°	421.2	8.7
160°-170°	280.2	5.8
170°-180°	98.1	2.0
0°-30°	577.0	11.9
0°-40°	926.3	19.1
0°-60°	1581.2	32.6
0°-90°	1977.3	40.7
90°-120°	615.3	12.7
90°-150°	2079.4	42.8
90°-180°	2879.0	59.3
0°-180°	4856.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	769	769	769	769	769	
5°	769	766	760	766	765	73
15°	732	729	720	723	722	206
25°	663	658	650	650	648	305
35°	570	566	557	553	550	356
45°	465	461	451	445	443	359
55°	352	350	342	334	330	315
65°	238	235	229	223	220	236
75°	127	124	121	118	118	135
85°	33	33	32	32	31	37
90°	2	11	18	22	24	5
95°	48	55	61	63	63	54
105°	187	188	191	193	196	198
115°	350	350	348	348	347	345
125°	510	510	509	507	506	454
135°	657	662	662	660	658	508
145°	798	802	802	802	799	500
155°	915	915	914	917	914	421
165°	996	994	992	996	994	281
175°	1036	1032	1031	1036	1031	98
180°	1038	1038	1038	1038	1038	



TEST NUMBER: P332762-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3
2.5°	771.3	771.0	770.6	770.3	770.0	769.2	768.0	766.8	765.6	764.4	765.5
5°	768.7	768.2	767.6	767.1	766.5	765.5	764.0	762.5	761.0	759.5	761.0
7.5°	761.5	761.0	760.5	759.9	759.4	758.3	756.6	754.9	753.2	751.5	752.8
10°	755.1	754.6	754.1	753.5	753.0	751.8	750.0	748.2	746.5	744.7	745.8
12.5°	746.8	746.2	745.7	745.1	744.6	743.4	741.5	739.6	737.7	735.8	737.0
15°	731.7	731.2	730.6	730.1	729.5	728.3	726.2	724.1	722.1	720.0	720.8
17.5°	713.6	712.9	712.3	711.5	710.8	709.6	707.6	705.7	703.7	701.8	702.3
20°	700.3	699.6	698.9	698.2	697.5	696.2	694.1	692.1	690.0	687.9	688.3
22.5°	686.0	685.1	684.2	683.3	682.4	680.9	678.8	676.8	674.7	672.6	673.4
25°	662.7	661.7	660.8	659.8	658.9	657.4	655.5	653.6	651.6	649.7	649.9
27.5°	636.0	635.1	634.1	633.1	632.1	630.7	628.9	627.2	625.3	623.6	623.3
30°	618.3	617.2	616.1	615.0	613.9	612.4	610.7	608.9	607.1	605.4	604.8
32.5°	599.5	598.6	597.5	596.6	595.6	594.1	592.3	590.4	588.5	586.6	586.0
35°	570.2	569.3	568.3	567.4	566.4	564.9	563.0	561.1	559.2	557.3	556.3
37.5°	539.2	538.4	537.5	536.6	535.8	534.3	532.3	530.2	528.1	526.1	525.1
40°	519.0	517.9	516.8	515.8	514.7	513.1	511.0	509.0	506.9	504.9	503.5
42.5°	497.3	496.7	496.1	495.4	494.7	493.2	491.0	488.7	486.4	484.2	482.6
45°	465.4	464.5	463.5	462.6	461.6	460.0	457.8	455.6	453.4	451.2	449.7
47.5°	432.0	431.3	430.7	430.0	429.4	428.0	426.0	424.0	421.9	419.9	418.2
50°	409.3	408.8	408.2	407.7	407.1	405.9	404.0	402.0	400.1	398.2	396.3
52.5°	387.1	386.5	385.8	385.2	384.5	383.2	381.1	379.1	377.1	375.0	373.4
55°	352.0	351.6	351.2	350.8	350.4	349.2	347.3	345.3	343.4	341.5	339.8
57.5°	318.5	318.0	317.5	317.0	316.6	315.4	313.5	311.6	309.7	307.8	306.3
60°	295.2	294.6	293.9	293.2	292.6	291.3	289.5	287.7	286.0	284.2	283.0
62.5°	272.6	272.0	271.4	270.8	270.3	269.0	267.2	265.3	263.4	261.5	260.4
65°	238.5	237.9	237.2	236.5	235.8	234.8	233.5	232.0	230.7	229.3	227.9
67.5°	204.3	203.7	203.0	202.4	201.8	200.8	199.5	198.2	196.9	195.5	194.2
70°	183.1	182.1	181.2	180.2	179.3	178.2	177.1	176.0	174.9	173.8	172.8
72.5°	160.4	159.5	158.5	157.5	156.5	155.7	154.8	153.9	153.0	152.1	151.2
75°	127.0	126.3	125.6	124.9	124.2	123.6	122.9	122.2	121.5	120.8	120.3
77.5°	95.1	94.7	94.4	94.2	93.9	93.4	92.8	92.2	91.6	91.0	90.8
80°	75.8	75.4	75.0	74.6	74.1	73.8	73.6	73.3	73.0	72.7	72.5
82.5°	57.1	56.9	56.7	56.5	56.3	56.2	56.2	56.1	56.0	56.0	55.8
85°	33.3	33.3	33.3	33.3	33.3	33.1	32.9	32.6	32.3	32.1	32.1
87.5°	13.3	13.6	13.9	14.2	14.4	14.7	14.8	15.1	15.2	15.4	15.6
90°	2.4	4.4	6.3	8.3	10.2	12.0	13.4	14.8	16.2	17.7	18.7
92.5°	17.2	19.4	21.7	23.9	26.1	27.8	28.8	29.8	30.8	31.8	32.4
95°	48.2	49.7	51.3	53.0	54.6	56.0	57.3	58.5	59.7	61.0	61.6
97.5°	84.1	85.4	86.7	87.9	89.3	90.6	92.1	93.6	95.0	96.5	97.1
100°	112.3	113.0	113.8	114.5	115.2	116.4	118.0	119.5	121.2	122.8	123.1
102.5°	141.9	142.2	142.4	142.8	143.0	143.9	145.4	146.8	148.3	149.7	150.3
105°	187.0	187.2	187.4	187.5	187.7	188.1	188.9	189.6	190.3	191.0	191.5
107.5°	234.3	234.6	234.7	235.0	235.2	235.4	235.4	235.6	235.7	235.8	236.3
110°	266.4	266.8	267.1	267.5	267.8	267.9	267.8	267.6	267.4	267.2	266.9



TEST NUMBER: P332762-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	299.8	299.9	300.0	300.0	300.1	300.0	299.7	299.4	299.0	298.7	298.7
115°	349.9	349.9	349.9	349.9	349.9	349.7	349.4	349.0	348.6	348.3	348.1
117.5°	397.1	397.2	397.4	397.5	397.7	397.6	397.4	397.1	396.9	396.6	396.0
120°	428.6	429.3	430.0	430.7	431.4	431.5	430.9	430.4	429.9	429.4	428.5
122.5°	461.3	461.6	461.8	462.2	462.4	462.5	462.2	461.9	461.7	461.4	460.8
125°	509.6	509.6	509.6	509.6	509.6	509.5	509.3	509.1	509.0	508.8	508.4
127.5°	553.4	554.0	554.4	555.0	555.6	555.7	555.4	555.1	554.8	554.5	554.2
130°	584.2	584.8	585.3	585.8	586.4	586.6	586.6	586.6	586.6	586.6	586.3
132.5°	615.7	616.1	616.5	616.9	617.3	617.3	617.3	617.1	617.0	616.8	616.5
135°	657.3	658.3	659.4	660.4	661.6	662.1	662.1	662.1	662.1	662.1	661.7
137.5°	702.5	703.0	703.5	704.0	704.5	704.9	705.2	705.5	705.8	706.1	705.6
140°	732.7	733.1	733.4	733.8	734.1	734.3	734.3	734.3	734.3	734.3	734.1
142.5°	760.3	760.7	761.0	761.4	761.8	761.8	761.7	761.5	761.4	761.3	761.2
145°	798.5	799.2	799.9	800.7	801.4	801.8	802.0	802.2	802.3	802.5	802.3
147.5°	836.4	837.3	838.1	838.9	839.8	840.2	840.0	839.9	839.7	839.6	839.5
150°	859.5	860.2	860.9	861.7	862.4	862.7	862.7	862.7	862.7	862.7	862.7
152.5°	881.3	881.8	882.2	882.6	883.0	883.3	883.4	883.6	883.8	883.9	884.3
155°	914.9	914.9	914.9	914.9	914.9	914.8	914.6	914.4	914.3	914.1	914.8
157.5°	943.1	942.8	942.5	942.1	941.8	941.7	941.6	941.6	941.5	941.5	942.1
160°	959.8	959.6	959.4	959.3	959.1	958.9	958.7	958.5	958.4	958.2	958.7
162.5°	975.2	974.8	974.3	973.8	973.4	973.0	972.9	972.7	972.5	972.3	973.3
165°	995.9	995.4	994.8	994.3	993.8	993.3	993.0	992.6	992.3	991.9	993.0
167.5°	1011.8	1011.1	1010.3	1009.6	1008.8	1008.4	1008.5	1008.5	1008.5	1008.6	1009.6
170°	1020.8	1019.9	1019.0	1018.1	1017.2	1016.8	1017.1	1017.2	1017.4	1017.6	1018.7
172.5°	1027.2	1026.4	1025.7	1025.0	1024.2	1023.9	1023.9	1024.0	1024.0	1024.0	1025.2
175°	1036.0	1035.1	1034.3	1033.4	1032.5	1032.0	1031.7	1031.6	1031.4	1031.3	1032.5
177.5°	1038.9	1038.2	1037.5	1036.8	1036.1	1035.7	1035.7	1035.7	1035.7	1035.7	1036.7
180°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7



TEST NUMBER: P332762-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3
2.5°	766.6	767.7	768.8	769.3	769.1	769.1	769.0	768.8
5°	762.5	764.0	765.5	766.1	765.8	765.6	765.2	765.0
7.5°	754.0	755.2	756.4	756.9	756.8	756.6	756.5	756.2
10°	746.9	748.0	749.1	749.5	749.2	748.9	748.6	748.4
12.5°	738.2	739.4	740.6	741.0	740.6	740.2	739.9	739.5
15°	721.7	722.5	723.3	723.5	723.1	722.7	722.2	721.8
17.5°	702.8	703.3	703.9	703.9	703.7	703.4	703.1	702.9
20°	688.8	689.2	689.6	689.7	689.4	689.1	688.9	688.6
22.5°	674.1	674.9	675.7	675.7	675.3	674.8	674.3	673.8
25°	650.0	650.1	650.3	650.1	649.5	649.0	648.4	647.8
27.5°	623.0	622.6	622.3	621.8	621.1	620.4	619.7	619.0
30°	604.3	603.7	603.2	602.5	601.8	601.2	600.5	599.8
32.5°	585.3	584.6	584.0	583.3	582.7	581.9	581.2	580.6
35°	555.3	554.4	553.4	552.6	551.9	551.2	550.6	549.9
37.5°	524.0	522.9	521.9	520.9	520.1	519.1	518.2	517.3
40°	502.2	500.7	499.4	498.4	497.6	497.0	496.3	495.6
42.5°	481.0	479.3	477.8	476.7	476.3	475.9	475.4	474.9
45°	448.2	446.7	445.2	444.3	443.9	443.5	443.0	442.6
47.5°	416.5	414.8	413.1	411.8	410.7	409.6	408.6	407.6
50°	394.3	392.4	390.5	389.2	388.3	387.5	386.7	385.9
52.5°	371.6	369.9	368.3	366.9	365.8	364.8	363.8	362.7
55°	338.3	336.6	334.9	333.7	332.9	332.1	331.2	330.4
57.5°	304.8	303.2	301.6	300.4	299.6	298.8	298.0	297.2
60°	281.7	280.5	279.2	278.3	277.6	276.9	276.2	275.5
62.5°	259.3	258.1	257.0	256.1	255.4	254.8	254.1	253.3
65°	226.6	225.2	223.9	222.8	222.1	221.4	220.8	220.1
67.5°	192.9	191.6	190.3	189.5	189.3	189.2	188.9	188.8
70°	171.7	170.6	169.4	168.7	168.3	167.9	167.5	167.1
72.5°	150.4	149.5	148.6	148.0	147.6	147.2	146.8	146.3
75°	119.7	119.1	118.7	118.3	118.1	118.0	117.9	117.7
77.5°	90.6	90.5	90.3	90.1	89.7	89.4	89.0	88.6
80°	72.2	71.9	71.6	71.5	71.3	71.1	71.1	70.9
82.5°	55.6	55.5	55.3	55.1	55.1	54.9	54.7	54.6
85°	32.1	32.1	32.1	32.0	31.8	31.7	31.6	31.4
87.5°	15.8	16.0	16.2	16.4	16.4	16.5	16.6	16.6
90°	19.8	20.8	21.9	22.7	23.0	23.4	23.7	24.1
92.5°	33.0	33.7	34.4	34.8	35.0	35.2	35.4	35.6
95°	62.0	62.6	63.1	63.4	63.4	63.4	63.4	63.4
97.5°	97.8	98.4	99.0	99.3	99.3	99.3	99.3	99.3
100°	123.5	123.8	124.2	124.4	124.4	124.4	124.4	124.4
102.5°	150.8	151.2	151.8	152.1	152.2	152.3	152.5	152.7
105°	192.1	192.6	193.1	193.7	194.2	194.7	195.3	195.8
107.5°	236.8	237.3	237.8	238.0	238.0	238.0	237.9	237.9
110°	266.5	266.2	265.8	265.9	266.4	267.0	267.5	268.1



TEST NUMBER: P332762-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	298.6	298.5	298.4	298.4	298.6	298.7	298.7	298.9
115°	347.9	347.8	347.6	347.4	347.2	347.1	346.9	346.7
117.5°	395.4	394.7	394.2	393.7	393.3	393.0	392.6	392.3
120°	427.5	426.7	425.8	425.5	425.9	426.2	426.6	426.9
122.5°	460.3	459.6	459.0	458.4	457.7	457.1	456.5	455.8
125°	508.1	507.7	507.4	507.0	506.7	506.3	506.0	505.6
127.5°	553.8	553.5	553.1	552.8	552.5	552.2	551.9	551.7
130°	585.9	585.6	585.2	584.7	584.0	583.3	582.6	581.9
132.5°	616.1	615.8	615.4	615.1	614.8	614.5	614.2	613.9
135°	661.4	661.0	660.7	660.2	659.7	659.1	658.6	658.1
137.5°	705.1	704.6	704.2	704.0	704.1	704.3	704.3	704.4
140°	734.0	733.8	733.6	733.4	733.2	733.1	732.8	732.7
142.5°	761.2	761.1	761.1	761.0	761.0	761.0	761.0	761.0
145°	802.2	802.0	801.8	801.5	800.9	800.3	799.9	799.3
147.5°	839.3	839.2	839.0	838.8	838.7	838.5	838.3	838.1
150°	862.7	862.7	862.7	862.6	862.4	862.3	862.1	861.9
152.5°	884.7	885.2	885.6	885.6	885.1	884.6	884.2	883.8
155°	915.5	916.2	917.0	917.0	916.2	915.5	914.8	914.1
157.5°	942.6	943.1	943.6	943.6	943.0	942.4	941.8	941.2
160°	959.3	959.8	960.4	960.1	959.3	958.4	957.5	956.6
162.5°	974.2	975.2	976.2	976.2	975.3	974.5	973.5	972.6
165°	994.0	995.1	996.2	996.3	995.6	994.9	994.2	993.5
167.5°	1010.7	1011.8	1012.9	1012.9	1011.8	1010.7	1009.6	1008.4
170°	1019.7	1020.8	1021.8	1021.8	1020.6	1019.3	1018.0	1016.8
172.5°	1026.4	1027.6	1028.9	1028.8	1027.6	1026.4	1025.1	1023.8
175°	1033.7	1035.0	1036.3	1036.3	1035.0	1033.7	1032.5	1031.3
177.5°	1037.8	1038.7	1039.7	1039.7	1038.5	1037.4	1036.3	1035.1
180°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7

(END OF REPORT)