

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332767-927

Luminaire Tested: **S124DIW-S575D1340U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332767-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S575D1340U927-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6227.7 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332767-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

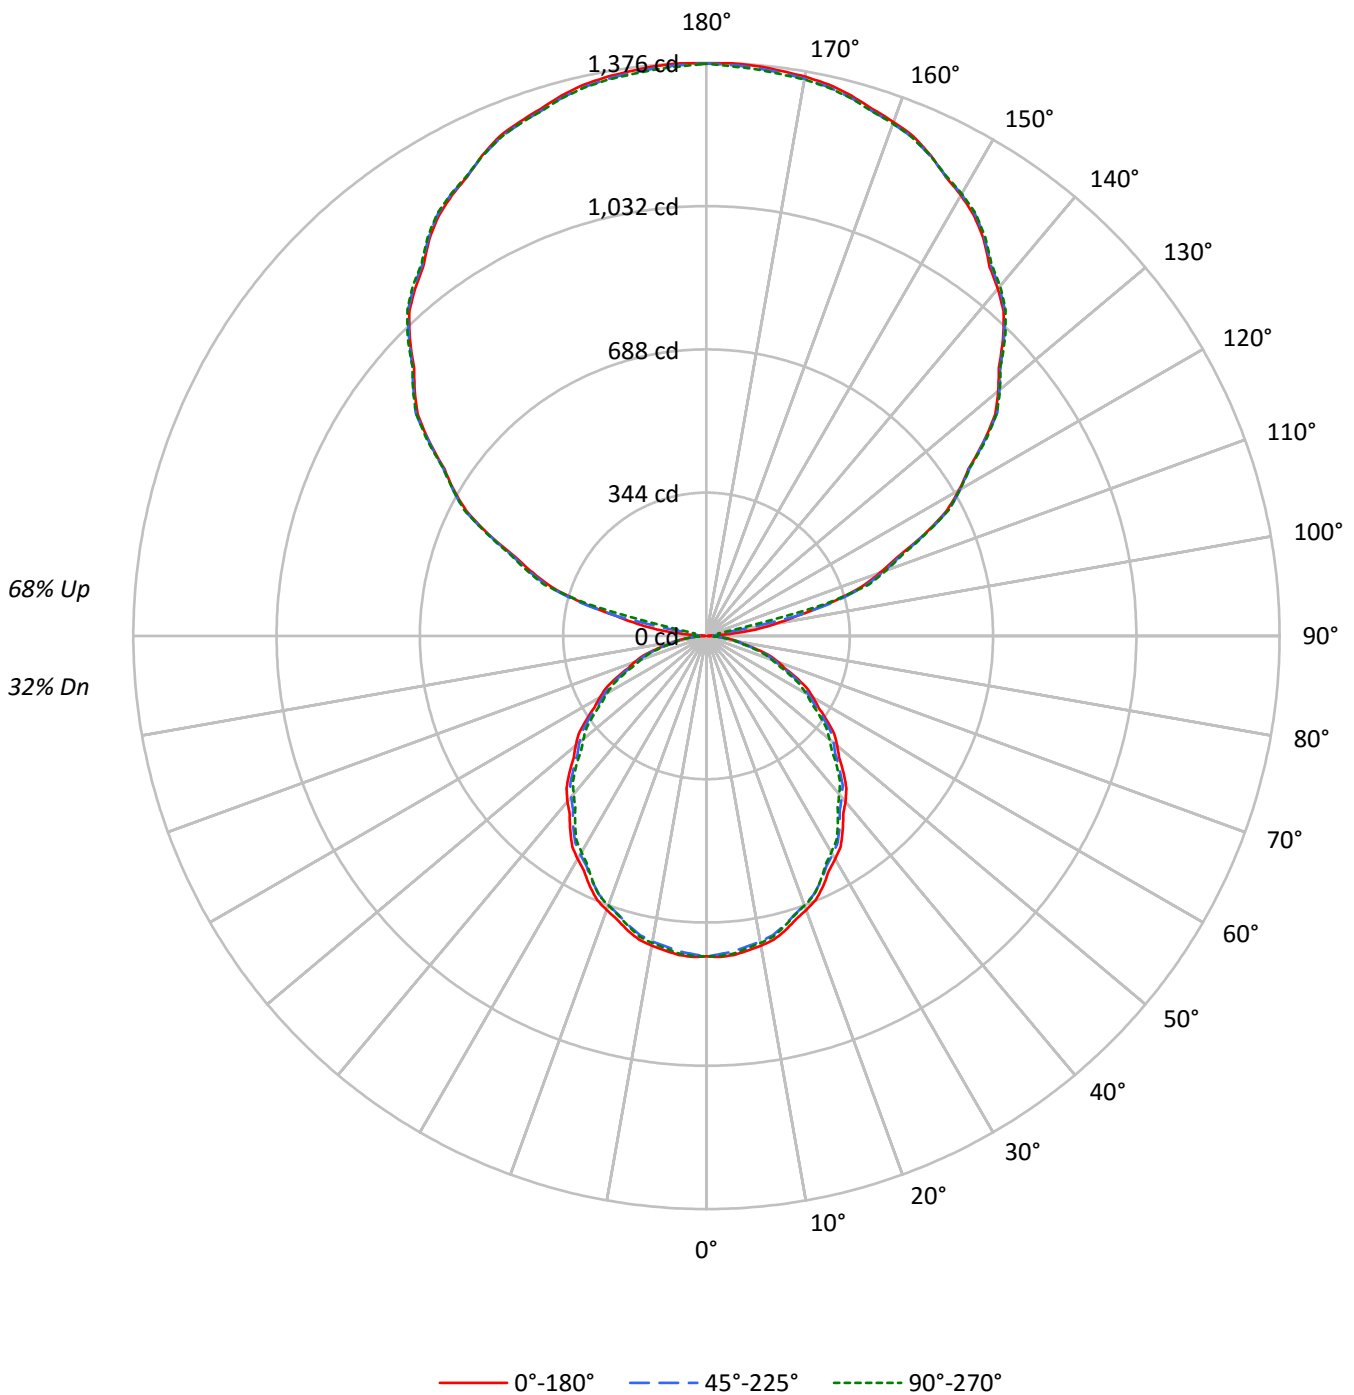



TEST NUMBER: P332767-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	92	92	92	92	73	73	73	56	56	56	39	39	39	32
1	94	89	86	82	84	81	77	75	64	62	60	49	47	46	35	34	33	27
2	85	78	72	67	76	70	65	61	56	53	49	43	40	38	31	29	28	22
3	78	69	61	56	70	62	56	51	49	45	42	38	35	32	27	25	24	19
4	71	61	53	47	64	55	48	43	44	39	35	34	30	28	24	22	20	16
5	65	54	46	40	58	49	42	37	39	34	30	30	27	24	22	20	18	14
6	60	48	40	35	54	44	37	32	35	30	26	27	24	21	20	17	16	12
7	55	43	36	30	50	39	33	28	32	27	23	25	21	18	18	16	14	11
8	51	39	32	27	46	36	29	25	29	24	20	22	19	16	16	14	12	10
9	48	36	28	24	43	33	26	22	26	22	18	21	17	15	15	13	11	9
10	44	33	26	21	40	30	24	19	24	20	16	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6211	6211	6211
5°	6229	6155	6199
10°	6190	6105	6135
15°	6115	6018	6033
20°	6016	5910	5916
25°	5903	5787	5770
30°	5764	5643	5591
35°	5619	5492	5419
40°	5469	5321	5223
45°	5313	5151	5053
50°	5141	5001	4847
55°	4954	4807	4650
60°	4766	4589	4448
65°	4556	4380	4204
70°	4322	4102	3944
75°	3961	3768	3671
80°	3524	3380	3296
85°	3084	2973	2908



TEST NUMBER: P332767-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.5	1.2
10°-20°	204.1	3.3
20°-30°	300.5	4.8
30°-40°	349.3	5.6
40°-50°	349.3	5.6
50°-60°	305.5	4.9
60°-70°	226.9	3.6
70°-80°	128.9	2.1
80°-90°	41.2	0.7
90°-100°	47.0	0.8
100°-110°	299.6	4.8
110°-120°	573.1	9.2
120°-130°	727.5	11.7
130°-140°	778.4	12.5
140°-150°	727.9	11.7
150°-160°	587.0	9.4
160°-170°	378.6	6.1
170°-180°	130.5	2.1
0°-30°	577.0	9.3
0°-40°	926.3	14.9
0°-60°	1581.2	25.4
0°-90°	1978.2	31.8
90°-120°	919.7	14.8
90°-150°	3153.4	50.6
90°-180°	4250.0	68.2
0°-180°	6227.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	769	769	769	769	769	
5°	769	766	760	766	765	73
15°	732	729	720	723	722	206
25°	663	658	650	650	648	305
35°	570	566	557	553	550	356
45°	465	461	451	445	443	359
55°	352	350	342	334	330	315
65°	238	235	229	223	220	236
75°	127	124	121	118	118	135
85°	33	33	32	32	31	37
90°	3	14	23	29	31	4
95°	56	24	23	28	30	73
105°	309	315	321	327	293	324
115°	577	580	580	581	582	568
125°	812	816	814	817	818	724
135°	1007	1006	1010	1012	1014	776
145°	1161	1164	1164	1165	1167	725
155°	1273	1274	1271	1275	1272	587
165°	1343	1338	1338	1345	1337	379
175°	1374	1368	1369	1377	1366	131
180°	1374	1374	1374	1374	1374	



TEST NUMBER: P332767-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3
2.5°	771.3	771.0	770.6	770.3	770.0	769.2	768.0	766.8	765.6	764.4	765.5
5°	768.7	768.2	767.6	767.1	766.5	765.5	764.0	762.5	761.0	759.5	761.0
7.5°	761.5	761.0	760.5	759.9	759.4	758.3	756.6	754.9	753.2	751.5	752.8
10°	755.1	754.6	754.1	753.5	753.0	751.8	750.0	748.2	746.5	744.7	745.8
12.5°	746.8	746.2	745.7	745.1	744.6	743.4	741.5	739.6	737.7	735.8	737.0
15°	731.7	731.2	730.6	730.1	729.5	728.3	726.2	724.1	722.1	720.0	720.8
17.5°	713.6	712.9	712.3	711.5	710.8	709.6	707.6	705.7	703.7	701.8	702.3
20°	700.3	699.6	698.9	698.2	697.5	696.2	694.1	692.1	690.0	687.9	688.3
22.5°	686.0	685.1	684.2	683.3	682.4	680.9	678.8	676.8	674.7	672.6	673.4
25°	662.7	661.7	660.8	659.8	658.9	657.4	655.5	653.6	651.6	649.7	649.9
27.5°	636.0	635.1	634.1	633.1	632.1	630.7	628.9	627.2	625.3	623.6	623.3
30°	618.3	617.2	616.1	615.0	613.9	612.4	610.7	608.9	607.1	605.4	604.8
32.5°	599.5	598.6	597.5	596.6	595.6	594.1	592.3	590.4	588.5	586.6	586.0
35°	570.2	569.3	568.3	567.4	566.4	564.9	563.0	561.1	559.2	557.3	556.3
37.5°	539.2	538.4	537.5	536.6	535.8	534.3	532.3	530.2	528.1	526.1	525.1
40°	519.0	517.9	516.8	515.8	514.7	513.1	511.0	509.0	506.9	504.9	503.5
42.5°	497.3	496.7	496.1	495.4	494.7	493.2	491.0	488.7	486.4	484.2	482.6
45°	465.4	464.5	463.5	462.6	461.6	460.0	457.8	455.6	453.4	451.2	449.7
47.5°	432.0	431.3	430.7	430.0	429.4	428.0	426.0	424.0	421.9	419.9	418.2
50°	409.3	408.8	408.2	407.7	407.1	405.9	404.0	402.0	400.1	398.2	396.3
52.5°	387.1	386.5	385.8	385.2	384.5	383.2	381.1	379.1	377.1	375.0	373.4
55°	352.0	351.6	351.2	350.8	350.4	349.2	347.3	345.3	343.4	341.5	339.8
57.5°	318.5	318.0	317.5	317.0	316.6	315.4	313.5	311.6	309.7	307.8	306.3
60°	295.2	294.6	293.9	293.2	292.6	291.3	289.5	287.7	286.0	284.2	283.0
62.5°	272.6	272.0	271.4	270.8	270.3	269.0	267.2	265.3	263.4	261.5	260.4
65°	238.5	237.9	237.2	236.5	235.8	234.8	233.5	232.0	230.7	229.3	227.9
67.5°	204.3	203.7	203.0	202.4	201.8	200.8	199.5	198.2	196.9	195.5	194.2
70°	183.1	182.1	181.2	180.2	179.3	178.2	177.1	176.0	174.9	173.8	172.8
72.5°	160.4	159.5	158.5	157.5	156.5	155.7	154.8	153.9	153.0	152.1	151.2
75°	127.0	126.3	125.6	124.9	124.2	123.6	122.9	122.2	121.5	120.8	120.3
77.5°	95.1	94.7	94.4	94.2	93.9	93.4	92.8	92.2	91.6	91.0	90.8
80°	75.8	75.4	75.0	74.6	74.1	73.8	73.6	73.3	73.0	72.7	72.5
82.5°	57.1	56.9	56.7	56.5	56.3	56.2	56.2	56.1	56.0	56.0	55.8
85°	33.3	33.3	33.3	33.3	33.3	33.1	32.9	32.6	32.3	32.1	32.1
87.5°	13.5	13.9	14.3	14.7	15.0	15.4	15.6	15.8	16.1	16.3	16.6
90°	3.1	5.6	8.1	10.6	13.2	15.3	17.1	18.9	20.8	22.6	24.0
92.5°	12.9	13.1	13.2	13.4	13.5	14.5	16.3	18.1	20.0	21.8	23.1
95°	56.5	48.7	41.0	33.2	25.4	21.7	21.9	22.2	22.3	22.6	24.0
97.5°	120.0	124.8	129.7	134.5	139.3	129.0	103.5	78.1	52.6	27.1	27.3
100°	168.5	172.6	176.7	180.9	185.0	171.3	139.7	108.2	76.7	45.2	41.4
102.5°	222.8	225.8	228.8	231.8	234.8	234.2	230.1	226.1	222.0	217.9	175.9
105°	309.3	310.6	312.0	313.4	314.7	316.0	317.2	318.3	319.4	320.6	322.7
107.5°	389.6	390.3	391.0	391.7	392.4	393.5	395.1	396.6	398.2	399.7	400.7
110°	443.9	444.6	445.3	445.9	446.6	447.7	449.0	450.4	451.8	453.1	453.6



TEST NUMBER: P332767-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	496.5	497.7	499.0	500.2	501.5	502.3	503.0	503.7	504.3	504.9	504.9
115°	577.4	578.1	578.8	579.5	580.2	580.4	580.2	580.0	579.7	579.5	580.0
117.5°	650.4	651.3	652.2	653.2	654.0	654.7	655.3	655.8	656.2	656.8	656.7
120°	699.7	700.6	701.6	702.5	703.4	703.7	703.5	703.3	703.1	702.8	703.3
122.5°	745.8	746.3	746.9	747.4	748.0	748.4	748.7	749.0	749.3	749.6	750.0
125°	811.7	812.6	813.6	814.4	815.4	815.6	815.2	814.7	814.2	813.8	814.4
127.5°	874.2	874.4	874.6	874.9	875.1	875.8	876.8	877.8	878.9	880.0	879.8
130°	914.5	914.7	915.0	915.1	915.4	915.8	916.6	917.2	917.9	918.6	918.9
132.5°	951.5	951.9	952.3	952.7	953.1	953.8	954.7	955.5	956.3	957.2	957.4
135°	1006.9	1006.7	1006.5	1006.3	1006.1	1006.4	1007.3	1008.2	1009.2	1010.0	1010.5
137.5°	1056.1	1056.1	1056.2	1056.4	1056.5	1057.0	1058.0	1059.0	1060.0	1061.0	1061.5
140°	1088.1	1088.6	1089.0	1089.5	1090.0	1090.4	1090.8	1091.3	1091.8	1092.3	1092.9
142.5°	1116.9	1117.7	1118.6	1119.4	1120.2	1120.7	1121.0	1121.3	1121.6	1121.8	1122.4
145°	1161.1	1161.7	1162.4	1163.2	1163.8	1164.2	1164.2	1164.2	1164.2	1164.2	1164.4
147.5°	1196.2	1197.5	1198.8	1200.1	1201.3	1201.9	1201.7	1201.4	1201.2	1200.9	1201.1
150°	1221.7	1222.7	1223.5	1224.5	1225.3	1225.7	1225.5	1225.3	1225.0	1224.8	1224.8
152.5°	1243.1	1243.8	1244.5	1245.2	1246.0	1246.2	1245.8	1245.3	1244.9	1244.5	1244.9
155°	1273.1	1273.3	1273.5	1273.7	1274.0	1273.7	1273.1	1272.4	1271.7	1271.1	1271.9
157.5°	1298.4	1298.2	1298.1	1297.9	1297.8	1297.4	1296.6	1295.8	1295.1	1294.3	1295.5
160°	1313.1	1312.5	1311.8	1311.1	1310.4	1310.0	1309.7	1309.5	1309.2	1309.1	1310.4
162.5°	1326.3	1325.4	1324.6	1323.7	1322.9	1322.3	1322.1	1321.8	1321.6	1321.4	1322.7
165°	1343.0	1341.8	1340.7	1339.5	1338.4	1337.8	1337.8	1337.8	1337.8	1337.8	1339.7
167.5°	1356.1	1354.9	1353.8	1352.6	1351.4	1350.7	1350.6	1350.4	1350.3	1350.1	1352.2
170°	1363.5	1362.2	1360.7	1359.4	1358.0	1357.5	1357.6	1357.9	1358.1	1358.4	1360.2
172.5°	1368.4	1367.1	1365.7	1364.3	1362.9	1362.4	1362.6	1362.9	1363.0	1363.3	1365.1
175°	1373.8	1372.4	1371.0	1369.7	1368.3	1367.7	1367.9	1368.2	1368.4	1368.7	1370.7
177.5°	1376.3	1375.0	1373.6	1372.4	1371.1	1370.6	1371.0	1371.4	1371.7	1372.1	1373.6
180°	1373.8	1373.8	1373.8	1373.8	1373.8	1373.8	1373.8	1373.8	1373.8	1373.8	1373.8



TEST NUMBER: P332767-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3
2.5°	766.6	767.7	768.8	769.3	769.1	769.1	769.0	768.8
5°	762.5	764.0	765.5	766.1	765.8	765.6	765.2	765.0
7.5°	754.0	755.2	756.4	756.9	756.8	756.6	756.5	756.2
10°	746.9	748.0	749.1	749.5	749.2	748.9	748.6	748.4
12.5°	738.2	739.4	740.6	741.0	740.6	740.2	739.9	739.5
15°	721.7	722.5	723.3	723.5	723.1	722.7	722.2	721.8
17.5°	702.8	703.3	703.9	703.9	703.7	703.4	703.1	702.9
20°	688.8	689.2	689.6	689.7	689.4	689.1	688.9	688.6
22.5°	674.1	674.9	675.7	675.7	675.3	674.8	674.3	673.8
25°	650.0	650.1	650.3	650.1	649.5	649.0	648.4	647.8
27.5°	623.0	622.6	622.3	621.8	621.1	620.4	619.7	619.0
30°	604.3	603.7	603.2	602.5	601.8	601.2	600.5	599.8
32.5°	585.3	584.6	584.0	583.3	582.7	581.9	581.2	580.6
35°	555.3	554.4	553.4	552.6	551.9	551.2	550.6	549.9
37.5°	524.0	522.9	521.9	520.9	520.1	519.1	518.2	517.3
40°	502.2	500.7	499.4	498.4	497.6	497.0	496.3	495.6
42.5°	481.0	479.3	477.8	476.7	476.3	475.9	475.4	474.9
45°	448.2	446.7	445.2	444.3	443.9	443.5	443.0	442.6
47.5°	416.5	414.8	413.1	411.8	410.7	409.6	408.6	407.6
50°	394.3	392.4	390.5	389.2	388.3	387.5	386.7	385.9
52.5°	371.6	369.9	368.3	366.9	365.8	364.8	363.8	362.7
55°	338.3	336.6	334.9	333.7	332.9	332.1	331.2	330.4
57.5°	304.8	303.2	301.6	300.4	299.6	298.8	298.0	297.2
60°	281.7	280.5	279.2	278.3	277.6	276.9	276.2	275.5
62.5°	259.3	258.1	257.0	256.1	255.4	254.8	254.1	253.3
65°	226.6	225.2	223.9	222.8	222.1	221.4	220.8	220.1
67.5°	192.9	191.6	190.3	189.5	189.3	189.2	188.9	188.8
70°	171.7	170.6	169.4	168.7	168.3	167.9	167.5	167.1
72.5°	150.4	149.5	148.6	148.0	147.6	147.2	146.8	146.3
75°	119.7	119.1	118.7	118.3	118.1	118.0	117.9	117.7
77.5°	90.6	90.5	90.3	90.1	89.7	89.4	89.0	88.6
80°	72.2	71.9	71.6	71.5	71.3	71.1	71.1	70.9
82.5°	55.6	55.5	55.3	55.1	55.1	54.9	54.7	54.6
85°	32.1	32.1	32.1	32.0	31.8	31.7	31.6	31.4
87.5°	16.9	17.2	17.4	17.7	17.7	17.8	17.9	18.0
90°	25.3	26.7	28.1	29.0	29.5	29.9	30.3	30.8
92.5°	24.6	25.9	27.3	28.0	28.1	28.2	28.3	28.4
95°	25.3	26.7	28.1	28.9	29.1	29.3	29.5	29.8
97.5°	27.4	27.6	27.6	27.9	28.1	28.3	28.5	28.8
100°	37.5	33.6	29.7	27.9	28.1	28.3	28.5	28.8
102.5°	134.1	92.2	50.3	29.4	29.5	29.5	29.5	29.6
105°	324.7	326.8	328.8	325.7	317.5	309.3	301.0	292.9
107.5°	401.7	402.7	403.7	404.6	405.5	406.4	407.3	408.1
110°	454.1	454.5	455.0	455.5	456.2	456.9	457.6	458.3



TEST NUMBER: P332767-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	504.7	504.6	504.5	504.9	505.8	506.7	507.6	508.4
115°	580.4	580.9	581.3	581.5	581.5	581.5	581.5	581.5
117.5°	656.6	656.5	656.4	656.3	656.2	656.2	656.1	655.9
120°	703.7	704.2	704.6	704.6	704.2	703.7	703.3	702.8
122.5°	750.2	750.5	750.8	750.7	750.2	749.7	749.3	748.8
125°	815.2	815.9	816.5	817.0	817.2	817.5	817.7	817.9
127.5°	879.7	879.6	879.4	879.2	879.1	878.8	878.7	878.5
130°	919.0	919.2	919.5	919.6	919.6	919.6	919.6	919.6
132.5°	957.7	957.9	958.1	958.1	958.0	957.8	957.6	957.4
135°	1011.0	1011.4	1011.9	1012.3	1012.8	1013.2	1013.7	1014.2
137.5°	1062.0	1062.5	1063.0	1063.2	1063.0	1063.0	1062.8	1062.6
140°	1093.6	1094.3	1095.0	1095.4	1095.7	1095.9	1096.1	1096.4
142.5°	1122.8	1123.3	1123.9	1124.1	1124.2	1124.2	1124.3	1124.3
145°	1164.6	1164.8	1165.1	1165.5	1165.9	1166.3	1166.8	1167.3
147.5°	1201.3	1201.5	1201.7	1201.9	1202.1	1202.4	1202.5	1202.8
150°	1224.8	1224.8	1224.8	1224.9	1225.1	1225.3	1225.6	1225.8
152.5°	1245.2	1245.6	1245.9	1246.1	1245.9	1245.8	1245.7	1245.5
155°	1272.9	1273.7	1274.7	1274.8	1274.1	1273.4	1272.7	1272.1
157.5°	1296.6	1297.8	1299.0	1299.0	1297.8	1296.6	1295.5	1294.3
160°	1311.8	1313.1	1314.5	1314.5	1313.1	1311.8	1310.4	1309.1
162.5°	1324.1	1325.5	1326.8	1326.7	1325.2	1323.7	1322.1	1320.6
165°	1341.5	1343.3	1345.1	1345.0	1343.0	1340.9	1338.9	1336.8
167.5°	1354.2	1356.1	1358.2	1358.0	1355.7	1353.4	1351.2	1348.9
170°	1362.0	1363.8	1365.6	1365.4	1363.2	1360.9	1358.6	1356.3
172.5°	1366.9	1368.8	1370.6	1370.3	1367.8	1365.3	1362.9	1360.4
175°	1372.8	1374.8	1376.9	1376.5	1373.8	1371.0	1368.3	1365.6
177.5°	1375.1	1376.5	1378.0	1377.6	1375.4	1373.2	1371.0	1368.8
180°	1373.8	1373.8	1373.8	1373.8	1373.8	1373.8	1373.8	1373.8

(END OF REPORT)