

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332768-927

Luminaire Tested: **S124DIW-S575D1340U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332768-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S575D1340U927-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5663.7 lumens
Efficiency: N/A
Efficacy: 105.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332768-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

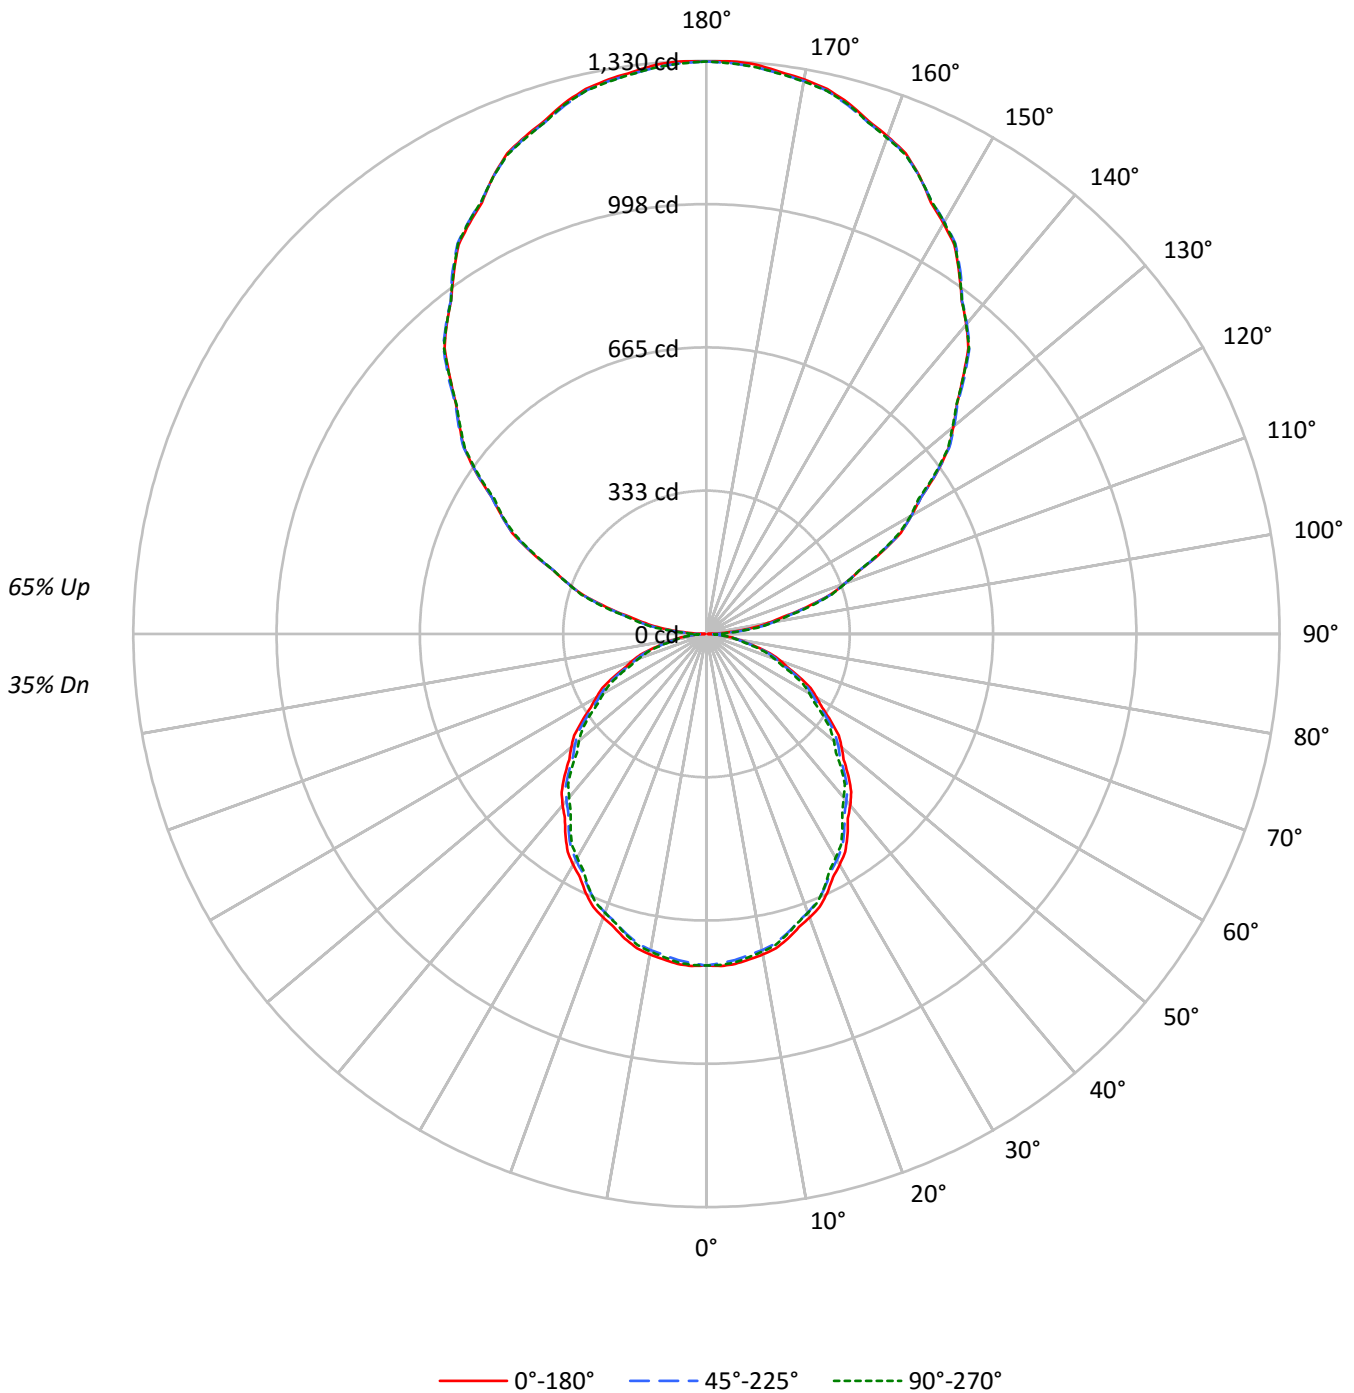



TEST NUMBER: P332768-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	42	42	42	35
1	94	90	86	83	85	82	78	75	66	63	61	51	49	48	37	36	36	29
2	86	79	73	68	77	71	66	62	57	54	51	45	42	40	33	31	30	25
3	78	69	62	56	70	63	57	52	51	46	43	39	36	34	29	27	25	21
4	72	61	53	47	64	55	49	44	45	40	36	35	32	29	26	24	22	18
5	66	54	46	41	59	49	42	37	40	35	31	31	28	25	23	21	19	15
6	60	49	41	35	54	44	37	32	36	31	27	28	25	22	21	19	17	14
7	56	44	36	31	50	40	33	28	33	27	24	26	22	19	19	17	15	12
8	52	40	32	27	47	36	30	25	30	25	21	23	20	17	18	15	13	11
9	48	36	29	24	43	33	27	22	27	22	19	22	18	15	16	14	12	10
10	45	33	26	21	40	30	24	20	25	20	17	20	16	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6211	6211	6211
5°	6229	6155	6199
10°	6190	6105	6135
15°	6115	6018	6033
20°	6016	5910	5916
25°	5903	5787	5770
30°	5764	5643	5591
35°	5619	5492	5419
40°	5469	5321	5223
45°	5313	5151	5053
50°	5141	5001	4847
55°	4954	4807	4650
60°	4766	4589	4448
65°	4556	4380	4204
70°	4322	4102	3944
75°	3961	3768	3671
80°	3524	3380	3296
85°	3084	2973	2908



TEST NUMBER: P332768-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.5	1.3
10°-20°	204.1	3.6
20°-30°	300.5	5.3
30°-40°	349.3	6.2
40°-50°	349.3	6.2
50°-60°	305.5	5.4
60°-70°	226.9	4.0
70°-80°	128.9	2.3
80°-90°	41.2	0.7
90°-100°	87.6	1.5
100°-110°	259.5	4.6
110°-120°	440.5	7.8
120°-130°	580.9	10.3
130°-140°	652.4	11.5
140°-150°	641.1	11.3
150°-160°	539.2	9.5
160°-170°	358.7	6.3
170°-180°	125.6	2.2
0°-30°	577.0	10.2
0°-40°	926.3	16.4
0°-60°	1581.2	27.9
0°-90°	1978.2	34.9
90°-120°	787.7	13.9
90°-150°	2662.0	47.0
90°-180°	3686.0	65.1
0°-180°	5663.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	769	769	769	769	769	
5°	769	766	760	766	765	73
15°	732	729	720	723	722	206
25°	663	658	650	650	648	305
35°	570	566	557	553	550	356
45°	465	461	451	445	443	359
55°	352	350	342	334	330	315
65°	238	235	229	223	220	236
75°	127	124	121	118	118	135
85°	33	33	32	32	31	37
90°	3	14	23	28	31	6
95°	62	71	78	81	81	69
105°	239	241	244	248	251	254
115°	448	448	446	445	444	442
125°	652	652	651	649	647	581
135°	841	847	848	845	842	651
145°	1022	1026	1027	1026	1023	639
155°	1171	1171	1170	1174	1170	539
165°	1275	1272	1270	1275	1272	359
175°	1326	1321	1320	1327	1320	126
180°	1328	1328	1328	1328	1328	



TEST NUMBER: P332768-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3
2.5°	771.3	771.0	770.6	770.3	770.0	769.2	768.0	766.8	765.6	764.4	765.5
5°	768.7	768.2	767.6	767.1	766.5	765.5	764.0	762.5	761.0	759.5	761.0
7.5°	761.5	761.0	760.5	759.9	759.4	758.3	756.6	754.9	753.2	751.5	752.8
10°	755.1	754.6	754.1	753.5	753.0	751.8	750.0	748.2	746.5	744.7	745.8
12.5°	746.8	746.2	745.7	745.1	744.6	743.4	741.5	739.6	737.7	735.8	737.0
15°	731.7	731.2	730.6	730.1	729.5	728.3	726.2	724.1	722.1	720.0	720.8
17.5°	713.6	712.9	712.3	711.5	710.8	709.6	707.6	705.7	703.7	701.8	702.3
20°	700.3	699.6	698.9	698.2	697.5	696.2	694.1	692.1	690.0	687.9	688.3
22.5°	686.0	685.1	684.2	683.3	682.4	680.9	678.8	676.8	674.7	672.6	673.4
25°	662.7	661.7	660.8	659.8	658.9	657.4	655.5	653.6	651.6	649.7	649.9
27.5°	636.0	635.1	634.1	633.1	632.1	630.7	628.9	627.2	625.3	623.6	623.3
30°	618.3	617.2	616.1	615.0	613.9	612.4	610.7	608.9	607.1	605.4	604.8
32.5°	599.5	598.6	597.5	596.6	595.6	594.1	592.3	590.4	588.5	586.6	586.0
35°	570.2	569.3	568.3	567.4	566.4	564.9	563.0	561.1	559.2	557.3	556.3
37.5°	539.2	538.4	537.5	536.6	535.8	534.3	532.3	530.2	528.1	526.1	525.1
40°	519.0	517.9	516.8	515.8	514.7	513.1	511.0	509.0	506.9	504.9	503.5
42.5°	497.3	496.7	496.1	495.4	494.7	493.2	491.0	488.7	486.4	484.2	482.6
45°	465.4	464.5	463.5	462.6	461.6	460.0	457.8	455.6	453.4	451.2	449.7
47.5°	432.0	431.3	430.7	430.0	429.4	428.0	426.0	424.0	421.9	419.9	418.2
50°	409.3	408.8	408.2	407.7	407.1	405.9	404.0	402.0	400.1	398.2	396.3
52.5°	387.1	386.5	385.8	385.2	384.5	383.2	381.1	379.1	377.1	375.0	373.4
55°	352.0	351.6	351.2	350.8	350.4	349.2	347.3	345.3	343.4	341.5	339.8
57.5°	318.5	318.0	317.5	317.0	316.6	315.4	313.5	311.6	309.7	307.8	306.3
60°	295.2	294.6	293.9	293.2	292.6	291.3	289.5	287.7	286.0	284.2	283.0
62.5°	272.6	272.0	271.4	270.8	270.3	269.0	267.2	265.3	263.4	261.5	260.4
65°	238.5	237.9	237.2	236.5	235.8	234.8	233.5	232.0	230.7	229.3	227.9
67.5°	204.3	203.7	203.0	202.4	201.8	200.8	199.5	198.2	196.9	195.5	194.2
70°	183.1	182.1	181.2	180.2	179.3	178.2	177.1	176.0	174.9	173.8	172.8
72.5°	160.4	159.5	158.5	157.5	156.5	155.7	154.8	153.9	153.0	152.1	151.2
75°	127.0	126.3	125.6	124.9	124.2	123.6	122.9	122.2	121.5	120.8	120.3
77.5°	95.1	94.7	94.4	94.2	93.9	93.4	92.8	92.2	91.6	91.0	90.8
80°	75.8	75.4	75.0	74.6	74.1	73.8	73.6	73.3	73.0	72.7	72.5
82.5°	57.1	56.9	56.7	56.5	56.3	56.2	56.2	56.1	56.0	56.0	55.8
85°	33.3	33.3	33.3	33.3	33.3	33.1	32.9	32.6	32.3	32.1	32.1
87.5°	13.5	13.9	14.3	14.7	15.0	15.4	15.6	15.8	16.1	16.3	16.6
90°	3.1	5.6	8.1	10.6	13.2	15.3	17.1	18.9	20.8	22.6	24.0
92.5°	22.0	24.9	27.7	30.6	33.5	35.6	36.8	38.1	39.4	40.7	41.5
95°	61.6	63.7	65.8	67.8	69.9	71.7	73.3	74.9	76.4	78.1	78.7
97.5°	107.7	109.3	111.0	112.6	114.2	116.0	117.9	119.8	121.6	123.5	124.3
100°	143.9	144.7	145.7	146.6	147.5	148.9	151.0	153.0	155.1	157.2	157.6
102.5°	181.6	182.0	182.4	182.8	183.1	184.2	186.1	188.0	189.8	191.7	192.3
105°	239.4	239.6	239.9	240.0	240.3	240.8	241.8	242.7	243.6	244.5	245.2
107.5°	300.0	300.2	300.6	300.8	301.1	301.3	301.4	301.6	301.7	301.8	302.5
110°	341.1	341.5	342.0	342.5	342.9	343.0	342.8	342.5	342.4	342.1	341.7



TEST NUMBER: P332768-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	383.8	383.9	384.0	384.1	384.2	384.0	383.7	383.2	382.8	382.4	382.3
115°	447.9	447.9	447.9	447.9	447.9	447.7	447.3	446.8	446.3	445.8	445.7
117.5°	508.3	508.5	508.7	508.9	509.1	509.0	508.7	508.3	508.0	507.7	506.9
120°	548.6	549.5	550.4	551.4	552.2	552.4	551.7	551.0	550.3	549.6	548.5
122.5°	590.5	590.9	591.3	591.6	592.0	592.0	591.7	591.4	591.0	590.7	589.9
125°	652.4	652.4	652.4	652.4	652.4	652.3	652.0	651.8	651.6	651.3	650.9
127.5°	708.4	709.2	709.9	710.5	711.2	711.4	711.0	710.7	710.3	709.9	709.5
130°	747.9	748.6	749.3	750.0	750.7	751.0	751.0	751.0	751.0	751.0	750.5
132.5°	788.2	788.7	789.2	789.7	790.2	790.4	790.2	790.0	789.8	789.6	789.2
135°	841.4	842.8	844.1	845.5	846.9	847.6	847.6	847.6	847.6	847.6	847.2
137.5°	899.4	900.0	900.6	901.3	901.9	902.5	902.8	903.2	903.5	903.9	903.2
140°	938.0	938.4	938.9	939.4	939.8	940.0	940.0	940.0	940.0	940.0	939.8
142.5°	973.4	973.8	974.2	974.7	975.2	975.3	975.1	974.9	974.8	974.5	974.5
145°	1022.2	1023.2	1024.1	1025.0	1025.9	1026.4	1026.7	1026.9	1027.1	1027.4	1027.1
147.5°	1070.7	1071.8	1072.9	1074.0	1075.1	1075.5	1075.4	1075.2	1075.0	1074.8	1074.7
150°	1100.3	1101.2	1102.2	1103.0	1104.0	1104.4	1104.4	1104.4	1104.4	1104.4	1104.4
152.5°	1128.2	1128.8	1129.3	1129.9	1130.4	1130.8	1131.0	1131.2	1131.4	1131.6	1132.1
155°	1171.2	1171.2	1171.2	1171.2	1171.2	1171.1	1170.8	1170.6	1170.4	1170.2	1171.1
157.5°	1207.4	1207.0	1206.6	1206.1	1205.7	1205.5	1205.5	1205.4	1205.4	1205.3	1206.0
160°	1228.8	1228.5	1228.3	1228.0	1227.8	1227.6	1227.3	1227.2	1226.9	1226.7	1227.3
162.5°	1248.5	1247.8	1247.3	1246.7	1246.1	1245.7	1245.5	1245.2	1245.0	1244.8	1246.0
165°	1274.9	1274.3	1273.6	1272.9	1272.2	1271.7	1271.2	1270.7	1270.3	1269.8	1271.2
167.5°	1295.3	1294.3	1293.4	1292.4	1291.5	1291.0	1291.1	1291.1	1291.2	1291.2	1292.6
170°	1306.8	1305.7	1304.6	1303.4	1302.3	1301.8	1302.0	1302.3	1302.5	1302.7	1304.1
172.5°	1315.0	1314.1	1313.1	1312.2	1311.2	1310.7	1310.8	1310.8	1310.9	1310.9	1312.5
175°	1326.4	1325.2	1324.1	1322.9	1321.8	1321.0	1320.9	1320.6	1320.4	1320.2	1321.8
177.5°	1330.0	1329.1	1328.2	1327.3	1326.4	1326.0	1326.0	1326.0	1326.0	1326.0	1327.2
180°	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4



TEST NUMBER: P332768-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3
2.5°	766.6	767.7	768.8	769.3	769.1	769.1	769.0	768.8
5°	762.5	764.0	765.5	766.1	765.8	765.6	765.2	765.0
7.5°	754.0	755.2	756.4	756.9	756.8	756.6	756.5	756.2
10°	746.9	748.0	749.1	749.5	749.2	748.9	748.6	748.4
12.5°	738.2	739.4	740.6	741.0	740.6	740.2	739.9	739.5
15°	721.7	722.5	723.3	723.5	723.1	722.7	722.2	721.8
17.5°	702.8	703.3	703.9	703.9	703.7	703.4	703.1	702.9
20°	688.8	689.2	689.6	689.7	689.4	689.1	688.9	688.6
22.5°	674.1	674.9	675.7	675.7	675.3	674.8	674.3	673.8
25°	650.0	650.1	650.3	650.1	649.5	649.0	648.4	647.8
27.5°	623.0	622.6	622.3	621.8	621.1	620.4	619.7	619.0
30°	604.3	603.7	603.2	602.5	601.8	601.2	600.5	599.8
32.5°	585.3	584.6	584.0	583.3	582.7	581.9	581.2	580.6
35°	555.3	554.4	553.4	552.6	551.9	551.2	550.6	549.9
37.5°	524.0	522.9	521.9	520.9	520.1	519.1	518.2	517.3
40°	502.2	500.7	499.4	498.4	497.6	497.0	496.3	495.6
42.5°	481.0	479.3	477.8	476.7	476.3	475.9	475.4	474.9
45°	448.2	446.7	445.2	444.3	443.9	443.5	443.0	442.6
47.5°	416.5	414.8	413.1	411.8	410.7	409.6	408.6	407.6
50°	394.3	392.4	390.5	389.2	388.3	387.5	386.7	385.9
52.5°	371.6	369.9	368.3	366.9	365.8	364.8	363.8	362.7
55°	338.3	336.6	334.9	333.7	332.9	332.1	331.2	330.4
57.5°	304.8	303.2	301.6	300.4	299.6	298.8	298.0	297.2
60°	281.7	280.5	279.2	278.3	277.6	276.9	276.2	275.5
62.5°	259.3	258.1	257.0	256.1	255.4	254.8	254.1	253.3
65°	226.6	225.2	223.9	222.8	222.1	221.4	220.8	220.1
67.5°	192.9	191.6	190.3	189.5	189.3	189.2	188.9	188.8
70°	171.7	170.6	169.4	168.7	168.3	167.9	167.5	167.1
72.5°	150.4	149.5	148.6	148.0	147.6	147.2	146.8	146.3
75°	119.7	119.1	118.7	118.3	118.1	118.0	117.9	117.7
77.5°	90.6	90.5	90.3	90.1	89.7	89.4	89.0	88.6
80°	72.2	71.9	71.6	71.5	71.3	71.1	71.1	70.9
82.5°	55.6	55.5	55.3	55.1	55.1	54.9	54.7	54.6
85°	32.1	32.1	32.1	32.0	31.8	31.7	31.6	31.4
87.5°	16.9	17.2	17.4	17.7	17.7	17.8	17.9	18.0
90°	25.3	26.7	28.0	29.0	29.5	29.9	30.3	30.8
92.5°	42.3	43.2	44.0	44.5	44.8	45.1	45.3	45.6
95°	79.5	80.2	80.8	81.2	81.2	81.2	81.2	81.2
97.5°	125.2	126.0	126.7	127.2	127.2	127.2	127.2	127.2
100°	158.1	158.6	159.0	159.2	159.2	159.2	159.2	159.2
102.5°	193.0	193.6	194.2	194.6	194.9	195.0	195.2	195.4
105°	245.9	246.6	247.2	248.0	248.6	249.3	250.0	250.6
107.5°	303.1	303.7	304.4	304.7	304.7	304.6	304.6	304.5
110°	341.2	340.7	340.3	340.4	341.1	341.7	342.5	343.2



TEST NUMBER: P332768-927

CATALOG NUMBER: S124DIW-S575D1340U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	382.2	382.1	382.0	382.1	382.1	382.3	382.5	382.6
115°	445.4	445.2	445.0	444.7	444.5	444.3	444.0	443.9
117.5°	506.2	505.4	504.6	504.0	503.5	503.1	502.6	502.2
120°	547.4	546.2	545.1	544.7	545.2	545.7	546.1	546.5
122.5°	589.1	588.4	587.6	586.8	586.0	585.2	584.4	583.5
125°	650.5	650.0	649.5	649.0	648.6	648.2	647.7	647.2
127.5°	709.0	708.5	708.1	707.7	707.3	706.9	706.5	706.2
130°	750.1	749.6	749.2	748.5	747.6	746.6	745.8	744.8
132.5°	788.7	788.3	787.8	787.4	787.0	786.6	786.3	785.9
135°	846.7	846.2	845.7	845.2	844.5	843.8	843.1	842.4
137.5°	902.7	902.1	901.5	901.3	901.4	901.6	901.7	901.8
140°	939.6	939.4	939.1	938.9	938.7	938.4	938.2	938.0
142.5°	974.5	974.5	974.4	974.3	974.3	974.2	974.2	974.1
145°	1026.9	1026.7	1026.4	1026.0	1025.3	1024.6	1024.0	1023.3
147.5°	1074.4	1074.3	1074.1	1073.9	1073.6	1073.4	1073.2	1073.0
150°	1104.4	1104.4	1104.4	1104.3	1104.1	1103.8	1103.6	1103.4
152.5°	1132.7	1133.2	1133.8	1133.7	1133.1	1132.5	1131.9	1131.3
155°	1172.0	1172.9	1173.9	1173.9	1172.9	1172.0	1171.1	1170.2
157.5°	1206.7	1207.4	1208.1	1208.0	1207.2	1206.4	1205.7	1204.9
160°	1228.0	1228.8	1229.4	1229.2	1228.0	1226.9	1225.7	1224.6
162.5°	1247.2	1248.5	1249.7	1249.7	1248.6	1247.4	1246.3	1245.2
165°	1272.6	1273.9	1275.3	1275.6	1274.6	1273.7	1272.8	1271.8
167.5°	1294.0	1295.3	1296.6	1296.6	1295.2	1293.8	1292.4	1291.0
170°	1305.4	1306.8	1308.2	1308.1	1306.5	1304.9	1303.3	1301.7
172.5°	1314.0	1315.6	1317.2	1317.1	1315.5	1313.9	1312.3	1310.7
175°	1323.3	1324.9	1326.6	1326.6	1324.9	1323.3	1321.8	1320.2
177.5°	1328.5	1329.8	1331.0	1330.9	1329.5	1328.0	1326.6	1325.1
180°	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4	1328.4

(END OF REPORT)