

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332791-927

Luminaire Tested: **S124DIW-S795D1050U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332791-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S795D1050U927-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6021.1 lumens
Efficiency: N/A
Efficacy: 114.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332791-927

CATALOG NUMBER: S124DIW-S795D1050U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

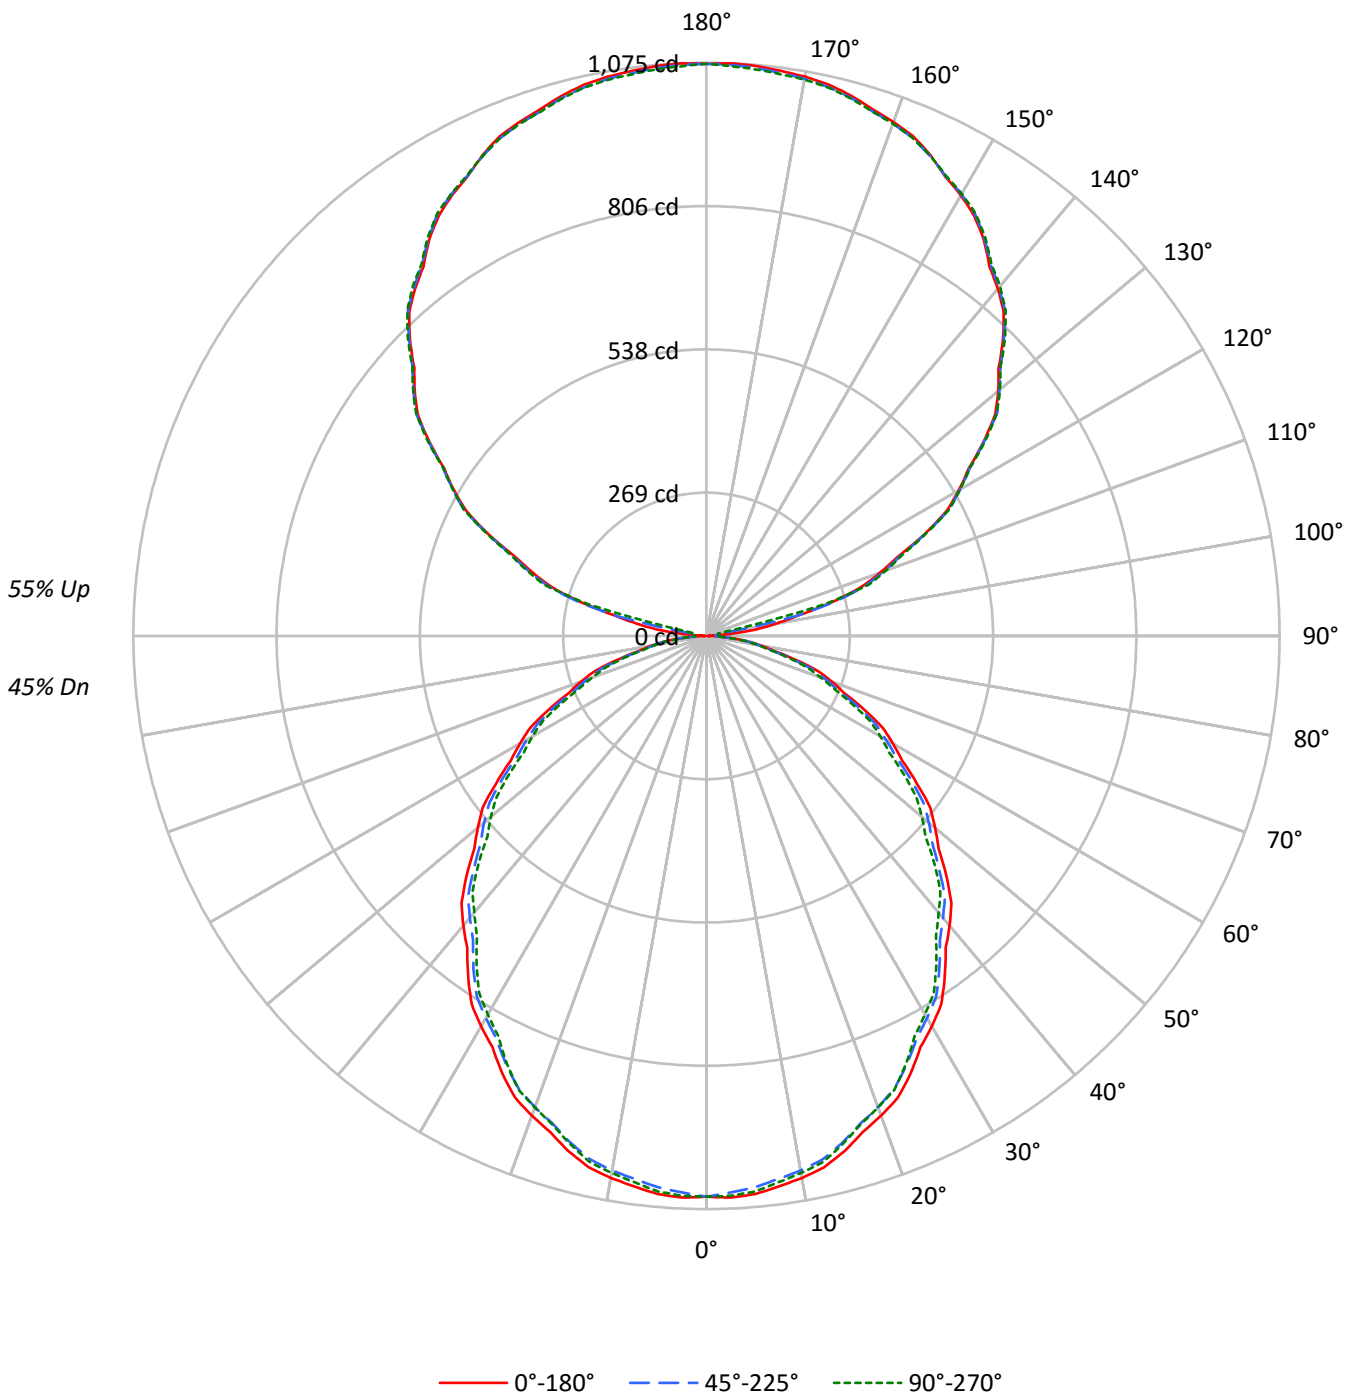



TEST NUMBER: P332791-927

CATALOG NUMBER: S124DIW-S795D1050U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45
1	97	92	88	85	88	85	81	78	70	68	66	57	56	54	45	44	43	38
2	88	81	74	69	80	74	69	64	62	58	55	50	48	45	40	38	36	32
3	80	71	64	58	73	65	59	54	54	50	46	45	41	38	35	33	31	27
4	73	63	55	49	67	58	51	45	48	43	39	40	36	33	32	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34	36	32	28	28	26	23	20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	20	17
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18	16
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14
9	49	37	30	25	45	35	28	23	29	24	20	25	20	18	20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8490	8490	8490
5°	8515	8413	8474
10°	8461	8344	8385
15°	8359	8226	8247
20°	8223	8079	8086
25°	8068	7911	7888
30°	7879	7713	7643
35°	7681	7508	7407
40°	7477	7273	7140
45°	7263	7042	6907
50°	7027	6836	6625
55°	6773	6570	6356
60°	6516	6273	6082
65°	6229	5989	5746
70°	5908	5611	5391
75°	5415	5153	5022
80°	4816	4621	4505
85°	4215	4057	3974



TEST NUMBER: P332791-927

CATALOG NUMBER: S124DIW-S795D1050U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.0	1.6
10°-20°	279.0	4.6
20°-30°	410.7	6.8
30°-40°	477.4	7.9
40°-50°	477.5	7.9
50°-60°	417.6	6.9
60°-70°	310.2	5.2
70°-80°	176.2	2.9
80°-90°	54.0	0.9
90°-100°	36.7	0.6
100°-110°	234.0	3.9
110°-120°	447.7	7.4
120°-130°	568.3	9.4
130°-140°	608.0	10.1
140°-150°	568.6	9.4
150°-160°	458.5	7.6
160°-170°	295.7	4.9
170°-180°	101.9	1.7
0°-30°	788.7	13.1
0°-40°	1266.2	21.0
0°-60°	2161.3	35.9
0°-90°	2701.6	44.9
90°-120°	718.4	11.9
90°-150°	2463.3	40.9
90°-180°	3319.0	55.1
0°-180°	6021.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1052	1052	1052	1052	1052	
5°	1051	1047	1038	1047	1046	100
15°	1000	996	984	989	987	282
25°	906	900	888	889	886	417
35°	779	773	762	756	752	487
45°	636	630	617	608	605	490
55°	481	478	467	457	452	431
65°	326	322	314	305	301	323
75°	174	169	165	162	161	184
85°	46	45	44	44	43	50
90°	2	11	18	22	24	5
95°	44	18	18	22	23	57
105°	242	246	250	256	229	253
115°	451	453	453	454	454	444
125°	634	637	636	638	639	566
135°	787	786	789	791	792	606
145°	907	909	909	910	912	567
155°	994	995	993	996	994	458
165°	1049	1045	1045	1051	1044	296
175°	1073	1069	1069	1075	1067	102
180°	1073	1073	1073	1073	1073	



TEST NUMBER: P332791-927

CATALOG NUMBER: S124DIW-S795D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6
2.5°	1054.3	1053.8	1053.4	1053.0	1052.5	1051.5	1049.8	1048.1	1046.5	1044.9	1046.3
5°	1050.8	1050.0	1049.2	1048.5	1047.7	1046.3	1044.3	1042.2	1040.1	1038.1	1040.1
7.5°	1041.0	1040.2	1039.5	1038.7	1038.0	1036.5	1034.2	1031.9	1029.6	1027.3	1029.0
10°	1032.2	1031.5	1030.7	1030.0	1029.2	1027.6	1025.2	1022.8	1020.3	1017.9	1019.4
12.5°	1020.7	1020.0	1019.2	1018.5	1017.8	1016.1	1013.5	1010.9	1008.4	1005.8	1007.4
15°	1000.2	999.4	998.7	997.9	997.2	995.5	992.6	989.8	987.0	984.2	985.3
17.5°	975.4	974.5	973.5	972.6	971.7	969.9	967.3	964.6	961.9	959.3	960.0
20°	957.2	956.2	955.4	954.4	953.5	951.6	948.8	945.9	943.2	940.4	941.0
22.5°	937.7	936.4	935.2	934.0	932.7	930.7	927.9	925.1	922.3	919.5	920.5
25°	905.8	904.5	903.2	901.9	900.6	898.6	896.0	893.3	890.7	888.1	888.3
27.5°	869.4	868.1	866.7	865.4	864.0	862.1	859.7	857.3	854.8	852.4	851.9
30°	845.2	843.7	842.2	840.7	839.2	837.2	834.7	832.3	829.9	827.4	826.7
32.5°	819.5	818.2	816.8	815.5	814.1	812.1	809.6	807.0	804.5	801.8	801.0
35°	779.4	778.1	776.8	775.5	774.2	772.2	769.6	767.0	764.4	761.8	760.4
37.5°	737.1	735.9	734.7	733.6	732.3	730.3	727.5	724.7	721.9	719.1	717.6
40°	709.5	708.0	706.5	705.0	703.5	701.3	698.5	695.7	692.9	690.1	688.2
42.5°	679.9	678.9	678.0	677.2	676.2	674.2	671.1	668.0	664.9	661.8	659.7
45°	636.2	634.9	633.6	632.2	631.0	628.8	625.8	622.8	619.8	616.8	614.7
47.5°	590.5	589.6	588.7	587.8	586.9	585.1	582.3	579.6	576.8	574.0	571.6
50°	559.5	558.7	558.0	557.2	556.5	554.8	552.2	549.6	546.9	544.3	541.7
52.5°	529.2	528.3	527.4	526.5	525.5	523.7	520.9	518.2	515.4	512.6	510.3
55°	481.2	480.5	480.0	479.4	478.9	477.3	474.7	472.1	469.4	466.8	464.5
57.5°	435.3	434.7	434.0	433.4	432.8	431.1	428.6	426.0	423.4	420.8	418.7
60°	403.6	402.7	401.7	400.8	399.9	398.2	395.8	393.3	390.9	388.5	386.7
62.5°	372.6	371.9	371.1	370.3	369.5	367.8	365.2	362.6	360.0	357.4	355.9
65°	326.1	325.2	324.2	323.3	322.3	320.9	319.1	317.2	315.3	313.5	311.6
67.5°	279.2	278.4	277.5	276.6	275.8	274.5	272.7	270.8	269.1	267.3	265.5
70°	250.3	249.0	247.6	246.3	245.0	243.6	242.1	240.6	239.1	237.7	236.1
72.5°	219.3	217.9	216.7	215.3	214.0	212.8	211.6	210.3	209.1	207.9	206.8
75°	173.6	172.6	171.7	170.8	169.8	168.9	167.9	167.0	166.1	165.2	164.4
77.5°	129.9	129.5	129.1	128.7	128.3	127.7	126.8	126.0	125.2	124.4	124.1
80°	103.6	103.1	102.5	102.0	101.4	100.9	100.5	100.2	99.8	99.4	99.0
82.5°	78.0	77.8	77.5	77.2	77.0	76.8	76.8	76.7	76.6	76.5	76.3
85°	45.5	45.5	45.5	45.5	45.5	45.3	44.9	44.6	44.2	43.8	43.8
87.5°	18.0	18.2	18.5	18.8	19.0	19.2	19.3	19.4	19.6	19.7	20.0
90°	2.4	4.4	6.3	8.3	10.2	12.0	13.4	14.8	16.2	17.7	18.7
92.5°	10.1	10.2	10.3	10.5	10.5	11.3	12.8	14.2	15.6	17.0	18.1
95°	44.1	38.1	32.0	26.0	19.9	17.0	17.1	17.3	17.5	17.7	18.7
97.5°	93.7	97.5	101.3	105.1	108.8	100.8	80.9	61.0	41.1	21.2	21.3
100°	131.7	134.8	138.1	141.2	144.5	133.8	109.2	84.5	60.0	35.3	32.3
102.5°	174.0	176.3	178.7	181.1	183.4	183.0	179.8	176.6	173.3	170.2	137.4
105°	241.6	242.6	243.8	244.8	245.9	246.8	247.7	248.7	249.5	250.4	252.0
107.5°	304.4	304.9	305.4	305.9	306.5	307.4	308.6	309.8	311.0	312.2	313.0
110°	346.7	347.3	347.8	348.3	348.9	349.7	350.8	351.8	352.9	353.9	354.3



TEST NUMBER: P332791-927

CATALOG NUMBER: S124DIW-S795D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	387.9	388.8	389.8	390.7	391.7	392.4	392.9	393.4	393.9	394.4	394.3
115°	451.1	451.6	452.2	452.7	453.2	453.4	453.2	453.0	452.9	452.7	453.0
117.5°	508.0	508.7	509.5	510.2	510.9	511.4	511.8	512.2	512.6	513.0	512.9
120°	546.6	547.3	548.0	548.7	549.5	549.7	549.5	549.4	549.1	549.0	549.4
122.5°	582.6	583.0	583.4	583.8	584.2	584.6	584.9	585.1	585.3	585.6	585.8
125°	634.1	634.8	635.5	636.2	636.9	637.1	636.8	636.4	636.0	635.6	636.2
127.5°	682.9	683.0	683.3	683.4	683.6	684.0	684.9	685.7	686.5	687.4	687.3
130°	714.3	714.5	714.7	714.9	715.0	715.4	716.0	716.4	717.0	717.6	717.7
132.5°	743.2	743.5	743.9	744.2	744.5	745.0	745.7	746.4	747.0	747.7	747.9
135°	786.6	786.4	786.2	786.0	785.8	786.2	786.9	787.6	788.3	789.0	789.3
137.5°	824.9	825.0	825.1	825.1	825.2	825.6	826.4	827.2	828.0	828.8	829.2
140°	850.0	850.3	850.7	851.0	851.4	851.8	852.2	852.5	852.9	853.2	853.7
142.5°	872.4	873.1	873.7	874.4	875.0	875.4	875.7	875.8	876.1	876.3	876.7
145°	907.0	907.5	908.0	908.6	909.1	909.3	909.3	909.3	909.3	909.3	909.6
147.5°	934.4	935.4	936.4	937.4	938.4	938.8	938.7	938.5	938.3	938.1	938.3
150°	954.3	955.1	955.8	956.5	957.2	957.4	957.3	957.1	956.9	956.7	956.7
152.5°	971.0	971.6	972.2	972.7	973.3	973.4	973.1	972.8	972.5	972.2	972.4
155°	994.4	994.7	994.8	995.0	995.1	995.0	994.4	994.0	993.4	992.8	993.6
157.5°	1014.2	1014.1	1014.0	1013.8	1013.8	1013.4	1012.8	1012.2	1011.6	1011.0	1011.9
160°	1025.7	1025.2	1024.7	1024.1	1023.6	1023.3	1023.1	1022.9	1022.7	1022.5	1023.6
162.5°	1036.0	1035.4	1034.7	1034.0	1033.3	1032.8	1032.7	1032.5	1032.4	1032.1	1033.2
165°	1049.0	1048.1	1047.3	1046.3	1045.4	1045.0	1045.0	1045.0	1045.0	1045.0	1046.5
167.5°	1059.3	1058.4	1057.5	1056.5	1055.6	1055.1	1054.9	1054.9	1054.8	1054.6	1056.2
170°	1065.1	1064.0	1063.0	1061.8	1060.8	1060.3	1060.5	1060.7	1060.9	1061.0	1062.5
172.5°	1068.9	1067.9	1066.8	1065.7	1064.6	1064.2	1064.4	1064.5	1064.8	1064.9	1066.4
175°	1073.1	1072.1	1071.0	1069.9	1068.8	1068.4	1068.6	1068.7	1068.9	1069.1	1070.7
177.5°	1075.0	1074.0	1073.0	1072.1	1071.0	1070.7	1071.0	1071.3	1071.5	1071.8	1072.9
180°	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1



TEST NUMBER: P332791-927

CATALOG NUMBER: S124DIW-S795D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6
2.5°	1047.8	1049.3	1050.8	1051.5	1051.4	1051.2	1051.1	1050.9
5°	1042.2	1044.3	1046.3	1047.2	1046.8	1046.5	1046.1	1045.7
7.5°	1030.6	1032.3	1033.9	1034.6	1034.4	1034.2	1034.0	1033.7
10°	1020.9	1022.4	1023.9	1024.5	1024.1	1023.7	1023.3	1022.9
12.5°	1009.1	1010.7	1012.3	1012.9	1012.4	1011.9	1011.3	1010.8
15°	986.4	987.5	988.6	989.0	988.4	987.9	987.3	986.7
17.5°	960.7	961.4	962.1	962.3	961.9	961.5	961.2	960.8
20°	941.5	942.1	942.6	942.7	942.3	942.0	941.6	941.2
22.5°	921.5	922.5	923.5	923.7	923.0	922.3	921.6	921.0
25°	888.5	888.7	888.9	888.6	887.9	887.1	886.4	885.6
27.5°	851.5	851.0	850.6	849.9	849.0	848.0	847.1	846.1
30°	825.9	825.2	824.4	823.6	822.7	821.7	820.8	819.9
32.5°	800.0	799.2	798.3	797.3	796.4	795.4	794.5	793.6
35°	759.1	757.8	756.5	755.3	754.4	753.5	752.6	751.6
37.5°	716.2	714.8	713.4	712.1	710.8	709.6	708.4	707.1
40°	686.3	684.5	682.6	681.2	680.2	679.4	678.4	677.5
42.5°	657.4	655.3	653.1	651.7	651.1	650.5	649.8	649.2
45°	612.7	610.6	608.6	607.3	606.7	606.1	605.5	605.0
47.5°	569.3	567.0	564.7	562.8	561.4	560.0	558.6	557.1
50°	539.1	536.5	533.9	532.0	530.8	529.7	528.6	527.5
52.5°	508.0	505.6	503.4	501.5	500.1	498.7	497.3	495.8
55°	462.3	460.1	457.8	456.1	455.0	453.9	452.7	451.6
57.5°	416.5	414.4	412.3	410.7	409.6	408.4	407.4	406.3
60°	385.1	383.4	381.7	380.4	379.5	378.5	377.6	376.7
62.5°	354.3	352.8	351.3	350.1	349.1	348.2	347.3	346.3
65°	309.7	307.8	305.9	304.6	303.6	302.7	301.7	300.8
67.5°	263.7	261.9	260.1	259.0	258.8	258.6	258.3	258.0
70°	234.6	233.1	231.6	230.6	230.0	229.5	228.9	228.4
72.5°	205.6	204.4	203.2	202.3	201.7	201.1	200.6	200.0
75°	163.7	162.9	162.2	161.7	161.5	161.3	161.1	161.0
77.5°	123.9	123.7	123.5	123.1	122.6	122.2	121.7	121.2
80°	98.7	98.3	97.9	97.7	97.4	97.3	97.1	96.9
82.5°	76.0	75.8	75.6	75.4	75.3	75.0	74.9	74.6
85°	43.8	43.8	43.8	43.7	43.6	43.3	43.2	42.9
87.5°	20.1	20.4	20.6	20.7	20.8	20.8	20.9	21.0
90°	19.8	20.8	21.9	22.7	23.0	23.4	23.7	24.1
92.5°	19.2	20.2	21.3	21.9	21.9	22.0	22.1	22.2
95°	19.8	20.8	21.9	22.6	22.7	22.9	23.1	23.3
97.5°	21.4	21.5	21.6	21.8	21.9	22.1	22.3	22.5
100°	29.2	26.2	23.2	21.8	21.9	22.1	22.3	22.5
102.5°	104.7	72.0	39.3	23.0	23.0	23.1	23.1	23.1
105°	253.7	255.2	256.8	254.4	248.0	241.6	235.2	228.8
107.5°	313.8	314.6	315.4	316.1	316.8	317.4	318.1	318.8
110°	354.7	355.1	355.4	355.8	356.4	356.9	357.4	358.0



TEST NUMBER: P332791-927

CATALOG NUMBER: S124DIW-S795D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	394.3	394.2	394.1	394.4	395.1	395.8	396.5	397.1
115°	453.4	453.8	454.1	454.3	454.3	454.3	454.3	454.3
117.5°	512.9	512.9	512.8	512.7	512.6	512.5	512.5	512.4
120°	549.7	550.1	550.4	550.4	550.1	549.7	549.4	549.0
122.5°	586.1	586.2	586.5	586.4	586.1	585.7	585.3	584.9
125°	636.8	637.3	637.8	638.2	638.3	638.5	638.7	638.9
127.5°	687.1	687.1	686.9	686.8	686.7	686.5	686.3	686.3
130°	717.9	718.1	718.3	718.4	718.4	718.4	718.4	718.4
132.5°	748.1	748.3	748.5	748.5	748.3	748.1	748.1	747.9
135°	789.7	790.0	790.4	790.8	791.2	791.5	791.9	792.2
137.5°	829.6	830.0	830.4	830.5	830.4	830.3	830.2	830.0
140°	854.3	854.8	855.3	855.7	855.9	856.0	856.2	856.4
142.5°	877.1	877.5	877.9	878.1	878.1	878.1	878.2	878.2
145°	909.7	909.9	910.1	910.4	910.7	911.1	911.4	911.8
147.5°	938.4	938.5	938.7	938.8	939.1	939.2	939.4	939.5
150°	956.7	956.7	956.7	956.8	957.0	957.2	957.4	957.5
152.5°	972.7	973.0	973.3	973.4	973.3	973.1	973.0	973.0
155°	994.3	995.0	995.7	995.8	995.2	994.7	994.2	993.6
157.5°	1012.8	1013.8	1014.7	1014.7	1013.8	1012.8	1011.9	1011.0
160°	1024.7	1025.7	1026.8	1026.8	1025.7	1024.7	1023.6	1022.5
162.5°	1034.3	1035.4	1036.4	1036.4	1035.1	1034.0	1032.8	1031.5
165°	1047.9	1049.3	1050.8	1050.6	1049.0	1047.4	1045.8	1044.2
167.5°	1057.8	1059.4	1060.9	1060.8	1059.1	1057.2	1055.5	1053.7
170°	1063.9	1065.3	1066.8	1066.6	1064.8	1063.0	1061.2	1059.5
172.5°	1067.8	1069.2	1070.6	1070.4	1068.4	1066.5	1064.6	1062.6
175°	1072.3	1073.9	1075.5	1075.2	1073.1	1071.0	1068.8	1066.7
177.5°	1074.1	1075.2	1076.4	1076.1	1074.4	1072.7	1071.0	1069.3
180°	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1

(END OF REPORT)