

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333105-927

Luminaire Tested: **S124RDIW-S1195D1050U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333105-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIW-S1195D1050U927-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1050 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7139.5 lumens  
Efficiency: N/A  
Efficacy: 105.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 67.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333105-927

CATALOG NUMBER: S124RDIW-S1195D1050U927-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

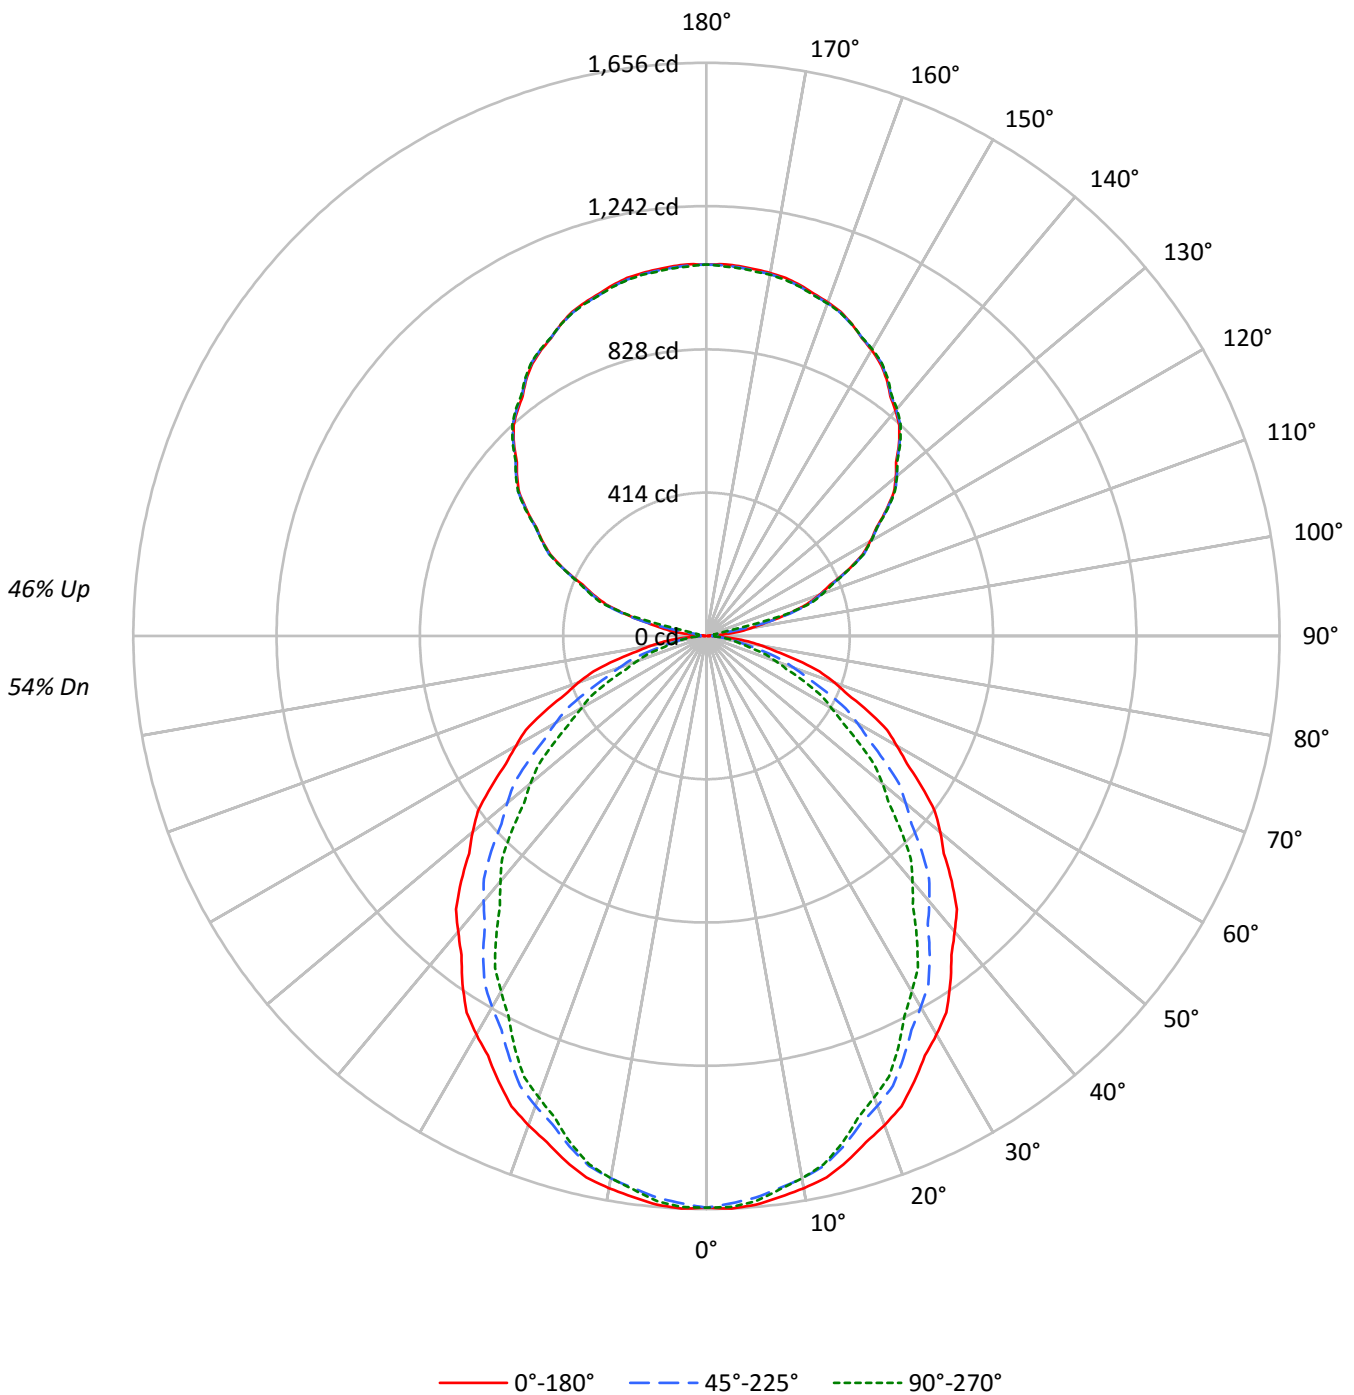



TEST NUMBER: P333105-927

CATALOG NUMBER: S124RDIW-S1195D1050U927-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	54
1	99	95	91	87	92	88	85	82	75	73	71	64	62	60	53	52	51	46
2	90	83	77	72	83	77	72	67	66	62	59	56	53	51	47	45	43	39
3	82	73	66	60	76	68	62	57	59	54	50	50	46	43	42	39	37	33
4	76	65	57	51	70	61	54	48	52	47	43	45	41	37	38	35	32	29
5	69	58	50	44	64	54	47	42	47	41	37	40	36	33	34	31	28	25
6	64	52	44	38	59	49	42	36	42	37	32	36	32	29	31	27	25	22
7	59	47	39	34	55	44	37	32	39	33	29	33	29	25	28	25	22	20
8	55	43	35	30	51	40	33	28	35	30	26	30	26	23	26	23	20	18
9	51	39	32	27	48	37	30	25	32	27	23	28	24	21	24	21	18	16
10	48	36	29	24	45	34	27	23	30	24	21	26	22	19	22	19	16	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	13337	13337	13337
5°	13367	13203	13285
10°	13283	13045	13045
15°	13131	12771	12676
20°	12921	12411	12182
25°	12653	11989	11685
30°	12393	11544	11060
35°	12105	11083	10435
40°	11758	10559	9759
45°	11439	10038	9070
50°	11074	9437	8341
55°	10683	8812	7548
60°	10253	8128	6739
65°	9859	7272	5945
70°	9286	6331	5046
75°	8562	5250	4105
80°	7471	3998	3766
85°	6326	3631	3399



TEST NUMBER: P333105-927

CATALOG NUMBER: S124RDIW-S1195D1050U927-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	155.2	2.2
10°-20°	432.8	6.1
20°-30°	624.9	8.8
30°-40°	708.3	9.9
40°-50°	684.0	9.6
50°-60°	568.8	8.0
60°-70°	392.8	5.5
70°-80°	199.1	2.8
80°-90°	54.2	0.8
90°-100°	36.7	0.5
100°-110°	234.0	3.3
110°-120°	447.7	6.3
120°-130°	568.3	8.0
130°-140°	608.0	8.5
140°-150°	568.6	8.0
150°-160°	458.5	6.4
160°-170°	295.7	4.1
170°-180°	101.9	1.4
0°-30°	1212.9	17.0
0°-40°	1921.2	26.9
0°-60°	3174.0	44.5
0°-90°	3820.0	53.5
90°-120°	718.4	10.1
90°-150°	2463.3	34.5
90°-180°	3319.0	46.5
0°-180°	7139.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1652	1652	1652	1652	1652	
5°	1650	1644	1629	1641	1639	156
15°	1571	1559	1528	1525	1517	442
25°	1420	1396	1346	1325	1312	654
35°	1228	1186	1125	1083	1059	767
45°	1002	953	879	819	794	772
55°	759	707	626	563	536	679
65°	516	460	381	328	311	509
75°	274	227	168	140	132	290
85°	68	44	39	37	37	77
90°	2	11	18	22	24	5
95°	44	18	18	22	23	57
105°	242	246	250	256	229	253
115°	451	453	453	454	454	444
125°	634	637	636	638	639	566
135°	787	786	789	791	792	606
145°	907	909	909	910	912	567
155°	994	995	993	996	994	458
165°	1049	1045	1045	1051	1044	296
175°	1073	1069	1069	1075	1067	102
180°	1073	1073	1073	1073	1073	



TEST NUMBER: P333105-927

CATALOG NUMBER: S124RDIW-S1195D1050U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1652.0	1652.0	1652.0	1652.0	1652.0	1652.0	1652.0	1652.0	1652.0	1652.0	1652.0
2.5°	1656.1	1655.2	1654.3	1653.4	1652.5	1650.8	1648.4	1645.8	1643.4	1640.9	1643.4
5°	1649.5	1648.4	1647.3	1646.2	1645.0	1642.7	1639.4	1636.0	1632.7	1629.3	1632.1
7.5°	1634.6	1633.4	1632.2	1631.0	1629.8	1627.1	1622.7	1618.3	1613.9	1609.6	1611.4
10°	1620.4	1619.0	1617.6	1616.2	1614.8	1611.5	1606.5	1601.5	1596.4	1591.3	1592.4
12.5°	1602.2	1600.6	1598.9	1597.3	1595.7	1591.9	1585.9	1580.0	1574.0	1568.0	1568.8
15°	1571.1	1568.5	1566.1	1563.5	1561.0	1556.2	1549.2	1542.1	1535.1	1528.0	1527.5
17.5°	1533.4	1529.7	1526.1	1522.4	1518.8	1512.8	1504.3	1495.9	1487.4	1479.0	1477.4
20°	1504.0	1500.4	1496.7	1493.1	1489.5	1482.8	1473.3	1463.7	1454.1	1444.6	1442.3
22.5°	1471.6	1467.6	1463.5	1459.4	1455.2	1448.1	1437.8	1427.6	1417.4	1407.2	1403.7
25°	1420.5	1415.5	1410.4	1405.4	1400.3	1392.0	1380.5	1369.0	1357.5	1345.9	1341.2
27.5°	1366.9	1360.6	1354.2	1347.9	1341.5	1332.2	1319.9	1307.6	1295.2	1282.9	1277.0
30°	1329.5	1322.5	1315.4	1308.4	1301.4	1291.3	1278.0	1264.8	1251.6	1238.4	1231.4
32.5°	1290.0	1282.1	1274.1	1266.2	1258.3	1247.5	1233.8	1220.2	1206.5	1192.9	1184.7
35°	1228.3	1219.2	1210.3	1201.3	1192.3	1180.7	1166.7	1152.7	1138.6	1124.6	1115.0
37.5°	1162.3	1152.9	1143.7	1134.4	1125.1	1112.7	1097.2	1081.6	1066.0	1050.4	1039.7
40°	1115.7	1106.4	1097.2	1087.9	1078.6	1066.0	1050.0	1033.9	1017.9	1001.9	990.1
42.5°	1071.2	1061.4	1051.7	1042.0	1032.3	1019.1	1002.3	985.6	969.0	952.3	940.2
45°	1001.9	991.4	981.0	970.7	960.3	946.6	929.8	912.9	896.0	879.2	865.4
47.5°	930.3	919.5	908.8	898.0	887.3	873.1	855.6	838.0	820.5	803.0	788.7
50°	881.7	870.7	859.8	848.8	837.8	823.3	805.3	787.3	769.4	751.4	737.4
52.5°	832.1	821.3	810.6	799.9	789.2	774.5	756.1	737.7	719.2	700.8	686.5
55°	759.0	747.7	736.5	725.2	714.0	699.3	681.0	662.7	644.4	626.1	611.6
57.5°	686.6	674.9	663.2	651.6	639.8	625.0	607.0	589.0	571.0	553.0	538.2
60°	635.0	623.8	612.5	601.3	590.0	575.4	557.5	539.5	521.4	503.4	488.9
62.5°	588.4	576.8	565.1	553.4	541.7	526.6	508.2	489.7	471.3	452.9	439.3
65°	516.1	504.0	491.9	479.8	467.8	452.7	434.7	416.8	398.8	380.7	368.7
67.5°	440.9	429.4	417.8	406.2	394.7	380.5	363.8	347.1	330.4	313.7	303.3
70°	393.4	381.6	369.8	358.0	346.2	332.2	316.2	300.2	284.2	268.2	258.9
72.5°	342.8	332.2	321.5	310.8	300.1	287.2	272.0	256.9	241.8	226.6	218.7
75°	274.5	264.1	253.7	243.3	232.9	221.1	207.9	194.6	181.5	168.3	161.8
77.5°	205.2	196.4	187.5	178.7	169.8	160.1	149.4	138.8	128.1	117.4	113.6
80°	160.7	152.5	144.3	136.2	128.0	119.8	111.3	102.9	94.4	86.0	85.2
82.5°	122.2	114.7	107.3	99.7	92.3	86.1	81.3	76.4	71.6	66.8	66.1
85°	68.3	62.7	57.0	51.4	45.8	42.6	41.7	40.9	40.1	39.2	38.7
87.5°	23.8	22.3	20.9	19.6	18.1	17.4	17.5	17.6	17.7	17.7	17.7
90°	2.4	4.4	6.3	8.3	10.2	12.0	13.4	14.8	16.2	17.7	18.7
92.5°	10.1	10.2	10.3	10.5	10.5	11.3	12.8	14.2	15.6	17.0	18.1
95°	44.1	38.1	32.0	26.0	19.9	17.0	17.1	17.3	17.5	17.7	18.7
97.5°	93.7	97.5	101.3	105.1	108.8	100.8	80.9	61.0	41.1	21.2	21.3
100°	131.7	134.8	138.1	141.2	144.5	133.8	109.2	84.5	60.0	35.3	32.3
102.5°	174.0	176.3	178.7	181.1	183.4	183.0	179.8	176.6	173.3	170.2	137.4
105°	241.6	242.6	243.8	244.8	245.9	246.8	247.7	248.7	249.5	250.4	252.0
107.5°	304.4	304.9	305.4	305.9	306.5	307.4	308.6	309.8	311.0	312.2	313.0
110°	346.7	347.3	347.8	348.3	348.9	349.7	350.8	351.8	352.9	353.9	354.3



TEST NUMBER: P333105-927

CATALOG NUMBER: S124RDIW-S1195D1050U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	387.9	388.8	389.8	390.7	391.7	392.4	392.9	393.4	393.9	394.4	394.3
115°	451.1	451.6	452.2	452.7	453.2	453.4	453.2	453.0	452.9	452.7	453.0
117.5°	508.0	508.7	509.5	510.2	510.9	511.4	511.8	512.2	512.6	513.0	512.9
120°	546.6	547.3	548.0	548.7	549.5	549.7	549.5	549.4	549.1	549.0	549.4
122.5°	582.6	583.0	583.4	583.8	584.2	584.6	584.9	585.1	585.3	585.6	585.8
125°	634.1	634.8	635.5	636.2	636.9	637.1	636.8	636.4	636.0	635.6	636.2
127.5°	682.9	683.0	683.3	683.4	683.6	684.0	684.9	685.7	686.5	687.4	687.3
130°	714.3	714.5	714.7	714.9	715.0	715.4	716.0	716.4	717.0	717.6	717.7
132.5°	743.2	743.5	743.9	744.2	744.5	745.0	745.7	746.4	747.0	747.7	747.9
135°	786.6	786.4	786.2	786.0	785.8	786.2	786.9	787.6	788.3	789.0	789.3
137.5°	824.9	825.0	825.1	825.1	825.2	825.6	826.4	827.2	828.0	828.8	829.2
140°	850.0	850.3	850.7	851.0	851.4	851.8	852.2	852.5	852.9	853.2	853.7
142.5°	872.4	873.1	873.7	874.4	875.0	875.4	875.7	875.8	876.1	876.3	876.7
145°	907.0	907.5	908.0	908.6	909.1	909.3	909.3	909.3	909.3	909.3	909.6
147.5°	934.4	935.4	936.4	937.4	938.4	938.8	938.7	938.5	938.3	938.1	938.3
150°	954.3	955.1	955.8	956.5	957.2	957.4	957.3	957.1	956.9	956.7	956.7
152.5°	971.0	971.6	972.2	972.7	973.3	973.4	973.1	972.8	972.5	972.2	972.4
155°	994.4	994.7	994.8	995.0	995.1	995.0	994.4	994.0	993.4	992.8	993.6
157.5°	1014.2	1014.1	1014.0	1013.8	1013.8	1013.4	1012.8	1012.2	1011.6	1011.0	1011.9
160°	1025.7	1025.2	1024.7	1024.1	1023.6	1023.3	1023.1	1022.9	1022.7	1022.5	1023.6
162.5°	1036.0	1035.4	1034.7	1034.0	1033.3	1032.8	1032.7	1032.5	1032.4	1032.1	1033.2
165°	1049.0	1048.1	1047.3	1046.3	1045.4	1045.0	1045.0	1045.0	1045.0	1045.0	1046.5
167.5°	1059.3	1058.4	1057.5	1056.5	1055.6	1055.1	1054.9	1054.9	1054.8	1054.6	1056.2
170°	1065.1	1064.0	1063.0	1061.8	1060.8	1060.3	1060.5	1060.7	1060.9	1061.0	1062.5
172.5°	1068.9	1067.9	1066.8	1065.7	1064.6	1064.2	1064.4	1064.5	1064.8	1064.9	1066.4
175°	1073.1	1072.1	1071.0	1069.9	1068.8	1068.4	1068.6	1068.7	1068.9	1069.1	1070.7
177.5°	1075.0	1074.0	1073.0	1072.1	1071.0	1070.7	1071.0	1071.3	1071.5	1071.8	1072.9
180°	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1



TEST NUMBER: P333105-927

CATALOG NUMBER: S124RDIW-S1195D1050U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1652.0	1652.0	1652.0	1652.0	1652.0	1652.0	1652.0	1652.0
2.5°	1645.8	1648.4	1650.8	1651.9	1651.7	1651.5	1651.2	1651.1
5°	1634.9	1637.7	1640.5	1641.6	1641.1	1640.5	1640.0	1639.4
7.5°	1613.1	1614.9	1616.8	1617.2	1616.3	1615.4	1614.5	1613.6
10°	1593.6	1594.7	1595.9	1595.9	1594.7	1593.6	1592.4	1591.3
12.5°	1569.4	1570.1	1570.7	1570.3	1568.8	1567.2	1565.6	1564.0
15°	1526.9	1526.4	1525.8	1524.6	1522.6	1520.6	1518.7	1516.7
17.5°	1475.8	1474.3	1472.7	1470.4	1467.4	1464.4	1461.5	1458.5
20°	1440.1	1437.8	1435.6	1432.7	1429.0	1425.4	1421.7	1418.0
22.5°	1400.4	1397.0	1393.7	1390.5	1387.5	1384.5	1381.6	1378.6
25°	1336.3	1331.6	1326.8	1323.0	1320.2	1317.4	1314.5	1311.8
27.5°	1271.1	1265.2	1259.3	1254.3	1250.3	1246.3	1242.2	1238.2
30°	1224.3	1217.3	1210.3	1204.5	1200.0	1195.6	1191.0	1186.5
32.5°	1176.5	1168.4	1160.2	1154.1	1149.8	1145.5	1141.2	1136.9
35°	1105.4	1095.9	1086.3	1079.0	1074.0	1068.9	1063.8	1058.8
37.5°	1029.0	1018.4	1007.7	999.8	994.7	989.7	984.7	979.6
40°	978.3	966.5	954.7	946.2	941.1	936.0	931.1	926.0
42.5°	928.2	916.2	904.1	895.5	890.2	884.9	879.6	874.3
45°	851.6	837.8	824.0	814.6	809.6	804.5	799.5	794.4
47.5°	774.4	760.2	745.9	735.9	730.4	724.8	719.2	713.7
50°	723.3	709.2	695.1	685.5	680.2	674.8	669.5	664.1
52.5°	672.2	658.0	643.6	633.7	628.2	622.7	617.0	611.5
55°	596.9	582.3	567.7	557.7	552.4	547.0	541.7	536.3
57.5°	523.4	508.5	493.7	484.3	480.2	476.1	472.1	468.0
60°	474.2	459.6	445.0	435.5	430.9	426.4	421.9	417.4
62.5°	425.9	412.4	398.9	390.3	386.7	383.2	379.5	376.0
65°	356.6	344.5	332.4	324.6	321.3	317.9	314.6	311.2
67.5°	292.9	282.5	272.1	265.1	261.3	257.6	253.9	250.2
70°	249.6	240.3	231.1	225.1	222.2	219.4	216.6	213.8
72.5°	210.8	202.9	195.0	189.7	187.1	184.6	182.0	179.4
75°	155.3	148.9	142.4	138.3	136.7	134.9	133.2	131.6
77.5°	109.9	106.1	102.3	100.2	99.7	99.2	98.7	98.2
80°	84.4	83.5	82.6	82.1	81.8	81.5	81.3	81.0
82.5°	65.6	65.0	64.3	63.8	63.6	63.3	63.1	62.7
85°	38.1	37.5	37.0	36.7	36.7	36.7	36.7	36.7
87.5°	17.7	17.7	17.7	17.8	18.1	18.4	18.7	19.0
90°	19.8	20.8	21.9	22.7	23.0	23.4	23.7	24.1
92.5°	19.2	20.2	21.3	21.9	21.9	22.0	22.1	22.2
95°	19.8	20.8	21.9	22.6	22.7	22.9	23.1	23.3
97.5°	21.4	21.5	21.6	21.8	21.9	22.1	22.3	22.5
100°	29.2	26.2	23.2	21.8	21.9	22.1	22.3	22.5
102.5°	104.7	72.0	39.3	23.0	23.0	23.1	23.1	23.1
105°	253.7	255.2	256.8	254.4	248.0	241.6	235.2	228.8
107.5°	313.8	314.6	315.4	316.1	316.8	317.4	318.1	318.8
110°	354.7	355.1	355.4	355.8	356.4	356.9	357.4	358.0





TEST NUMBER: P333105-927

CATALOG NUMBER: S124RDIW-S1195D1050U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	394.3	394.2	394.1	394.4	395.1	395.8	396.5	397.1
115°	453.4	453.8	454.1	454.3	454.3	454.3	454.3	454.3
117.5°	512.9	512.9	512.8	512.7	512.6	512.5	512.5	512.4
120°	549.7	550.1	550.4	550.4	550.1	549.7	549.4	549.0
122.5°	586.1	586.2	586.5	586.4	586.1	585.7	585.3	584.9
125°	636.8	637.3	637.8	638.2	638.3	638.5	638.7	638.9
127.5°	687.1	687.1	686.9	686.8	686.7	686.5	686.3	686.3
130°	717.9	718.1	718.3	718.4	718.4	718.4	718.4	718.4
132.5°	748.1	748.3	748.5	748.5	748.3	748.1	748.1	747.9
135°	789.7	790.0	790.4	790.8	791.2	791.5	791.9	792.2
137.5°	829.6	830.0	830.4	830.5	830.4	830.3	830.2	830.0
140°	854.3	854.8	855.3	855.7	855.9	856.0	856.2	856.4
142.5°	877.1	877.5	877.9	878.1	878.1	878.1	878.2	878.2
145°	909.7	909.9	910.1	910.4	910.7	911.1	911.4	911.8
147.5°	938.4	938.5	938.7	938.8	939.1	939.2	939.4	939.5
150°	956.7	956.7	956.7	956.8	957.0	957.2	957.4	957.5
152.5°	972.7	973.0	973.3	973.4	973.3	973.1	973.0	973.0
155°	994.3	995.0	995.7	995.8	995.2	994.7	994.2	993.6
157.5°	1012.8	1013.8	1014.7	1014.7	1013.8	1012.8	1011.9	1011.0
160°	1024.7	1025.7	1026.8	1026.8	1025.7	1024.7	1023.6	1022.5
162.5°	1034.3	1035.4	1036.4	1036.4	1035.1	1034.0	1032.8	1031.5
165°	1047.9	1049.3	1050.8	1050.6	1049.0	1047.4	1045.8	1044.2
167.5°	1057.8	1059.4	1060.9	1060.8	1059.1	1057.2	1055.5	1053.7
170°	1063.9	1065.3	1066.8	1066.6	1064.8	1063.0	1061.2	1059.5
172.5°	1067.8	1069.2	1070.6	1070.4	1068.4	1066.5	1064.6	1062.6
175°	1072.3	1073.9	1075.5	1075.2	1073.1	1071.0	1068.8	1066.7
177.5°	1074.1	1075.2	1076.4	1076.1	1074.4	1072.7	1071.0	1069.3
180°	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1	1073.1

(END OF REPORT)