

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333058-927

Luminaire Tested: **S124RDIW-S795D470U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333058-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S795D470U927-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3831.6 lumens
Efficiency: N/A
Efficacy: 101.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 37.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333058-927

CATALOG NUMBER: S124RDIW-S795D470U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

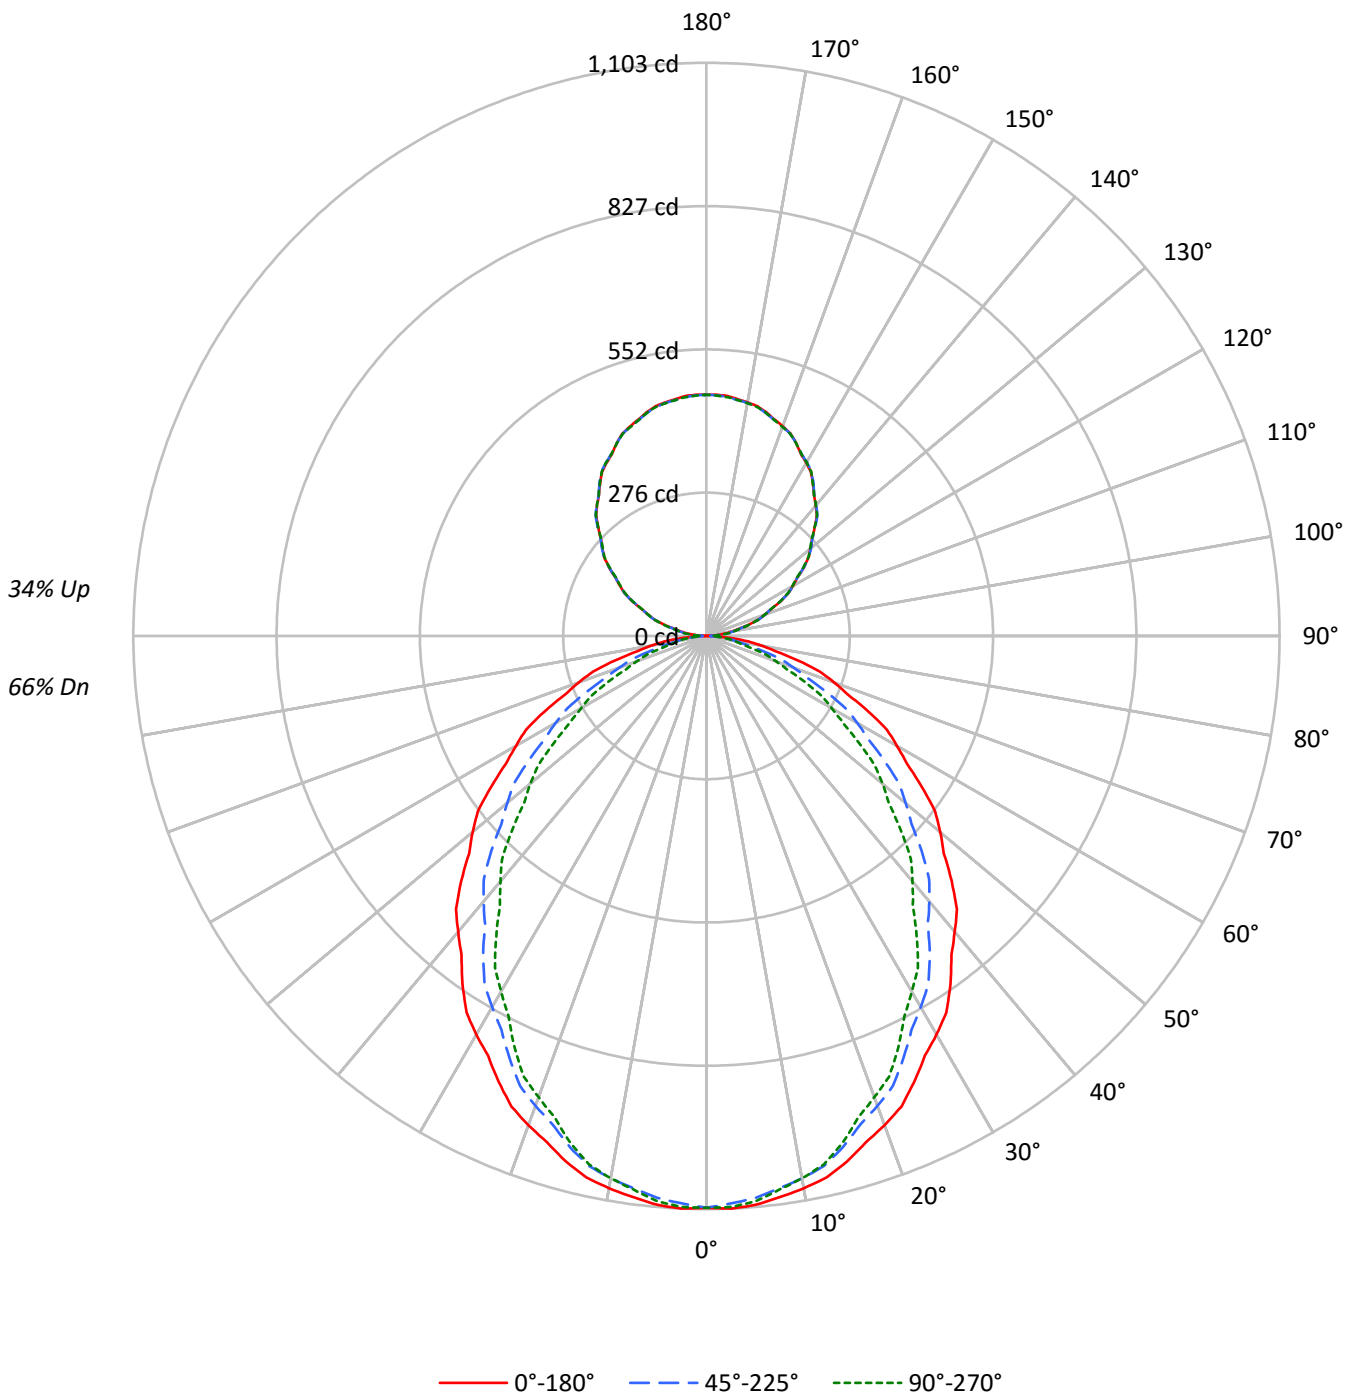



TEST NUMBER: P333058-927

CATALOG NUMBER: S124RDIW-S795D470U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	92	92	92	81	81	81	71	71	71	66
1	102	98	94	90	96	92	89	86	82	79	77	72	70	69	64	62	61	57
2	93	86	79	74	87	81	75	71	72	68	64	64	61	58	56	54	52	48
3	85	76	68	62	80	72	65	60	64	59	54	57	53	49	50	47	44	41
4	78	67	59	53	73	64	56	51	57	51	47	51	46	43	45	42	39	35
5	72	60	52	46	67	57	50	44	51	45	41	46	41	37	41	37	34	31
6	66	54	46	40	62	51	44	39	46	40	36	42	37	33	37	33	30	27
7	61	49	41	35	58	47	39	34	42	36	32	38	33	29	34	30	27	24
8	57	45	37	31	54	43	35	30	39	33	28	35	30	26	31	27	24	22
9	53	41	33	28	50	39	32	27	36	30	25	32	27	24	29	25	22	20
10	50	38	30	26	47	36	29	25	33	27	23	30	25	22	27	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8884	8884	8884
5°	8904	8795	8849
10°	8848	8689	8689
15°	8747	8507	8444
20°	8607	8267	8115
25°	8429	7986	7783
30°	8255	7690	7368
35°	8064	7383	6951
40°	7832	7032	6500
45°	7618	6687	6042
50°	7376	6286	5556
55°	7116	5871	5029
60°	6830	5414	4490
65°	6567	4846	3960
70°	6187	4216	3361
75°	5702	3497	2732
80°	4974	2664	2506
85°	4215	2418	2260



TEST NUMBER: P333058-927

CATALOG NUMBER: S124RDIW-S795D470U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.4	2.7
10°-20°	288.3	7.5
20°-30°	416.3	10.9
30°-40°	471.8	12.3
40°-50°	455.6	11.9
50°-60°	378.9	9.9
60°-70°	261.6	6.8
70°-80°	132.6	3.5
80°-90°	35.4	0.9
90°-100°	30.6	0.8
100°-110°	90.7	2.4
110°-120°	153.9	4.0
120°-130°	203.0	5.3
130°-140°	227.9	5.9
140°-150°	224.0	5.8
150°-160°	188.4	4.9
160°-170°	125.3	3.3
170°-180°	43.9	1.1
0°-30°	807.9	21.1
0°-40°	1279.7	33.4
0°-60°	2114.3	55.2
0°-90°	2543.9	66.4
90°-120°	275.2	7.2
90°-150°	930.1	24.3
90°-180°	1288.0	33.6
0°-180°	3831.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1100	1100	1100	1100	1100	
5°	1099	1095	1085	1093	1092	104
15°	1047	1038	1018	1016	1010	295
25°	946	930	896	883	874	436
35°	818	790	749	721	705	511
45°	667	635	586	546	529	514
55°	506	471	417	375	357	452
65°	344	307	254	219	207	339
75°	183	151	112	93	88	193
85°	46	29	26	24	24	51
90°	1	5	8	10	11	4
95°	22	25	27	28	28	24
105°	84	84	85	87	88	89
115°	156	156	156	155	155	154
125°	228	228	228	227	226	203
135°	294	296	296	295	294	227
145°	357	359	359	359	358	223
155°	409	409	409	410	409	188
165°	445	444	444	446	444	126
175°	463	462	461	464	461	44
180°	464	464	464	464	464	



TEST NUMBER: P333058-927

CATALOG NUMBER: S124RDIW-S795D470U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5
2.5°	1103.2	1102.6	1101.9	1101.4	1100.7	1099.6	1098.0	1096.4	1094.7	1093.1	1094.7
5°	1098.8	1098.0	1097.3	1096.5	1095.7	1094.3	1092.0	1089.8	1087.5	1085.3	1087.2
7.5°	1088.9	1088.1	1087.3	1086.5	1085.7	1083.9	1080.9	1078.0	1075.1	1072.1	1073.3
10°	1079.4	1078.5	1077.5	1076.6	1075.6	1073.5	1070.2	1066.8	1063.4	1060.0	1060.7
12.5°	1067.2	1066.2	1065.1	1064.0	1063.0	1060.4	1056.5	1052.4	1048.5	1044.5	1045.0
15°	1046.6	1044.9	1043.1	1041.5	1039.8	1036.6	1031.9	1027.2	1022.5	1017.9	1017.5
17.5°	1021.4	1019.0	1016.5	1014.2	1011.7	1007.7	1002.0	996.4	990.8	985.2	984.1
20°	1001.9	999.4	997.0	994.6	992.1	987.8	981.4	975.0	968.6	962.3	960.8
22.5°	980.3	977.6	974.9	972.1	969.4	964.6	957.7	950.9	944.1	937.3	935.1
25°	946.3	942.9	939.5	936.1	932.8	927.2	919.6	911.9	904.2	896.5	893.3
27.5°	910.5	906.3	902.1	897.9	893.6	887.4	879.2	871.0	862.8	854.6	850.6
30°	885.6	880.9	876.2	871.6	866.9	860.2	851.4	842.6	833.7	824.9	820.2
32.5°	859.3	854.1	848.7	843.4	838.2	831.0	821.9	812.8	803.7	794.6	789.2
35°	818.2	812.2	806.2	800.2	794.2	786.6	777.2	767.8	758.4	749.1	742.8
37.5°	774.2	768.0	761.8	755.7	749.5	741.2	730.9	720.5	710.1	699.7	692.6
40°	743.2	737.0	730.9	724.7	718.5	710.0	699.3	688.7	678.0	667.3	659.5
42.5°	713.5	707.0	700.6	694.1	687.6	678.8	667.7	656.6	645.5	634.3	626.3
45°	667.3	660.4	653.5	646.6	639.6	630.6	619.3	608.1	596.8	585.7	576.5
47.5°	619.6	612.5	605.4	598.2	591.0	581.6	570.0	558.3	546.6	534.9	525.4
50°	587.3	580.0	572.7	565.4	558.1	548.4	536.5	524.5	512.5	500.5	491.2
52.5°	554.3	547.2	540.0	532.8	525.7	515.9	503.7	491.4	479.1	466.8	457.3
55°	505.6	498.0	490.6	483.1	475.6	465.8	453.6	441.4	429.3	417.1	407.3
57.5°	457.4	449.6	441.8	434.0	426.2	416.3	404.3	392.4	380.4	368.4	358.5
60°	423.0	415.5	408.1	400.5	393.0	383.3	371.3	359.3	347.4	335.3	325.6
62.5°	392.0	384.2	376.4	368.6	360.8	350.8	338.5	326.2	313.9	301.7	292.6
65°	343.8	335.7	327.6	319.6	311.6	301.6	289.5	277.6	265.6	253.7	245.6
67.5°	293.7	286.1	278.3	270.6	262.8	253.5	242.3	231.2	220.1	209.0	202.0
70°	262.1	254.2	246.3	238.4	230.6	221.3	210.6	199.9	189.3	178.6	172.5
72.5°	228.4	221.3	214.1	207.0	199.9	191.3	181.3	171.1	161.1	151.0	145.7
75°	182.8	175.9	169.0	162.1	155.1	147.3	138.5	129.7	120.9	112.1	107.7
77.5°	136.7	130.8	124.9	119.1	113.1	106.6	99.6	92.4	85.3	78.2	75.7
80°	107.0	101.6	96.2	90.7	85.3	79.8	74.1	68.5	62.9	57.3	56.7
82.5°	81.4	76.4	71.5	66.5	61.5	57.4	54.2	50.9	47.7	44.5	44.0
85°	45.5	41.7	38.0	34.3	30.5	28.4	27.8	27.3	26.7	26.1	25.7
87.5°	15.7	14.7	13.7	12.7	11.6	11.1	11.1	11.1	11.0	11.0	10.9
90°	1.1	2.0	2.9	3.7	4.6	5.3	6.0	6.7	7.3	7.9	8.4
92.5°	7.7	8.7	9.7	10.7	11.7	12.4	12.9	13.3	13.8	14.2	14.5
95°	21.5	22.3	23.0	23.7	24.4	25.0	25.6	26.1	26.7	27.3	27.5
97.5°	37.6	38.2	38.7	39.4	39.9	40.6	41.2	41.8	42.5	43.2	43.4
100°	50.2	50.5	50.9	51.2	51.6	52.0	52.8	53.5	54.2	54.9	55.1
102.5°	63.5	63.6	63.7	63.8	64.0	64.4	65.0	65.7	66.3	67.0	67.2
105°	83.7	83.7	83.8	83.9	84.0	84.1	84.4	84.8	85.1	85.4	85.6
107.5°	104.8	104.9	105.0	105.1	105.2	105.3	105.4	105.4	105.4	105.4	105.7
110°	119.1	119.3	119.5	119.6	119.8	119.9	119.8	119.7	119.6	119.5	119.4



TEST NUMBER: P333058-927

CATALOG NUMBER: S124RDIW-S795D470U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	134.1	134.1	134.2	134.2	134.3	134.2	134.0	133.9	133.7	133.6	133.6
115°	156.5	156.5	156.5	156.5	156.5	156.5	156.3	156.1	156.0	155.8	155.7
117.5°	177.6	177.7	177.8	177.8	177.8	177.8	177.8	177.6	177.5	177.4	177.1
120°	191.7	192.0	192.3	192.7	193.0	193.0	192.7	192.5	192.3	192.0	191.6
122.5°	206.4	206.4	206.6	206.7	206.8	206.8	206.8	206.6	206.5	206.4	206.1
125°	227.9	227.9	227.9	227.9	227.9	227.9	227.8	227.8	227.7	227.6	227.4
127.5°	247.6	247.8	248.0	248.3	248.5	248.6	248.4	248.3	248.2	248.0	247.9
130°	261.3	261.6	261.8	262.1	262.3	262.4	262.4	262.4	262.4	262.4	262.2
132.5°	275.4	275.6	275.8	275.9	276.1	276.2	276.1	276.0	276.0	275.9	275.8
135°	294.0	294.5	294.9	295.4	295.9	296.1	296.1	296.1	296.1	296.1	296.0
137.5°	314.3	314.5	314.7	314.9	315.1	315.3	315.4	315.6	315.7	315.8	315.6
140°	327.7	327.9	328.0	328.2	328.4	328.4	328.4	328.4	328.4	328.4	328.4
142.5°	340.1	340.2	340.4	340.6	340.7	340.8	340.7	340.6	340.6	340.5	340.5
145°	357.2	357.5	357.8	358.1	358.5	358.6	358.7	358.8	358.9	358.9	358.9
147.5°	374.1	374.5	374.9	375.3	375.7	375.8	375.7	375.7	375.7	375.6	375.5
150°	384.4	384.8	385.1	385.4	385.7	385.9	385.9	385.9	385.9	385.9	385.9
152.5°	394.2	394.4	394.6	394.8	395.0	395.1	395.1	395.2	395.3	395.4	395.5
155°	409.2	409.2	409.2	409.2	409.2	409.2	409.1	409.0	408.9	408.8	409.2
157.5°	421.8	421.7	421.6	421.4	421.3	421.2	421.2	421.2	421.1	421.1	421.4
160°	429.4	429.3	429.2	429.1	429.0	429.0	428.9	428.8	428.7	428.6	428.9
162.5°	436.3	436.0	435.8	435.6	435.4	435.2	435.1	435.1	435.0	434.9	435.4
165°	445.4	445.2	445.0	444.7	444.5	444.3	444.2	444.0	443.9	443.7	444.2
167.5°	452.6	452.3	451.9	451.6	451.2	451.1	451.1	451.1	451.1	451.1	451.6
170°	456.6	456.2	455.8	455.4	455.0	454.9	455.0	455.0	455.1	455.2	455.7
172.5°	459.5	459.1	458.8	458.5	458.1	458.0	458.0	458.0	458.0	458.0	458.6
175°	463.4	463.0	462.6	462.2	461.8	461.6	461.5	461.4	461.4	461.3	461.8
177.5°	464.7	464.4	464.1	463.7	463.4	463.3	463.3	463.3	463.3	463.3	463.7
180°	464.1	464.1	464.1	464.1	464.1	464.1	464.1	464.1	464.1	464.1	464.1



TEST NUMBER: P333058-927

CATALOG NUMBER: S124RDIW-S795D470U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5
2.5°	1096.4	1098.0	1099.6	1100.4	1100.3	1100.1	1099.9	1099.8
5°	1089.0	1090.9	1092.8	1093.5	1093.1	1092.8	1092.4	1092.0
7.5°	1074.5	1075.8	1077.0	1077.2	1076.7	1076.0	1075.5	1074.8
10°	1061.5	1062.2	1063.0	1063.0	1062.2	1061.5	1060.7	1060.0
12.5°	1045.4	1045.8	1046.3	1046.0	1045.0	1043.9	1042.8	1041.8
15°	1017.2	1016.8	1016.4	1015.6	1014.2	1012.9	1011.6	1010.3
17.5°	983.1	982.1	981.0	979.5	977.5	975.5	973.5	971.5
20°	959.3	957.7	956.2	954.3	951.9	949.4	947.0	944.6
22.5°	932.9	930.6	928.4	926.2	924.2	922.3	920.3	918.3
25°	890.2	887.0	883.8	881.3	879.4	877.6	875.7	873.8
27.5°	846.7	842.8	838.8	835.5	832.8	830.1	827.4	824.7
30°	815.6	810.9	806.2	802.3	799.4	796.4	793.4	790.4
32.5°	783.7	778.3	772.9	768.7	765.9	763.0	760.2	757.3
35°	736.3	730.0	723.7	718.7	715.4	712.0	708.6	705.3
37.5°	685.5	678.3	671.2	666.0	662.7	659.3	655.9	652.5
40°	651.6	643.7	635.9	630.3	626.9	623.5	620.2	616.8
42.5°	618.3	610.3	602.3	596.5	592.9	589.5	586.0	582.4
45°	567.3	558.1	548.9	542.6	539.2	535.9	532.5	529.2
47.5°	515.9	506.4	496.9	490.2	486.6	482.8	479.1	475.4
50°	481.8	472.5	463.0	456.6	453.0	449.5	445.9	442.4
52.5°	447.8	438.3	428.7	422.2	418.4	414.7	411.1	407.3
55°	397.6	387.9	378.2	371.5	368.0	364.4	360.8	357.3
57.5°	348.6	338.7	328.8	322.6	319.9	317.2	314.5	311.8
60°	315.9	306.2	296.4	290.0	287.1	284.1	281.1	278.1
62.5°	283.7	274.7	265.7	260.0	257.6	255.2	252.8	250.4
65°	237.5	229.5	221.4	216.3	214.0	211.8	209.5	207.3
67.5°	195.1	188.2	181.3	176.6	174.1	171.6	169.1	166.7
70°	166.3	160.1	153.9	149.9	148.1	146.2	144.3	142.4
72.5°	140.5	135.1	129.8	126.4	124.7	122.9	121.2	119.5
75°	103.5	99.2	94.8	92.1	91.0	89.9	88.7	87.6
77.5°	73.2	70.7	68.1	66.7	66.4	66.1	65.8	65.4
80°	56.2	55.6	55.1	54.7	54.5	54.3	54.1	53.9
82.5°	43.6	43.3	42.9	42.5	42.4	42.1	42.0	41.8
85°	25.3	25.0	24.6	24.4	24.4	24.4	24.4	24.4
87.5°	10.9	10.9	10.8	10.9	11.0	11.2	11.4	11.6
90°	8.9	9.3	9.8	10.1	10.3	10.5	10.6	10.8
92.5°	14.8	15.1	15.4	15.5	15.7	15.8	15.8	15.9
95°	27.7	28.0	28.2	28.4	28.4	28.4	28.4	28.4
97.5°	43.7	44.0	44.3	44.4	44.4	44.4	44.4	44.4
100°	55.2	55.4	55.5	55.6	55.6	55.6	55.6	55.6
102.5°	67.4	67.7	67.9	68.0	68.0	68.1	68.2	68.3
105°	86.0	86.2	86.4	86.7	86.9	87.1	87.4	87.6
107.5°	105.9	106.2	106.4	106.5	106.5	106.5	106.4	106.4
110°	119.2	119.1	118.9	118.9	119.1	119.4	119.6	119.9



TEST NUMBER: P333058-927

CATALOG NUMBER: S124RDIW-S795D470U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	133.6	133.5	133.5	133.5	133.6	133.6	133.6	133.6
115°	155.7	155.6	155.5	155.4	155.3	155.3	155.2	155.1
117.5°	176.9	176.6	176.3	176.1	175.9	175.8	175.6	175.5
120°	191.2	190.8	190.4	190.4	190.5	190.7	190.8	191.0
122.5°	205.9	205.6	205.3	205.0	204.8	204.5	204.1	203.9
125°	227.3	227.1	227.0	226.8	226.6	226.5	226.3	226.2
127.5°	247.7	247.6	247.4	247.2	247.2	247.0	246.9	246.8
130°	262.1	261.9	261.7	261.5	261.2	260.9	260.5	260.2
132.5°	275.6	275.4	275.3	275.1	275.0	274.9	274.7	274.6
135°	295.8	295.6	295.5	295.3	295.1	294.9	294.6	294.4
137.5°	315.4	315.2	315.0	314.9	315.0	315.0	315.1	315.1
140°	328.3	328.2	328.1	328.0	328.0	327.9	327.8	327.7
142.5°	340.5	340.5	340.5	340.4	340.4	340.4	340.4	340.4
145°	358.8	358.7	358.6	358.5	358.2	358.0	357.7	357.5
147.5°	375.4	375.3	375.3	375.3	375.2	375.1	375.0	374.9
150°	385.9	385.9	385.9	385.9	385.8	385.7	385.6	385.6
152.5°	395.8	395.9	396.2	396.1	395.9	395.7	395.5	395.3
155°	409.5	409.8	410.1	410.1	409.8	409.5	409.2	408.8
157.5°	421.6	421.8	422.1	422.1	421.8	421.5	421.3	421.0
160°	429.1	429.4	429.6	429.5	429.1	428.7	428.3	427.9
162.5°	435.8	436.3	436.7	436.7	436.3	435.9	435.5	435.1
165°	444.7	445.1	445.6	445.7	445.4	445.0	444.7	444.4
167.5°	452.1	452.6	453.0	453.0	452.6	452.1	451.5	451.1
170°	456.1	456.6	457.1	457.0	456.5	455.9	455.3	454.8
172.5°	459.1	459.7	460.2	460.2	459.6	459.1	458.5	458.0
175°	462.4	463.0	463.5	463.5	463.0	462.4	461.8	461.3
177.5°	464.2	464.6	465.1	465.0	464.5	464.1	463.5	463.0
180°	464.1	464.1	464.1	464.1	464.1	464.1	464.1	464.1

(END OF REPORT)