

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332787-830

Luminaire Tested: **S124DIW-S795D1050U830-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332787-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S795D1050U830-4F0-1E-UDD-A
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7291.9 lumens
Efficiency: N/A
Efficacy: 138.6 lumens/watt
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

Luminous Intensity Polar Plot

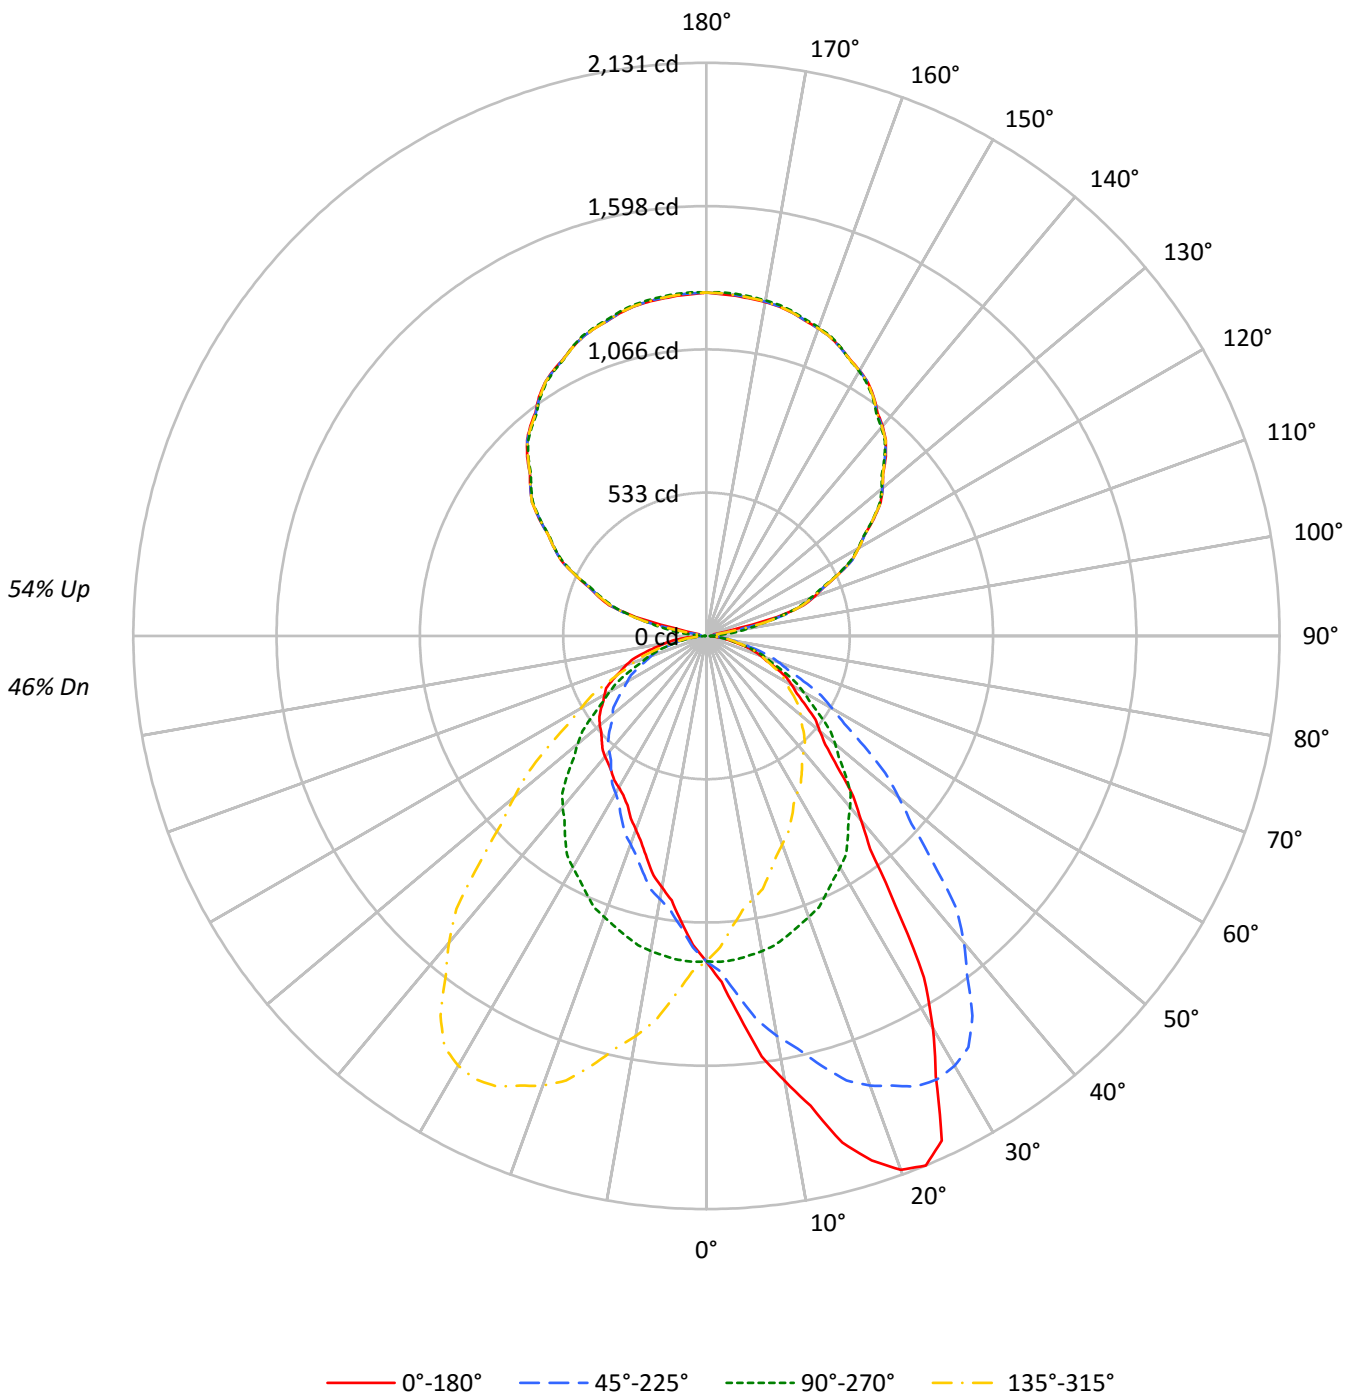



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	46
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	45	39
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	41	39	38	33
3	81	72	64	59	74	66	60	55	55	51	47	46	42	40	37	34	32	28
4	74	63	56	50	68	59	52	47	49	44	40	41	37	34	33	30	28	24
5	68	57	49	43	62	52	45	40	44	39	35	37	33	30	30	27	25	21
6	63	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	22	19
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	25	22	19	17
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	17	15
9	50	38	31	26	46	35	29	24	30	25	21	25	21	19	21	18	16	14
10	47	35	28	23	43	32	26	22	28	23	19	24	20	17	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9769	9769	9769	9769
5°	11505	9794	8645	9794
10°	13774	9752	7783	9752
15°	16298	9653	7148	9653
20°	18148	9552	6580	9552
25°	18441	9404	6188	9404
30°	15691	9261	6065	9261
35°	12064	9030	6067	9030
40°	9403	8759	6181	8759
45°	7840	8350	6284	8350
50°	6900	7851	6498	7851
55°	6321	7253	6759	7253
60°	5924	6717	7074	6717
65°	5515	6118	7335	6118
70°	5042	5526	7501	5526
75°	4504	4863	7411	4863
80°	3775	3984	7178	3984
85°	2788	2881	6873	2881



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	117.9	1.6
10°-20°	363.4	5.0
20°-30°	576.2	7.9
30°-40°	641.2	8.8
40°-50°	583.7	8.0
50°-60°	477.0	6.5
60°-70°	340.5	4.7
70°-80°	187.5	2.6
80°-90°	54.9	0.8
90°-100°	43.7	0.6
100°-110°	278.4	3.8
110°-120°	532.6	7.3
120°-130°	676.2	9.3
130°-140°	723.4	9.9
140°-150°	676.5	9.3
150°-160°	545.5	7.5
160°-170°	351.9	4.8
170°-180°	121.3	1.7
0°-30°	1057.5	14.5
0°-40°	1698.7	23.3
0°-60°	2759.4	37.8
0°-90°	3342.4	45.8
90°-120°	854.7	11.7
90°-150°	2930.8	40.2
90°-180°	3949.0	54.2
0°-180°	7291.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1210	1210	1210	1210	1210	
5°	1420	1209	1067	1209	1420	144
15°	1950	1155	855	1155	1950	551
25°	2070	1056	695	1056	2070	913
35°	1224	916	616	916	1224	777
45°	687	731	550	731	687	541
55°	449	515	480	515	449	406
65°	289	320	384	320	289	286
75°	144	156	238	156	144	154
85°	30	31	74	31	30	37
90°	29	3	29	3	29	13
95°	28	52	28	52	28	22
105°	272	288	272	288	272	237
115°	540	537	540	537	540	535
125°	760	754	760	754	760	677
135°	942	936	942	936	942	726
145°	1085	1079	1085	1079	1085	678
155°	1182	1183	1182	1183	1182	545
165°	1242	1248	1242	1248	1242	351
175°	1269	1277	1269	1277	1269	121
180°	1277	1277	1277	1277	1277	



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1287.9	1287.5	1283.5	1282.7	1279.9	1276.3	1275.4	1269.0	1256.2	1250.2	1248.6
5°	1419.7	1429.6	1416.6	1414.1	1412.6	1396.1	1387.5	1377.5	1354.4	1341.0	1330.4
7.5°	1576.9	1578.0	1572.3	1567.7	1555.0	1540.5	1518.9	1495.8	1468.4	1439.7	1418.2
10°	1680.3	1684.3	1677.8	1676.8	1651.2	1635.2	1603.1	1576.0	1544.9	1510.3	1478.8
12.5°	1789.4	1783.8	1780.5	1759.0	1754.3	1725.0	1687.7	1659.8	1611.9	1572.2	1530.1
15°	1950.0	1939.0	1931.9	1902.3	1887.8	1847.2	1807.6	1777.1	1714.4	1654.7	1609.6
17.5°	2044.2	2055.2	2039.0	2026.8	1989.2	1960.8	1920.3	1856.1	1807.1	1733.1	1676.1
20°	2112.4	2113.4	2104.4	2091.9	2062.3	2026.2	1982.1	1911.9	1853.2	1779.5	1701.4
22.5°	2130.8	2131.1	2127.2	2115.5	2093.1	2063.9	2019.4	1960.8	1889.7	1809.6	1731.5
25°	2070.3	2068.3	2072.8	2085.8	2077.3	2068.3	2042.7	1999.1	1933.0	1848.2	1764.0
27.5°	1845.3	1859.2	1884.6	1916.7	1947.6	1971.1	1977.7	1968.8	1927.8	1858.1	1769.9
30°	1683.3	1700.3	1719.4	1751.4	1813.6	1849.3	1888.3	1917.9	1901.4	1845.7	1763.5
32.5°	1505.2	1509.5	1537.8	1574.2	1631.2	1699.7	1761.6	1821.7	1841.6	1812.4	1743.9
35°	1224.1	1231.1	1261.7	1297.8	1367.5	1451.2	1544.5	1627.7	1696.3	1723.9	1688.8
37.5°	998.9	1019.1	1040.7	1079.5	1140.9	1216.2	1313.1	1420.7	1523.1	1591.7	1603.3
40°	892.3	904.8	920.4	949.9	1002.0	1076.3	1159.4	1282.8	1391.6	1489.8	1521.9
42.5°	808.0	815.4	824.9	851.7	891.4	965.2	1041.1	1149.6	1258.9	1376.3	1430.0
45°	686.7	694.3	710.3	725.9	755.9	807.1	877.7	967.0	1076.8	1190.1	1289.3
47.5°	599.2	604.0	613.5	630.1	655.6	689.4	746.9	821.4	923.1	1033.1	1138.9
50°	549.4	553.4	560.9	576.0	595.5	625.6	672.7	742.4	822.1	932.9	1036.6
52.5°	510.1	511.7	517.3	527.4	543.0	568.3	606.9	664.6	738.7	837.4	940.8
55°	449.1	451.2	456.2	463.7	477.2	493.2	522.8	565.9	630.7	716.3	806.1
57.5°	399.0	400.4	404.6	407.6	418.7	431.7	454.5	485.2	534.2	606.9	687.0
60°	366.9	365.9	371.0	373.4	381.0	392.0	409.5	439.1	481.7	540.4	614.1
62.5°	335.6	334.2	338.5	341.8	346.1	355.5	369.9	393.0	427.6	480.6	544.3
65°	288.7	286.7	289.3	293.2	297.3	302.3	312.8	333.4	360.9	399.0	447.6
67.5°	241.6	243.7	244.1	246.1	248.5	255.2	262.5	277.0	296.4	327.0	368.2
70°	213.6	214.1	216.0	216.0	217.5	223.6	229.6	238.1	257.1	285.2	318.8
72.5°	185.5	187.6	186.8	188.4	189.5	193.5	197.9	206.0	222.3	243.1	271.5
75°	144.4	145.9	145.9	146.4	147.9	149.4	152.9	158.9	170.4	186.0	205.6
77.5°	105.3	105.5	106.1	108.0	108.0	110.4	113.0	117.8	123.5	134.1	146.1
80°	81.2	82.2	81.7	82.8	82.8	84.7	85.7	91.7	94.3	101.2	110.7
82.5°	59.6	60.5	60.4	61.8	62.7	63.1	64.5	66.8	69.4	75.6	79.5
85°	30.1	31.1	30.1	31.1	32.6	33.1	34.6	35.1	37.1	38.6	42.1
87.5°	14.5	15.6	15.6	15.9	16.6	16.9	17.0	16.3	17.7	17.8	19.1
90°	28.7	28.2	27.8	27.3	27.0	26.1	24.8	23.6	22.2	21.0	19.3
92.5°	26.4	26.3	26.2	26.1	26.0	25.4	24.0	22.8	21.5	20.3	18.6
95°	27.7	27.5	27.2	27.1	26.9	26.1	24.8	23.6	22.2	21.0	20.8
97.5°	26.8	26.5	26.3	26.1	25.9	25.7	25.6	25.4	25.4	25.2	48.9
100°	26.8	26.5	26.3	26.1	25.9	27.6	31.2	34.8	38.5	42.0	71.4
102.5°	27.5	27.4	27.4	27.3	27.3	46.8	85.7	124.6	163.5	202.5	206.2
105°	272.2	279.8	287.5	295.1	302.7	305.6	303.7	301.8	299.8	297.9	296.9
107.5°	379.3	378.5	377.7	376.9	376.1	375.2	374.3	373.3	372.4	371.5	370.0
110°	425.9	425.3	424.6	424.0	423.4	422.8	422.4	422.0	421.6	421.1	419.9



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	472.5	471.7	470.9	470.1	469.3	468.9	469.0	469.1	469.2	469.3	468.6
115°	540.5	540.5	540.5	540.5	540.5	540.3	539.9	539.4	539.0	538.6	538.9
117.5°	609.6	609.7	609.8	609.9	610.0	610.1	610.2	610.2	610.3	610.4	609.9
120°	653.2	653.7	654.0	654.5	654.9	654.9	654.5	654.0	653.7	653.2	653.4
122.5°	696.0	696.4	696.8	697.3	697.7	697.8	697.5	697.3	697.0	696.7	696.4
125°	760.2	760.0	759.7	759.5	759.3	758.8	758.3	757.6	757.0	756.3	756.8
127.5°	816.5	816.6	816.8	817.0	817.2	817.3	817.5	817.6	817.7	817.8	816.8
130°	854.7	854.7	854.7	854.7	854.7	854.6	854.4	854.1	853.9	853.8	853.1
132.5°	889.9	890.0	890.1	890.3	890.5	890.5	890.3	890.0	889.9	889.7	888.8
135°	942.5	942.2	941.7	941.3	940.8	940.5	940.0	939.6	939.1	938.8	937.9
137.5°	987.6	987.8	987.9	988.0	988.2	988.0	987.5	987.0	986.6	986.1	985.1
140°	1019.0	1018.7	1018.5	1018.3	1018.1	1017.7	1017.0	1016.4	1015.8	1015.1	1014.7
142.5°	1044.9	1044.9	1044.8	1044.8	1044.7	1044.5	1044.1	1043.6	1043.1	1042.6	1042.4
145°	1084.9	1084.4	1084.0	1083.5	1083.2	1082.8	1082.6	1082.4	1082.2	1081.9	1081.9
147.5°	1117.9	1117.7	1117.5	1117.3	1117.0	1116.8	1116.6	1116.5	1116.3	1116.2	1116.3
150°	1139.3	1139.1	1138.9	1138.6	1138.4	1138.3	1138.3	1138.3	1138.3	1138.3	1138.5
152.5°	1157.6	1157.7	1157.8	1158.0	1158.1	1158.0	1157.6	1157.3	1157.0	1156.7	1157.1
155°	1182.2	1182.9	1183.6	1184.1	1184.8	1184.7	1183.8	1183.0	1182.1	1181.3	1181.9
157.5°	1202.9	1204.0	1205.0	1206.2	1207.3	1207.3	1206.2	1205.0	1204.0	1202.9	1203.6
160°	1216.6	1217.9	1219.2	1220.4	1221.7	1221.7	1220.4	1219.2	1217.9	1216.6	1216.8
162.5°	1227.3	1228.8	1230.2	1231.6	1233.1	1233.1	1231.9	1230.6	1229.4	1228.0	1228.3
165°	1242.4	1244.3	1246.2	1248.1	1250.0	1250.2	1248.5	1246.8	1245.1	1243.4	1243.4
167.5°	1253.7	1255.8	1257.9	1260.1	1262.2	1262.3	1260.5	1258.6	1256.7	1254.8	1255.0
170°	1260.6	1262.6	1264.8	1266.9	1269.0	1269.2	1267.5	1265.8	1264.1	1262.4	1262.3
172.5°	1264.3	1266.7	1268.9	1271.2	1273.6	1273.8	1272.1	1270.5	1268.8	1267.1	1266.9
175°	1269.1	1271.7	1274.2	1276.8	1279.3	1279.7	1277.7	1275.8	1273.9	1272.1	1271.8
177.5°	1272.2	1274.2	1276.3	1278.3	1280.3	1280.7	1279.3	1278.0	1276.6	1275.3	1274.9
180°	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1249.0	1243.4	1239.3	1236.1	1227.4	1222.1	1218.1	1212.5	1206.1	1199.3	1190.8
5°	1319.8	1302.8	1290.3	1271.2	1253.2	1238.1	1222.7	1208.6	1191.6	1173.0	1159.4
7.5°	1394.4	1369.0	1336.5	1308.3	1276.7	1249.1	1224.5	1199.2	1172.9	1147.5	1124.1
10°	1441.7	1409.1	1373.0	1330.4	1290.3	1254.7	1221.6	1189.6	1158.5	1127.4	1100.8
12.5°	1492.6	1452.0	1398.6	1348.9	1303.9	1256.3	1216.4	1177.1	1139.6	1106.9	1075.9
15°	1560.9	1502.3	1440.7	1374.0	1314.8	1259.2	1204.6	1155.0	1112.9	1069.7	1039.6
17.5°	1603.0	1530.4	1459.9	1390.3	1318.7	1248.5	1189.6	1132.3	1079.6	1036.7	998.8
20°	1630.7	1558.5	1470.7	1401.1	1315.9	1243.7	1175.5	1111.8	1056.7	1011.1	971.9
22.5°	1654.7	1571.3	1483.6	1391.9	1307.0	1230.5	1155.8	1091.7	1035.5	987.4	949.9
25°	1667.7	1572.0	1476.8	1385.5	1289.3	1198.5	1130.9	1055.7	995.5	944.9	904.8
27.5°	1669.1	1566.8	1459.1	1357.6	1258.3	1173.8	1088.4	1021.2	958.8	905.2	866.7
30°	1664.7	1558.0	1442.2	1332.4	1232.7	1140.9	1066.8	993.5	929.9	876.8	836.6
32.5°	1650.7	1539.5	1420.5	1304.3	1201.0	1111.3	1034.6	965.1	903.1	850.6	808.6
35°	1610.1	1500.3	1373.5	1252.7	1146.9	1056.2	987.0	916.3	854.2	804.6	763.9
37.5°	1546.6	1447.4	1318.4	1193.4	1089.6	998.4	929.9	866.0	809.9	759.5	717.9
40°	1491.3	1404.1	1274.8	1152.9	1040.7	953.9	889.8	831.1	775.5	727.8	688.2
42.5°	1427.6	1351.5	1232.3	1103.2	994.9	907.9	845.3	792.6	740.2	696.2	656.6
45°	1313.8	1263.8	1151.4	1032.2	919.4	837.2	777.5	731.4	687.3	644.1	611.1
47.5°	1183.1	1158.3	1063.8	950.5	843.4	762.3	710.6	668.0	629.3	592.9	563.6
50°	1095.3	1083.3	1001.5	892.3	790.0	713.8	661.7	625.1	592.0	560.0	532.3
52.5°	1008.7	1008.2	934.6	834.5	739.9	666.5	614.7	580.6	552.0	525.8	501.1
55°	876.3	890.2	832.6	743.4	658.6	592.5	545.9	515.3	495.3	473.7	455.2
57.5°	754.6	777.9	730.4	651.8	581.1	520.1	479.6	456.6	435.2	422.2	408.7
60°	675.2	697.3	660.2	594.0	527.4	475.2	436.6	416.0	397.5	388.5	379.0
62.5°	604.6	624.3	596.8	535.5	477.6	427.5	394.9	375.1	362.6	352.8	346.5
65°	503.8	520.3	496.8	452.1	402.6	362.4	335.8	320.3	308.3	304.3	297.3
67.5°	407.3	422.3	409.5	371.6	331.9	301.4	280.7	265.8	258.6	255.1	250.2
70°	349.9	365.0	351.4	318.3	287.8	262.2	242.6	234.1	226.6	225.1	218.0
72.5°	301.3	311.6	298.0	272.2	246.0	224.5	209.3	200.4	196.5	193.8	190.0
75°	226.1	235.1	226.1	206.0	187.5	172.5	159.4	155.9	151.4	149.9	147.4
77.5°	160.0	167.9	160.9	148.4	134.5	122.9	115.9	111.4	110.4	107.7	109.0
80°	122.3	127.3	120.8	112.3	101.2	93.2	88.2	85.7	82.8	81.7	83.7
82.5°	87.8	90.0	86.7	81.0	72.8	67.6	64.2	61.3	60.7	60.9	60.9
85°	45.6	45.1	44.6	39.6	37.1	33.6	31.6	31.1	30.5	31.6	32.6
87.5°	18.8	18.9	18.1	16.1	14.4	12.7	11.9	11.0	11.9	12.7	13.6
90°	17.6	15.9	14.2	12.2	9.9	7.5	5.2	2.8	5.2	7.5	9.9
92.5°	16.9	15.2	13.5	12.5	12.4	12.3	12.2	12.1	12.2	12.3	12.4
95°	20.5	20.4	20.2	23.7	30.9	38.1	45.3	52.5	45.3	38.1	30.9
97.5°	72.6	96.2	120.0	129.5	125.1	120.6	116.0	111.5	116.0	120.6	125.1
100°	100.6	129.9	159.2	171.9	168.1	164.3	160.4	156.7	160.4	164.3	168.1
102.5°	210.1	214.0	217.7	218.2	215.5	212.6	209.8	207.1	209.8	212.6	215.5
105°	295.9	294.7	293.7	292.6	291.2	290.0	288.7	287.5	288.7	290.0	291.2
107.5°	368.6	367.1	365.7	364.7	364.0	363.4	362.8	362.1	362.8	363.4	364.0
110°	418.6	417.4	416.0	415.1	414.4	413.8	413.2	412.6	413.2	413.8	414.4



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	468.1	467.5	466.9	466.0	464.9	463.7	462.6	461.5	462.6	463.7	464.9
115°	539.0	539.2	539.4	539.2	538.6	538.0	537.3	536.7	537.3	538.0	538.6
117.5°	609.4	609.0	608.5	607.8	607.0	606.1	605.3	604.5	605.3	606.1	607.0
120°	653.7	653.8	654.0	653.7	652.9	652.1	651.2	650.4	651.2	652.1	652.9
122.5°	696.2	695.9	695.6	695.1	694.7	694.1	693.6	693.1	693.6	694.1	694.7
125°	757.1	757.6	758.0	757.8	757.0	756.1	755.3	754.4	755.3	756.1	757.0
127.5°	815.9	814.9	813.9	813.3	813.1	812.9	812.7	812.5	812.7	812.9	813.1
130°	852.4	851.9	851.2	850.7	850.6	850.4	850.2	849.9	850.2	850.4	850.6
132.5°	888.1	887.2	886.5	885.8	885.4	885.0	884.7	884.3	884.7	885.0	885.4
135°	937.1	936.2	935.4	935.0	935.2	935.5	935.7	935.9	935.7	935.5	935.2
137.5°	984.2	983.3	982.3	981.8	981.8	981.7	981.6	981.5	981.6	981.7	981.8
140°	1014.3	1013.9	1013.4	1013.0	1012.6	1012.2	1011.7	1011.3	1011.7	1012.2	1012.6
142.5°	1042.1	1041.9	1041.6	1041.1	1040.4	1039.5	1038.8	1038.0	1038.8	1039.5	1040.4
145°	1081.9	1081.9	1081.9	1081.7	1081.0	1080.3	1079.8	1079.1	1079.8	1080.3	1081.0
147.5°	1116.6	1116.8	1117.0	1116.5	1115.3	1114.2	1113.0	1111.7	1113.0	1114.2	1115.3
150°	1138.8	1139.0	1139.2	1138.9	1138.0	1137.2	1136.3	1135.5	1136.3	1137.2	1138.0
152.5°	1157.4	1157.8	1158.2	1158.0	1157.3	1156.7	1156.0	1155.3	1156.0	1156.7	1157.3
155°	1182.6	1183.2	1183.8	1184.0	1183.8	1183.6	1183.5	1183.2	1183.5	1183.6	1183.8
157.5°	1204.3	1205.0	1205.8	1206.2	1206.3	1206.5	1206.5	1206.7	1206.5	1206.5	1206.3
160°	1217.0	1217.3	1217.5	1217.9	1218.5	1219.2	1219.8	1220.4	1219.8	1219.2	1218.5
162.5°	1228.5	1228.7	1228.9	1229.5	1230.2	1231.1	1231.9	1232.7	1231.9	1231.1	1230.2
165°	1243.4	1243.4	1243.4	1243.9	1244.9	1246.0	1247.1	1248.1	1247.1	1246.0	1244.9
167.5°	1255.1	1255.2	1255.4	1255.9	1257.1	1258.2	1259.2	1260.4	1259.2	1258.2	1257.1
170°	1262.1	1261.8	1261.6	1262.2	1263.4	1264.7	1265.9	1267.2	1265.9	1264.7	1263.4
172.5°	1266.6	1266.4	1266.2	1266.7	1268.0	1269.2	1270.5	1271.8	1270.5	1269.2	1268.0
175°	1271.6	1271.4	1271.2	1271.7	1273.0	1274.2	1275.5	1276.8	1275.5	1274.2	1273.0
177.5°	1274.6	1274.2	1273.9	1274.3	1275.5	1276.7	1277.9	1279.0	1277.9	1276.7	1275.5
180°	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1186.8	1183.3	1178.0	1170.8	1164.8	1158.4	1156.8	1154.3	1159.1	1155.2	1154.0
5°	1147.9	1137.4	1123.9	1108.3	1099.3	1086.3	1083.7	1078.7	1073.7	1073.3	1068.2
7.5°	1106.7	1091.3	1073.6	1057.7	1043.0	1028.8	1019.5	1017.5	1010.1	1005.8	1000.8
10°	1080.2	1061.2	1040.7	1025.6	1008.6	993.5	983.0	977.0	971.9	966.5	961.5
12.5°	1049.0	1028.7	1011.8	995.5	975.2	963.8	946.5	936.1	935.1	935.2	922.2
15°	1012.6	992.5	966.5	943.4	932.4	910.3	900.8	888.7	881.3	873.7	867.7
17.5°	971.0	946.0	925.7	899.2	878.2	860.6	848.1	840.8	829.5	818.9	811.2
20°	944.9	918.3	896.8	868.7	845.6	824.1	813.6	803.5	795.0	786.0	777.5
22.5°	918.4	890.7	864.3	837.1	815.6	792.9	782.7	769.0	760.9	755.9	747.4
25°	876.8	846.7	816.6	790.5	768.5	748.4	734.9	724.3	715.3	711.3	705.8
27.5°	831.4	801.5	772.5	742.9	717.8	703.3	692.5	684.6	679.3	674.0	671.6
30°	802.6	771.5	740.4	712.8	689.8	675.2	665.2	659.7	655.6	653.2	650.6
32.5°	773.3	742.6	709.9	684.8	664.1	651.2	643.6	638.0	636.0	635.1	634.2
35°	726.3	695.3	665.2	642.6	623.1	618.1	611.5	608.6	607.6	611.1	612.6
37.5°	680.9	652.1	624.4	602.6	589.7	582.4	580.1	580.3	583.9	587.0	590.6
40°	651.7	623.6	597.6	578.4	566.5	561.9	560.9	563.5	567.4	571.0	575.0
42.5°	623.2	595.5	571.8	554.0	545.6	541.5	542.1	544.6	550.2	554.5	560.5
45°	579.0	555.9	532.8	518.3	511.3	512.3	512.3	516.8	522.4	528.9	535.4
47.5°	537.3	514.2	495.1	483.0	479.3	478.4	481.3	487.1	495.0	503.1	512.2
50°	509.3	487.2	470.7	459.7	455.6	457.1	461.2	466.7	476.2	486.3	495.8
52.5°	480.8	460.8	445.4	435.2	432.4	435.1	439.1	447.8	456.2	467.0	478.5
55°	436.6	419.5	407.6	400.0	399.0	400.5	405.0	414.5	426.6	440.2	451.2
57.5°	392.6	378.3	367.3	362.1	362.6	364.0	371.5	382.8	395.6	410.0	424.2
60°	363.0	349.9	340.9	336.9	337.3	340.4	349.4	360.0	376.0	390.0	405.0
62.5°	334.9	323.4	314.8	311.2	310.5	317.1	325.7	336.7	352.7	368.3	384.6
65°	289.7	280.7	273.7	271.7	273.2	278.2	289.3	303.8	317.4	333.8	350.9
67.5°	245.6	238.2	233.4	234.3	236.1	243.6	252.8	265.2	280.6	297.7	314.6
70°	217.5	210.6	206.5	207.0	210.0	219.0	227.1	239.6	256.2	273.7	287.8
72.5°	188.7	184.1	180.5	182.6	185.6	191.8	201.8	214.3	228.8	245.2	260.0
75°	144.9	144.9	142.9	144.4	148.9	154.9	162.4	175.4	190.0	203.0	215.1
77.5°	107.4	106.4	107.6	109.5	112.1	119.2	127.8	137.1	148.1	161.1	171.1
80°	82.2	82.8	85.2	88.2	89.3	94.7	103.8	112.3	120.8	131.9	141.4
82.5°	61.7	62.3	63.5	67.4	68.3	74.3	80.1	88.6	96.3	103.8	111.7
85°	33.6	33.6	36.1	37.6	40.1	44.1	47.6	52.6	59.7	64.7	72.2
87.5°	15.3	15.6	17.6	18.8	20.3	22.6	23.8	28.4	30.3	32.5	36.3
90°	12.2	14.2	15.9	17.6	19.3	21.0	22.2	23.6	24.8	26.1	27.0
92.5°	12.5	13.5	15.2	16.9	18.6	20.3	21.5	22.8	24.0	25.4	26.0
95°	23.7	20.2	20.4	20.5	20.8	21.0	22.2	23.6	24.8	26.1	26.9
97.5°	129.5	120.0	96.2	72.6	48.9	25.2	25.4	25.4	25.6	25.7	25.9
100°	171.9	159.2	129.9	100.6	71.4	42.0	38.5	34.8	31.2	27.6	25.9
102.5°	218.2	217.7	214.0	210.1	206.2	202.5	163.5	124.6	85.7	46.8	27.3
105°	292.6	293.7	294.7	295.9	296.9	297.9	299.8	301.8	303.7	305.6	302.7
107.5°	364.7	365.7	367.1	368.6	370.0	371.5	372.4	373.3	374.3	375.2	376.1
110°	415.1	416.0	417.4	418.6	419.9	421.1	421.6	422.0	422.4	422.8	423.4



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	466.0	466.9	467.5	468.1	468.6	469.3	469.2	469.1	469.0	468.9	469.3
115°	539.2	539.4	539.2	539.0	538.9	538.6	539.0	539.4	539.9	540.3	540.5
117.5°	607.8	608.5	609.0	609.4	609.9	610.4	610.3	610.2	610.2	610.1	610.0
120°	653.7	654.0	653.8	653.7	653.4	653.2	653.7	654.0	654.5	654.9	654.9
122.5°	695.1	695.6	695.9	696.2	696.4	696.7	697.0	697.3	697.5	697.8	697.7
125°	757.8	758.0	757.6	757.1	756.8	756.3	757.0	757.6	758.3	758.8	759.3
127.5°	813.3	813.9	814.9	815.9	816.8	817.8	817.7	817.6	817.5	817.3	817.2
130°	850.7	851.2	851.9	852.4	853.1	853.8	853.9	854.1	854.4	854.6	854.7
132.5°	885.8	886.5	887.2	888.1	888.8	889.7	889.9	890.0	890.3	890.5	890.5
135°	935.0	935.4	936.2	937.1	937.9	938.8	939.1	939.6	940.0	940.5	940.8
137.5°	981.8	982.3	983.3	984.2	985.1	986.1	986.6	987.0	987.5	988.0	988.2
140°	1013.0	1013.4	1013.9	1014.3	1014.7	1015.1	1015.8	1016.4	1017.0	1017.7	1018.1
142.5°	1041.1	1041.6	1041.9	1042.1	1042.4	1042.6	1043.1	1043.6	1044.1	1044.5	1044.7
145°	1081.7	1081.9	1081.9	1081.9	1081.9	1081.9	1082.2	1082.4	1082.6	1082.8	1083.2
147.5°	1116.5	1117.0	1116.8	1116.6	1116.3	1116.2	1116.3	1116.5	1116.6	1116.8	1117.0
150°	1138.9	1139.2	1139.0	1138.8	1138.5	1138.3	1138.3	1138.3	1138.3	1138.3	1138.4
152.5°	1158.0	1158.2	1157.8	1157.4	1157.1	1156.7	1157.0	1157.3	1157.6	1158.0	1158.1
155°	1184.0	1183.8	1183.2	1182.6	1181.9	1181.3	1182.1	1183.0	1183.8	1184.7	1184.8
157.5°	1206.2	1205.8	1205.0	1204.3	1203.6	1202.9	1204.0	1205.0	1206.2	1207.3	1207.3
160°	1217.9	1217.5	1217.3	1217.0	1216.8	1216.6	1217.9	1219.2	1220.4	1221.7	1221.7
162.5°	1229.5	1228.9	1228.7	1228.5	1228.3	1228.0	1229.4	1230.6	1231.9	1233.1	1233.1
165°	1243.9	1243.4	1243.4	1243.4	1243.4	1243.4	1245.1	1246.8	1248.5	1250.2	1250.0
167.5°	1255.9	1255.4	1255.2	1255.1	1255.0	1254.8	1256.7	1258.6	1260.5	1262.3	1262.2
170°	1262.2	1261.6	1261.8	1262.1	1262.3	1262.4	1264.1	1265.8	1267.5	1269.2	1269.0
172.5°	1266.7	1266.2	1266.4	1266.6	1266.9	1267.1	1268.8	1270.5	1272.1	1273.8	1273.6
175°	1271.7	1271.2	1271.4	1271.6	1271.8	1272.1	1273.9	1275.8	1277.7	1279.7	1279.3
177.5°	1274.3	1273.9	1274.2	1274.6	1274.9	1275.3	1276.6	1278.0	1279.3	1280.7	1280.3
180°	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1153.1	1152.4	1149.5	1149.1	1149.5	1152.4	1153.1	1154.0	1155.2	1159.1	1154.3
5°	1065.3	1062.7	1061.2	1066.8	1061.2	1062.7	1065.3	1068.2	1073.3	1073.7	1078.7
7.5°	998.9	996.9	992.5	991.2	992.5	996.9	998.9	1000.8	1005.8	1010.1	1017.5
10°	956.4	954.4	950.5	949.4	950.5	954.4	956.4	961.5	966.5	971.9	977.0
12.5°	915.5	911.5	910.7	911.7	910.7	911.5	915.5	922.2	935.2	935.1	936.1
15°	861.2	859.2	853.7	855.2	853.7	859.2	861.2	867.7	873.7	881.3	888.7
17.5°	807.7	805.2	798.5	804.5	798.5	805.2	807.7	811.2	818.9	829.5	840.8
20°	774.0	770.0	766.5	765.9	766.5	770.0	774.0	777.5	786.0	795.0	803.5
22.5°	741.9	738.3	738.0	734.7	738.0	738.3	741.9	747.4	755.9	760.9	769.0
25°	701.8	698.3	697.3	694.7	697.3	698.3	701.8	705.8	711.3	715.3	724.3
27.5°	671.0	669.3	667.5	668.3	667.5	669.3	671.0	671.6	674.0	679.3	684.6
30°	652.1	651.7	650.6	650.6	650.6	651.7	652.1	650.6	653.2	655.6	659.7
32.5°	636.5	636.4	637.1	637.1	637.1	636.4	636.5	634.2	635.1	636.0	638.0
35°	614.5	616.0	617.1	615.6	617.1	616.0	614.5	612.6	611.1	607.6	608.6
37.5°	594.7	596.3	597.7	599.4	597.7	596.3	594.7	590.6	587.0	583.9	580.3
40°	579.5	583.0	584.0	586.5	584.0	583.0	579.5	575.0	571.0	567.4	563.5
42.5°	565.1	568.9	571.6	572.0	571.6	568.9	565.1	560.5	554.5	550.2	544.6
45°	542.9	546.9	550.4	550.4	550.4	546.9	542.9	535.4	528.9	522.4	516.8
47.5°	519.9	525.8	529.2	530.2	529.2	525.8	519.9	512.2	503.1	495.0	487.1
50°	504.3	511.3	514.8	517.4	514.8	511.3	504.3	495.8	486.3	476.2	466.7
52.5°	489.1	496.1	500.8	502.1	500.8	496.1	489.1	478.5	467.0	456.2	447.8
55°	462.7	472.7	478.2	480.2	478.2	472.7	462.7	451.2	440.2	426.6	414.5
57.5°	437.8	447.0	453.5	455.0	453.5	447.0	437.8	424.2	410.0	395.6	382.8
60°	418.6	428.6	436.6	438.1	436.6	428.6	418.6	405.0	390.0	376.0	360.0
62.5°	398.9	409.3	416.6	420.5	416.6	409.3	398.9	384.6	368.3	352.7	336.7
65°	365.0	375.4	382.5	384.0	382.5	375.4	365.0	350.9	333.8	317.4	303.8
67.5°	327.8	338.4	343.0	345.9	343.0	338.4	327.8	314.6	297.7	280.6	265.2
70°	301.8	310.3	315.3	317.8	315.3	310.3	301.8	287.8	273.7	256.2	239.6
72.5°	272.1	281.0	286.8	287.3	286.8	281.0	272.1	260.0	245.2	228.8	214.3
75°	226.6	234.6	237.6	237.6	237.6	234.6	226.6	215.1	203.0	190.0	175.4
77.5°	179.4	183.5	187.3	188.0	187.3	183.5	179.4	171.1	161.1	148.1	137.1
80°	148.9	151.4	154.4	154.4	154.4	151.4	148.9	141.4	131.9	120.8	112.3
82.5°	117.6	119.7	122.7	122.3	122.7	119.7	117.6	111.7	103.8	96.3	88.6
85°	71.2	75.7	75.2	74.2	75.2	75.7	71.2	72.2	64.7	59.7	52.6
87.5°	37.5	38.1	39.3	40.2	39.3	38.1	37.5	36.3	32.5	30.3	28.4
90°	27.3	27.8	28.2	28.7	28.2	27.8	27.3	27.0	26.1	24.8	23.6
92.5°	26.1	26.2	26.3	26.4	26.3	26.2	26.1	26.0	25.4	24.0	22.8
95°	27.1	27.2	27.5	27.7	27.5	27.2	27.1	26.9	26.1	24.8	23.6
97.5°	26.1	26.3	26.5	26.8	26.5	26.3	26.1	25.9	25.7	25.6	25.4
100°	26.1	26.3	26.5	26.8	26.5	26.3	26.1	25.9	27.6	31.2	34.8
102.5°	27.3	27.4	27.4	27.5	27.4	27.4	27.3	27.3	46.8	85.7	124.6
105°	295.1	287.5	279.8	272.2	279.8	287.5	295.1	302.7	305.6	303.7	301.8
107.5°	376.9	377.7	378.5	379.3	378.5	377.7	376.9	376.1	375.2	374.3	373.3
110°	424.0	424.6	425.3	425.9	425.3	424.6	424.0	423.4	422.8	422.4	422.0



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	470.1	470.9	471.7	472.5	471.7	470.9	470.1	469.3	468.9	469.0	469.1
115°	540.5	540.5	540.5	540.5	540.5	540.5	540.5	540.5	540.3	539.9	539.4
117.5°	609.9	609.8	609.7	609.6	609.7	609.8	609.9	610.0	610.1	610.2	610.2
120°	654.5	654.0	653.7	653.2	653.7	654.0	654.5	654.9	654.9	654.5	654.0
122.5°	697.3	696.8	696.4	696.0	696.4	696.8	697.3	697.7	697.8	697.5	697.3
125°	759.5	759.7	760.0	760.2	760.0	759.7	759.5	759.3	758.8	758.3	757.6
127.5°	817.0	816.8	816.6	816.5	816.6	816.8	817.0	817.2	817.3	817.5	817.6
130°	854.7	854.7	854.7	854.7	854.7	854.7	854.7	854.7	854.6	854.4	854.1
132.5°	890.3	890.1	890.0	889.9	890.0	890.1	890.3	890.5	890.5	890.3	890.0
135°	941.3	941.7	942.2	942.5	942.2	941.7	941.3	940.8	940.5	940.0	939.6
137.5°	988.0	987.9	987.8	987.6	987.8	987.9	988.0	988.2	988.0	987.5	987.0
140°	1018.3	1018.5	1018.7	1019.0	1018.7	1018.5	1018.3	1018.1	1017.7	1017.0	1016.4
142.5°	1044.8	1044.8	1044.9	1044.9	1044.9	1044.8	1044.8	1044.7	1044.5	1044.1	1043.6
145°	1083.5	1084.0	1084.4	1084.9	1084.4	1084.0	1083.5	1083.2	1082.8	1082.6	1082.4
147.5°	1117.3	1117.5	1117.7	1117.9	1117.7	1117.5	1117.3	1117.0	1116.8	1116.6	1116.5
150°	1138.6	1138.9	1139.1	1139.3	1139.1	1138.9	1138.6	1138.4	1138.3	1138.3	1138.3
152.5°	1158.0	1157.8	1157.7	1157.6	1157.7	1157.8	1158.0	1158.1	1158.0	1157.6	1157.3
155°	1184.1	1183.6	1182.9	1182.2	1182.9	1183.6	1184.1	1184.8	1184.7	1183.8	1183.0
157.5°	1206.2	1205.0	1204.0	1202.9	1204.0	1205.0	1206.2	1207.3	1207.3	1206.2	1205.0
160°	1220.4	1219.2	1217.9	1216.6	1217.9	1219.2	1220.4	1221.7	1221.7	1220.4	1219.2
162.5°	1231.6	1230.2	1228.8	1227.3	1228.8	1230.2	1231.6	1233.1	1233.1	1231.9	1230.6
165°	1248.1	1246.2	1244.3	1242.4	1244.3	1246.2	1248.1	1250.0	1250.2	1248.5	1246.8
167.5°	1260.1	1257.9	1255.8	1253.7	1255.8	1257.9	1260.1	1262.2	1262.3	1260.5	1258.6
170°	1266.9	1264.8	1262.6	1260.6	1262.6	1264.8	1266.9	1269.0	1269.2	1267.5	1265.8
172.5°	1271.2	1268.9	1266.7	1264.3	1266.7	1268.9	1271.2	1273.6	1273.8	1272.1	1270.5
175°	1276.8	1274.2	1271.7	1269.1	1271.7	1274.2	1276.8	1279.3	1279.7	1277.7	1275.8
177.5°	1278.3	1276.3	1274.2	1272.2	1274.2	1276.3	1278.3	1280.3	1280.7	1279.3	1278.0
180°	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1156.8	1158.4	1164.8	1170.8	1178.0	1183.3	1186.8	1190.8	1199.3	1206.1	1212.5
5°	1083.7	1086.3	1099.3	1108.3	1123.9	1137.4	1147.9	1159.4	1173.0	1191.6	1208.6
7.5°	1019.5	1028.8	1043.0	1057.7	1073.6	1091.3	1106.7	1124.1	1147.5	1172.9	1199.2
10°	983.0	993.5	1008.6	1025.6	1040.7	1061.2	1080.2	1100.8	1127.4	1158.5	1189.6
12.5°	946.5	963.8	975.2	995.5	1011.8	1028.7	1049.0	1075.9	1106.9	1139.6	1177.1
15°	900.8	910.3	932.4	943.4	966.5	992.5	1012.6	1039.6	1069.7	1112.9	1155.0
17.5°	848.1	860.6	878.2	899.2	925.7	946.0	971.0	998.8	1036.7	1079.6	1132.3
20°	813.6	824.1	845.6	868.7	896.8	918.3	944.9	971.9	1011.1	1056.7	1111.8
22.5°	782.7	792.9	815.6	837.1	864.3	890.7	918.4	949.9	987.4	1035.5	1091.7
25°	734.9	748.4	768.5	790.5	816.6	846.7	876.8	904.8	944.9	995.5	1055.7
27.5°	692.5	703.3	717.8	742.9	772.5	801.5	831.4	866.7	905.2	958.8	1021.2
30°	665.2	675.2	689.8	712.8	740.4	771.5	802.6	836.6	876.8	929.9	993.5
32.5°	643.6	651.2	664.1	684.8	709.9	742.6	773.3	808.6	850.6	903.1	965.1
35°	611.5	618.1	623.1	642.6	665.2	695.3	726.3	763.9	804.6	854.2	916.3
37.5°	580.1	582.4	589.7	602.6	624.4	652.1	680.9	717.9	759.5	809.9	866.0
40°	560.9	561.9	566.5	578.4	597.6	623.6	651.7	688.2	727.8	775.5	831.1
42.5°	542.1	541.5	545.6	554.0	571.8	595.5	623.2	656.6	696.2	740.2	792.6
45°	512.3	512.3	511.3	518.3	532.8	555.9	579.0	611.1	644.1	687.3	731.4
47.5°	481.3	478.4	479.3	483.0	495.1	514.2	537.3	563.6	592.9	629.3	668.0
50°	461.2	457.1	455.6	459.7	470.7	487.2	509.3	532.3	560.0	592.0	625.1
52.5°	439.1	435.1	432.4	435.2	445.4	460.8	480.8	501.1	525.8	552.0	580.6
55°	405.0	400.5	399.0	400.0	407.6	419.5	436.6	455.2	473.7	495.3	515.3
57.5°	371.5	364.0	362.6	362.1	367.3	378.3	392.6	408.7	422.2	435.2	456.6
60°	349.4	340.4	337.3	336.9	340.9	349.9	363.0	379.0	388.5	397.5	416.0
62.5°	325.7	317.1	310.5	311.2	314.8	323.4	334.9	346.5	352.8	362.6	375.1
65°	289.3	278.2	273.2	271.7	273.7	280.7	289.7	297.3	304.3	308.3	320.3
67.5°	252.8	243.6	236.1	234.3	233.4	238.2	245.6	250.2	255.1	258.6	265.8
70°	227.1	219.0	210.0	207.0	206.5	210.6	217.5	218.0	225.1	226.6	234.1
72.5°	201.8	191.8	185.6	182.6	180.5	184.1	188.7	190.0	193.8	196.5	200.4
75°	162.4	154.9	148.9	144.4	142.9	144.9	144.9	147.4	149.9	151.4	155.9
77.5°	127.8	119.2	112.1	109.5	107.6	106.4	107.4	109.0	107.7	110.4	111.4
80°	103.8	94.7	89.3	88.2	85.2	82.8	82.2	83.7	81.7	82.8	85.7
82.5°	80.1	74.3	68.3	67.4	63.5	62.3	61.7	60.9	60.9	60.7	61.3
85°	47.6	44.1	40.1	37.6	36.1	33.6	33.6	32.6	31.6	30.5	31.1
87.5°	23.8	22.6	20.3	18.8	17.6	15.6	15.3	13.6	12.7	11.9	11.0
90°	22.2	21.0	19.3	17.6	15.9	14.2	12.2	9.9	7.5	5.2	2.8
92.5°	21.5	20.3	18.6	16.9	15.2	13.5	12.5	12.4	12.3	12.2	12.1
95°	22.2	21.0	20.8	20.5	20.4	20.2	23.7	30.9	38.1	45.3	52.5
97.5°	25.4	25.2	48.9	72.6	96.2	120.0	129.5	125.1	120.6	116.0	111.5
100°	38.5	42.0	71.4	100.6	129.9	159.2	171.9	168.1	164.3	160.4	156.7
102.5°	163.5	202.5	206.2	210.1	214.0	217.7	218.2	215.5	212.6	209.8	207.1
105°	299.8	297.9	296.9	295.9	294.7	293.7	292.6	291.2	290.0	288.7	287.5
107.5°	372.4	371.5	370.0	368.6	367.1	365.7	364.7	364.0	363.4	362.8	362.1
110°	421.6	421.1	419.9	418.6	417.4	416.0	415.1	414.4	413.8	413.2	412.6



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	469.2	469.3	468.6	468.1	467.5	466.9	466.0	464.9	463.7	462.6	461.5
115°	539.0	538.6	538.9	539.0	539.2	539.4	539.2	538.6	538.0	537.3	536.7
117.5°	610.3	610.4	609.9	609.4	609.0	608.5	607.8	607.0	606.1	605.3	604.5
120°	653.7	653.2	653.4	653.7	653.8	654.0	653.7	652.9	652.1	651.2	650.4
122.5°	697.0	696.7	696.4	696.2	695.9	695.6	695.1	694.7	694.1	693.6	693.1
125°	757.0	756.3	756.8	757.1	757.6	758.0	757.8	757.0	756.1	755.3	754.4
127.5°	817.7	817.8	816.8	815.9	814.9	813.9	813.3	813.1	812.9	812.7	812.5
130°	853.9	853.8	853.1	852.4	851.9	851.2	850.7	850.6	850.4	850.2	849.9
132.5°	889.9	889.7	888.8	888.1	887.2	886.5	885.8	885.4	885.0	884.7	884.3
135°	939.1	938.8	937.9	937.1	936.2	935.4	935.0	935.2	935.5	935.7	935.9
137.5°	986.6	986.1	985.1	984.2	983.3	982.3	981.8	981.8	981.7	981.6	981.5
140°	1015.8	1015.1	1014.7	1014.3	1013.9	1013.4	1013.0	1012.6	1012.2	1011.7	1011.3
142.5°	1043.1	1042.6	1042.4	1042.1	1041.9	1041.6	1041.1	1040.4	1039.5	1038.8	1038.0
145°	1082.2	1081.9	1081.9	1081.9	1081.9	1081.9	1081.7	1081.0	1080.3	1079.8	1079.1
147.5°	1116.3	1116.2	1116.3	1116.6	1116.8	1117.0	1116.5	1115.3	1114.2	1113.0	1111.7
150°	1138.3	1138.3	1138.5	1138.8	1139.0	1139.2	1138.9	1138.0	1137.2	1136.3	1135.5
152.5°	1157.0	1156.7	1157.1	1157.4	1157.8	1158.2	1158.0	1157.3	1156.7	1156.0	1155.3
155°	1182.1	1181.3	1181.9	1182.6	1183.2	1183.8	1184.0	1183.8	1183.6	1183.5	1183.2
157.5°	1204.0	1202.9	1203.6	1204.3	1205.0	1205.8	1206.2	1206.3	1206.5	1206.5	1206.7
160°	1217.9	1216.6	1216.8	1217.0	1217.3	1217.5	1217.9	1218.5	1219.2	1219.8	1220.4
162.5°	1229.4	1228.0	1228.3	1228.5	1228.7	1228.9	1229.5	1230.2	1231.1	1231.9	1232.7
165°	1245.1	1243.4	1243.4	1243.4	1243.4	1243.4	1243.9	1244.9	1246.0	1247.1	1248.1
167.5°	1256.7	1254.8	1255.0	1255.1	1255.2	1255.4	1255.9	1257.1	1258.2	1259.2	1260.4
170°	1264.1	1262.4	1262.3	1262.1	1261.8	1261.6	1262.2	1263.4	1264.7	1265.9	1267.2
172.5°	1268.8	1267.1	1266.9	1266.6	1266.4	1266.2	1266.7	1268.0	1269.2	1270.5	1271.8
175°	1273.9	1272.1	1271.8	1271.6	1271.4	1271.2	1271.7	1273.0	1274.2	1275.5	1276.8
177.5°	1276.6	1275.3	1274.9	1274.6	1274.2	1273.9	1274.3	1275.5	1276.7	1277.9	1279.0
180°	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1218.1	1222.1	1227.4	1236.1	1239.3	1243.4	1249.0	1248.6	1250.2	1256.2	1269.0
5°	1222.7	1238.1	1253.2	1271.2	1290.3	1302.8	1319.8	1330.4	1341.0	1354.4	1377.5
7.5°	1224.5	1249.1	1276.7	1308.3	1336.5	1369.0	1394.4	1418.2	1439.7	1468.4	1495.8
10°	1221.6	1254.7	1290.3	1330.4	1373.0	1409.1	1441.7	1478.8	1510.3	1544.9	1576.0
12.5°	1216.4	1256.3	1303.9	1348.9	1398.6	1452.0	1492.6	1530.1	1572.2	1611.9	1659.8
15°	1204.6	1259.2	1314.8	1374.0	1440.7	1502.3	1560.9	1609.6	1654.7	1714.4	1777.1
17.5°	1189.6	1248.5	1318.7	1390.3	1459.9	1530.4	1603.0	1676.1	1733.1	1807.1	1856.1
20°	1175.5	1243.7	1315.9	1401.1	1470.7	1558.5	1630.7	1701.4	1779.5	1853.2	1911.9
22.5°	1155.8	1230.5	1307.0	1391.9	1483.6	1571.3	1654.7	1731.5	1809.6	1889.7	1960.8
25°	1130.9	1198.5	1289.3	1385.5	1476.8	1572.0	1667.7	1764.0	1848.2	1933.0	1999.1
27.5°	1088.4	1173.8	1258.3	1357.6	1459.1	1566.8	1669.1	1769.9	1858.1	1927.8	1968.8
30°	1066.8	1140.9	1232.7	1332.4	1442.2	1558.0	1664.7	1763.5	1845.7	1901.4	1917.9
32.5°	1034.6	1111.3	1201.0	1304.3	1420.5	1539.5	1650.7	1743.9	1812.4	1841.6	1821.7
35°	987.0	1056.2	1146.9	1252.7	1373.5	1500.3	1610.1	1688.8	1723.9	1696.3	1627.7
37.5°	929.9	998.4	1089.6	1193.4	1318.4	1447.4	1546.6	1603.3	1591.7	1523.1	1420.7
40°	889.8	953.9	1040.7	1152.9	1274.8	1404.1	1491.3	1521.9	1489.8	1391.6	1282.8
42.5°	845.3	907.9	994.9	1103.2	1232.3	1351.5	1427.6	1430.0	1376.3	1258.9	1149.6
45°	777.5	837.2	919.4	1032.2	1151.4	1263.8	1313.8	1289.3	1190.1	1076.8	967.0
47.5°	710.6	762.3	843.4	950.5	1063.8	1158.3	1183.1	1138.9	1033.1	923.1	821.4
50°	661.7	713.8	790.0	892.3	1001.5	1083.3	1095.3	1036.6	932.9	822.1	742.4
52.5°	614.7	666.5	739.9	834.5	934.6	1008.2	1008.7	940.8	837.4	738.7	664.6
55°	545.9	592.5	658.6	743.4	832.6	890.2	876.3	806.1	716.3	630.7	565.9
57.5°	479.6	520.1	581.1	651.8	730.4	777.9	754.6	687.0	606.9	534.2	485.2
60°	436.6	475.2	527.4	594.0	660.2	697.3	675.2	614.1	540.4	481.7	439.1
62.5°	394.9	427.5	477.6	535.5	596.8	624.3	604.6	544.3	480.6	427.6	393.0
65°	335.8	362.4	402.6	452.1	496.8	520.3	503.8	447.6	399.0	360.9	333.4
67.5°	280.7	301.4	331.9	371.6	409.5	422.3	407.3	368.2	327.0	296.4	277.0
70°	242.6	262.2	287.8	318.3	351.4	365.0	349.9	318.8	285.2	257.1	238.1
72.5°	209.3	224.5	246.0	272.2	298.0	311.6	301.3	271.5	243.1	222.3	206.0
75°	159.4	172.5	187.5	206.0	226.1	235.1	226.1	205.6	186.0	170.4	158.9
77.5°	115.9	122.9	134.5	148.4	160.9	167.9	160.0	146.1	134.1	123.5	117.8
80°	88.2	93.2	101.2	112.3	120.8	127.3	122.3	110.7	101.2	94.3	91.7
82.5°	64.2	67.6	72.8	81.0	86.7	90.0	87.8	79.5	75.6	69.4	66.8
85°	31.6	33.6	37.1	39.6	44.6	45.1	45.6	42.1	38.6	37.1	35.1
87.5°	11.9	12.7	14.4	16.1	18.1	18.9	18.8	19.1	17.8	17.7	16.3
90°	5.2	7.5	9.9	12.2	14.2	15.9	17.6	19.3	21.0	22.2	23.6
92.5°	12.2	12.3	12.4	12.5	13.5	15.2	16.9	18.6	20.3	21.5	22.8
95°	45.3	38.1	30.9	23.7	20.2	20.4	20.5	20.8	21.0	22.2	23.6
97.5°	116.0	120.6	125.1	129.5	120.0	96.2	72.6	48.9	25.2	25.4	25.4
100°	160.4	164.3	168.1	171.9	159.2	129.9	100.6	71.4	42.0	38.5	34.8
102.5°	209.8	212.6	215.5	218.2	217.7	214.0	210.1	206.2	202.5	163.5	124.6
105°	288.7	290.0	291.2	292.6	293.7	294.7	295.9	296.9	297.9	299.8	301.8
107.5°	362.8	363.4	364.0	364.7	365.7	367.1	368.6	370.0	371.5	372.4	373.3
110°	413.2	413.8	414.4	415.1	416.0	417.4	418.6	419.9	421.1	421.6	422.0



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	462.6	463.7	464.9	466.0	466.9	467.5	468.1	468.6	469.3	469.2	469.1
115°	537.3	538.0	538.6	539.2	539.4	539.2	539.0	538.9	538.6	539.0	539.4
117.5°	605.3	606.1	607.0	607.8	608.5	609.0	609.4	609.9	610.4	610.3	610.2
120°	651.2	652.1	652.9	653.7	654.0	653.8	653.7	653.4	653.2	653.7	654.0
122.5°	693.6	694.1	694.7	695.1	695.6	695.9	696.2	696.4	696.7	697.0	697.3
125°	755.3	756.1	757.0	757.8	758.0	757.6	757.1	756.8	756.3	757.0	757.6
127.5°	812.7	812.9	813.1	813.3	813.9	814.9	815.9	816.8	817.8	817.7	817.6
130°	850.2	850.4	850.6	850.7	851.2	851.9	852.4	853.1	853.8	853.9	854.1
132.5°	884.7	885.0	885.4	885.8	886.5	887.2	888.1	888.8	889.7	889.9	890.0
135°	935.7	935.5	935.2	935.0	935.4	936.2	937.1	937.9	938.8	939.1	939.6
137.5°	981.6	981.7	981.8	981.8	982.3	983.3	984.2	985.1	986.1	986.6	987.0
140°	1011.7	1012.2	1012.6	1013.0	1013.4	1013.9	1014.3	1014.7	1015.1	1015.8	1016.4
142.5°	1038.8	1039.5	1040.4	1041.1	1041.6	1041.9	1042.1	1042.4	1042.6	1043.1	1043.6
145°	1079.8	1080.3	1081.0	1081.7	1081.9	1081.9	1081.9	1081.9	1081.9	1082.2	1082.4
147.5°	1113.0	1114.2	1115.3	1116.5	1117.0	1116.8	1116.6	1116.3	1116.2	1116.3	1116.5
150°	1136.3	1137.2	1138.0	1138.9	1139.2	1139.0	1138.8	1138.5	1138.3	1138.3	1138.3
152.5°	1156.0	1156.7	1157.3	1158.0	1158.2	1157.8	1157.4	1157.1	1156.7	1157.0	1157.3
155°	1183.5	1183.6	1183.8	1184.0	1183.8	1183.2	1182.6	1181.9	1181.3	1182.1	1183.0
157.5°	1206.5	1206.5	1206.3	1206.2	1205.8	1205.0	1204.3	1203.6	1202.9	1204.0	1205.0
160°	1219.8	1219.2	1218.5	1217.9	1217.5	1217.3	1217.0	1216.8	1216.6	1217.9	1219.2
162.5°	1231.9	1231.1	1230.2	1229.5	1228.9	1228.7	1228.5	1228.3	1228.0	1229.4	1230.6
165°	1247.1	1246.0	1244.9	1243.9	1243.4	1243.4	1243.4	1243.4	1243.4	1245.1	1246.8
167.5°	1259.2	1258.2	1257.1	1255.9	1255.4	1255.2	1255.1	1255.0	1254.8	1256.7	1258.6
170°	1265.9	1264.7	1263.4	1262.2	1261.6	1261.8	1262.1	1262.3	1262.4	1264.1	1265.8
172.5°	1270.5	1269.2	1268.0	1266.7	1266.2	1266.4	1266.6	1266.9	1267.1	1268.8	1270.5
175°	1275.5	1274.2	1273.0	1271.7	1271.2	1271.4	1271.6	1271.8	1272.1	1273.9	1275.8
177.5°	1277.9	1276.7	1275.5	1274.3	1273.9	1274.2	1274.6	1274.9	1275.3	1276.6	1278.0
180°	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1275.4	1276.3	1279.9	1282.7	1283.5	1287.5	1287.9
5°	1387.5	1396.1	1412.6	1414.1	1416.6	1429.6	1419.7
7.5°	1518.9	1540.5	1555.0	1567.7	1572.3	1578.0	1576.9
10°	1603.1	1635.2	1651.2	1676.8	1677.8	1684.3	1680.3
12.5°	1687.7	1725.0	1754.3	1759.0	1780.5	1783.8	1789.4
15°	1807.6	1847.2	1887.8	1902.3	1931.9	1939.0	1950.0
17.5°	1920.3	1960.8	1989.2	2026.8	2039.0	2055.2	2044.2
20°	1982.1	2026.2	2062.3	2091.9	2104.4	2113.4	2112.4
22.5°	2019.4	2063.9	2093.1	2115.5	2127.2	2131.1	2130.8
25°	2042.7	2068.3	2077.3	2085.8	2072.8	2068.3	2070.3
27.5°	1977.7	1971.1	1947.6	1916.7	1884.6	1859.2	1845.3
30°	1888.3	1849.3	1813.6	1751.4	1719.4	1700.3	1683.3
32.5°	1761.6	1699.7	1631.2	1574.2	1537.8	1509.5	1505.2
35°	1544.5	1451.2	1367.5	1297.8	1261.7	1231.1	1224.1
37.5°	1313.1	1216.2	1140.9	1079.5	1040.7	1019.1	998.9
40°	1159.4	1076.3	1002.0	949.9	920.4	904.8	892.3
42.5°	1041.1	965.2	891.4	851.7	824.9	815.4	808.0
45°	877.7	807.1	755.9	725.9	710.3	694.3	686.7
47.5°	746.9	689.4	655.6	630.1	613.5	604.0	599.2
50°	672.7	625.6	595.5	576.0	560.9	553.4	549.4
52.5°	606.9	568.3	543.0	527.4	517.3	511.7	510.1
55°	522.8	493.2	477.2	463.7	456.2	451.2	449.1
57.5°	454.5	431.7	418.7	407.6	404.6	400.4	399.0
60°	409.5	392.0	381.0	373.4	371.0	365.9	366.9
62.5°	369.9	355.5	346.1	341.8	338.5	334.2	335.6
65°	312.8	302.3	297.3	293.2	289.3	286.7	288.7
67.5°	262.5	255.2	248.5	246.1	244.1	243.7	241.6
70°	229.6	223.6	217.5	216.0	216.0	214.1	213.6
72.5°	197.9	193.5	189.5	188.4	186.8	187.6	185.5
75°	152.9	149.4	147.9	146.4	145.9	145.9	144.4
77.5°	113.0	110.4	108.0	108.0	106.1	105.5	105.3
80°	85.7	84.7	82.8	82.8	81.7	82.2	81.2
82.5°	64.5	63.1	62.7	61.8	60.4	60.5	59.6
85°	34.6	33.1	32.6	31.1	30.1	31.1	30.1
87.5°	17.0	16.9	16.6	15.9	15.6	15.6	14.5
90°	24.8	26.1	27.0	27.3	27.8	28.2	28.7
92.5°	24.0	25.4	26.0	26.1	26.2	26.3	26.4
95°	24.8	26.1	26.9	27.1	27.2	27.5	27.7
97.5°	25.6	25.7	25.9	26.1	26.3	26.5	26.8
100°	31.2	27.6	25.9	26.1	26.3	26.5	26.8
102.5°	85.7	46.8	27.3	27.3	27.4	27.4	27.5
105°	303.7	305.6	302.7	295.1	287.5	279.8	272.2
107.5°	374.3	375.2	376.1	376.9	377.7	378.5	379.3
110°	422.4	422.8	423.4	424.0	424.6	425.3	425.9



TEST NUMBER: P332787-830

CATALOG NUMBER: S124DIW-S795D1050U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	469.0	468.9	469.3	470.1	470.9	471.7	472.5
115°	539.9	540.3	540.5	540.5	540.5	540.5	540.5
117.5°	610.2	610.1	610.0	609.9	609.8	609.7	609.6
120°	654.5	654.9	654.9	654.5	654.0	653.7	653.2
122.5°	697.5	697.8	697.7	697.3	696.8	696.4	696.0
125°	758.3	758.8	759.3	759.5	759.7	760.0	760.2
127.5°	817.5	817.3	817.2	817.0	816.8	816.6	816.5
130°	854.4	854.6	854.7	854.7	854.7	854.7	854.7
132.5°	890.3	890.5	890.5	890.3	890.1	890.0	889.9
135°	940.0	940.5	940.8	941.3	941.7	942.2	942.5
137.5°	987.5	988.0	988.2	988.0	987.9	987.8	987.6
140°	1017.0	1017.7	1018.1	1018.3	1018.5	1018.7	1019.0
142.5°	1044.1	1044.5	1044.7	1044.8	1044.8	1044.9	1044.9
145°	1082.6	1082.8	1083.2	1083.5	1084.0	1084.4	1084.9
147.5°	1116.6	1116.8	1117.0	1117.3	1117.5	1117.7	1117.9
150°	1138.3	1138.3	1138.4	1138.6	1138.9	1139.1	1139.3
152.5°	1157.6	1158.0	1158.1	1158.0	1157.8	1157.7	1157.6
155°	1183.8	1184.7	1184.8	1184.1	1183.6	1182.9	1182.2
157.5°	1206.2	1207.3	1207.3	1206.2	1205.0	1204.0	1202.9
160°	1220.4	1221.7	1221.7	1220.4	1219.2	1217.9	1216.6
162.5°	1231.9	1233.1	1233.1	1231.6	1230.2	1228.8	1227.3
165°	1248.5	1250.2	1250.0	1248.1	1246.2	1244.3	1242.4
167.5°	1260.5	1262.3	1262.2	1260.1	1257.9	1255.8	1253.7
170°	1267.5	1269.2	1269.0	1266.9	1264.8	1262.6	1260.6
172.5°	1272.1	1273.8	1273.6	1271.2	1268.9	1266.7	1264.3
175°	1277.7	1279.7	1279.3	1276.8	1274.2	1271.7	1269.1
177.5°	1279.3	1280.7	1280.3	1278.3	1276.3	1274.2	1272.2
180°	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8	1276.8

(END OF REPORT)